

STATUS OF THE APPLICATION OF THERMOELECTRIC TECHNOLOGY IN VEHICLES

**Lon E. Bell
BSST LLC**

**10th Diesel Engine Emission Reduction (DEER) Conference
United States Department of Energy
August 29 - September 2, 2004
San Diego, California**

Discussion

- Why thermoelectrics (TE)?
- Status of TE technology
- Expected short & medium term advancements in TE technology
- Current vehicular applications
- Prospects for future applications
- Summary and concluding remarks

BSST

Developer and producer of advanced TE systems for heating, cooling, temperature control and power generation applications

TE contractual relationships with Visteon, Government Agencies, Northrop Grumman, RTI and others

Subsidiary of Amerigon Incorporated

- World's largest commercial user of TEs
- Currently supplies TE-based climate control systems to Ford, General Motors, Nissan and Toyota
- Production in California, Mexico and China

Why Thermoelectrics?

- Solid-state cooling, heating and power generation
- Small, light-weight and potentially very rugged
- Very few (or no) moving parts
- Electrically powered
- Potential contributions to vehicle system efficiency gains and pollution reduction
- Enables distributed cooling/heating/temperature control and waste power recovery

What Has Limited Usage?

- Cooling efficiency has been about $\frac{1}{4}$ that of freon
 - Inadequate for most HVAC applications
 - Limits usage to small, spot coolers and controllers
 - Too inefficient for most electronic subsystem cooling
- Thermal flux density has been low
 - TE materials too costly
 - Volume and weight too great at high power levels
 - Form factor not readily adaptable to some application needs
- Lack of design knowledge and effective simulation tools
 - Performance often poorer than predicted
 - Characteristics and, hence response, can be a strong function of operating conditions
- Too inefficient for waste power recovery

Recent Performance Gains

Materials

BiTe Thermoelectrics (1960s)

Heterostructures (2000-2002)

Baseline

+70 to 160%

Materials/Design

Incremental improvements
(1960-2002)

5 to 15%

New ancillary materials and
components (1960-2002)

5 to 10%

System Level

Isolated Element Cycle (2000-2002)

100 to 120%

Convection Cycle (2001-2002)

30 to 80%

Power Density


Sintered micropower (2002)

Up to 25 X Increase

Heterostructure (2001)

30 to 300 X Increase

TED Performance Roadmap

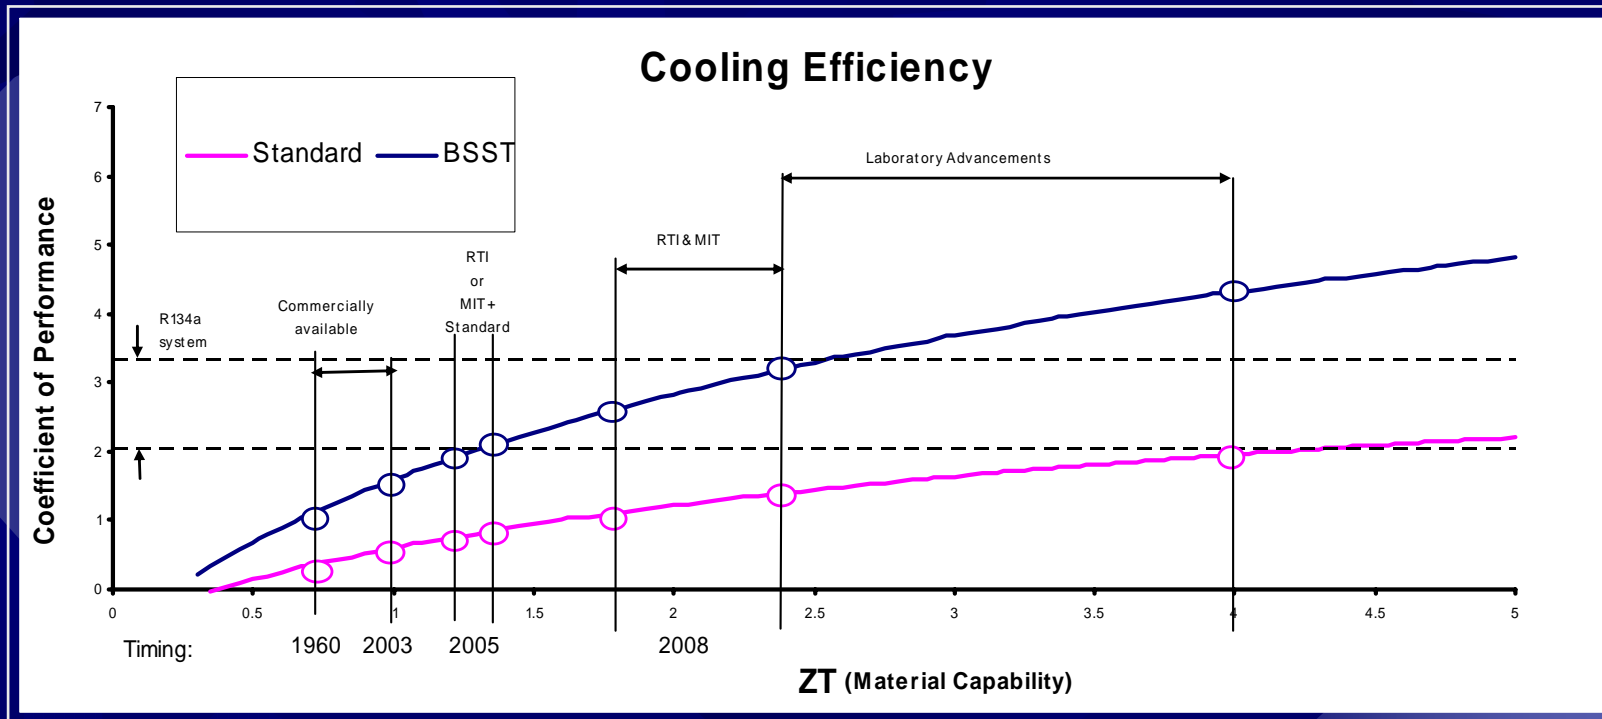



Applications

CCSTM System

- Provides consumer benefits with significant market pull
 - Heats and cools seats (all year comfort)
 - Quick response time
 - Very effective with leather seating
- Very high take rates
 - 50% to 90% in present applications
 - Sells in all climate zones
- First, sustained solid state heater/cooler application in vehicles
 - Quiet, effective operation
 - No negative contribution to emissions
 - Proven to be very reliable

CCSTM Vehicle Seat Application



**Production CCS™
Assembly**

**Perforated
Leather**


**Distribution
Layer**

Waste Duct

**Perforated
Leather**

**Distribution
Layer**

**Cushion
TED**

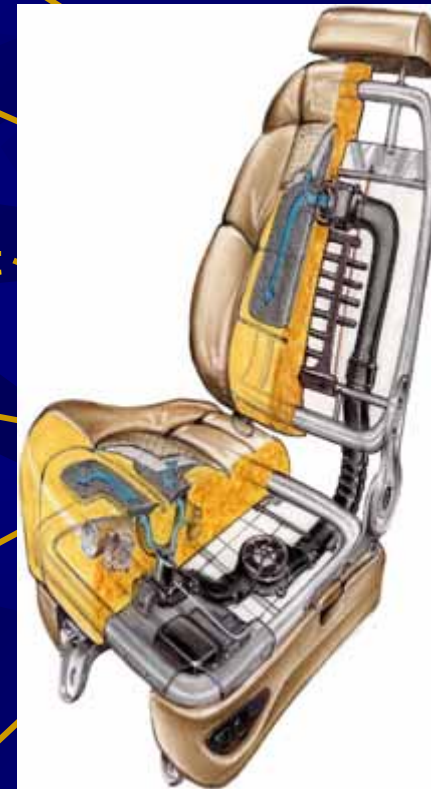

**Back
TED**

**Supply
Duct**

**Blower
Assembly**

**Control
Module**

Current CCSTM Vehicle Lines



Cadillac Deville



Cadillac XLR



Mercury Monterey



Escalade ESV



Infiniti M45



Lincoln Navigator



Ford Expedition



Lincoln Aviator



Lexus LS 430



Infiniti Q45



Toyota Celsior



Lincoln LS




Hyundai Equus



Nissan Cima

CCSTM Growth Rates

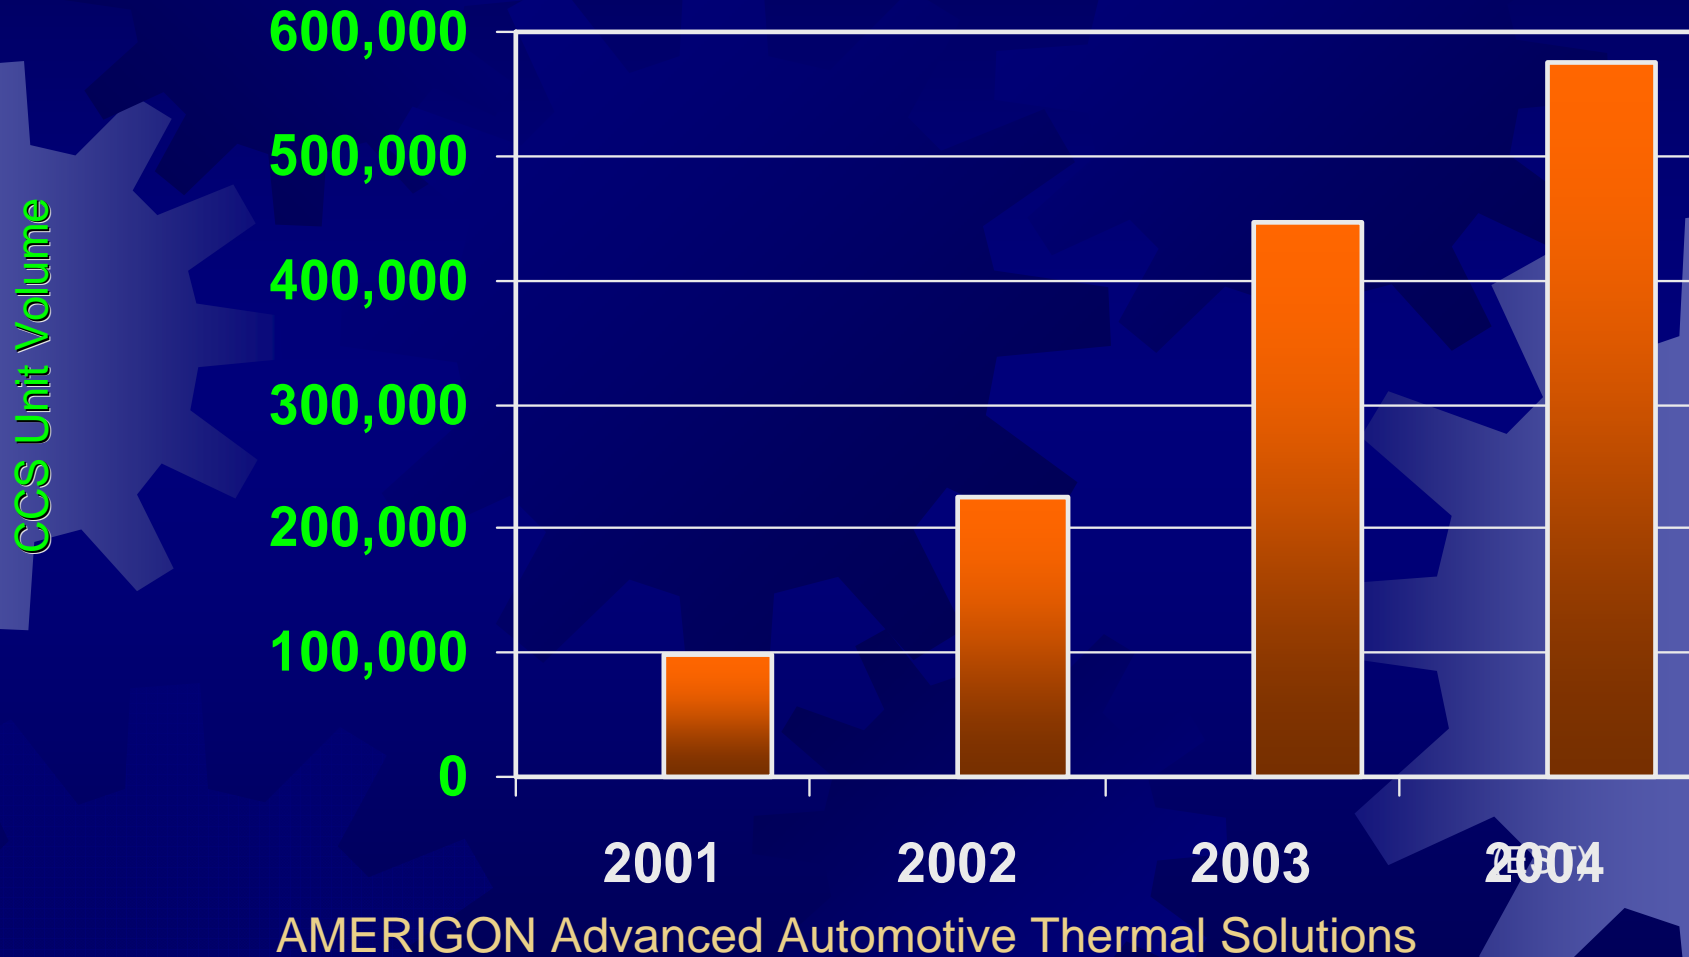

Primary Vehicular Cooling/Heating/Climate Control

- ★ Long-standing target for TE usage
- ★ Awaits commercial availability of:
 - ★ Materials with double the present figure of merit
 - ★ Lower cost (higher power density) systems
 - ★ Source of 2-4 kW of electric power
- ★ However, these present barriers are reduced for:
 - ★ Small DI & diesel powered vehicles
 - ★ Hybrid vehicles
 - ★ Fuel cell powered vehicles

Waste Power Recovery

- Over half of the energy consumed by vehicles is wasted:
 - Exhaust gases
 - Engine heating
 - Impact of other smaller losses
- Well recognized and studied opportunity
- System capabilities required to make recovery systems viable:
 - Factor of 1.5 to 2 TE material efficiency improvement
 - Lower cost (higher power density) systems
 - Capability to store recovered waste energy
- However, these present barriers are reduced in:
 - Vehicles with high electrical demands (trucks, vans, busses, luxury vehicles)
 - Meeting governmental demands for CO₂ reduction



Long-term Trends

Vehicle Industry Trends Favor Solid State (TE) Power Conversion

- Vehicles are becoming more electrified
 - Higher electrical demands under nearly all driving conditions
 - On board electrical energy management and storage systems are more prevalent and support adaptation
- Emission reduction becoming a higher priority worldwide
 - CFC reduction in HVAC, refrigeration systems
 - CO2 reduction in all vehicle types
- Advanced vehicle types requiring new subsystem functionality
 - Diesel and DI gasoline powered vehicles need better heating, cooling and waste recovery systems
 - Hybrids, hydrogen powered vehicles need more compatible HVAC
 - Fuel cell vehicles need HVAC, waste power recovery

Waste Heat Recovery May Become a Critical Necessity

- Directly addresses the global need to reduce CO2 emissions
- Provides source of additional electrical power without increasing fuel consumption
- Targeted by DOE for a 10% contribution toward OFCVT* initiative to increase overall efficiency by 30 to 45% for light duty applications and 40 to 55% for heavy duty applications by 2012
- * Office of FreedomCar and Vehicle Technologies

Summary

- Over 2 million TE modules are in use successfully in passenger car, SUV, van and light truck seating systems today
 - Reliability is proven for this application
 - Customer satisfaction is high
 - Market is growing rapidly
- Other vehicle applications are envisioned
 - HVAC
 - Waste power recovery
- New applications are driven by
 - CFC, CO2 reduction policies
 - Vehicle electrification
 - Demands for diesel, DI, hybrid vehicle performance improvement
- But require commercial availability of
 - More efficient TE materials
 - Reduced cost (high power density designs)

Concluding Remarks

Long-term societal needs for emission reduction and greater fuel efficiency are opening opportunities for solid-state TE system usage. Such systems interface well with other advanced components including electronic fuel controls, power management systems and electrical power storage systems. The trend toward further electrification of passenger vehicles offers additional opportunities for application of TE systems because of their ability to interface directly with other electronic subsystems. Thereby, the energy losses associated with converting electrical power to mechanical work in subsystems that employ electric motors, actuators or pumps for operation, are avoided.