


Hydrogen Fueling Infrastructure Research and Station Technology

U.S. DEPARTMENT OF
ENERGY

Energy Efficiency &
Renewable Energy

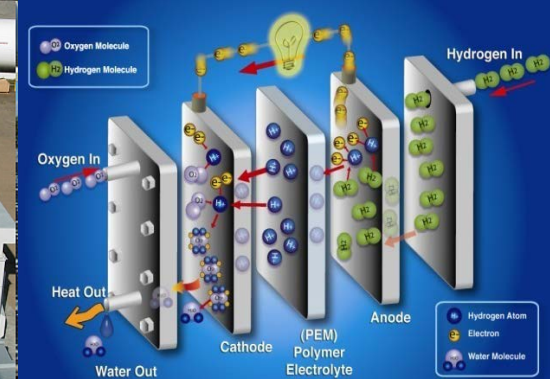


Erika Sutherland

U.S. Department of Energy
Fuel Cell Technologies Office

Question and Answer

- Please type your question into the question box

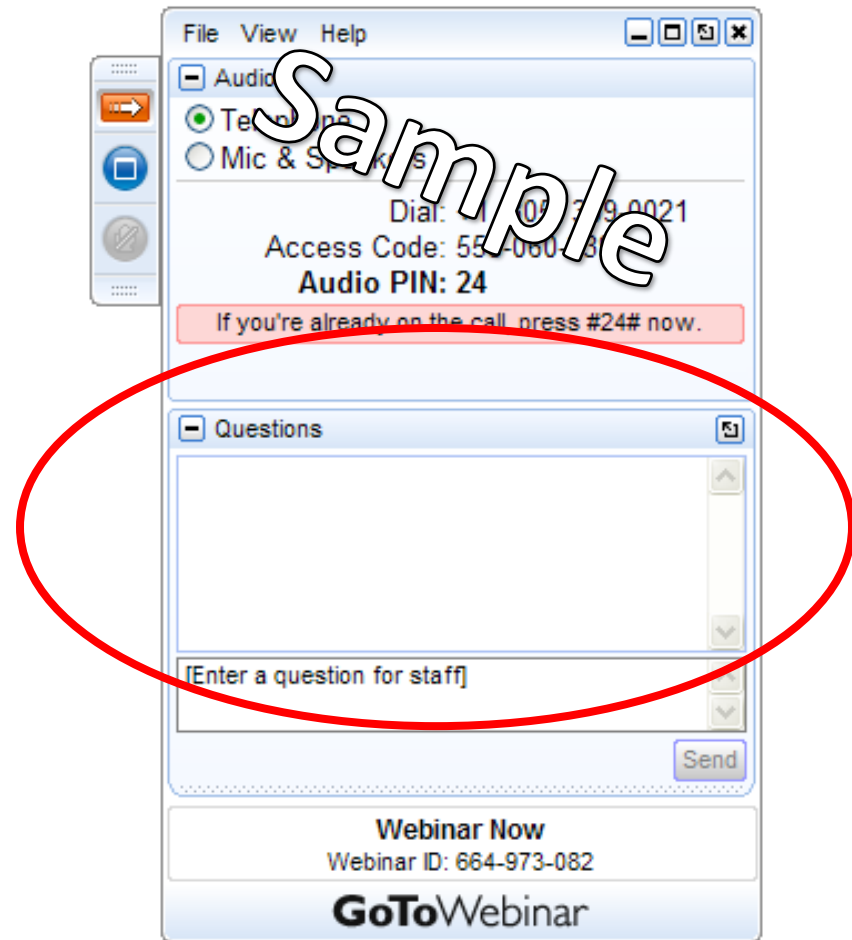

hydrogenandfuelcells.energy.gov



Hydrogen Fueling Infrastructure Research and Station Technology

Hydrogen Fueling Infrastructure Research and Station Technology

Chris Ainscough, Joe Pratt, Jennifer Kurtz,
Brian Somerday, Danny Terlip, Terry Johnson

November 18, 2014


The Hydrogen Fueling Infrastructure Research and Station Technology Project



Objective: Ensure that FCEV customers have a positive fueling experience relative to conventional gasoline/diesel stations as vehicles are introduced (2015-2017), and transition to advanced refueling technology beyond 2017.



- Co-led by NREL and SNL
- Leverages lab core capabilities
- Supports goals and objectives of H2USA



Existing Project Tasks:

Hydrogen Station Equipment Performance (HyStEP) Device

- Goal: Develop hydrogen station test device to validate dispenser fueling protocol
- September 2014 – August 2015

Hydrogen Contaminant Detector

- Goal: Develop requirements for inline fuel quality system for installation at stations
- Timeframe under development

Reference Station Design

- Goal: Develop station designs based on state-of-the-art components and characterize cost, throughput, reliability, and footprint using DOE models
- June 2013 - December 2014



H₂USA

Mission Statement

The mission of H₂ USA is to promote the commercial introduction and widespread adoption of FCEVs across America through creation of a public-private collaboration to overcome the hurdle of establishing hydrogen infrastructure.

Goals

- Establishing necessary hydrogen infrastructure and leveraging multiple energy sources, including natural gas and renewables
- Deploying FCEVs across America
- Improving America's energy and economic security
- Significantly reducing greenhouse gas emissions
- Developing domestic sources of clean energy and creating jobs in the United States
- Validating new technologies and creating a strong domestic supply base in the clean energy sector

Signatories on the Letter of Understanding



U.S. Department of Energy



State of California



Northeast States for Coordinated Air Use Management




Air Liquide



American Gas Association



American Honda Motor Company



ARC: Hydrogen



Argonne National Laboratory



Association of Global Automakers



California Fuel Cell Partnership



Chrysler Group LLC



Electric Drive Transportation Association



Fuel Cell & Hydrogen Energy Association



General Motors Holding LLC



Hawaii Natural Energy Institute



Hydrogenics



Hyundai Motor America



Intelligent Energy Ltd.



ITM Power



Kobelco Compressors America, Inc.



Linde North America



Massachusetts Hydrogen Coalition



Mercedes-Benz
Mercedes-Benz USA, LLC



National Association of Convenience Stores



National Renewable Energy Laboratory



Nissan North America R&D



Nuvera



PDC Machines



Plug Power Inc.



Pacific Northwest National Laboratory



Volkswagen Group of America



Proton Onsite



Sandia National Laboratories



Savannah River National Laboratory



SCRA




Toyota Motor North America



H2FIRST Long-term Objectives



- Reduce the installation cost of a hydrogen fueling station to be competitive with conventional liquid fuel stations.
- Improve the availability, reliability, and cost while ensuring the safety of high-pressure components.
- Focus a flexible and responsive set of technical experts and facilities to help solve today's urgent challenges and the future unpredicted needs.
- Enable distributed generation of renewable hydrogen in a broader energy ecosystem.

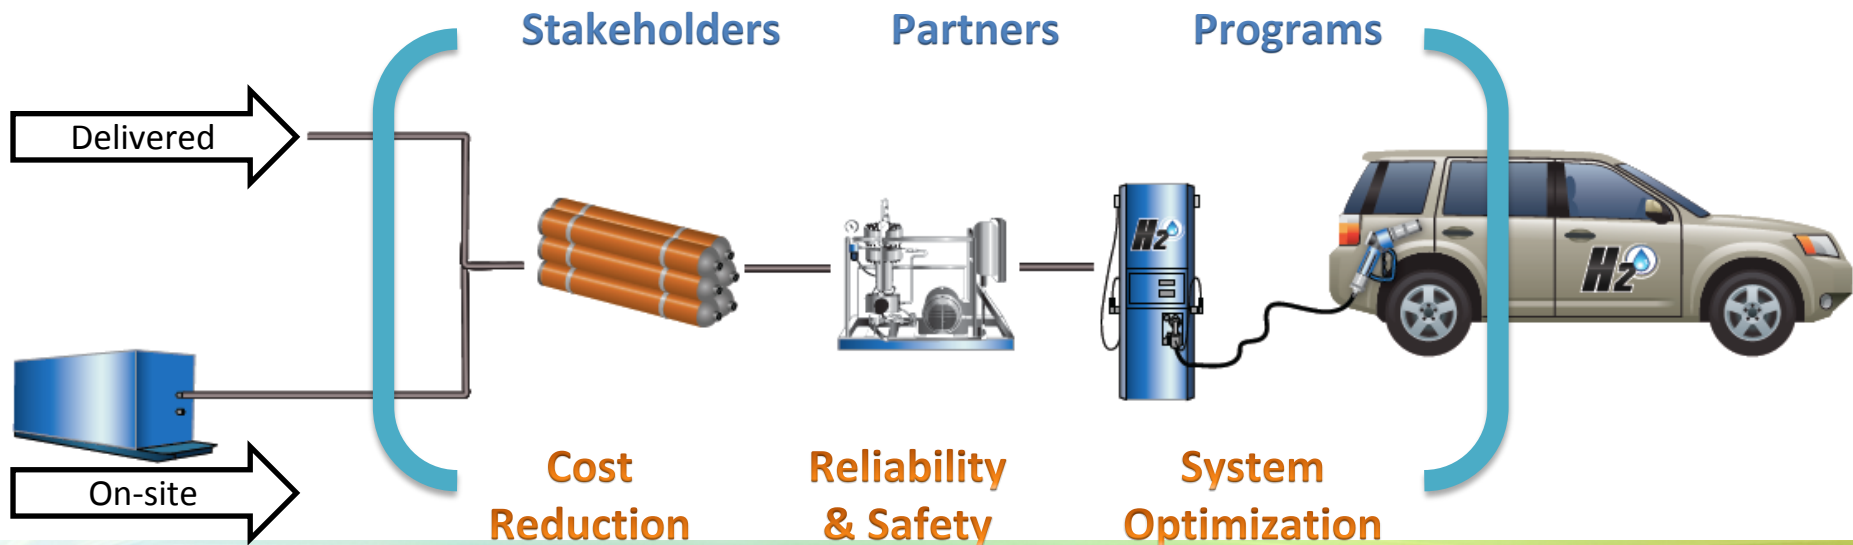


H2FIRST Project Coordination



DOE FCTO Decision Authority



Hydrogen Fueling Station WG

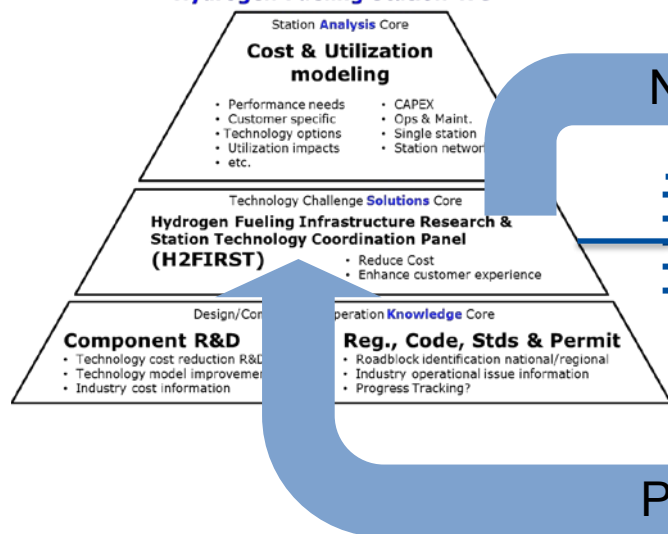

Needs, Ideas, Feedback

Pre-Proposal

Full Proposal

Add key external partners

Project Status & Results

**H2USA HFSWG
Coordination Activity**



**H2FIRST Project
Partners Activity**

Task Overview

HyStEP **Hydrogen Station Equipment Performance Device**

Objective – Accelerate commercial hydrogen station acceptance by developing and validating a prototype performance test device.

- Team consists of vehicle OEMs, station providers, state and government agencies and lab teams (SNL and NREL)
- Highest priority: Device to test fueling protocol (SAE J2601/CSA HGV 4.3)



CSA HGV 4.3-12

CSA America Participant Copy Only. Distribution Prohibited

HGV 4.3 – Test methods for hydrogen fueling parameter evaluation



SURFACE VEHICLE STANDARD	J2601	PropDft 1-2014
	Issued 2010-03	
	Revised xxx-xx	
	Reaffirmed xxx-xx	
	Superseding J2601-2010	
Fueling Protocols for Light Duty Gaseous Hydrogen Surface Vehicles		

RATIONALE

SAE J2601 has been updated from the original Technical Information Report (TIR) released in 2010 with technical revisions and clarifications. The updated content is based on improved fueling simulation models and has been validated through real world testing of light duty fuel cell vehicles at hydrogen stations, along with controlled lab testing. With robust correlation between these new simulations and tests, SAE J2601 is now being released as a standard for hydrogen fueling worldwide.

TABLE OF CONTENTS

1. SCOPE
2. BACKGROUND
3. REFERENCES
4. DEFINITIONS
5. ABBREVIATIONS AND SYMBOLS
6. GENERAL FUELING PROTOCOL DESCRIPTION
7. GENERAL PROCESS REQUIREMENTS FOR HYDROGEN FUELING
8. KEY MODELING ASSUMPTIONS
9. TABLE-BASED FUELING PROTOCOL
10. NON-STANDARD, DEVELOPMENT HYDROGEN FUELING PROTOCOLS
11. NOTES


11. NOTES
 10. NON-STANDARD, DEVELOPMENT HYDROGEN FUELING PROTOCOLS
 9. TABLE-BASED FUELING PROTOCOL
 8. KEY MODELING ASSUMPTIONS
 7. GENERAL PROCESS REQUIREMENTS FOR HYDROGEN FUELING
 6. GENERAL FUELING PROTOCOL DESCRIPTION
 5. ABBREVIATIONS AND SYMBOLS
 4. DEFINITIONS
 3. REFERENCES
 2. BACKGROUND
 1. SCOPE

- Why we need HyStEP:
 - As hydrogen is compressed into a vehicle tank, it heats up.
 - Hydrogen is pre-cooled as low as -40°C , and the fill rate is controlled.
 - Carbon fiber vehicle tanks have thermal limits that must not be exceeded.
 - The fueling protocol standards SAE J2601 and CSA HGV 4.3 specify how to fill hydrogen vehicles safely.
 - Vehicle manufacturers, consumers, station operators, and state stakeholders all want to know that stations are filling safely.


HyStEP Task Overview



- Specifications for HyStEP
 - Device is mobile: Mounted in truck bed or trailer
 - Type IV 70 MPa tank(s) with 4-7 kg capacity
 - Designed to perform subset of CSA HGV 4.3 tests, may add others in the future (e.g. MC fill)
 - SAE J2799 IrDA for communication tests and fills
 - Tank and receptacle instrumented with multiple P, T sensors to monitor pressure ramp rate, ambient, tank, and gas conditions.
 - Leak simulation to check dispenser response

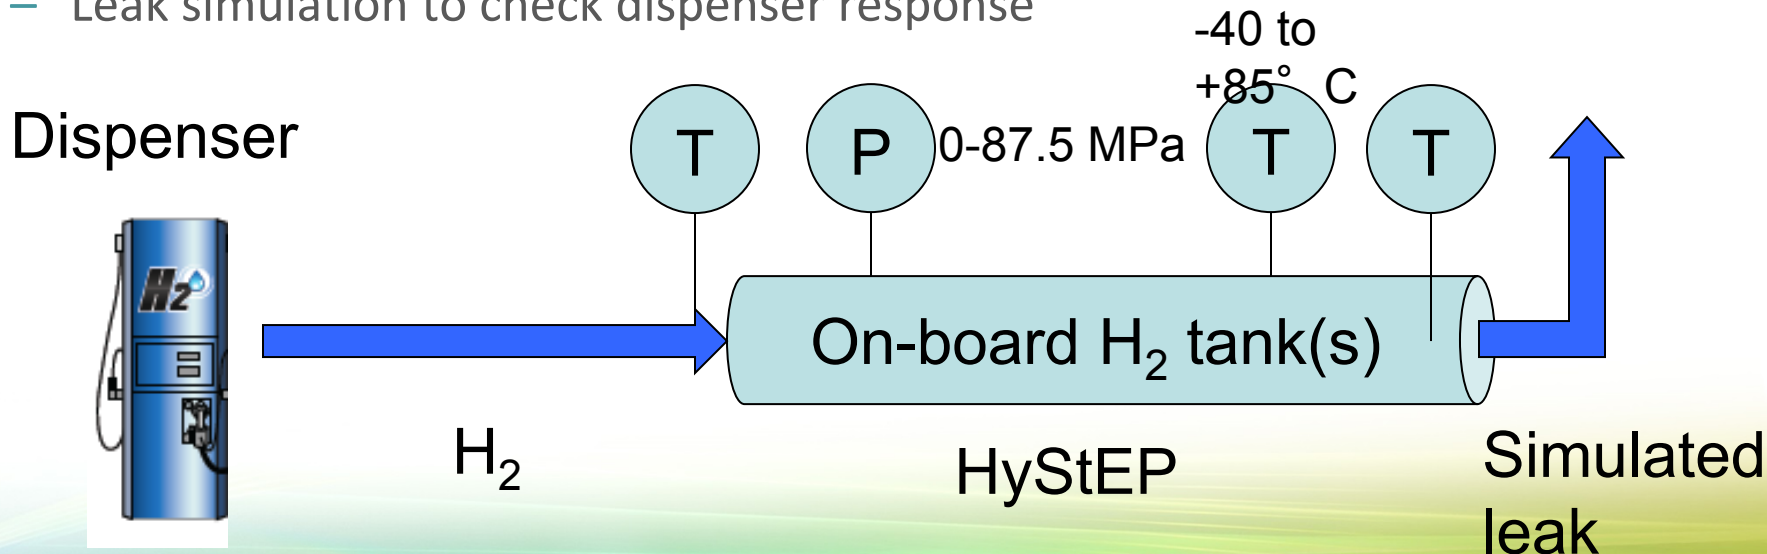

HyStEP Device scheduled for completion September 2015

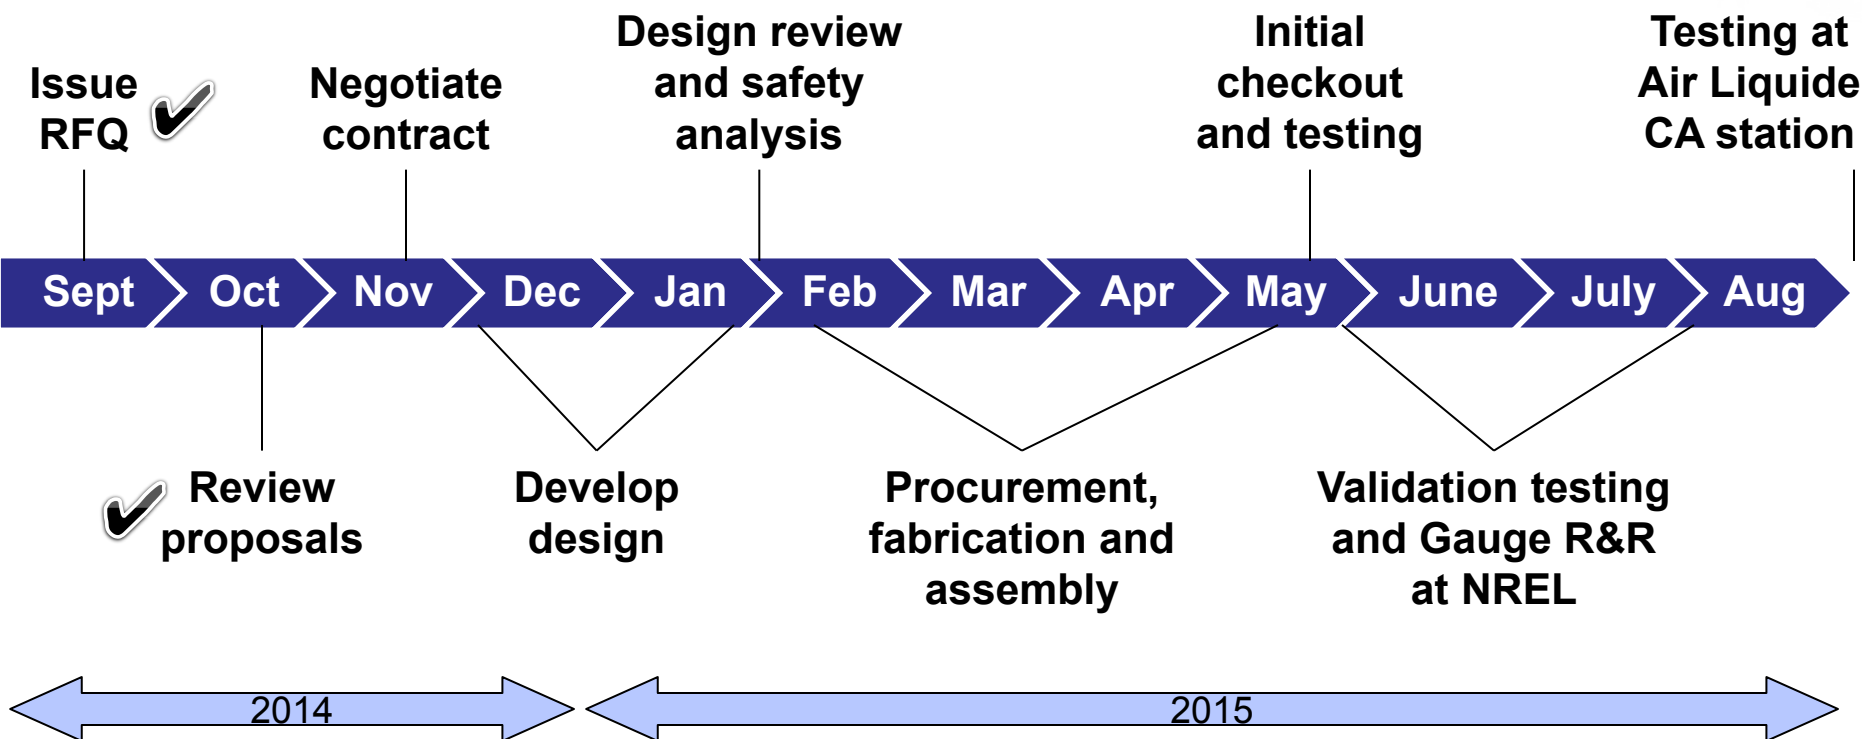

Task Overview

Hydrogen Contaminant Detector

Hydrogen Contaminant Detector (HCD) Task Overview



Objective – *Develop requirements for inline fuel quality system for installation at stations.*

Current Activity

Market Survey

Perform a market survey of current detection technology characteristics including detector availability, capabilities, cost and maintenance

Requirements Document

Incorporate input from industry and government experts with research from the market survey to develop a set of engineering requirements for a detector

Hydrogen Contaminant Detector Challenges




Desired Characteristics	Challenges
Ease of station integration	• Multiple station configurations • Extreme gas pressure and temperature

Near term solutions will likely be tailored to individual station technologies based on probable contaminants.

Hydrogen Station Integration

Risk Based Approach

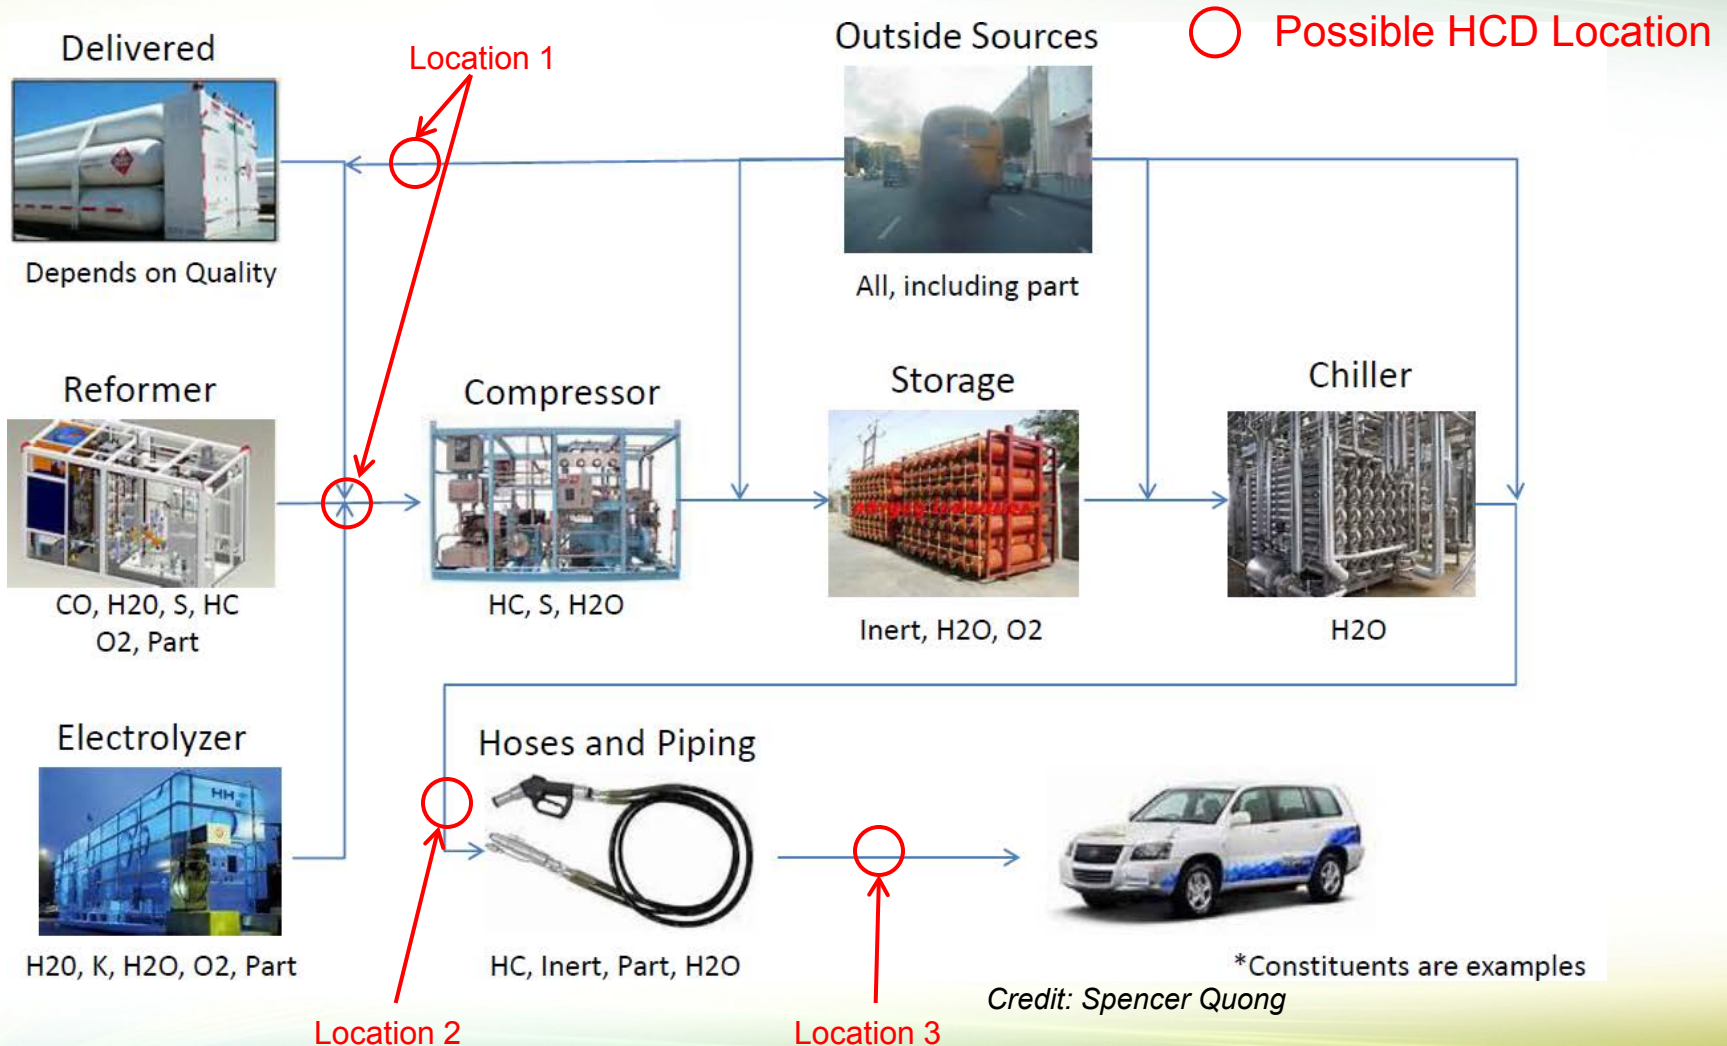


Hydrogen Station Integration


Risk Based Approach



- Delivered Hydrogen (SMR Production)
 - Gaseous
 - Liquid
- On-site Hydrogen Production
 - Water Electrolysis
 - Steam Methane Reformation
- Pros
 - L1: low pressure requirements
 - L2: captures most contaminant sources
 - L3: captures all contaminant sources
- Cons
 - L1: misses potential contaminants from downstream sources
 - L2: must be integrated with <87.5 MPa and $> -40^{\circ}$ C gas
 - L3: burden on vehicle OEM; many more cars than stations

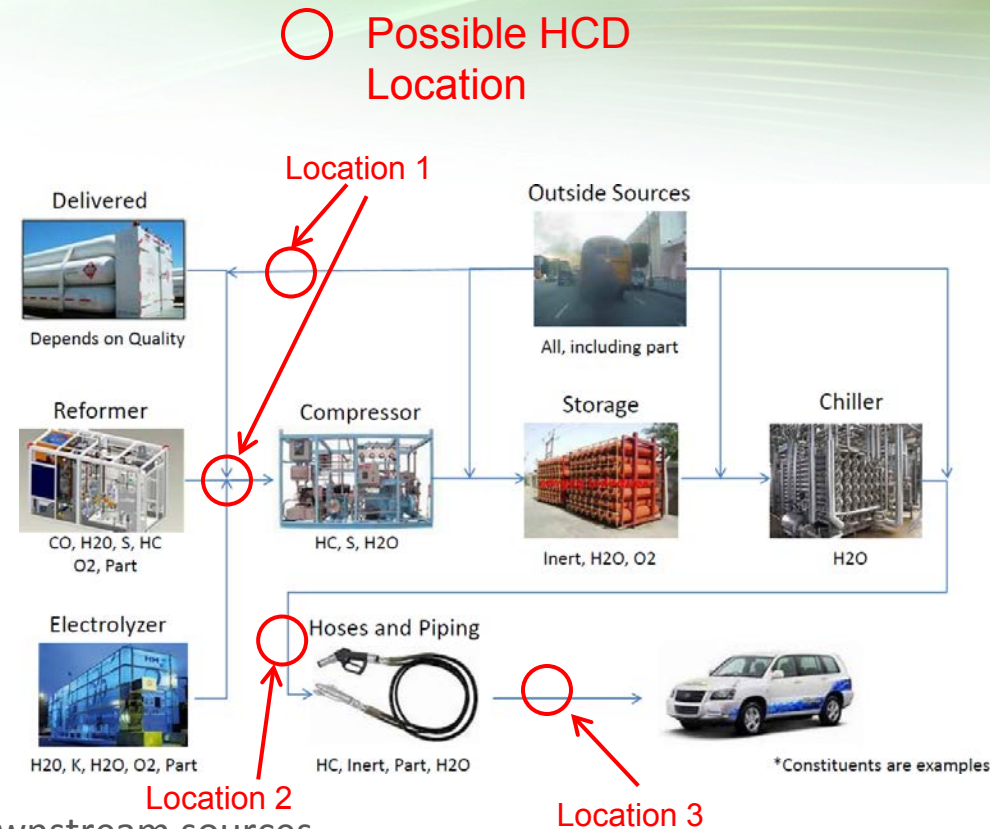


Technical Accomplishments: Fuel Quality- Relative Tradeoff Drivers Identified

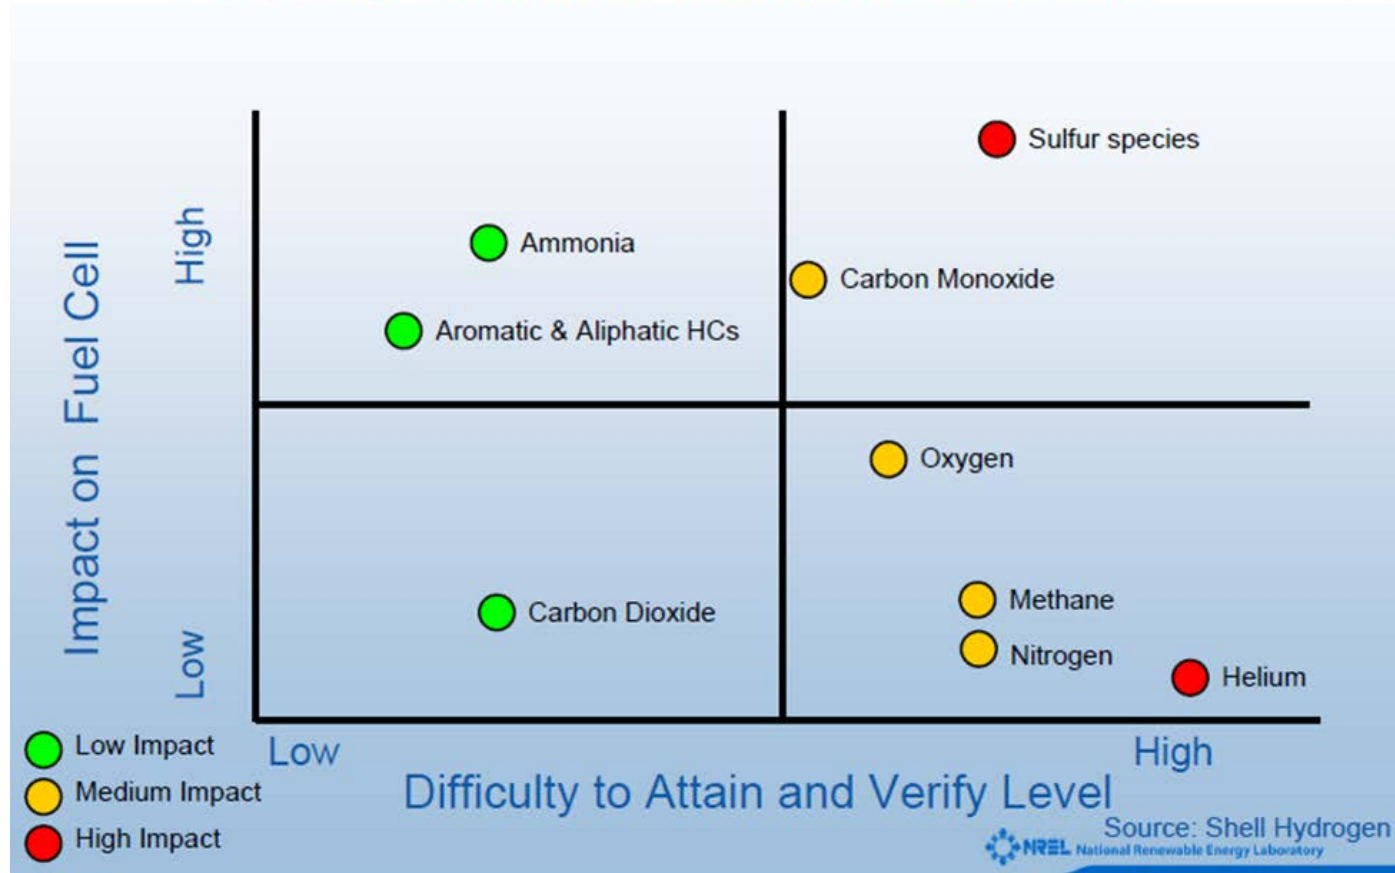

CO is the most critical constituent in the specification

Contaminants Detected and Levels

Current station data: Field observations

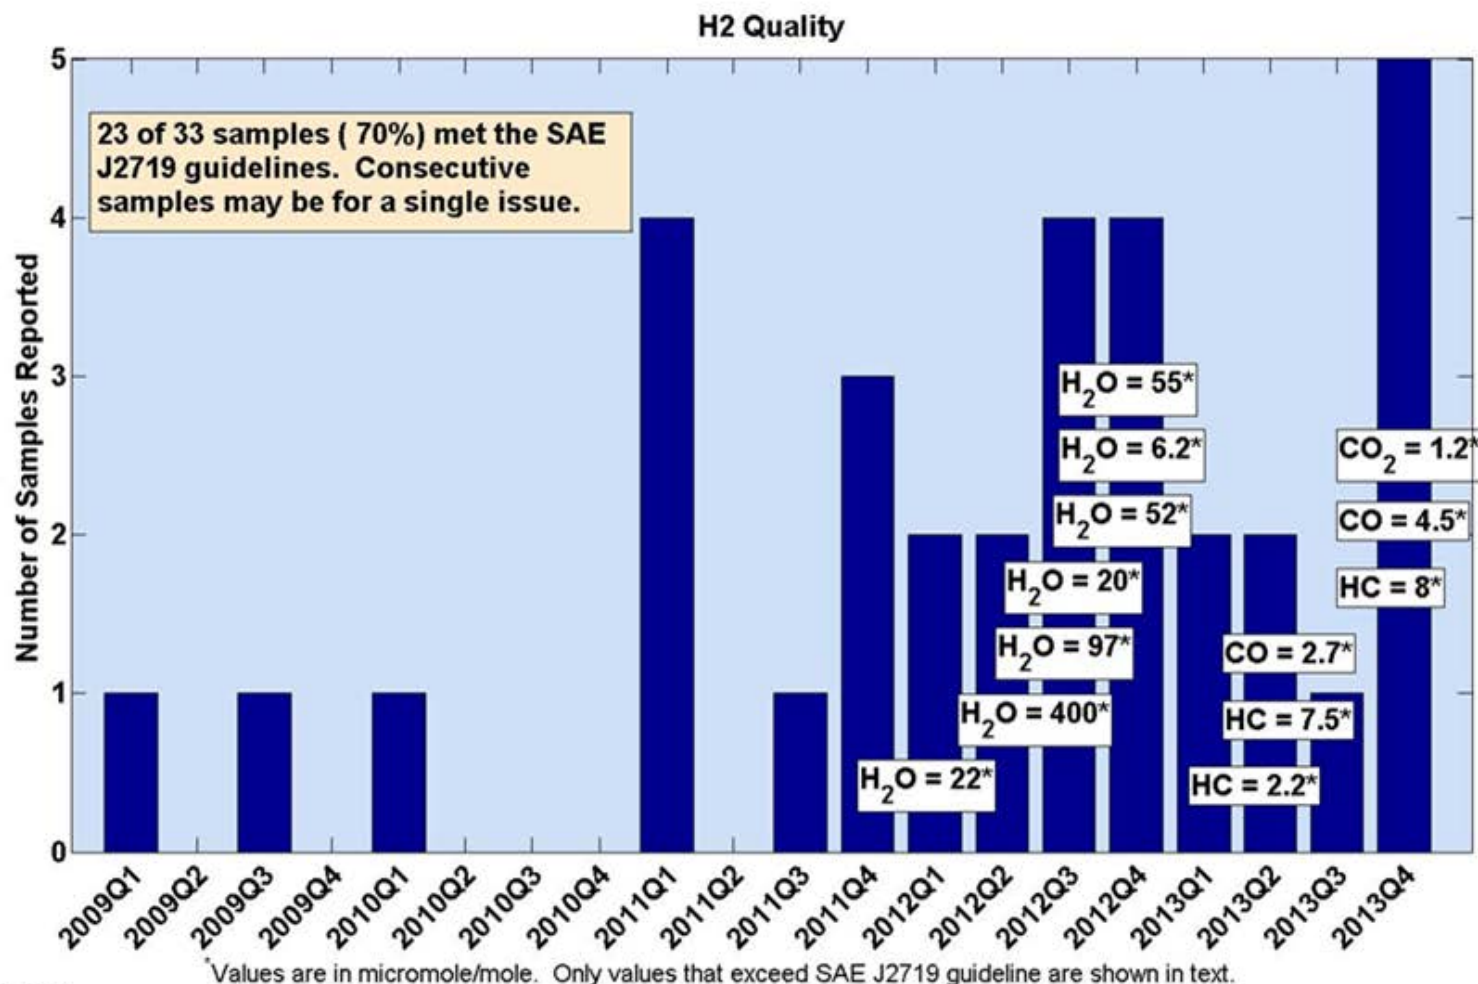

NREL cdp_infr_25
Created: Apr-24-14 4:13 PM | Data Range: 2009Q1-2013Q4

- Study of available hydrogen contaminant detectors. Task elements include:
 - Gather data on relevant technologies
 - Prioritize detectors for most impactful contaminants
 - Prioritize commercial technologies for station deployment
 - Define engineering requirements for a deployable HCD
 - Identify gaps
- NREL and SRNL developing work plan, timeline and milestones
- Output: market survey and engineering requirements

Market Survey

Technologies Investigated



Gas Chromatograph Technologies

- GC/PDID – Pulsed Discharge Ionization Detector
- GC/DID – Discharge Ionization Detector
- GC/ECD – Electron Capture Detector
- GC/PFPD – Pulsed Flame Photometric Detector

Mass Spectrometry

- APIMS – Atmospheric Pressure Ion Mobility Spectrometry

Piezoelectric

- QCM – Quartz Crystal Microbalance

Optical

- TDL – Tunable Diode Laser
- ICOS – Internal Combustion Optical Sensor
- FTIR-Gas Cell – Fourier Transform Infrared spectroscopy
- CRDS – Cavity Ring Down Spectroscopy

Task Overview

Reference Station Design

Objective – Develop station designs based on state-of-the-art components and characterize cost, throughput, reliability, and footprint using DOE models.


Approach

- Develop a station design matrix.
- Identify priority options of 10-15 stations.
- Complete an external review with stakeholders.
- Develop three to five high-impact station designs.
- Report on gaps, recommendations for testing, and R&D.
- Hold a stakeholder information webinar

Station Characteristics




- Hydrogen delivery type
- Daily capacity
- Land area requirement
- Fuel cost
- Capital investment
- Compressor configuration
- Storage size
- Consecutive fill capacity
- Number of hoses

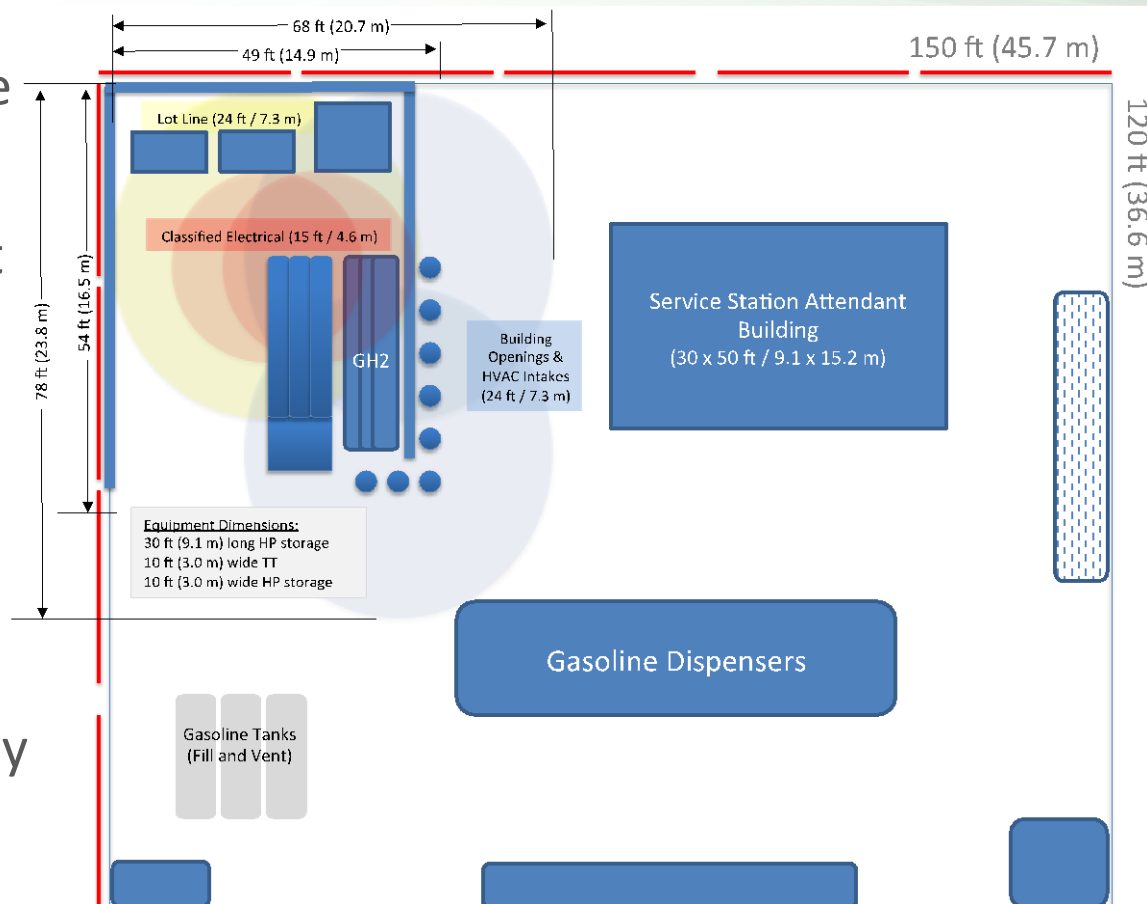


Source: Safety, Codes and Standards for Hydrogen Installations: Hydrogen Fueling System Footprint Metric Development, SAND2014-3416 Sandia National Laboratories, 2014.

This is a highly-collaborative project between H2FIRST, H2USA, ANL, and DOE

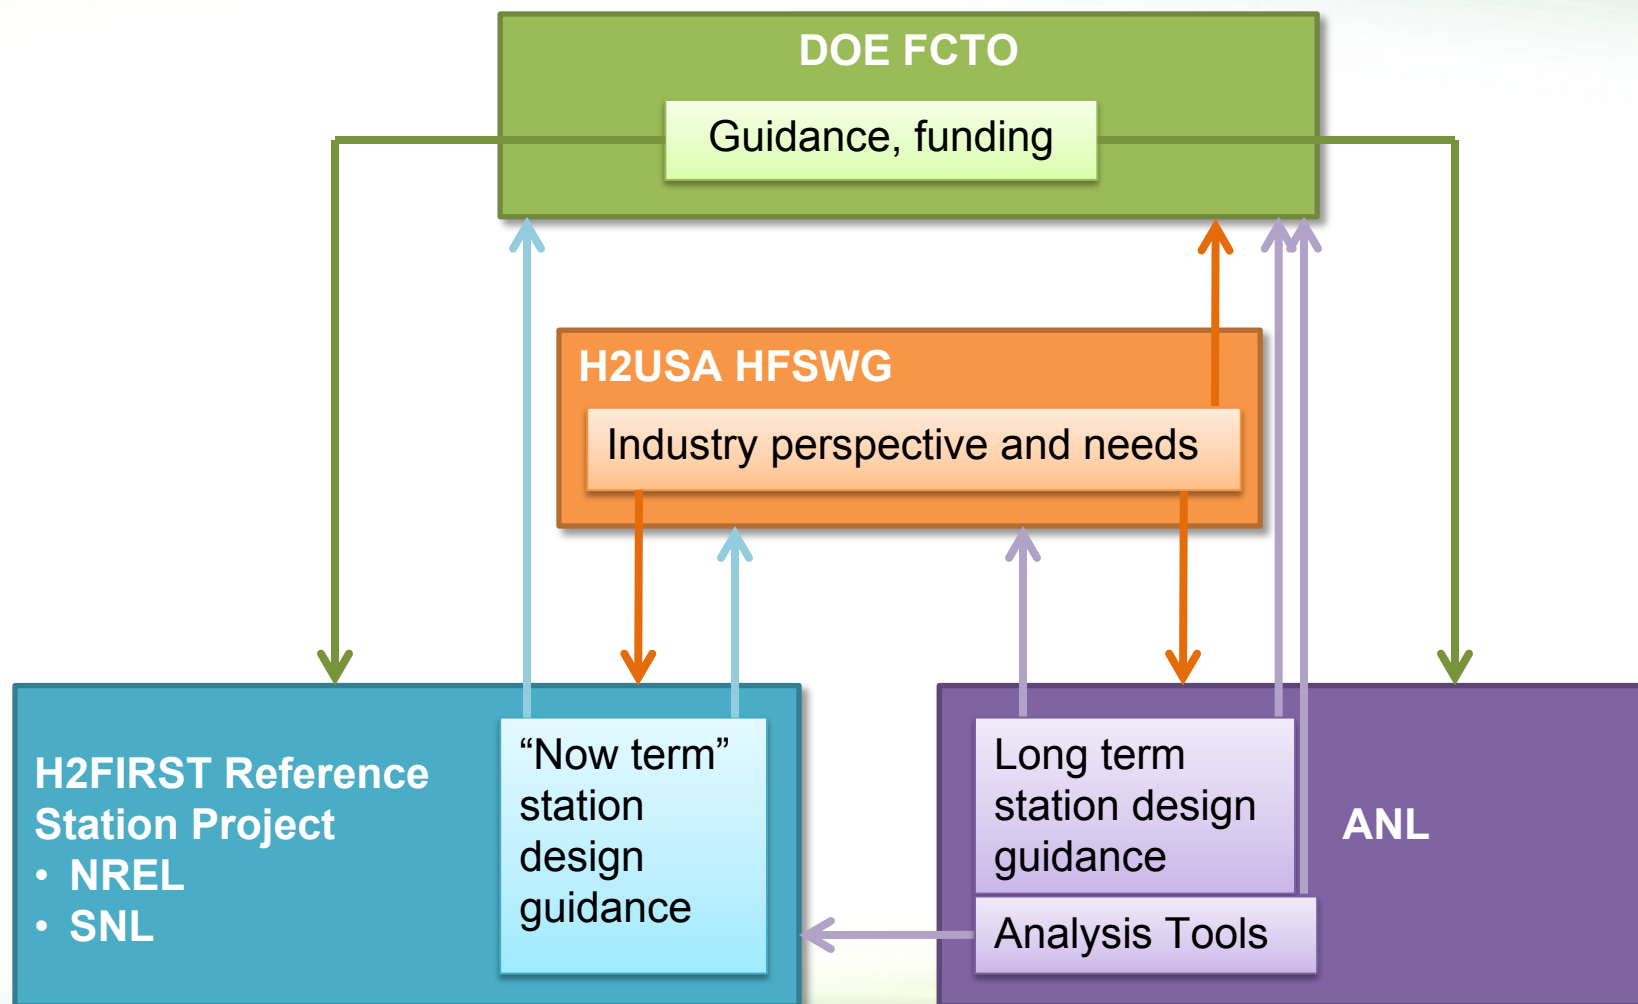

Reference Station Design Task Process

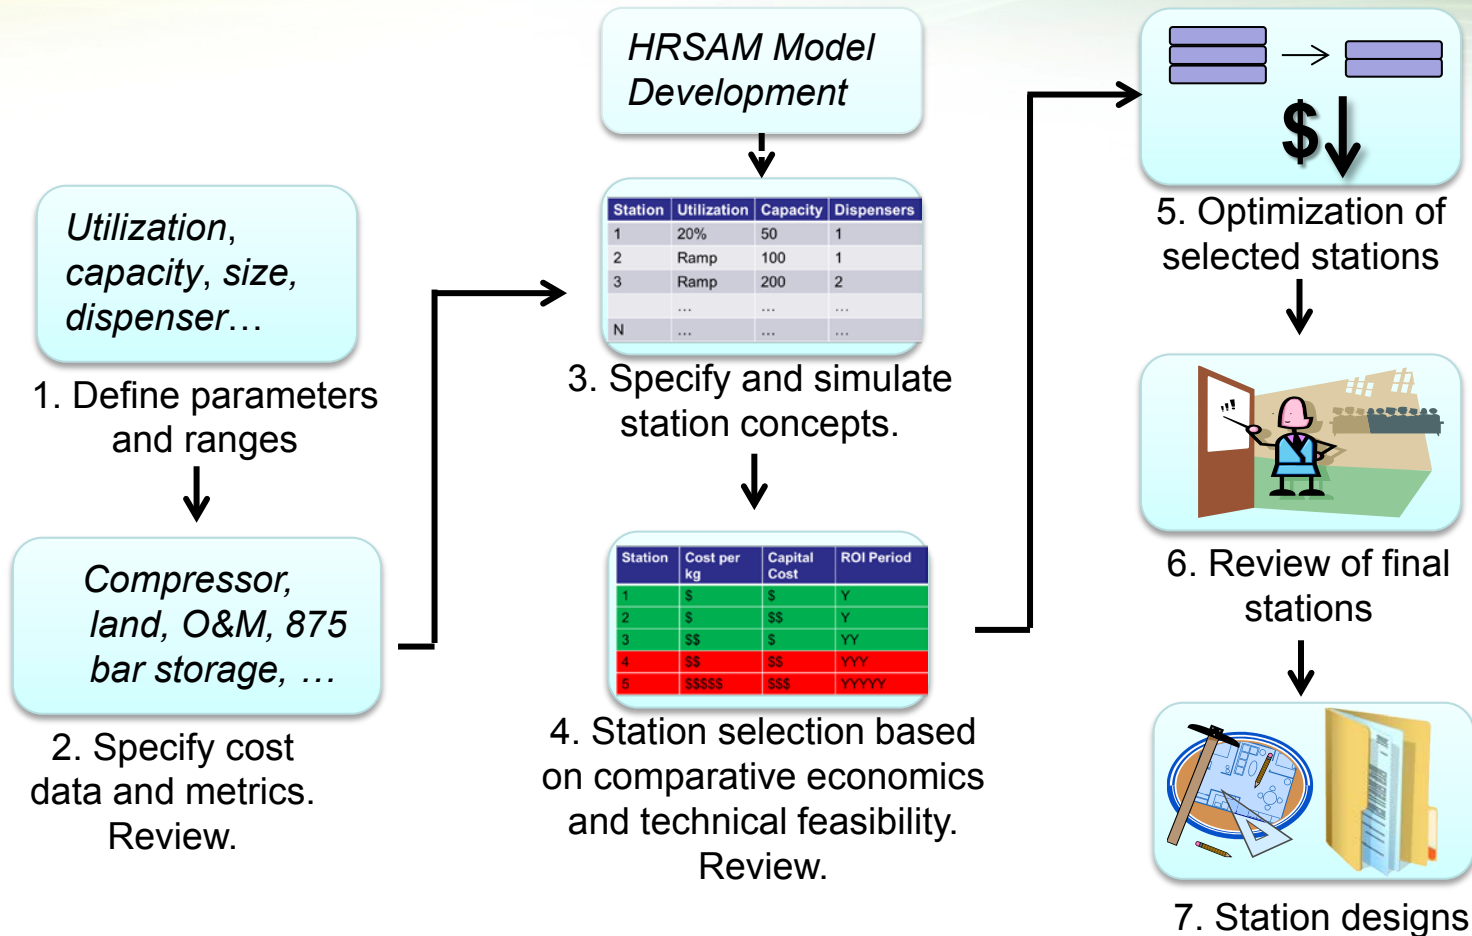

Status: Step 4. Down-select ongoing.

How to get involved in H2USA



- To join H2USA, email info@h2usa.org, or visit <http://h2usa.org>

How to get involved in H2FIRST



Contact

Bianca Kroebe Thayer, Sandia National Laboratories

925-294-1214

bkthaye@sandia.gov

OR

Alex Schroeder, National Renewable Energy Laboratory

303-275-3790

Alex.Schroeder@nrel.gov

Questions



- Please type questions into the chat box in the webinar software.
- For more information, please visit. <http://1.usa.gov/1zRGmtD> *

Joe Pratt, Sandia National Laboratories

jwpratt@sandia.gov

Chris Ainscough, National Renewable Energy Laboratory

Chris.Ainscough@nrel.gov

* Full URL: <http://energy.gov/eere/fuelcells/h2first-hydrogen-fueling-infrastructure-research-and-station-technology>

BACKUP

Supporting Capabilities – CIRC Materials Science & Engineering Science Focus



Hydrogen Effects on Materials Laboratory



CIRI Capabilities

- Materials and Components
 - Materials testing in high-pressure H_2 at variable temperature
 - Customized testing on metals and non-metals
 - Weld research and development
 - Full-scale component testing in H_2
- Systems Engineering
 - Full-scale H_2 station breadboard for system optimization
 - Real world equipment evaluation and innovation platform


Status

- Assessing HyReF (full-scale component testing and H_2 station breadboard) planned for 2015

Supporting Capabilities – ESIF & DERTF Testing & Analysis Focus



Energy Systems Integration Facility

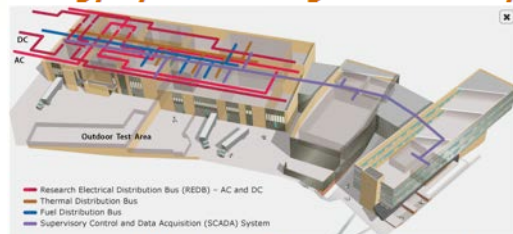

Electricity Laboratories Thermal Laboratories Fuel Laboratories Data, Analysis, and Visualization

Distributed Energy Resources Test Facility



Capabilities

- On-site hydrogen generation (electrolyzers)
- High pressure component testing
- Flexible, renewable-ready hydrogen energy storage platform
- Advanced hydrogen sensor testing
- 700-bar and 350-bar (nom) dispensing
- Research Electrical Distribution Bus (REDB) capability for grid integration
- Physical and photo-electrochemical material characterization
- Systems integration & device under test platforms

Research Station Status

- 700-bar research station construction for basic system architecture started and expected completion in December 2014

Photo credit: NREL (April 2014)

