ENERGY Energy Efficiency & FUEL CELL TECHNOLOGIES OFFICE

Manufacturing R&D

The Manufacturing R&D sub-program in the Fuel Cell Technologies Office (FCTO) improves processes and reduces the cost of manufacturing components and systems for hydrogen production and delivery, hydrogen storage, and fuel cells for transportation, stationary, and portable applications. Scaling up production of today's hydrogen and fuel cell components and systems (currently built using laboratory-scale fabrication technologies) to highvolume commercially-viable products is challenging. In addition, crosscutting technologies and capabilities such as metrology and quality control standards, modeling and simulation tools for efficient manufacturing processes, and the development of a domestic supplier base are necessary to continue the establishment of a robust, domestic hydrogen and fuel cell manufacturing industry.

Why is this Important?

As the market for hydrogen and fuel cells grows, the need for development of automation and manufacturing processes for mass production of these systems becomes increasingly critical. To meet the needs of increasing production volumes, FCTO's Manufacturing R&D program works with industry, universities, and national laboratories to research, develop, and demonstrate high-volume manufacturing processes and technologies to reduce cost while also maintaining performance.

What are the Challenges?

Fuel Cells

The ramp-up to high-volume production of fuel cells will require quality control



Figure 1. Industrial-style roll-to-roll web-line at the National Renewable Energy Laboratory. The web-line is used to develop and validate in-line inspection methods for fuel cell components, including membranes, electrodes, and gas diffusion media.

and measurement technologies consistent with high-volume manufacturing processes (see Figure 1). Manufacturers will need process control strategies specific to producing fuel cell components to reduce or eliminate sampling and testing of components, modules, and subsystems. As fuel cell manufacturing scales up, the relationships between fuel cell system performance, manufacturing process parameters, and variability must be clearly understood. Such understanding will likely play a major role in fuel cell system design, acceptable tolerances, and specifications and is integral to implementing design for manufacturability.

Hydrogen Storage

The high cost of carbon fiber is the primary cost driver in hydrogen storage composite tank technology. The cost of carbon fiber can be reduced by improving materials, processing, and systems while moving to higher volume manufacturing processes using advanced manufacturing R&D. Cycle time reductions, filament winding process advancements, a reduction in the amount of fiber used through strategic fiber placement, and improvements in resin matrix technologies are all examples of manufacturing-related R&D which can lower hydrogen storage costs.

Hydrogen Production and Delivery

Currently, hydrogen production is capital-intensive. Widespread adoption of hydrogen fuel cells requires consumers to have access to cost-competitive hydrogen. Steam methane reforming of natural gas in centralized production facilities is projected to meet the DOE cost goal of less than \$4 per gallon gasoline equivalent at high production volumes, but there are opportunities for lowering the manufacturing costs of building hydrogen fueling stations for vehicles. Additionally, reliability issues in manufactured components and systems raise the overall cost of compression.

Cross-Cutting

Cross-cutting activities such as manufacturing process simulation, quality control, and metrology must be developed for the full suite

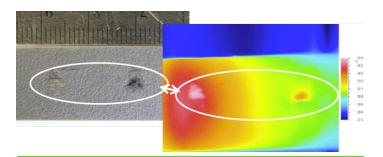


Figure 2. Example of infrared thermographic detection of gas diffusion media defects (surface scratches) using direct current excitation. The sample is shown on the left and the detected thermal response, with the material moving at 30 feet per minute, is shown on the right.



Figure 3. Example of a hydrogen storage pressure vessel showing forward and aft dome caps that were filament wound during the manufacturing process.

of hydrogen- and fuel cell-related manufacturing processes. Process simulation can help to establish manufacturing process requirements (e.g., tolerances and quality assurance requirements), reduce manufacturing costs by relaxing noncritical tolerances, cut development times by generating more robust designs, and facilitate optimal solutions. Low-cost quality control technologies are needed to increase the reliability and quality of manufactured products. Non-destructive, in-line metrology techniques must be developed to reliably measure various process quantities such as microstructure defects, catalyst loading levels, surface roughness, coating quality, and dimensional accuracy (Figure 2).

Success Stories

Projects previously supported by the Manufacturing R&D Program have resulted in significant manufacturing advancements.

Examples of these advancements include:

- Demonstrated multiple quality control diagnostic technologies, some of which can detect defects as small as 150 μm.
- Reduced the cost and increased the throughput of gas diffusion layers

by 50% and 400% respectively since 2008.1 $\,$

- Demonstrated the ability to bond membrane layers in less than 1 second using ultrasonic bonding techniques (compared to 1 minute when using traditional hot pressing).²
- Reduced the cost and weight of hydrogen storage composite tanks by more than 15% using advanced fiber placement manufacturing techniques (Figure 3).³

Goals

- Develop manufacturing techniques to reduce the cost of automotive fuel cell stacks at high volume (500,000 units/ year) from the 2008 value of \$38/kW to \$20/kW system cost by 2020.
- Develop fabrication and assembly processes to produce compressed hydrogen storage systems that cost \$10/kWh for widespread commercialization of hydrogen fuel cell electric vehicles across most light duty platforms by 2020.
- Support efforts to reduce the cost of manufacturing components and systems to produce hydrogen at less than \$4/gge (untaxed, delivered, and dispensed at high volumes) by 2020.

For More Information

More information is available from the proceedings of the Hydrogen and Fuel Cell Manufacturing R&D Workshop⁴ which was held by DOE and NREL with various manufacturing stakeholders from the federal government, universities, national laboratories, and industry. Additional details about current FCTO activities are presented in the Manufacturing section of the Office's Multi-Year Research, Development, and Demonstration Plan.⁵

More information on the Fuel Cell Technologies Office is available at <u>http://</u> <u>www.hydrogenandfuelcells.energy.gov</u>.

References and Notes

- http://www.hydrogen.energy.gov/pdfs/review11/mn002_ morgan_2011_o.pdf
- http://www.hydrogen.energy.gov/ pdfs/review09/mf_05_puffer.pdf
- http://www.hydrogen.energy.gov/ pdfs/review13/mn008_leavitt_2013_p. pdf
- http://www1.eere.energy.gov/hydrogenandfuelcells/wkshp_h2_fc_manufacturing.html
- http://www1.eere.energy.gov/hydrogenandfuelcells/mypp/pdfs/manufacturing.pdf

U.S. DEPARTMENT OF

Energy Efficiency & Renewable Energy

For more information, visit: hydrogenandfuelcells.energy.gov

May 2016

Printed with a renewable-source ink on paper containing at least 50% wastepaper, including 10% post consumer waste.