



FACT SHEET

Robotic Technology

The U.S. Department of Energy, Savannah River Site (SRS) has 51 underground carbon-steel waste storage tanks, located in two tank farm facilities. These tanks were built to hold radioactive liquid waste from nuclear weapons production, and range in size from 750,000 to 1,300,000 gallons. Today, about 35 million gallons of highly radioactive liquid waste remain in 43 waste tanks as eight of the tanks have been operationally closed.

Savannah River Remediation (SRR) uses robots in large, high-level waste storage tanks and in the liquid waste facilities to:

- Inspect the integrity of the waste tanks' systems
- Remove waste from the tanks
- Clean up contaminated tank surfaces and equipment
- Retrieve samples of residual waste that cannot be removed from the tanks
- Remove contaminated waste from liquid waste facility floors
- Inspect and repair contaminated equipment inside the liquid waste facilities

There are no plans to build additional tanks, so it is essential to validate the integrity of existing tanks and transfer systems. Service life management of these tanks includes an on-going surveillance program where the primary and secondary tank walls in the annulus space and annulus pan floor are inspected with a remotely manipulated camera. Select areas receive additional higher resolution photography and ultrasonic inspections.

The cameras and sensors for these inspections are deployed on 'wall crawler' robots.

Both chemical and mechanical techniques are used to remove the waste to the lowest levels practical. These removal techniques have been further improved by SRR's use of robots inside of the waste tanks. Several different robots have been used to achieve further removal of waste material, and retrieval of samples of the waste for laboratory evaluation.



Waste removal in these tanks is completed in a series of steps. The first step removes the bulk, or most significant volume of waste, and leaves behind a much smaller waste heel. Mechanical and chemical techniques are used in the second waste removal step to take out more of the hard-to-reach waste, leaving behind an even smaller amount of residual waste material. Additional steps, depending on the physical characteristics of each tank, may include cooling coil flushing or annulus cleaning.


After all of the applicable waste removal steps are completed, samples of the residual waste material must be retrieved and submitted for laboratory evaluation. Those results are analyzed to ensure the tank is ready to be operationally closed and filled with a cement-like substance.

Robots are inserted into the tank to obtain the laboratory samples of the residual waste material. These remotely controlled robots are equipped with tools and cameras.


The Robots

The **Small Roving Annulus Inspection Vehicle (SRAIV)** is a modified, commercially available wall crawler designed to implement the In-Service Inspection (ISI) of waste tanks, along with digital video and still definition photography. The SRAIV provides an improved capability to achieve a more complete inspection of the tank walls than previous methods. The SRAIV is deployed through annulus risers in the tank to gain access to tank walls requiring inspection. The SRAIV is deployed using a manually operated deployment pole and is coupled to the wall using permanent magnet wheels. Navigation is performed from the remote console where pictorial views can be displayed from the on-board cameras. The unit incorporates multiple ultrasonic inspection (UT) transducers for traditional weld examination. These surveillances are performed on surfaces in the annulus in a systematic manner. Remotely controlled magnetic wall crawlers equipped with cameras and ultrasonic transducers integrated with commercially available “P-scan” data analysis equipment have been used to ultrasonically inspect tank walls, weld areas, and leak sites.

The **Sand Mantis** (pictured below) has been used for removing residual waste, from tanks that do have cooling coils, using a patented water-jet system that transfers the material to a grinder for grinding into smaller particles that can be more easily removed from the

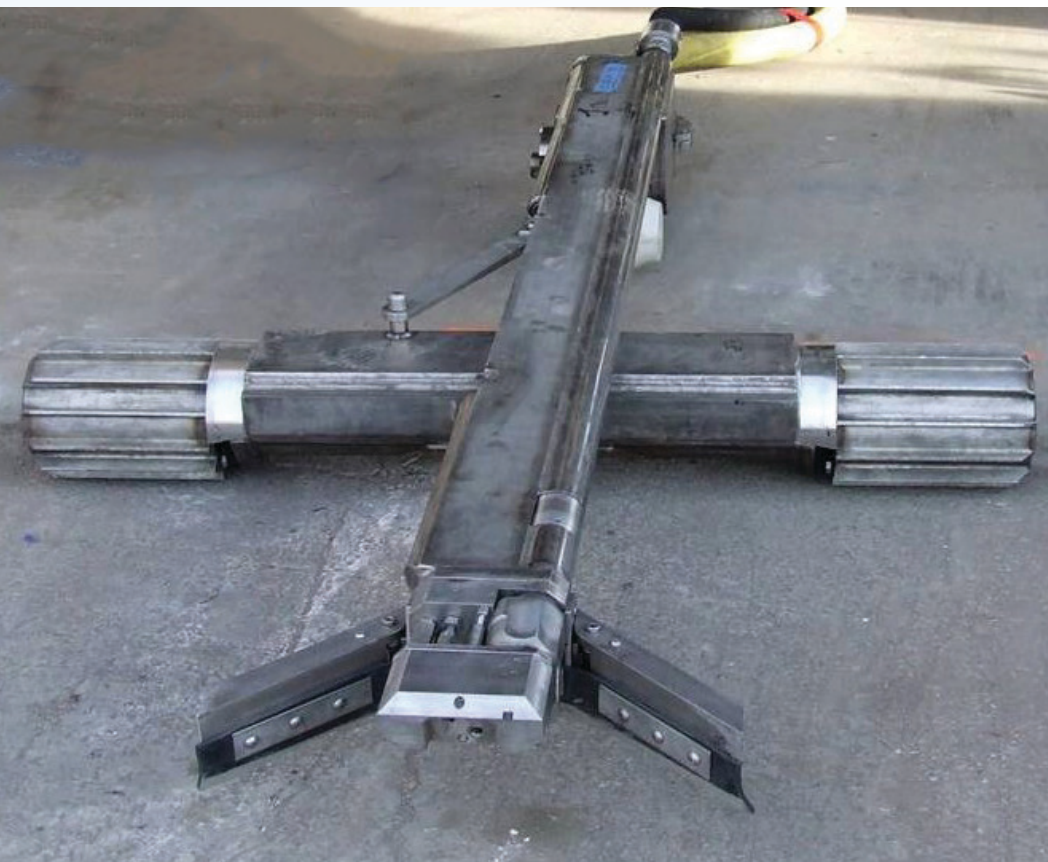

waste tanks. It sprays highly-pressurized water from a tiny opening made of specially selected material that can stand up to the water's pressure over time. The complete robot is 8 feet long and weighs approximately 800 pounds. The Sand Mantis' cross-shaped body can be collapsed into a straight line for insertion through the small openings in the top of a tank. Once inside, the robot unfolds and is remotely guided.

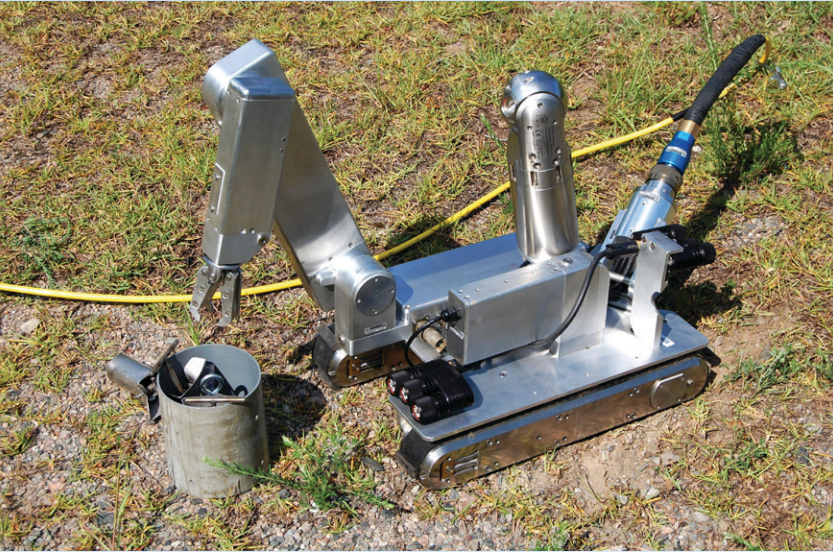

Frankie, a commercially available robot, was modified by SRR and moves across the tank floor on treads. Frankie's primary function is to scoop thin layers of residual material left behind from heel removal and cleaning processes. Frankie replaces a custom-built vial that was scraped along the tank floor; Frankie does a better job and with less risk to workers.

New innovations have led to the creation of G.I. Joe (left), SRR's latest sampling robot. An enhancement of Frankie, G.I. Joe was also a commercially available design and was modified by SRR in order to obtain better samples of residual waste, while reducing exposure to workers. The arm grips a scoop that is dragged along the tank floor. Once the scoop is filled

with material, an engineer uses cameras and remote controls to maneuver the robot to another area within the tank where the scoop is placed into a basket. The basket is then lifted out of the tank and the sample is sent to the laboratory for analysis.

PackBot is a remote controlled robot whose primary functions is to perform inspection work. This was commercially procured from a vendor and modified by SRR. PackBot, performs remote inspection work in Defense Waste Processing Facility.

The KUKA robotic arm attached to the BROKK 100 robotic base is a specialized combination of two commercially available robotic devices that were modified by SRR to work as one robot for performing remote repair work in the liquid waste facilities. The robots were specifically used to successfully detect leak sites and perform repair work in the 3H Evaporator vessel.

The KUKA robotic arm attached to the BROKK act as one body. It can fit through doorways and travel around tight spaces. The BROKK can hold multiple attachments, such as a hammer, shear, claw, bucket, and other manipulators. For SRR, it is used to hold the KUKA arm to perform remote work. The KUKA robotic arm is very fast. It can pick up objects and move them around very quickly

when programmed. The KUKA robotic arm is used worldwide in a number of industries from the automotive industry to healthcare.

For the 3H Evaporator repair, the BROKK (left) moved around the floor of the evaporator cell and KUKA arm was used in several ways. First, the arm maneuvered specialized cutting tools to remove the lagging and the insulation around the vessel. Next, the KUKA arm was also used to deploy a camera inside the evaporator cell to perform inspections of the general leak site. Finally, the arm held an ultrasonic probe that measured the thickness of the evaporator vessel walls surrounding the leak sites.



SRR is the Liquid Waste contractor at SRS, which is owned by the U.S. Department of Energy. SRR is composed of a team of companies led by AECOM with partners Bechtel National, CH2M, and BWX Technologies, Inc.