



Draft Supplemental Environmental Impact Statement
for a Geologic Repository for the Disposal of
Spent Nuclear Fuel and High-Level Radioactive Waste
at Yucca Mountain, Nye County, Nevada –
Nevada Rail Transportation Corridor
DOE/EIS-0250F-S2D

and

Draft Environmental Impact Statement
for a Rail Alignment for the
Construction and Operation of a Railroad
in Nevada to a Geologic Repository at
Yucca Mountain, Nye County, Nevada
DOE/EIS-0369D

Volume II




U.S. Department of Energy
Office of Civilian Radioactive Waste Management

October 2007

3. AFFECTED ENVIRONMENT

This chapter describes the environmental setting and existing conditions in the areas encompassing Caliente rail alignment and Mina rail alignment alternative segments and common segments; it provides a baseline for use in evaluating the potential project-related environmental impacts of constructing and operating the proposed railroad. Section 3.2 describes the affected environment along the Caliente rail alignment; Section 3.3 describes the affected environment along the Mina rail alignment; and Section 3.4 describes American Indian interests in the affected environment.

Glossary terms shown in ***bold italics***.

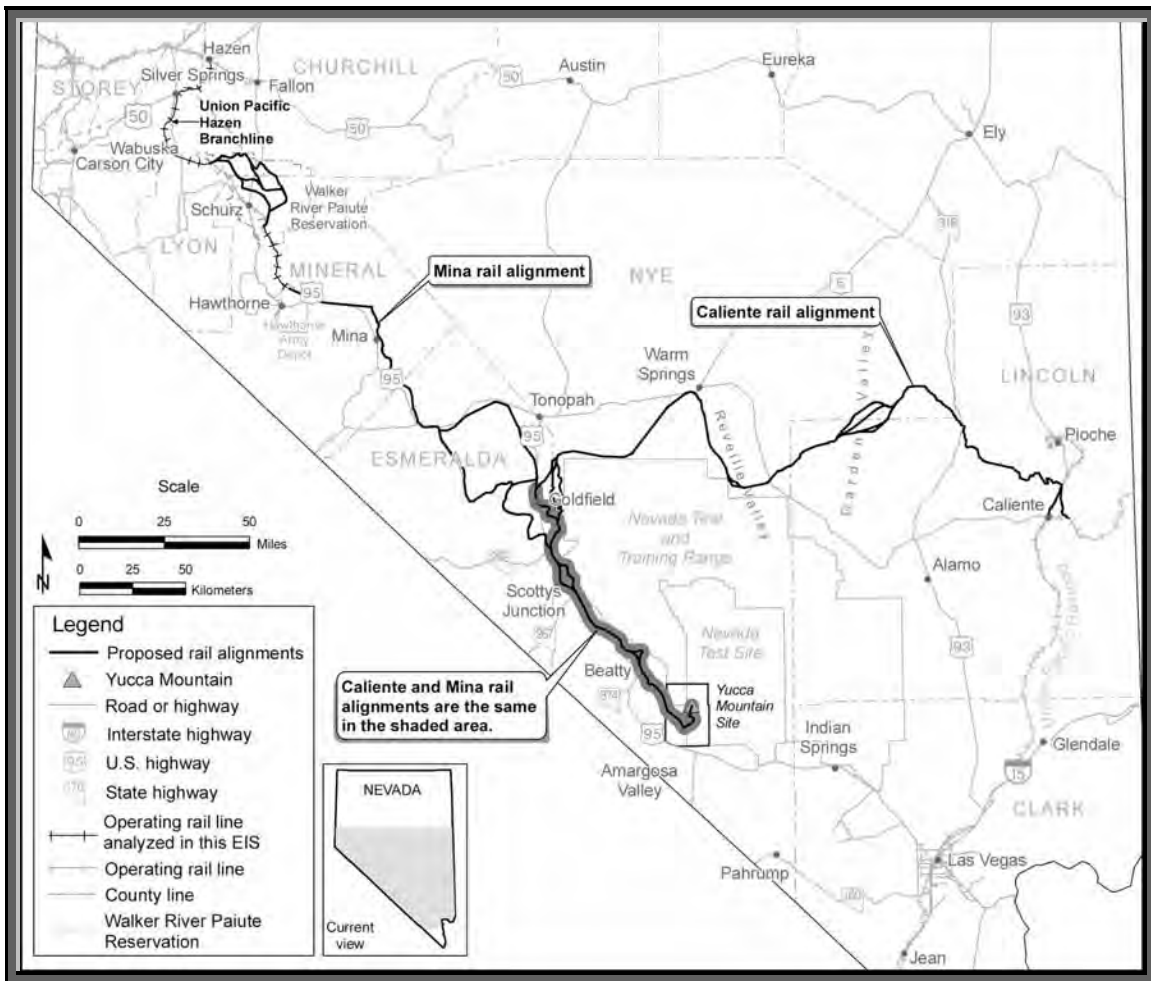

3.1 Introduction

The U.S. Department of Energy (DOE or the Department) has compiled extensive information about the environmental resources that could be affected if the Department constructed and operated the proposed ***railroad*** along a ***rail alignment*** within either the Caliente ***rail corridor*** or the Mina rail corridor. DOE

used this information to establish the baseline against which it assessed potential *impacts* under the **Proposed Action** and **Shared-Use Option** (see Chapter 4, Environmental Impacts).

DOE obtained baseline environmental information from many sources, including DOE-sponsored reports and studies, other federal agencies (for example, the Bureau of Land Management), the State of Nevada, and local governments.

Descriptions of the *affected environments* along the Caliente rail alignment and the Mina rail alignment focus on environmental resources within and adjacent to the *alternative segments* and *common segments*, and the proposed locations of railroad *construction and operations support facilities* outside the *nominal* width of the rail line *construction right-of-way*.

This chapter describes the environmental setting and existing conditions for the following resource areas:

- Physical setting (physiography, geology, and soils)
- Land use (grazing, mineral and energy resources, recreation and land access, utility and transportation corridors) and ownership (private and *public lands*)
- Aesthetic (visual) resources
- *Air quality* and climate
- Surface-water resources (streams and *washes, waters of the United States, wetlands, floodplains*)
- Groundwater resources (*hydrographic areas*, wells, springs)
- Biological resources (vegetation, wildlife, special status species, Nevada game species, wild horses and burros)
- Noise and vibration
- Socioeconomics (employment and income, population and housing, public services, and transportation)
- Occupational and public health and safety (nonradiological and radiological)
- Utilities, energy, and materials (public suppliers of water, *wastewater treatment*, and electricity; fossil fuels; construction materials)
- Hazardous materials and waste (use of materials and generation of wastes)
- Cultural resources (archaeological, historical, cultural)
- Paleontological resources (*fossils*)
- *Environmental justice*

Proposed Action: To determine a rail alignment within a rail corridor in which to construct and operate a railroad to transport spent nuclear fuel, high-level radioactive waste, and other materials from an existing railroad in Nevada to a repository at Yucca Mountain, Nye County, Nevada. The Proposed Action includes the construction of railroad construction and operations support facilities.

This Rail Alignment EIS analyzes two alternatives that would implement the Proposed Action: the Caliente rail alignment and the Mina rail alignment.

This Rail Alignment EIS also analyzes a Shared-Use Option for each implementing alternative, under which DOE would allow commercial shippers to use the rail line for transportation of general freight.

Rail corridor: A strip of land 400 meters (0.25 mile) wide through which DOE would identify an alignment for the construction of a *rail line* in Nevada to a geologic repository at Yucca Mountain

Rail alignment: An engineered refinement of a rail corridor in which DOE would identify the location of a rail line. A rail alignment is comprised of common segments and alternative segments.

Construction right-of-way: Nominally, 150 meters (500 feet) on either side of the centerline of the rail alignment (a nominal width of 300 meters [1,000 feet]). In some locations along the rail alignment, the nominal width of the construction right-of-way would be greater (for example, to accommodate certain deep cuts and fills and construction of drainage structures) or less (for example, to avoid sensitive environmental resources). The rail line construction right-of-way is generally linear, but also includes specific locations of construction and operations support facilities (such as quarries, some water wells, and access roads) outside the linear construction right-of-way.

3.2 Caliente Rail Alignment

This section describes the affected environment along the Caliente rail alignment. The scope of the affected environment reflects the *region of influence* for each resource area. DOE expects that most potential impacts would occur within a certain distance from the centerline of the rail alignment and within the *footprints* of construction and operations support facilities. However, resource area regions of influence vary, depending on the nature and type of the resource. Each environmental resource section fully describes the region of influence for the resource. Table 3-1 summarizes the regions of influence for the Caliente rail alignment analyzed in this Rail Alignment Environmental Impact Statement (EIS).

The **region of influence** is the physical area that bounds the environmental, sociologic, economic, or cultural features of interest for analysis purposes.

Table 3-1. Regions of influence for environmental resource areas – Caliente rail alignment (page 1 of 4).

Resource area	Region(s) of influence
Physical setting	All areas that would be directly or indirectly affected by construction and operation of the proposed railroad. These areas include the nominal width of the rail line construction right-of-way, and the footprints of construction and operations support facilities outside the nominal width of the construction right-of-way. See Section 3.2.1.1.
Land use and ownership	The nominal width of the construction right-of-way, including all private land (including patented mining claims), American Indian lands, and public land fully or partially within this area. Also includes the locations of construction and operations support facilities outside the nominal width of the construction right-of-way. See Section 3.2.2.1.
Aesthetic resources	The <i>viewshed</i> around all alternative segments, common segments, and proposed locations of construction and operations support facilities. DOE used a conservative region of influence extending 40 kilometers (25 miles) on either side of the centerline of the rail alignment. See Section 3.2.3.1.
Air quality and climate	The air basins bounded by Lincoln, Nye, and Esmeralda Counties. See Section 3.2.4.1.
Surface-water resources	The nominal width of the construction right-of-way for most of the analysis. In cases where surface-water flow patterns (including floodwaters) could be modified or surface-water drainage patterns could carry eroded soil, sedimentation, or spills downstream, the region of influence extends to 1.6 kilometers (1.0 mile) on either side of the centerline of the rail alignment. See Section 3.2.5.1.
Groundwater resources	<i>Aquifers</i> that would underlie areas of proposed railroad construction and operations, portions of groundwater aquifers DOE would use to obtain water for construction and operations support and that would be affected by these groundwater withdrawals, and nearby springs that might be affected by such groundwater withdrawals. The horizontal extent of the region of influence varies depending on the particular aspects of the specific project activity. See Section 3.2.6.1.

Table 3-1. Regions of influence for environmental resource areas – Caliente rail alignment (page 2 of 4).

Resource area	Region(s) of influence
Biological resources	<p>DOE used two areas of assessment to describe the affected environment for biological resources: a region of influence and a study area.</p> <p><i>Region of influence:</i> Generally, the nominal width of the construction right-of-way. For facilities that would be outside the nominal width of the construction right-of-way (such as quarries), the footprint of the proposed facility.</p> <p><i>Study area:</i> A 16-kilometer (10-mile)-wide area, extending 8 kilometers (5 miles) on either side of the centerline of the rail alignment, for use in database and literature searches to ensure the identification of sensitive <i>habitat</i> areas near the Caliente rail alignment and transient or migratory wildlife, particularly special status species, that could pass through the region of influence.</p> <p>See Section 3.2.7.1.</p>
Noise and vibration	<p>The nominal width of the construction right-of-way out to variable distances, depending on several analytical factors (<i>ambient</i> sound level, train speed, number of trains per day, and number of railcars). For construction and operations support facilities, the region of influence varies depending on the magnitude of noise those facilities would generate and <i>ambient noise</i> levels, which would affect how far away the noise might be heard. Therefore, the region of influence varies along the rail alignment. Also includes the locations of receptors that might be affected by noise, vibration, or both.</p> <p>See Section 3.2.8.1.</p>
Socioeconomics	<p><i>Employment and income, population and housing, and public services:</i> Lincoln, Nye, Esmeralda, and Clark Counties in Nevada.</p> <p><i>Transportation resources:</i> Public roadways near the Caliente rail alignment and the alignment itself.</p> <p>See Section 3.2.9.1.</p>
Occupational and public health and safety	<p><i>Nonradiological region of influence</i></p> <p>The region of influence for public nonradiological impacts includes:</p> <ul style="list-style-type: none"> • The nominal width of the construction right-of-way • Public roads in Lincoln, Nye, and Esmeralda Counties that the workforce would use during railroad construction and operations • Railroad construction and operations support facilities including access roads, water wells, and quarries where workers would perform construction, operations, or maintenance activities <p><i>Radiological region of influence</i></p> <p>The region of influence for radiological impacts for incident-free transportation includes the area 0.8 kilometer (0.5 mile) on either side of the centerline of the rail alignment.</p> <p>The region of influence for occupational radiological impacts for incident-free operation also includes the physical boundaries of railroad operations support facilities, where workers would perform operations involving <i>casks</i> and <i>cask cars</i>. Railroad operations support facilities within the radiological region of influence include only the <i>Interchange Yard</i>, the <i>Staging Yard</i>, the <i>Rail Equipment Maintenance Facility</i>, and the <i>Cask Maintenance Facility</i> because DOE anticipates that <i>radioactive</i> materials would be managed only at those facilities.</p> <p>See Section 3.2.10.1.</p>

Table 3-1. Regions of influence for environmental resource areas – Caliente rail alignment (page 3 of 4).

Resource area	Region(s) of influence
Occupational and public health and safety (continued)	<p>For purposes of this Rail Alignment EIS, the affected environment for public radiological impacts includes:</p> <ul style="list-style-type: none"> • Residents within the region of influence of the Caliente rail alignment, including persons who live within 0.8 kilometer (0.5 mile) of either side of the centerline of the rail alignment. For the public radiological impact analysis, DOE evaluated four specific alignments: the alignment that would have the highest exposed population; the shortest alignment; the longest alignment, and the alignment that would have the lowest population. • Individuals at locations such as residences or businesses near the rail alignment. • Individuals within the region of influence for radiological impacts for potential public exposure related to accidents and sabotage. This includes the area 80 kilometers (50 miles) on either side of the centerline of the rail line. <p>See Section 3.2.10.1.</p>
Utilities, energy, and materials	<p><i>Regions of influence for utilities and energy</i></p> <ul style="list-style-type: none"> • Public water systems: Systems in Lincoln, Nye, and Esmeralda Counties and communities within those counties. • Wastewater treatment: For wastewater transported offsite for treatment and disposal, the existing permitted treatment facilities in Lincoln, Nye, and Esmeralda Counties and communities within those counties. (Note: For wastewater treated using other methods [for example, on-site portable wastewater-treatment facilities], DOE would recycle treated wastewater, and there is no associated region of influence.) • Telecommunications: For telephone and fiber-optic telecommunications, the southern Nevada region serviced by Nevada Bell Telephone Company (AT&T Nevada), Citizens Telecommunications Company of Nevada, and Lincoln County Telephone System, Inc. • Electricity: Areas serviced by the southern Nevada electrical grid operated by Caliente Public Utilities, Lincoln County Power District No. 1, Nevada Power Company, Sierra Pacific Power Company, and Valley Electric Association, Inc. • Fossil fuels: Regional suppliers within the State of Nevada that could most economically supply the project. <p><i>Regions of influence for materials</i></p> <ul style="list-style-type: none"> • The region of influence for cast-in-place concrete and <i>subballast</i> is limited to the State of Nevada. Subballast, sand, and gravel would be generated from <i>overburden</i> at quarries and <i>borrow sites</i> near the rail alignment. There is a high likelihood DOE would also find subballast, sand, and gravel along <i>cuts</i> for the proposed rail line on <i>alluvial fans</i>. DOE would use some of the natural sand and gravel excavated from cuts and crushed rock from the quarries to make concrete aggregate. <p>See Section 3.2.11.1.</p>

Table 3-1. Regions of influence for environmental resource areas – Caliente rail alignment (page 4 of 4).

Resource area	Region(s) of influence
Utilities, energy, and materials (continued)	<p><i>Regions of influence for materials</i> (continued)</p> <ul style="list-style-type: none"> • DOE would obtain ballast rock from potential quarry sites close to the construction right-of-way during the construction phase and from commercial quarry sites in southern Utah and in California during the operations phase. Therefore, the region of influence for obtaining ballast rock would encompass the State of Nevada during the construction phase, and Utah and California during the operations phase. • Other materials, including steel, steel rail, general building materials, concrete ties, and other precast concrete could be procured and shipped from various national suppliers. Therefore, the region of influence for these materials is national. <p>See Section 3.2.11.1.</p>
Hazardous materials and waste	<p><i>Use of hazardous materials and the generation of hazardous and nonhazardous wastes:</i> The nominal width of the construction right-of-way, and the locations of construction and operations support facilities outside that area.</p> <p><i>Disposal of low-level radioactive waste:</i> DOE low-level waste disposal sites, sites in Agreement States, and U.S. Nuclear Regulatory Commission-licensed sites.</p> <p><i>Disposal of hazardous wastes:</i> The entire continental United States.</p> <p><i>Disposal of nonhazardous waste:</i> Disposal facilities in Lincoln, Nye, Esmeralda, and Clark Counties in Nevada.</p> <p>See Section 3.2.12.1.</p>
Cultural resources	<p>Two levels of coverage, based on distance from the rail alignment:</p> <ul style="list-style-type: none"> • Level I. The first level of coverage is within the nominal width of the rail line construction right-of-way, the area where ground disturbance could directly or indirectly impact cultural resources. • Level II. The second level of coverage is a 3.2-kilometer (2-mile)-wide area centered on the rail alignment. This area includes potential disturbances that could indirectly impact cultural resources. <p>See Section 3.2.13.1.</p>
Paleontological resources	<p>The nominal width of the rail line construction right-of-way, and the footprints of railroad construction and operations support facilities. Section 3.2.14.1</p>
Environmental justice	<p>An area encompassing the regions of influence for all other resource areas. Includes populations that could be affected by the project that have cultural or religious ties to the area. See Section 3.2.15.1.</p>

3.2.1 PHYSICAL SETTING

This section describes physiography, geology, and soils along the Caliente rail alignment. Characterization of the physical setting also identifies relationships to other resource areas described in this Rail Alignment EIS, such as aesthetics, land use, biological (vegetation) resources, and surface-water resources.

Section 3.2.1.1 describes the region of influence for physical setting along the Caliente rail alignment; Section 3.2.1.2 describes the general physical setting and characteristics in the region of influence; and Section 3.2.1.3 describes the physical setting in more detail for the Caliente rail alignment alternative segments and common segments.

3.2.1.1 Region of Influence

The region of influence for physical setting along the Caliente rail alignment includes all areas that would be directly or indirectly affected by construction and operation of the proposed railroad. These areas include the nominal width of the *rail line* construction right-of-way, and the footprints of facilities outside the nominal width of the construction right-of-way.

3.2.1.2 General Setting and Characteristics

3.2.1.2.1 Physiography

The Caliente rail alignment would cross the Basin and Range Physiographic Province, which is characterized in this area by north-trending, linear mountain ranges separated by broad sediment-filled valleys. Most of the Caliente rail alignment would cross the southern Great Basin, a subdivision of the Basin and Range Province. The mountain ranges are mostly tilted, *fault*-bounded crustal blocks as much as 80 kilometers (50 miles) long and 24 kilometers (15 miles) wide. Mountain ranges typically rise from 300 to 1,500 meters (980 to 4,900 feet) above the adjacent valley floors and occupy 40 to 50 percent of the total land area. As shown in Figure 3-1, from northeast to southwest, a rail line along the Caliente rail alignment would use gaps, passes, and valleys to cross or travel near the following mountain ranges: Cedar Range, Highland Range, Chief Range, North Pahroc Range, Seaman Range, Golden Gate Range, Quinn Canyon Range, Reveille Range, Kawich Range, Hot Creek Range, and Goldfield Hills.

From east to west, the rail line would cross lowlands in Meadow Valley Wash, Dry Lake Valley, White River Valley, Coal Valley, Garden Valley, Sand Spring Valley, Railroad Valley, Reveille Valley, Stone Cabin Valley, Cactus Flat, Ralston Valley, Mud Lake, Stonewall Flat, Lida Valley, Sarcobatus Flat, Oasis Valley, Crater Flat, and Jackass Flats (Figure 3-1). All lowlands, with the exception of Meadow Valley Wash, Oasis Valley, Crater Flat, and Jackass Flats, have interior drainage to *playas* or dry washes and are therefore closed basins. Section 3.2.5 describes surface-water resources in the Caliente rail alignment region of influence. Sediment in the valleys are composed of coarse to fine alluvial debris (boulders, cobbles, sand, silt and clay) eroded from the adjacent mountains. Large alluvial fans, a common landform in the region, begin from the base of the mountains, and sometimes extend far into the valleys.

Alluvial fan: A low, outspread, relatively flat-to-gently sloping mass of loose rock material, shaped like an open fan or a segment of a cone, deposited by a stream where it issues from a narrow mountain valley on a plain or break valley.

Playas: A nearly level area at the bottom of a desert basin that does not drain to a river and is temporarily covered with water from heavy rains or snowmelts. Normally a dry lakebed that may contain water in response to seasonally high runoff.

Playas occur in the lowest parts of some valleys. After heavy rains or snowmelt, the lowlands can fill with water. Evaporation of this water over days or weeks leaves a variety of salts near the surface that limit the growth of vegetation. These valleys are sometimes referred to as closed basins, because no surface water flows out of them.

Elevations along the Caliente rail alignment range from about 980 meters (3,200 feet) above mean sea level at the base of Busted Butte on the west side of Jackass Flats to about 1,900 meters (6,200 feet) above mean sea level at Warm Springs Summit in the Kawich Range (DIRS 176184-Shannon & Wilson 2006, Figure 3, Plates 70 and 71).

3.2.1.2.2 Geology

This section summarizes regional geology along the Caliente rail alignment. The geotechnical report to support the preliminary design effort (DIRS 176184-Shannon & Wilson 2006, all) provides a more detailed discussion of regional geology.

The Caliente rail alignment would cross a region of complex stratigraphic and structural elements that includes major north-south trending basins and ranges and broad volcanic uplands. Table 3-2 provides a generalized stratigraphic description and lists rock sequences according to the geologic age during which they were deposited, and their locations from east to west along the Caliente rail alignment. Table 3-2 also defines the geologic periods discussed in the geology sections of this Rail Alignment EIS.

In general, the age and *lithology* of rocks exposed to the east and west of the South Reville Range are quite different. To the east, Tertiary *volcanic rocks* and Paleozoic *sedimentary rocks*, largely of marine origin, are the principal rocks exposed; to the west, Tertiary volcanic rocks are the principal rocks exposed. The Tertiary volcanic rocks in the western area overlie Paleozoic sedimentary rocks, but these sedimentary rocks are compositionally different from the Paleozoic rocks in the eastern area. The Tertiary volcanic rocks, in turn, are covered in many areas by a variety of late Tertiary and Quaternary alluvial deposits.

Soils in the valleys were primarily formed from late Tertiary and Quaternary and some Paleozoic debris eroded from neighboring mountains, wind-blown sand and silt, fine-grained lake deposits, evaporite deposits, marsh and playa sediments, and spring-carbonate deposits. In some areas, alluvial fans are thin and overlie bedrock surfaces. Elsewhere, basin-fill sediments are more than 1,200 meters (4,000 feet) thick (DIRS 176184-Shannon & Wilson 2006, p. 12).

Volcanic rocks are rocks that have been ejected at or near the earth's surface. **Tuffs**, lava flows, volcanic **breccias**, basalt, andesite, and rhyolite are types of volcanic rocks that are found in the Great Basin. They are differentiated by chemistry and texture.

Sedimentary rocks are rocks formed by the accumulation of sediment in water or land. Sandstone, chert, limestone, dolomite, shale, siltstone, and mudstone are types of sedimentary rocks that are found in the Great Basin. They are differentiated by chemistry, deposition, and grain size.

Metamorphic rocks are rocks in which the original mineralogy, texture, or composition has changed due to the effects of pressure, temperature, or the gain or loss of chemical components.

The oldest *outcrops* in the region are Precambrian Era *metamorphic rocks*, which are exposed in hills west of Goldfield alternative segment 4 and west of Caliente common segment 6. Other than these two exposures, Precambrian rocks are covered by younger rocks.

Table 3-2. General stratigraphy – Caliente rail alignment.^a

Geologic period ^b	Eastern portion of the Caliente rail alignment ^c	Central portion of the Caliente rail alignment ^d	Western portion of the Caliente rail alignment ^e	Southern portion of the Caliente rail alignment (southwest Nevada volcanic field) ^f
Cenozoic Era ^g (less than 65 Ma)- Quaternary Period (less than 1.6 Ma)	Stream channel, floodplain, and valley floor alluvium; wind-blown, playa, and landslide deposits; fan alluvium; terrace, marsh, spring, and lake beach deposits.	Stream channel and floodplain alluvium; wind-blown, playa, and landslide deposits; fan alluvium; basin-fill deposits.	Stream channel and floodplain alluvium; wind-blown, playa, and landslide deposits; fan alluvium; basin-fill deposits.	Stream channel and floodplain alluvium; wind-blown, playa, and landslide deposits; fan alluvium; basin-fill deposits. Basalt flows.
Cenozoic Era ^g (less than 65 Ma)- Tertiary Period (65 to 1.6 Ma)	Late Tertiary rocks include conglomerate and sandstone. Mid-Tertiary rocks include tuffs and rhyolitic to basaltic lava flows. Early Tertiary rocks include lake-derived limestone and conglomerate, marine limestone, shale, mudstone, sandstone, and siltstone.	Late Tertiary rocks include basalt flows and andesite flows. Mid-Tertiary rocks include tuffs, dacite lava flows, and andesite lava flows. Early Tertiary rocks include sandstone, conglomerate, and calcareous siltstone and mudstone.	Late Tertiary rocks include conglomerate and sandstone. Mid-Tertiary rocks include tuffs, basalt, and andesite. Early Tertiary rocks are not exposed in the region.	Silicic ash-flow tuffs; minor basalts. Predominantly volcanic rocks of the southwestern Nevada volcanic field.
Mesozoic Era (240 to 65 Ma)	No rocks of this age are exposed along this portion of the alignment.	No rocks of this age are exposed along this portion of the alignment.	Quartz monzonite and granodiorite.	Granitic rocks of late Mesozoic (Cretaceous) age occur. No other rocks of this age are exposed along this portion of the alignment.
Paleozoic Era (570 to 240 Ma)	Alternating marine and terrestrial sediments comprised mostly of shale, quartzite, limestone, and dolomite.	Alternating marine and terrestrial sediments comprised mostly of shale, quartzite, limestone, and dolomite.	Rocks of Late and Middle Paleozoic age are not exposed along this portion of the alignment. Rocks of early Paleozoic (Ordovician and Cambrian) are largely limestone and dolomite.	Alternating marine and terrestrial sediments comprised mostly of shale, quartzite, limestone, and dolomite.
Precambrian Era (greater than 570 Ma)	Rocks of this age are not exposed along this portion of the alignment.	Rocks of this age are not exposed along this portion of the alignment.	Conglomerate, quartzite, sandstone, shale, dolomite, limestone, chert, and diabase overlie old <i>igneous</i> and metamorphic rocks that form the crystalline “basement.”	Conglomerate, quartzite, sandstone, shale, dolomite, limestone, chert, and diabase overlie old igneous and metamorphic rocks that form the crystalline “basement.”

a. Source: DIRS 176184-Shannon & Wilson 2006, Tables 2 and 3.

b. Ma = approximate years ago in millions.

c. Includes Meadow Valley Wash; Dry Lake and White River Valleys; and Chief, North Pahroc, and Seaman Ranges.

d. Includes Railroad, Reveille, Stone, and Cabin Valleys; Cactus Flat; Golden Gate, Quinn Canyon, and Kawich Ranges.

e. Includes Goldfield Hills, Stonewall Flat, Lida Valley, and Stonewall Mountain.

f. Includes Sarcobatus Flat, Pahute Mesa, Oasis Valley, Crater Flat, Yucca Mountain, Jackass Flats, Rock Valley, and Yucca Flat.

g. The Cenozoic Era consists of both the Quaternary and the Tertiary periods.

During the late Paleozoic Era, the area was periodically covered by shallow seas to the east that generally deepened westward. Thick layers of limestone, shale, and sandstone, now exposed widely in the mountains along Caliente common segment 1, are the remains of these Paleozoic seas. By early Mesozoic time, the seas had retreated westward across the region for the last time (DIRS 176184-Shannon & Wilson 2006, pp. 9 to 11).

Major east-west compression occurred periodically in the Great Basin between about 350 million and 65 million years ago (DIRS 169734-BSC 2004, p. 2-16). This compression moved large sheets of old rock great distances upward and eastward over young rocks along *thrust faults* to produce mountains. Most of the thrust fault traces have eroded away; however, a remnant of the Pahrnagat Fault has been identified south of the Garden Valley alternative segments (DIRS 176184-Shannon & Wilson 2006, Plate 4). Range-bounding *normal faults*, which have developed in response to *crustal extension* over the past 20 million years, are conspicuous features in this part of Nevada and are especially visible in parts of Nye County. These faults have surface traces that form distinctive segments 5 to 30 kilometers (3.1 to 19 miles) long (DIRS 174214-Kleinhampl and Ziony 1985, p. 144). Although generally coincident with the range fronts, in places these normal faults, and shorter *splay faults* radiating outward from these normal faults, extend into adjacent valleys where they are buried by recent alluvial deposits. Both the exposed and buried parts of active faults could be capable of rupturing the surface.

Crustal extension in the region, which began about 20 million years ago, is still occurring (DIRS 176184-Shannon & Wilson 2006, p. 12). Present-day mountains and valleys were well developed by about 11.5 million years ago. Evidence of recent, continuing crustal extension is based on Holocene-age (about the last 10,000 years) faults, recurring *earthquakes*, and geothermal features (some of which are used for commercial purposes such as spas and pools). The Holocene-age faults are visible in many valleys in Nye County that the Caliente rail alignment would cross (Figure 3-2).

Evidence of crustal extension is seen in the Walker-Lane Structural Belt, a 96-kilometer (60-mile)-wide deformation zone that parallels the Nevada-California border from Las Vegas to northern California. The belt includes generally northwest-trending faults that were active within the last 20 million years (DIRS 176184-Shannon & Wilson 2006, p. 14). Ruptures along these faults or along buried faults are possible and could cause earthquakes. Section 3.2.1.2.2.1 provides more information on *seismic* activity along the Caliente alignment.

The southwestern Nevada volcanic field is a volcanic plateau that developed between 16 and 7 million years ago, with the greatest eruptions occurring between 14 and 11 million years ago (DIRS 176184-Shannon & Wilson 2006, p. 11). The volcanic field encompasses common segment 5, the Oasis Valley alternative segments, and common segment 6 (Sarcobatus Flat, Pahute Mesa, Oasis Valley, Crater Flat, Yucca Mountain, Jackass Flats, and Rock Valley).

Faulting is movement of the earth's crust that produces relative displacement of adjacent rock masses along a fracture. Generally, the fracture is referred to as a fault.

Splay faults are minor faults that branch off of a primary fault, or interconnect to form a fault zone.



A **normal fault** is a fault where the block above an inclined fault has moved down relative to the other block.



A **thrust fault** is a fault that occurs when squeezing forces push the block above an inclined fault up in relation to the other block.

Source: DIRS 155970-DOE 2002, Figure 3-9.

The volcanic field has a complex history of volcanism and deformation (DIRS 169734-BSC 20040, pp. 2-4 through 2-15). Eruption of 17 ash-flow *tuff* sequences and lava flows occurred from at least seven large, overlapping *caldera* complexes to form the southwestern Nevada volcanic field. The youngest caldera-forming events associated with this feature occurred between 7.5 and 7.6 million years ago with eruptions east of Caliente common segment 4 (DIRS 176184-Shannon & Wilson 2006, p. 11). The mid-Tertiary eruptions deposited ash and created volcanic-ash flows with minor lava flows and reworked materials. Only Tertiary and younger rocks are exposed in the southwestern Nevada volcanic field area.

3.2.1.2.2.1 Faulting and Seismic Activity. Historically, there have been numerous earthquakes in the Great Basin region as a result of ongoing crustal extension (see Figure 3-3). Consistent with geologic evidence, the historical record of Holocene-age *seismicity* (occurring within the last 10,000 years) suggests that seismic activity was concentrated in the western part of the Great Basin, and to a lesser extent, in the eastern part (DIRS 176184-Shannon & Wilson 2006, p. 15 and Plate 4). Modern earthquakes in the southern Great Basin predominantly occur at depths of 2 to 12 kilometers (1.2 to 7 miles) below Earth's surface (DIRS 169734-BSC 20040, p. 4-35).

The southern Great Basin contains many Quaternary fault traces; however, there are few instances of surface rupture within the last 10,000 years (DIRS 176184-Shannon & Wilson 2006, p. 15). These faults are characterized by discontinuous scarps (vertical displacement along a fault), from surface displacement. Studies of Holocene faults in the Great Basin have calculated slip rates of 0.001 to 0.01 millimeter (0.000039 to 0.00039 inch) per year, with a surface-rupturing recurrence interval of about 100 years (DIRS 176905-Workman et al. 2002, p. 18). Studies of fractures other than *block-bounding faults* around Yucca Mountain determined that fault displacements of about 0.10 centimeter (0.039) would have an exceedance *probability* of once every 100,000 years (DIRS 169734-BSC 2004, p. 4-64).

Figure 3-3 shows the number and locations of earthquakes of magnitude 3.0 and greater on the Richter scale based on available historical and recorded data from 1852 to 2004. Most of the earthquakes around the Caliente rail alignment fall within a magnitude range of 3.0 to 3.9, the range that most people begin to feel ground shaking (DIRS 180969-USGS 2006, all). As magnitude increases, the potential for damage from ground shaking also increases.

Five seismic events with a magnitude 5.0 or greater occurred within 30 kilometers (19 miles) of the Caliente rail alignment, several occurring on the Nevada Test Site north of Yucca Mountain. Most seismic events on the Nevada Test Site are associated with historical underground testing, not natural *faulting*. Seismic activity from manmade tests has not activated local faults (DIRS 169734-BSC 2004, pp. 4-33 and 4-35). A magnitude 6.0 earthquake was also recorded within the Chief Range southeast of the City of Caliente. A 1992 earthquake near Little Skull Mountain is the largest recorded earthquake in the vicinity of Yucca Mountain. The 5.6 magnitude event was apparently triggered by a 7.3 magnitude earthquake at Landers, California, which occurred 300 kilometers (190 miles) southwest of Yucca Mountain, and 20 hours earlier (DIRS 169734-BSC 2004, pp. 4-38 and 4-39). Since 1978, DOE has monitored seismic activity in the area around Yucca Mountain to pinpoint seismic events (DIRS 155970-DOE 2002, p. 3-32). In the area around the Caliente rail alignment, earthquakes with a magnitude of 6.1 to 6.4 are predicted to have a return period of 2,500 years (DIRS 174296-Shannon & Wilson 2005, p. 14).

Through the National Earthquake Hazard Reduction Program, national and regional shaking-hazard maps are used to determine the probability of seismic-related damage based on regional earthquake occurrence rates and how far the shaking travels horizontally (DIRS 174194-USGS 2005, all). These maps are used to meet modern seismic design provisions for the construction of buildings, bridges, highways, and utilities. Shaking-hazard maps, also known as peak acceleration maps, show the levels of horizontal shaking that have a certain probability of being exceeded in a 50-year period (see Figure 3-4). When an

earthquake occurs, the forces caused by the shaking can be measured as a percentage of the constant known as *g*, which is the acceleration of a falling object due to gravity. The resulting map uses contour lines to show the amount of shaking a location would experience during any area earthquake, regardless of its distance to the epicenter.

The predicted peak horizontal accelerations tend to decrease from west to east across the Caliente rail alignment. Most of the Caliente rail alignment would have a 2-percent probability of exceeding a peak horizontal acceleration of 30-percent *g* within a 50-year period (see Figure 3-4) and a 10-percent probability of exceeding a peak horizontal acceleration of 10 percent *g* within a 50-year period (DIRS 174296-Shannon & Wilson 2005, Figure 3). The southern section of Goldfield alternative segment 4, Caliente common segment 4, the Bonnie Claire alternative segments, and the northern section of common segment 5 would have a 2-percent probability of exceeding a peak ground acceleration range 40-percent *g* in 50 years. In other words, the alignment would experience shaking of 40-percent or less from a seismic event with a return period of about 2,500 (DIRS 174296-Shannon & Wilson 2005, p. 14). A peak horizontal acceleration of 10 percent *g* could cause minor structural damage to normal buildings, while 40-percent *g* could cause damage to most structures.

3.2.1.2.2.2 Mineral and Energy Resources. For more than 100 years, parts of the southern Great Basin have produced substantial amounts of base and precious metals, particularly gold and silver (DIRS 173841-Shannon & Wilson 2005, p. 16). Parts of the Caliente rail alignment, especially in the vicinity of the Goldfield and Clifford Mining Districts, have been intensely mined and have extensive surface and underground mine workings. Energy resources reported along and near the rail alignment include low-temperature geothermal water and indications of small areas with petroleum resources. Section 3.2.2, Land Use and Ownership, describes *mining districts* and associated land claims along the Caliente rail alignment in more detail.

3.2.1.2.2.3 Potential Sources of Construction Materials. As described in Chapter 2, there would be local sources for some rail line construction materials. The estimated quantity of *ballast* required for construction of a rail line along the Caliente rail alignment would range from 3.12 to 3.19 million metric tons (3.44 to 3.52 million tons) (DIRS 176172-Nevada Rail Partners 2006, p. 3-1). DOE has identified six potential ballast quarry sites along the Caliente rail alignment with topographic and geologic characteristics suitable to accommodate excavation and preparation facilities. Figures 2-25 through 2-28 show the potential quarry locations along the Caliente rail alignment (South Reveille alternative segment 2, South Reveille alternative segment 3, Goldfield alternative segment 3, and Goldfield alternative segment 4). The topography and geology of potential quarry sites are described in more detail in the discussion of the alternative segment with which they are associated (Sections 3.2.1.3.1.2, 3.2.1.3.5.2, and 3.2.1.3.7.2). There is also a high likelihood the Department would find suitable sands and gravels on the alluvial fans within the rail line construction right-of-way for use as *subballast*. A final determination of subballast suitability would be made if DOE decided to implement the Proposed Action along the Caliente rail alignment. Section 3.2.11, Utilities, Energy, and Materials, describes the regional supply chains for other construction materials.

3.2.1.2.3 Soils

DOE used soil survey databases from the U.S. Department of Agriculture, Natural Resources Conservation Service (DIRS 176781-MO0603GSCSSGEO.000), to identify soil types and characteristics along the Caliente rail alignment. Approximately 95 percent of the project area has been surveyed. However, soil surveys around the Nevada Test and Training Range have not been completed. For areas with no available soils data, the Department does not consider the unavailable data critical to the design and construction of a railroad along the Caliente rail alignment, because soils are expected to be similar to

those already surveyed. In addition, as part of the final design, DOE would place geotechnical borings along the entire rail alignment to obtain site-specific soils data.

This Rail Alignment EIS identifies the specific soil characteristics relevant to railroad construction and operations. From a potential impact perspective, soil designated as supporting *prime farmland* is considered one of the relevant characteristics. The Natural Resources Conservation Service (DIRS 181427-NRCS 2007, Part 622.04(a)) defines prime farmland as:

Land that has the best combination of physical and chemical characteristics for producing food, feed, forage, fiber, and oilseed crops and that is available for these uses. It has the combination of soil properties, growing season, and moisture supply needed to produce sustained high yields of crops in an economic manner if it is treated and managed according to acceptable farming methods. In general, prime farmland has an adequate and dependable water supply from precipitation or irrigation, a favorable temperature and growing season, an acceptable level of acidity or *alkalinity*, an acceptable content of salt or sodium, and few or no rocks. Its soils are *permeable* to water and air. Prime farmland is not excessively eroded or saturated with water for long periods of time, and it either does not flood frequently during the growing season or is protected from flooding.

The prime farmland soil label is applied to the soil types and associations that the National Resources Conservation Service identifies as satisfying this definition. Three percent, or about 1.8 square kilometer (440 acres), of the rail line construction right-of-way would contain soils classified as prime farmland (see Figure 3-5). Lincoln County has about 1,600 square kilometers (400,000 acres) and Nye County has 610 square kilometers (150,000 acres) of prime farmland soils (DIRS 176781-MO0603GSCSSGEO.000). Esmeralda County does not have any soils classified as prime farmland. The amount of prime farmland soils within the Caliente rail alignment construction right-of-way would be less than 0.1 percent of the total prime farmland soils in Lincoln and Nye Counties. DOE has also contacted the Nevada Natural Resources Conservation Service office to collaborate on the identification of prime, unique statewide, or locally important farmland along the alignment. This correspondence is described further in Section 4.2.1.2.1.3, and in the individual segment discussions in Section 4.2.1.2.2.

Table 3-3 lists the prime farmland and quantity of soils with other characteristics along the Caliente rail alignment. The table lists the percentage of the area within the nominal width of the construction right-of-way that contains soils with a particular characteristic. In some locations along the rail alignment, DOE would occupy and disturb less of the construction right-of-way to avoid sensitive environmental resources and private property. Because different combinations of alternative segments and common segments would be different lengths and have different disturbed areas, DOE judged the impacts from soil erosion based on the acreage of specific soil types that would be affected by construction-related disturbance. Section 4.2.1.2.1.3 provides a more detailed discussion of how railroad construction and operations could affect topsoil.

Other soil characteristics that are particularly relevant to railroad construction and operations are classified on Table 3-3 as *erodes easily* and *blowing soil*. Soil with either of these characteristics can be quite susceptible to erosion. As seen in Table 3-3, these soil types are found in similar amounts within each group of alternative segments.

The erodes easily characteristic is a measure of the susceptibility of bare soil to be detached and moved by water. These soils, which tend to contain relatively high amounts of silts and *loams*, tend to erode easily when disturbed. About 15 percent of the entire Caliente rail alignment has soils with this characteristic (DIRS 176781-MO0603GSCSSGEO.000).

Table 3-3. Percent of soil characteristics within the Caliente rail alignment construction right-of-way.^a

Rail line segment	Percent prime farmland	Percent blowing soil	Percent erodes easily	Percent soil survey coverage ^b
Caliente alternative segment	5.2	c	74	100
Eccles alternative segment	4.8	c	71	100
Caliente common segment 1	10	c	18	100
Garden Valley alternative segment 1	8.4	5.7	13	100
Garden Valley alternative segment 2	11	6.1	22	100
Garden Valley alternative segment 3	c	2.1	12	100
Garden Valley alternative segment 8	9.8	6	14	100
Caliente common segment 2	c	10	16	100
South Reveille alternative segment 2	c	6.3	19	100
South Reveille alternative segment 3	c	c	15	100
Caliente common segment 3	c	32	17	100
Goldfield alternative segment 1	c	8.8	c	100
Goldfield alternative segment 3	c	9.5	c	100
Goldfield alternative segment 4	c	7.7	c	100
Caliente common segment 4	c	1.4	41	100
Bonnie Claire alternative segment 2	c	c	27	27
Bonnie Claire alternative segment 3	c	c	25	77
Common segment 5	c	2.6	c	73
Oasis Valley alternative segment 1	c	13	c	100
Oasis Valley alternative segment 3	c	4.8	c	100
Common segment 6	c	c	c	74

a. Source: DIRS 176781-MO0603GSCSSGEO.000.

b. There are data gaps around the Nevada Test and Training Range because those soil surveys have not been completed.

c. Characteristic not present. Soil percentages do not add up to 100 percent.

The blowing soil characteristic is based on the soil survey classification of susceptibility of a given soil to wind erosion. This classification method uses eight groupings. Soils assigned to Group 1 are the most susceptible to wind erosion and those assigned to Group 8 are the least susceptible. Soils listed in Table 3-3 with the blowing soil characteristic are those assigned to erodibility Group 1 or 2 (DIRS 181427-NRCS 2007, Exhibit 618-16). The blowing soil characteristic identifies areas where fine-textured, sandy materials predominate and where uncontrolled soil disturbance could result in increased wind erosion. Depending on combination of alternative segments and common segments, between 7.6 and 8.2 percent of the entire Caliente rail alignment would have soils with the blowing soil characteristic (DIRS 176781-MO0603GSCSSGEO.000). Figure 3-5 identifies the locations of prime farmland, erodes easily, and blowing soils.

3.2.1.3 Setting and Characteristics along Alternative Segments and Common Segments

3.2.1.3.1 Alternative Segments at the Interface with Union Pacific Railroad Mainline

3.2.1.3.1.1 Physiography. The physiography of the area where the Caliente rail alignment would interface with the Union Pacific Railroad Mainline is dominated by Meadow Valley Wash, the Cedar Range to the east, and the Chief Range to the west (see Figures 2-5 and Figure 3-6). There are terraces

and alluvial fans on both sides of Meadow Valley Wash (DIRS 156091-Borup and Bagley 1976, pp. 5 and 6). The Caliente and Eccles alternative segments would start at different locations near Clover Creek, which is dry most of the year, and extend north, crossing Meadow Valley Wash. Elevations range from about 1,340 meters (4,400 feet) above mean sea level in the areas of Clover Creek and Meadow Valley Wash to just over 1,520 meters (5,000 feet) above mean sea level in the more rugged area north of Clover Creek.

3.2.1.3.1.2 Geology. The area where the Caliente rail alignment would interface with the Union Pacific Railroad Mainline is largely composed of recent sedimentary deposits and some volcanic rocks. The Caliente and Eccles alternative segments would not cross known Quaternary fault traces. Nonmetallic minerals (perlite, a glassy volcanic rock with high water content that can be used for insulation and acoustic tiles, and quartzite, a hard rock made up almost entirely of the mineral quartz) found within these rocks have been commercially mined in the vicinity of the Caliente alternative segment. Section 3.2.2, Land Use and Ownership, provides additional information about the mining districts around the Caliente rail alignment.

Neither the Caliente nor the Eccles alternative segment would cross Quaternary faults. There was a magnitude 6.0 earthquake in the Chief Range area southeast of the City of Caliente. Otherwise, there have been few earthquakes in the area within the past 150 years.

The site of potential quarry CA-8B is in hilly terrain north of the City of Caliente, west of the Caliente alternative segment. **Basalt** would be excavated from the Cobalt Canyon formation (DIRS 176172-Nevada Rail Partners 2006, Figure 3-C).

Geothermal resources close to the proposed Caliente rail alignment in the Caliente area are being used commercially in a hotel spa and for space heating (DIRS 173841-Shannon & Wilson 2005, pp. 115 and 116). Hot springs in the Caliente area are indicative of high heat flow within the Earth, and are related to the crustal extension of the southern Great Basin. There are no other energy resources along the Caliente or Eccles alternative segments.

3.2.1.3.1.3 Soils. Soils in the area of the Interface with the Union Pacific Railroad Mainline occur mainly on floodplains, low terraces, and alluvial fans (DIRS 156091-Borup and Bagley 1976, all). Most of these soils are on nearly level to moderate slopes, are very thick, and are well drained to moderately well drained. Other soils are very thin to moderately thick, are well drained, and gently slope to steep soils and rock outcrops.

About 5.2 and 4.8 percent of the soils in the Caliente and Eccles alternative segments, respectively, are classified as prime farmland (see Table 3-3). Along the Caliente alternative segment, soil associations classified as prime farmland are within the Caliente city limits, and are primarily on private residential land. Along the Eccles alternative segment, the southern prime farmland soils are on alluvial fan deposits in the Little Mountain **Grazing Allotment**. The northern prime farmland soils are on alluvial fans in the Peck Grazing Allotment. Section 3.2.2, Land Use and Ownership, provides additional information about grazing allotments. About 74 and 71 percent of the soil along the Caliente and Eccles alternative segments, respectively, are classified as erodes easily. There are no soils anywhere along the Caliente or Eccles alternative segments with the blowing soil characteristic.

3.2.1.3.2 Caliente Common Segment 1 (Dry Lake Valley Area)

3.2.1.3.2.1 Physiography. From east to west, Caliente common segment 1 would cross between, through, or around the Chief, Highland, and Black Canyon Ranges, Dry Lake Valley, the North Pahroc Range, White River Valley, the Seaman Range, Coal Valley, and the Golden Gate Range (see Figures 3-6

and 3-7). Bennett Pass, at an elevation of about 1,730 meters (5,700 feet) above mean sea level, separates the Highland and Black Canyon Ranges to the north from the Chief Range to the south. This segment of the Caliente rail alignment would travel through Bennett Pass, then south of the Black Canyon Range and curve around Robber Roost Hills and the Burnt Springs Range. The segment would then cross Dry Lake Valley, a wide, nearly flat depression with elevations generally ranging from 1,400 to 1,420 meters (4,600 to 4,660 feet) above mean sea level.

Turning northwest, Caliente common segment 1 would enter the northern section of the North Pahroc Range. In this area, elevations generally range from 1,600 to 1,700 meters (5,200 to 5,600 feet) above mean sea level. The segment would then head north along the east side of the White River Valley for about 10 kilometers (6.2 miles) and would cross the dry White River and proceed northwest of State Route 318, north of the Seaman Range, in the vicinity of Timber Mountain. The northern portion of the Seaman Range trends northwesterly and merges at the north end of Coal Valley with the Golden Gate Range, which trends north-northeasterly. North of this point, the Golden Gate Range merges with the broad expanse of White River Valley (see Figure 3-7). The Caliente rail alignment would go around the rugged Seaman Range. In this area, Caliente common segment 1 would encounter elevations ranging from 1,500 to 1,650 meters (5,000 to 5,400 feet) above mean sea level.

3.2.1.3.2.2 Geology. Bedrock at the surface along Caliente common segment 1 is quite variable. The segment would cross old sedimentary rocks in the eastern mountain passes and more recent volcanic rocks around the North Pahroc and Golden Gate Ranges (DIRS 176184-Shannon & Wilson 2006, Table 5). The valleys are covered with modern-day *alluvium*, and most contain playas.

Most earthquakes in the area have been of magnitude 3.0 or less, with the exception of the Timber Mountain area, where there was an earthquake of magnitude 5.0 (see Figure 3-3). Caliente common segment 1 would cross three prominent faults in the area, the Dry Lake and the West Dry Lake faults (Figure 3-6) and faults of the North Pahroc Range (Figure 3-7). These discontinuous faults are identified by offset bedrock or alluvial deposits, and were last active more than 11,000 years ago.

The Quaternary deposits in Dry Lake Valley contain naturally occurring surface fissures that range in size from about 27 meters (90 feet) to several kilometers long and up to 4.6 meters (15 feet) wide (DIRS 176184-Shannon & Wilson 2006, pp. 43 and 44). The cracks in Dry Lake Valley appear to be related to tectonic movements caused by faulting along the east and west margins of the valley (DIRS 176184-Shannon & Wilson 2006, Plate 4).

Limestone deposits are known mineral resources in the vicinity of Caliente common segment 1 (DIRS 173841-Shannon & Wilson 2005, p. 108 and Plate 1). Warm springs are the only known energy resources near the common segment. Section 3.2.2, Land Use and Ownership, describes mining districts and mineral and energy resources along the segment.

3.2.1.3.2.3 Soils. Soils along Caliente common segment 1 are predominantly very thick, well-drained, silty loams, with some thin, well-drained, gravelly sandy loams (DIRS 176781-MO0603GSCSSGEO.000). In this area, there are also badlands, semi-*arid* areas with steeply gullied topography caused by rapid erosion, where runoff occurs rapidly and erosion is severe. There is a wide range of soil types along Caliente common segment 1 (DIRS 176781-MO0603GSCSSGEO.000). Soil depths vary from thin to very thick. Most of the well-drained soils in the White River area occur on *fan piedmonts*, *fan remnants*, and *fan skirts*.

Fan piedmonts, fan remnants, and fan skirts refer to locations within a large *alluvial fan*. Fan piedmonts refer to the area along the base of a mountain slope. Fan remnants refer to parts of an older alluvial fan that remain after erosion has removed most of the fan. Fan skirts refer to the area along the base of the alluvial fan in a valley.

Soils classified as prime farmland make up 2.6 percent of the soils along Caliente common segment 1. Soils with the erodes easily characteristic comprise 18 percent of the soils. None of the available soils data include soils with the blowing soil characteristic.

3.2.1.3.3 Garden Valley Alternative Segments

3.2.1.3.3.1 Physiography. All of the Garden Valley alternative segments would cross the Golden Gate Range and pass through Garden Valley, which is a broad, nearly flat depression. From north to south along the Golden Gate Range, there are two unnamed gaps and two named gaps (Water Gap and Murphy Gap). Garden Valley alternative segments 1 and 3 would cross the Golden Gate Range through the northernmost unnamed gap. This gap, a relatively gentle pass, has an elevation of about 1,600 meters (5,200 feet) above mean sea level. Garden Valley alternative segments 2 and 8 would cross Golden Gate Range farther to the south at Water Gap, which has an elevation of 1,580 meters (5,200 feet) (Figure 3-8).

3.2.1.3.3.2 Geology. The Garden Valley alternative segments would cross a variety of sedimentary and volcanic rocks in gaps of the Golden Gate Range. The floor of Garden Valley is covered with thick alluvial sediments. The Garden Valley alternative segments would cross the northernmost exposure of the Golden Gate Fault. This fault is a complex zone that consists of discontinuous traces extending along the eastern border of the Golden Gate Range. It is uncertain when this fault was last active; however there is record of movement occurring about 15,000 years ago (DIRS 177713-MO0607LFAFUS96.000, Fault Number 1393).

Other than gravel and alluvial materials present on the floor of Garden Valley, the Garden Valley alternative segments would not cross any known commercial mineral deposits.

3.2.1.3.3.3 Soils. The Nye and Lincoln County soil surveys indicate that soils in the area of Garden Valley are mostly very thick and well-drained, and occur on fan piedmonts (DIRS 176781-MO0603GSCSSGEO.000).

Some soils classified as prime farmland are found along the alternative segments. Less than 1 percent of soils along Garden Valley alternative segment 2 are prime farmland, less than 1 percent along Garden Valley alternative segments 1 and 3, and no prime farmland soils along Garden Valley alternative segment 8. Soils with the erodes easily characteristic range from 13 percent for Garden Valley alternative segment 1, 22 percent for Garden Valley alternative segment 2, 12 percent for Garden Valley alternative segment 3, to 14 percent for Garden Valley alternative segment 8 (Table 3-3). The alternative segments also contain blowing soils, 5.7 percent along Garden Valley alternative segment 1, 6.1 percent along Garden Valley alternative segment 2, 2.1 percent along Garden Valley alternative segment 3, and 6 percent along Garden Valley alternative segment 8.

3.2.1.3.4 Caliente Common Segment 2 (Quinn Canyon Range Area)

3.2.1.3.4.1 Physiography. The area of Caliente common segment 2 is dominated by the Worthington Mountains to the south and east and the rugged Quinn Canyon and Reveille Ranges to the north (see Figures 3-8 and 3-9). This common segment would pass from Garden Valley to Sand Springs Valley and through foothills of the Quinn Canyon Range to Railroad Valley. Elevations in this area generally range from 1,620 to 1,800 meters (5,300 to 5,900 feet) above mean sea level.

3.2.1.3.4.2 Geology. Caliente common segment 2 would primarily cross recent alluvial deposits through the valleys, and sedimentary bedrock along the southern tip of the Quinn Canyon Range. There are few recorded earthquakes within the vicinity of the rail alignment in this area. The alignment would

not cross recent fault traces or approach any energy resources. Other than gravel used for construction purposes, there is no commercial production in the area.

3.2.1.3.4.3 Soils. Caliente common segment 2 contains soils composed largely of fine sand underlain by *hardpan* (a layer of hard subsoil that prevents the *infiltration* of water or roots). The soils are thick to moderately thick and fine-textured (DIRS 176781-MO0603GSCSSGEO.000). The soils are formed on alluvium derived from volcanic rocks.

About 16 percent of the soils have the erodes easily characteristic. The data indicate that there are no prime farmland soils or soils with the blowing soil characteristic in this area.

3.2.1.3.5 South Reville Alternative Segments

3.2.1.3.5.1 Physiography. South Reville alternative segments 2 and 3 would enter Reville Valley south of the Reville Range (see Figure 3-9). The valley floor is relatively uniform, with elevations ranging from about 1,700 to 1,830 meters (5,700 to 6,000 feet) above mean sea level.

3.2.1.3.5.2 Geology. The South Reville alternative segments would cross recent alluvium and volcanic flows. The alternative segments would not cross any Quaternary fault scarps, and there have been few earthquakes recorded in the area within the last 150 years. Recently, there has been some prospecting for gold and silver in the area around the alternative segments. However, there is a low potential for mineral resources in the area. Section 3.2.2, Land Use and Ownership, describes land uses, including mineral exploration. There are no known energy resources around the alternative segments.

Potential quarry NN-9A would be in the southern portion of Reville Valley. The site would be about 32 to 48 kilometers (20 to 30 miles) from State Route 375, the nearest paved road. The quarry pit would mine a basalt ridge and the plant facilities would be in the valley below (DIRS 176172-Nevada Rail Partners 2006, pp. B-2 and B-3).

Potential quarry NN-9B also would be in the southern portion of Reville Valley, about 2 kilometers (1.2 miles) southeast of the site of potential quarry NN-9A. The quarry pit would mine a separate basalt ridge, with the plant facilities in the valley below, next to the South Reville alternative segment 2 rail *siding* (DIRS 176172-Nevada Rail Partners 2006, pp. C-1 and C-2).

3.2.1.3.5.3 Soils. South Reville Valley is dominated by very thick, well-drained, fan piedmont soils. These soils are derived from volcanic breccia and tuff. Nineteen percent of the soils along South Reville alternative segment 2 have soils with the erodes easily characteristic; 15 percent of the soils along South Reville alternative segment 3 have that characteristic. Additionally, 6.3 percent of South Reville alternative segment 2 soils have the blowing soils characteristic; South Reville alternative segment 3 contains none. There are no prime farmland soils along either of the South Reville alternative segments.

3.2.1.3.6 Caliente Common Segment 3 (Reville Valley to Mud Lake)

3.2.1.3.6.1 Physiography. The physiography of Caliente common segment 3 is characterized, from east to west, by the Reville Valley, Stone Cabin Valley, Cactus Flat, Ralston Valley, and Mud Lake (see Figures 3-9 and 3-10). The Reville Range would border the common segment on the east. The Hot Creek Range (the extension of the Kawich Range north of Warm Springs Summit) would border this common segment to the north. Caliente common segment 3 would cross Cow Canyon near Warm Springs Summit. Warm Springs, a cluster of hot springs, discharges just east of Warm Springs Summit in the Kawich Range. The Maintenance-of-Way Tracksides Facility would be next to the rail alignment in the northern section of Cactus Flat. The Maintenance-of-Way Headquarters Facility would be 8.0 kilometers (5.0 miles) south of Tonopah, adjacent to U.S. Highway 95.

Rail alignment elevations would range from 1,650 to 1,900 meters (5,400 to 6,200 feet) above mean sea level at Warm Springs Summit and 1,600 to 1,700 meters (5,200 to 5,600 feet) above mean sea level around Mud Lake.

3.2.1.3.6.2 Geology. Caliente common segment 3 would cross the length of Reveille Valley. Reveille Valley, a *graben* (a basin formed between normal faults), developed from displacements along the West Reveille fault and the western Hot Creek Reveille fault. At Warm Springs Summit, the common segment would cross young volcanic rocks that make up most of the Kawich Range. Stone Cabin Valley, Cactus Flat, and Ralston Valley consist of Quaternary alluvial materials, with some playa deposits in the lowest elevations of northern Cactus Flat and southern Ralston Valley. Runoff in southern Ralston Valley flows to Mud Lake, another playa. Some Quaternary alluvial deposits in Reveille Valley have been displaced by these faults, indicating movement within the past 1.6 million years.

Caliente common segment 3 would parallel the Kawich-Hot Creek fault zone along the eastern side of the Hot Creek and Kawich Ranges. Displacement along this fault has occurred throughout the Quaternary, most recently about 130,000 years ago (DIRS 177713-MO0607LFAFUS96.000, Fault Number 1355). The common segment would both parallel and cross the East Stone Cabin fault zone, which forms the northwestern border of the Kawich Range with Stone Cabin Valley (see Figure 3-9). The most recent movement along this fault was also about 130,000 years ago (DIRS 177713-MO0607LFAFUS96.000, Fault Number 1354).

There are several commercial minerals found in the area around Caliente common segment 3 (DIRS 173841-Shannon & Wilson 2005, Plate 1). The Warm Springs summit area has documented sources of gold, silver, base metals, barite, and turquoise. As described in Section 3.2.2, Land Use and Ownership, there are also several mining districts in the area. There are also hot springs in the Warm Springs Summit area. Other than gravel and alluvial materials present on the floor of Stone Cabin Valley, Cactus Flat, and Ralston Valley, Caliente common segment 3 would not cross any known commercial mineral deposits.

3.2.1.3.6.3 Soils. Soils along Caliente common segment 3 occur on alluvial fan remnants, skirts, piedmonts, and in the eastern portion, on alluvial flats (DIRS 176781-MO0603GSCSSGEO.000). They are derived from various sources, including wind-blown sand, mixed alluvium, and fine-grained playa deposits.

Soils with the erodes easily characteristic comprise about 17 percent of the soils, and soils with the blowing soil characteristic comprise about 32 percent of the soils (see Table 3-3). As part of the pre-construction process, stability tests would ensure that fine-grained playa soils would be suitable for construction. The proposed rail alignment would not cross any soils considered to be prime farmland.

3.2.1.3.7 Goldfield Alternative Segments

3.2.1.3.7.1 Physiography. The physiography of the Goldfield area is dominated by the Goldfield Hills (see Figure 3-10) and the extensive surface and underground mine workings associated with the mining district. The Goldfield area also includes part of the Mud Lake basin to the north and the Montezuma Valley and Malpais Mesa to the west. There are several prominent hills, ridges, and plateaus in the area, which the Goldfield alternative segments would either cross or go around. The central Goldfield alternative segment, Goldfield 1, would wind through the central part of Goldfield Hills, coming within about 1.9 kilometers (1.2 miles) of Black Butte, Espina Hill, and Blackcap Mountain. Goldfield alternative segments 3 and 4 would weave through the western section of the Goldfield Hills, using passes and valleys to maintain an appropriate *grade* (see Figure 3-10). The alternative segments would reach elevations ranging from 1,800 to 1,900 meters (6,000 feet to 6,200 feet) above mean sea level.

3.2.1.3.7.2 Geology. In the Goldfield area, the principal outcrops consist of young volcanic rocks. A combination of heat, water, and fractures in the bedrock contributed to the alteration and mineralization of the area volcanic rocks. This has resulted in an area with metallic mineral deposits (DIRS 173841-Shannon & Wilson 2005, pp. 68 to 70). The Goldfield Mining District has been extensively mined for gold, silver, and copper ore since the early 1900s. Nonmetallic minerals such as zeolite are also found in the area. Section 3.2.2, Land Use and Ownership, describes the local mining districts. There are no geothermal or other energy resources near the Goldfield alternative segments.

Potential quarry NS-3A would be on the basalt hills and surrounding valley northeast of Goldfield along Goldfield alternative segment 3. The quarry pit would encompass two hills on either side of a wash, with the plant facilities located in the valley below. Potential quarry NS-3B would be next to the site of NS-3A along Goldfield alternative segment 3 in a valley flanked by hills. The quarry pit would be adjacent to the rail alignment, and the plant facility would be to the east in the valley. Potential quarry ES-7 would be on Malpais Mesa, west of Goldfield along Goldfield alternative segment 4 (DIRS 176172-Nevada Rail Partners 2006, Figures 3-C and 3-D).

All of the Goldfield alternative segments would cross the northeastern edge of the Stonewall Flat fault zone. These faults offset bedrock in the Cuprite Hills, and are generally not well understood. The last fault movement was calculated to have occurred within the last 130,000 years (DIRS 177713-MO0607LFAFUS96.000, Fault Number 1089).

3.2.1.3.7.3 Soils. Soils along the Goldfield alternative segments include those derived from loose volcanic rock alluvium (DIRS 176781-MO0603GSCSSGEO.000). This area has well drained to excessively drained soils on mountains, hills, and fan piedmonts.

Soils with the blowing soil characteristic range from about 7.5 percent along Goldfield alternative segment 4 to 9.1 percent along Goldfield alternative segment 3; there are no soils with the erodes easily characteristic along any of the Goldfield alternative segments (see Table 3-3). None of the Goldfield alternative segments would cross prime farmland soils.

3.2.1.3.8 Caliente Common Segment 4 (Stonewall Flat Area)

3.2.1.3.8.1 Physiography. The physiography of Caliente common segment 4 is characterized by Stonewall Flat and Lida Valley, both depressions with numerous alkali flats (see Figures 3-10 and 3-11), and elevations between 1,400 and 1,500 meters (4,700 and 4,900 feet) above mean sea level. Stonewall Mountain is also a prominent feature that borders the common segment on the east.

3.2.1.3.8.2 Geology. In Stonewall Flat, a graben formed in part by the northeast-trending Stonewall Mountain Fault, Caliente common segment 4 would mostly cross fan and stream-channel alluvium, in addition to a small outcrop of volcanic rocks of Stonewall Mountain (DIRS 176184-Shannon & Wilson 2006, Table 5). There has been some seismic activity around the Cuprite Hills and at Stonewall Mountain within the past 150 years (see Figure 3-3).

There are metallic minerals, including copper, silver, and gold, along this common segment. The deposits occur in sedimentary and volcanic rocks that have been altered by hot fluids. Quartz veins are also mined for silica. Drilling in the Cuprite Hills suggests the existence of a large geothermal system in the area, with multiple warm heat-flow wells drilled in the Cuprite Hills (DIRS 173841-Shannon & Wilson 2005, Plate 1). Except for alluvium, there are no construction materials along the common segment.

3.2.1.3.8.3 Soils. Soils along Caliente common segment 4 are derived from alluvium and occur on fan piedmonts, fan skirts, and drainage ways (DIRS 176781-MO0603GSCSSGEO.000). Soils with the blowing soil characteristic comprise 1.4 percent of the soils along this common segment. Soils with the

erodes easily characteristic comprise about 41 percent of the soils. Caliente common segment 4 would not cross any prime farmland soils.

3.2.1.3.9 Bonnie Claire Alternative Segments

3.2.1.3.9.1 Physiography. The physiography of the Bonnie Claire area is characterized by the southern boundary of Lida Valley and the northern portion of Sarcobatus Flat, which are depressions with numerous alkali flats. Pahute Mesa would be to the east of the alternative segments; Stonewall Mountain would be to the northeast (see Figure 3-11). Bonnie Claire alternative segment 2 would pass to the east of an unnamed 1,500-meter (4,900-foot)-high bedrock knoll that separates Sarcobatus Flat and Lida Valley; Bonnie Claire alternative segment 3 would pass this knoll to the west (DIRS 176184-Shannon & Wilson 2006, Figure 3). Elevations in this area range from about 1,250 to 1,400 meters (4,100 to 4,600 feet) above mean sea level.

3.2.1.3.9.2 Geology. The Bonnie Claire alternative segments would cross the eastern portion of the southwestern Nevada volcanic field. Bonnie Claire 3 would cross a mixture of young volcanic rocks and ash-flow sedimentary rocks, while Bonnie Claire 2 would primarily cross alluvium on the western edge of Sarcobatus Flat (DIRS 176184-Shannon & Wilson 2006, Table 5).

The two alternative segments would bypass a sequence of interconnected unnamed faults. These faults are not well studied, although recent seismic activity has been recorded in the area. In 1999, there was a magnitude 5.3 earthquake in the area between the Bonnie Claire alternative segments. As seen in Figure 3-3, many aftershocks were recorded in the area, most between magnitudes 2.0 and 3.5. Since then, earthquakes immediately around the Bonnie Claire alternative segments have been below magnitude 3.0 (DIRS 176184-Shannon & Wilson 2006, Plate 4).

Metallic minerals such as gold and copper have been found within the volcanic rocks around the Bonnie Claire alternative segments. The Wagner Mining District is in this area, and is discussed in more detail in Section 3.2.2, Land Use and Ownership.

There are no energy or geothermal resources in the area surrounding the Bonnie Claire alternative segments, and other than gravel and alluvial materials present on the floor of Lida Valley, the Bonnie Claire alternative segments would not cross any known mineral deposits.

3.2.1.3.9.3 Soils. Soils along Bonnie Claire alternative segments 2 and 3 are derived from alluvium and *colluvium*, and are found on hills, alluvial fan piedmonts, and fan skirts. Soils are mainly identified for Bonnie Claire alternative segment 3, because soil data are not available for the area around the Nevada Test and Training Range.

Soils with the erodes easily characteristic comprise 27 and 25 percent of the soils for Bonnie Claire alternative segments 2 and 3, respectively. Available data do not indicate any soils with the blowing soil or prime farmland characteristic.

3.2.1.3.10 Common Segment 5 (Sarcobatus Flat Area)

3.2.1.3.10.1 Physiography. The physiography of common segment 5 consists of most of Sarcobatus Flat. Pahute Mesa would be to the northeast (see Figure 3-11). Coba Mountain is a prominent feature in the area, and extends from common segment 5 to the southwest (see Figure 3-12). Rail alignment elevations in the Sarcobatus Flat area would range from 1,200 to 1,250 meters (3,900 feet to 4,100 feet) above mean sea level.

3.2.1.3.10.2 Geology. Common segment 5 would cross Quaternary alluvium and mid-Tertiary ash-flow tuffs, minor lava flows, and reworked materials associated with the southwestern Nevada volcanic field. The common segment would not cross Quaternary faults (see Figures 3-11 and 3-12). Commercial minerals found within the area include gold and silver (DIRS 173841-Shannon & Wilson 2005, pp. 51 and 52). Additionally, an actively mined, relatively large gravel pit at the alluvial fan boundary between Pahute Mesa and Sarcobatus Flat would be within 0.8 kilometer (0.5 mile) of the rail alignment in this area.

Geothermal occurrences in Sarcobatus Valley include one warm spring and one hot well, which would be about 0.20 kilometer (0.12 mile) from the rail alignment.

3.2.1.3.10.3 Soils. Area soils are derived from alluvial deposits and are well drained. They occur on alluvial flats and fan piedmonts. Soils with the blowing soil characteristic comprise about 2.6 percent of the soils. There are no soils along common segment 5 with the erodes easily or prime farmland characteristics.

3.2.1.3.11 Oasis Valley Alternative Segments

3.2.1.3.11.1 Physiography. Oasis Valley alternative segments 1 and 3 would be in Oasis Valley, which is incised by the Amargosa River, an *ephemeral stream*, and tributary washes (see Figure 3-12). Elevations range from about 1,200 to 1,300 meters (3,900 to 4,200 feet) above mean sea level. At the northwest end, the alternative segments would cross alluvial fans extending from Pahute Mesa on the north and Oasis Mountain (in Bullfrog Hills) on the south.

3.2.1.3.11.2 Geology. The two Oasis Valley alternative segments would cross sedimentary rocks overlain in part by recent sediment from alluvial fans and Amargosa River floodplain deposits. Small outcrops of young volcanic rocks from the southwestern Nevada volcanic field area are also exposed. The rail alignment would not cross Quaternary faults, commercial mineral operations, geothermal resources or materials suitable for construction purposes.

3.2.1.3.11.3 Soils. Soils along Oasis Valley alternative segments 1 and 3 are derived from alluvium and are well drained to somewhat excessively drained. Soils occur on fan skirts and fan piedmonts. Oasis Valley 1 contains approximately 13 percent soils with the blowing soil characteristic, while Oasis Valley 3 contains approximately 5.3 percent of blowing soils. There are no prime farmland or erodes easily soils along either of the Oasis Valley alternative segments.

3.2.1.3.12 Common Segment 6 (Yucca Mountain Approach)

3.2.1.3.12.1 Physiography. The physiography of common segment 6 is characterized by Beatty Wash, Crater Flat, and several ridges and valleys that make up Yucca Mountain, Busted Butte, and Jackass Flats (see Figure 3-12). The common segment would go around the east side of Busted Butte, with Fortymile Wash and most of Jackass Flats to the east. North of Busted Butte, it would cross a series of washes and valleys flanked by multiple ridges, where it would terminate near Yucca Mountain. Rail alignment elevations would range from about 1,300 meters (4,300 feet) at Tram Ridge to 1,000 meters (3,300 feet) above mean sea level at the base of Busted Butte (DIRS 176184-Shannon & Wilson 2006, Figure 3, Sheets 70 and 71).

3.2.1.3.12.2 Geology. This area is in the southern edge of the southwestern Nevada volcanic field. Common segment 6 would cross a variety of alluvial deposits and sedimentary rocks, and young volcanic rocks. Faults in the area increase in number closer to the Yucca Mountain uplands. The fault traces generally trend to the north, including the Bare Mountain Fault and the eastern and western Yucca

Mountain fault groups. Displacements along faults are characterized in terms of the amount of movement per seismic event. For the set of block-bounding faults of primary significance to the *Yucca Mountain Site*, these surface values range from 0 to 1.7 meters (0 to 5.6 feet) per event (DIRS 155970-DOE 2002, Table 3-8).

DOE has monitored seismic activity at the Nevada Test Site since 1978. The largest recorded earthquake within 50 kilometers (30 miles) of Yucca Mountain was the Little Skull Mountain earthquake in 1992 (DIRS 169734-BSC 2004, p. 4-34 and Figure 4-19), which had a magnitude of 5.6 (DIRS 169734-BSC 2004, p. 4-38). DOE buildings on the Nevada Test Site were damaged and there was also damage in Beatty, Town of Amargosa Valley, and Mercury, Nevada. DOE would continue to monitor the seismic activity around Yucca Mountain with an array of monitoring stations spread throughout the area.

The bedrock around common segment 6 contains metallic minerals, such as gold and silver, and nonmetallic deposits, including fluorspar and silica (DIRS 173841-Shannon & Wilson 2005, pp. 38 to 45). There are also several hot springs around the Beatty Wash area, some of which are used by a hotel (DIRS 173841-Shannon & Wilson 2005, Plate 1).

3.2.1.3.12.3 Soils. Soils along common segment 6 occur on fan piedmonts, skirts, and fan remnants. The soils derived from Tertiary volcanic rocks and Quaternary alluvium are well drained to somewhat excessively drained. Soils on alluvial flats are derived from lake deposits and are well drained. None of the soils along common segment 6 contain prime farmland, blowing soil, or soils with the erodes easily characteristic.

3.2.2 LAND USE AND OWNERSHIP

This section describes the affected environment for land use and ownership along and adjacent to the Caliente rail alignment. At the recommendation of the U.S. Bureau of Land Management (BLM; a cooperating agency in the preparation of this Rail Alignment EIS), DOE organized this section by types of land uses rather than by rail line segments to enable the reader to quickly review issues of concern to them. The section provides an overview of land uses on private, American Indian, and public lands. The BLM and DOE manage public land the Caliente rail alignment would cross. The uses of public land discussed in detail in this section include grazing (within BLM-designated *grazing allotments*), mineral and energy extraction, and recreation. This section also discusses land access and existing utility rights-of-way.

Section 3.2.2.1 describes the region of influence for land use and ownership; Section 3.2.2.2 describes private land, including relevant land-use plans; Section 3.2.2.3 describes American Indian land; Section 3.2.2.4 describes public lands, BLM *resource management plans*, and project-related land *withdrawals*; and Section 3.2.2.5 describes the general environmental setting and land-use characteristics along the Caliente rail alignment.

Other sections of this Rail Alignment EIS describe additional subjects related to land use. Section 3.2.1, Physical Setting, describes farmland and prime farmland in more detail; Section 3.2.7, Biological Resources, describes *herd management areas*; and Section 3.2.11, Utilities, Energy, and Materials addresses utilities. Section 3.4 describes American Indian interests in and views on the Proposed Action.

3.2.2.1 Region of Influence

The region of influence for land use and ownership is the nominal width of the rail line construction right-of-way, and includes all private land (including patented *mining claims*), American Indian lands, and public land that would be fully or partially within the construction right-of-way. The land use and ownership region of influence also includes the locations of construction and operations support facilities outside the nominal width of the rail line construction right-of-way.

Although the *operations right-of-way* would be smaller than the construction right-of-way, DOE evaluated the construction right-of-way as the basis for identifying potential land-use impacts because:

- It provides a more conservative estimate of the amount of land that would be utilized than the operations right-of-way, providing an upper bound for analysis.
- The construction phase encompasses the most intensive land use in terms of noise, human activity, and disruptions to land access.
- The construction right-of-way footprint would be the basis for the initial right-of-way applications submitted to the BLM for the project.

3.2.2.2 Private Land

Private lands in Lincoln, Nye, and Esmeralda Counties are either clustered in towns and along highways, or they are widely scattered. Private land makes up a very small portion of these counties. Figure 3-13 provides an overview of privately owned lands near the Caliente rail alignment.

3.2.2.2.1 County Land-Use Plans

The Caliente rail alignment would cross parts of Lincoln, Nye, and Esmeralda Counties. County plans that affect land use along the rail alignment include the *Lincoln County Master Plan* (DIRS 174520-State of Nevada 2001, all), *Nye County Comprehensive Plan* (DIRS 147994-McRae 1994, all), and *Esmeralda County Master Plan* (DIRS 176770-Duval et al. 1976, all).

3.2.2.2.1.1 Lincoln County. The *Lincoln County Master Plan* guides the county's growth, management of natural resources, provisions for public services and facilities, and the protection of public health, safety, and welfare. Lincoln County is the third largest county in Nevada, covering approximately 28,000 square kilometers (11,000 square miles), and the Federal Government manages more than 97 percent of that land (DIRS 174520-State of Nevada 2001, p. 3-5). The BLM manages most public land in the county; the U.S. Forest Service manages the portions of the Humboldt-Toiyabe National Forest that fall within the county. Lincoln County is primarily rural and most residents live in Pioche (also the county seat), Panaca, Alamo, the City of Caliente, and the communities of Rachel, Hiko, Ash Springs, Richardville, Caselton, and Ursine. The rest of Lincoln County is sparsely settled.

3.2.2.2.1.2 Nye County. Nye County has an area of approximately 47,000 square kilometers (18,000 square miles) and is the largest county in Nevada. The Federal Government manages almost 93 percent of the county's land. Federally owned or managed lands in Nye County include the Nevada Test and Training Range, the Nevada Test Site, BLM-administered public land, a portion of Death Valley National Park, and portions of the Humboldt-Toiyabe National Forest. Private lands in Nye County are used for residential, commercial, and industrial purposes largely, but not exclusively, within the boundaries of unincorporated towns, and agricultural and mining uses both inside and outside these towns. The *Nye County Comprehensive Plan* guides growth and development, but is not equivalent to a zoning ordinance, nor does it regulate the use of land. However, the Nye County Board of Commissioners may choose to enact a zoning ordinance or other growth-management mechanisms to accomplish certain objectives of the plan. The plan also serves as a framework for local land-use plans and other growth-management mechanisms (DIRS 147994-McRae 1994, all).

3.2.2.2.1.3 Esmeralda County. The BLM manages more than 92 percent of the approximately 9,300 square kilometers (3,600 square miles) in Esmeralda County. Two percent of the land in Esmeralda County is National Forest land, and a small portion of the county falls within Death Valley National Park. Less than 5 percent of the land in the county is privately owned. The two most heavily populated areas in Esmeralda County at the issuance of the *Esmeralda County Master Plan* were Goldfield and Silver Peak (DIRS 176770-Duval et al. 1976, p. 25). Goldfield is the county seat for Esmeralda County; there are no incorporated cities in the county. Under the *Esmeralda County Master Plan*, land use has been divided into three basic categories: multiple use, agriculture, and urban expansion. The multiple-use category is suggested for those areas where federal or state ownership is expected to remain. Grazing, mining and prospecting, and recreation activities are recommended under the multiple-use concept. The plan also recommends that residential and commercial development be concentrated in the existing communities of Goldfield and Silver Peak, where public facilities can be most economically concentrated (DIRS 176770-Duval et al. 1976, p. 73).

3.2.2.2.2 Local Land-Use Planning

The initial design phase for the Caliente rail alignment emphasized avoiding towns and populated areas wherever feasible. Caliente and Goldfield are the most densely populated places along the Caliente rail alignment. Zoning and land use within Caliente is governed by the *City of Caliente Master Plan* (Caliente Master Plan) (DIRS 157312-Sweetwater and Anderson 1992, all). Goldfield does not have a master plan or zoning plan.

3.2.2.2.1 City of Caliente. The Caliente alternative segment would pass through the City of Caliente, which is in Lincoln County along U.S. Highway 93 and encompasses approximately 5.5 square kilometers (1.9 square miles) (DIRS 176855-U.S. Census Bureau 2003, p. 5). City services include restaurants, gas stations, motels, a small casino, and a variety of stores. Land uses within the City of Caliente include residential, governmental (administrative), commercial, industrial, agricultural, and recreational.

Commercial and industrial uses comprise approximately 11 percent of the land use and residential areas encompass approximately 9 percent of the land in the city (DIRS 157312-Sweetwater and Anderson 1992, p. 27). There are agricultural operations on approximately 0.3 square kilometer (80 acres) of land (approximately 8 percent) within Caliente, primarily within floodplains (DIRS 157312-Sweetwater and Anderson 1992, p. 24). Roads and utilities make up approximately 17 percent of land use in Caliente. Though vacant land occupies approximately 44 percent of the city land base, steep slopes and floodplains have limited the city's development potential.

Union Pacific Railroad Mainline tracks (Caliente Line) cross Caliente in approximately a northeast to south direction. Caliente has long been a central maintenance and switching center for railroad operations. The Caliente Line, at full capacity, operates 25 to 30 trains a day (DIRS 176807-Union Pacific 2005, all).

The Caliente Master Plan outlines strategies for both steady and rapid growth. Overall the plan fosters the following key development concepts (DIRS 157312-Sweetwater and Anderson 1992, p. 49):

- Caliente's role will continue to be residential, with tourism, the service industry, the [existing] railroad, and associated activities as primary economic activities.
- Residential expansion should occur primarily on open land to the north of U.S. Highway 93 (toward the cemetery) and should be predominantly single-family.
- The existing commercial core should be rehabilitated and continue as the commercial hub of Caliente.
- Small-scale, clean industrial uses should be promoted. A large site for major economic centers should be located north of the city out of the mouth of Antelope Canyon.
- Caliente should develop and improve recreational and tourist attractions.

One goal outlined in the master plan that could be specifically relevant to the Caliente rail alignment because it addresses rail operations is (DIRS 157312-Sweetwater and Anderson 1992, p. 54):

If Caliente is to be a distribution point for goods brought into the county, trains should be switched onto the Pioche Spur Line and materials unloaded at a location north of the City. This will reduce disruption to the community due to noise, traffic, dust, or trains blocking the vehicle crossing.

The *Lincoln County Master Plan* states that the NTS Development Corporation is cooperating with the City of Caliente in the development of the Meadow Valley Industrial Park, to be located along U.S. Highway 93 and the Union Pacific Railroad in Caliente (DIRS 174520-State of Nevada 2001, pp. 24 and 25).

The City of Caliente has an undated zoning map developed by Design Concepts West showing zones for residential areas, administrative and professional areas, commercial areas, industrial areas, and parks and recreational areas. Most of the land adjacent to the Union Pacific Railroad tracks is zoned general commercial or industrial. There are exceptions adjacent to the former Pioche and Prince Branchline north

of the Caliente Hot Springs, where the Lincoln County Hospital, senior citizens apartments, and a trailer court are immediately west of U.S. Highway 93. There is no zoning designation for the land that encompasses the former Pioche and Prince Branch (DIRS 180121-DC West [n.d.], all).

3.2.2.2.2 Goldfield. Goldfield alternative segment 4 would pass through Goldfield. Goldfield, an unincorporated town, is the county seat for Esmeralda County. The Goldfield census county division encompasses an area of more than 3,900 square kilometers (1,500 square miles) (DIRS 176855-U.S. Census Bureau 2003, p. 5). During its most prominent mining period at the beginning of the 20th Century, a number of passenger and freight railroad lines served Goldfield. The Goldfield Historic District, listed on the *National Register of Historic Places* in 1982 and entered onto the *Nevada State Register of Historic Places* on December 7, 2005, is in Goldfield and roughly bounded by Fifth Street, Miner Avenue, Spring Street, Elliot Street, and Crystal Avenue (DIRS 176854-National Register of Historic Places 1982, all). Although there is no zoning plan for Goldfield, the historic nature of its buildings and features are generally protected by the designation of its historic district. The Goldfield Historic District would be about 0.7 kilometer (0.4 mile) northwest of the Goldfield alternative segment 4 construction right-of-way.

3.2.2.2.3 Private Parcels

Most of the privately owned lands closest to the Caliente rail alignment are in or near Caliente and Goldfield. Figure 3-13 shows privately owned lands in or near the Caliente rail alignment. Note that patented mining claims are also private land, and are reflected in this private land information.

Table 3-4 lists the number of privately owned parcels of land that would be within the construction right-of-way of each Caliente alternative segment and common segment. Figures 3-14 through 3-25 show privately owned land along the Caliente rail alignment. Figures 3-15 through 3-18 show detailed land parcel maps for the Caliente and Eccles alternative segments.

Table 3-4. Private land that would be within or intersect the Caliente rail alignment construction right-of-way.

Rail line segment ^a	Number of parcels	Total area across parcels (square kilometers) ^b
Eccles alternative segment	11	0.32
Caliente alternative segment	32	0.31
Potential quarry CA-8B (siding only) ^c	2	0.18
Staging Yard at Caliente-Indian Cove	6	0.73
Staging Yard at Caliente-Upland	17	0.45
Caliente common segment 1	1	0.002
Goldfield alternative segment 1 ^c	6	0.38
Goldfield alternative segment 3 ^c	2	0.001
Goldfield alternative segment 4 ^d	37	0.23
Oasis Valley alternative segment 1	1	0.02

a. No other segments would intersect private land.
 b. To convert square kilometers to acres, multiply by 247.10.
 c. All parcels are patented mining claims.
 d. Four of the parcels are patented mining claims.

3.2.2.2.4 Pioche and Prince Branchline

There is an abandoned rail line from the former Union Pacific Railroad, Pioche and Prince Branchline in Caliente, which runs north generally parallel to U.S. Highway 93 (see Figure 3-14). The Union Pacific Railroad acquired the primary segments of right-of-way comprising the Pioche and Prince Branchline between 1901 and 1907. The Railroad retired the line on February 11, 1984, and received a certification of abandonment from the Interstate Commerce Commission to discontinue part of its operation in Nevada on the spur (DIRS 176910-IDT 2006, p. 7).

To be conservative in the assessment of potential land-use impacts, DOE assumed that all of the land underlying this abandoned rail line is privately owned. However, it is important to note that DOE is considering using this abandoned rail line for the proposed rail line to minimize potential impacts to environmental resources, such as wetlands.

3.2.2.3 American Indian Land

The closest American Indian land to the Caliente rail alignment would be the Timbisha Shoshone Trust Land. The Timbisha Homeland Act transferred 31.4 square kilometers (7,754 acres) of land into trust for the Timbisha Shoshone Tribe. The land is not contiguous; it is made up of five separate parcels in California and Nevada. The parcel near Scottys Junction covers approximately 11.39 square kilometers (2,800 acres).

During the first public scoping period for this Rail Alignment EIS, the Timbisha Shoshone Tribe requested that DOE alter the Caliente rail alignment to avoid their land (DIRS 174558-Sweeney 2004, all). DOE adjusted the proposed *rail route* based on this request, and the segment nearest the Timbisha Shoshone Trust Land near Scottys Junction, common segment 5, would be more than 3 kilometers (2 miles) east, as shown in Figure 3-24.

3.2.2.4 Public Land

Several agencies manage public lands near or encompassing the Caliente rail alignment, including the BLM, DOE, the U.S. Department of Defense, and the U.S. Forest Service.

The BLM and DOE manage approximately 159 square kilometers (39,000 acres) and 4.1 square kilometers (1,100 acres), respectively, of land that would be within the rail line construction right-of-way. The U.S. Department of Defense and the U.S. Forest Service manage lands near the Caliente rail alignment, but those lands would be outside the rail line construction right-of-way.

3.2.2.4.1 BLM-Administered Land

Approximately 97 percent of the lands along the Caliente rail alignment are BLM-administered public lands. Therefore, the proposed railroad project would in large part be subject to BLM land-use plans. The BLM manages public lands under the multiple-use concept, which balances the present and future needs of the American people. The BLM implements this concept through resource management plans, which are long-range, comprehensive land-use plans intended to provide for multiple uses and identify planning objectives and policies for designated areas. Resource management plan objectives are implemented through activity plans, such as allotment management plans and wildlife habitat management plans.

BLM resource management plans that apply to the Caliente rail alignment are included in the following:

- *Draft - Resource Management Plan/Environmental Impact Statement for the Ely District* (Draft Ely District Resource Management Plan; DIRS 174518-BLM 2005, all)
- *Tonopah Resource Management Plan and Record of Decision* (Tonopah Resource Management Plan; DIRS 173224-BLM 1997, all)
- *Record of Decision for the Approved Las Vegas Resource Management Plan and Final Environmental Impact Statement* (Las Vegas Resource Management Plan; DIRS 176043-BLM 1998, all)

The BLM issued the Draft Ely District Resource Management Plan in June 2005. The Caliente and Eccles alternative segments, all of Caliente common segment 1, all of the Garden Valley alternative segments, and the beginning of Caliente common segment 2 would be within the area covered by the Draft Ely District Resource Management Plan. Most of the rail alignment would then pass through lands covered by the Tonopah Resource Management Plan. A portion of common segment 6 would pass through lands covered by the Las Vegas Resource Management Plan; the section of common segment 6 that would be on the Nevada Test Site also falls within the BLM Las Vegas area but is managed by DOE. Table 3-5 lists the distances each Caliente rail alignment segment would pass through lands administered by the various BLM districts.

To construct and operate the proposed railroad along the Caliente rail alignment, DOE would apply for a BLM *right-of-way grant*. Section 503 of the Federal Land Policy and Management Act (DIRS 181386-BLM 2001; 43 United States Code [U.S.C.] 1761) authorized the BLM to grant, issue, or renew rights-of-way over, upon, under, or through public lands. BLM policy is to encourage prospective applicants to locate their proposals within existing corridors. Resource management plans describe these corridors and right-of-way avoidance areas – areas for which the BLM would avoid granting new rights-of-way unless there are no other options. *Areas of Critical Environmental Concern* are generally considered right-of-way avoidance areas.

Areas of Critical Environmental Concern are places within the public lands where special management attention is required to protect and prevent irreparable damage to important historic, cultural, or scenic values, fish and wildlife resources, and other natural systems or processes, or to protect life and safety from natural hazards (DIRS 181386-BLM 2001, p. 2).

Resource management plans also designate areas of potential land disposal (sale) within their management areas. Therefore, DOE must assess whether a railroad along the Caliente rail alignment would conflict with or adversely affect BLM land-disposal plans. Section 203(a) of the Federal Land Policy and Management Act allows for public land to be sold (disposed of) if it meets one of the following criteria:

- The land is difficult or uneconomic to manage as a part of the public lands.
- The land is not suitable for management by another federal department or agency.
- The land was acquired for a specific purpose and it is no longer required for that, or any other, federal purpose.
- Disposal of the land will serve important public objectives that can be achieved prudently or feasibly only if the land is removed from public ownership and these objectives outweigh other public objectives or values that will be served by maintaining the land in federal ownership.

Table 3-5. Caliente rail alignment crossing distances within each BLM resource management plan area.

Rail line segment	Ely District/Draft Resource Management Plan area (kilometers) ^{a,b}	Battle Mountain District/Tonopah Resource Management Plan area (kilometers)	Las Vegas District/Resource Management Plan area (kilometers)
Caliente alternative segment	18	0	0
Eccles alternative segment	19	0	0
Caliente common segment 1	110	0	0
Garden Valley alternative segment 1	35	0	0
Garden Valley alternative segment 2	35	0	0
Garden Valley alternative segment 3	37	0	0
Garden Valley alternative segment 8	37	0	0
Caliente common segment 2	31	19	0
South Reveille alternative segment 2	0	19	0
South Reveille alternative segment 3	0	19	0
Caliente common segment 3	0	110	0
Goldfield alternative segment 1	0	47	0
Goldfield alternative segment 3	0	50	0
Goldfield alternative segment 4	0	53	0
Caliente common segment 4	0	11	0
Bonnie Claire alternative segment 2	0	21	0
Bonnie Claire alternative segment 3	0	19	0
Common segment 5	0	40	0
Oasis Valley alternative segment 1	0	10	0
Oasis Valley alternative segment 3	0	14	0
Common segment 6	0	38	13
Total rail alignment distance by BLM district (shortest to longest alignment)	198 to 201	316 to 327	13

a. To convert kilometers to miles, multiply by 0.62137.

b. Individual segment lengths are rounded to two significant figures.

Sections 3.2.2.4.1.1 through 3.2.2.4.1.3 describe the planning areas and objectives of the applicable Resource Management Plans in relation to lands and realty, corridors, and access and recreation.

3.2.2.4.1.1 Draft Ely District Resource Management Plan. The Ely District Planning Area consists of public lands in White Pine County, Lincoln County, and a portion of Nye County in east-central Nevada. This district was previously subdivided into three resource areas (Egan, Schell, and Caliente) but would be managed as a single administrative unit under this Resource Management Plan. The Ely Field Office manages approximately 46 square kilometers (11 million acres) of public lands out of the approximately 56 square kilometers (14 million acres) within the boundaries of the district (DIRS 174518-BLM 2005, Executive Summary p. 7). Of this planning area, the BLM manages 5,400 square kilometers (1.34 million acres) in Nye County, 18,000 square kilometers (4.44 million acres) in White Pine County, and 23,000 square kilometers (5.62 million acres) in Lincoln County (DIRS 174518-BLM 2005, pp. 2.5-112). Draft management objectives (under the Draft Resource Management Plan preferred alternative) related to land tenure adjustments, corridors, and access are listed below (DIRS 174518-BLM 2005, Section 2.5.12).

- Land and realty
 - Retain public land or interest in land that would contribute to the restoration and health of land within the district.
 - Existing or newly designated Areas of Critical Environmental Concern totaling approximately 1,400 square kilometers (350,000 acres) would be withdrawn from *surface entry*. (There are no Areas of Critical Environmental Concern within the Caliente rail alignment region of influence; the closest Area of Critical Environmental Concern would be 60 kilometers [37 miles] away.)
 - Dispose of land in designated areas (approximately 390 square kilometers [96,000 acres]). (Some of this land could be in the vicinity of the Caliente and Eccles alternative segments.)
- Corridors
 - Designated corridors would be 0.8 kilometer (0.5 mile) wide.
 - Proactively designate new corridors and communication sites.
 - Land Use Authorizations (rights-of-way, permits, leases, and easements) would be issued on a case-by-case basis. Areas of Critical Environmental Concern would be avoidance or exclusion areas.
- Access and recreation
 - Off-highway vehicle use would be restricted to designated roads and trails; recreation management on approximately 3,000 square kilometers (730,000 acres) would emphasize off-highway vehicle use of designated roads and trails.
 - Emphasis would be to promote recreation across a wide spectrum of opportunities, both developed and undeveloped.

3.2.2.4.1.2 Tonopah Resource Management Plan. Located in south-central Nevada in Nye and Esmeralda Counties, the Tonopah Planning Area encompasses approximately 25,000 square kilometers (6.1 million acres) of public land and approximately 670 square kilometers (165,000 acres) of private land. Significant resources and program emphases include locatable minerals, livestock grazing, wild horses and burros, realty, cultural resources, and wildlife (DIRS 173224-BLM 1997, p. 1). Relevant land-use management objectives related to land and realty, corridors, and access are summarized below.

- Land and realty
 - Discretionary disposal of approximately 274 square kilometers (68,000 acres) of public land (DIRS 173224-BLM 1997, p. 2). Approximately 931 square kilometers (230,000 acres) have been identified for potential disposal in the vicinity of Goldfield, about 23 square kilometers (5,800 acres) have been identified for potential disposal near Scottys Junction, and approximately 160 square kilometers (39,000 acres) have been identified for potential disposal near Beatty (acreage based on BLM GIS data, DIRS 181617-Hopkins 2007).
- Corridors
 - Approximately 1,100 kilometers (670 miles) designated for transportation and utility corridors in the planning area (DIRS 173224-BLM 1997, p. 2).
 - Rights-of-way allowed (if compatible with values) on approximately 600 square kilometers (150,000 acres) (DIRS 173224-BLM 1997, p. 2). (There are no right-of-way exclusion areas within the Caliente rail alignment region of influence.)

- Designated right-of-way corridors within the planning area will be 5 kilometers (3 miles) wide except where there are topographic constraints. Grants for rights-of-way are still required for facilities placed within designated corridors. Designation of a corridor does not mean that future rights-of-way are restricted to corridors, nor does it mean that the BLM has committed to approving all right-of-way applications within corridors (DIRS 173224-BLM 1997, p. A-38).
- Access and recreation
 - Vehicles unrestricted on 77 percent of the planning area.
 - Vehicles limited to existing roads and trails in primitive and semi-primitive non-motorized and semi-primitive motorized areas.
 - Designates seven Special Recreation Management Areas (DIRS 173224-BLM 1997, p. 2).

3.2.2.4.1.3 Las Vegas Resource Management Plan. The Las Vegas Resource Management Plan provides a comprehensive framework for managing approximately 13,000 square kilometers (3.3 million acres) of public lands in Clark County and the southern portion of Nye County administered by the BLM Las Vegas Field Office. Approximately 2,830 square kilometers (700,000 acres) of this planning area is in Nye County. Significant resources and program emphases in the plan include threatened and *endangered species*; land disposal actions; wilderness management; wildlife habitat; special status species; *riparian* areas; forestry and vegetative products; livestock grazing; wild horses and burros; land acquisition priorities; rights-of-way; cultural resources; hazardous materials management; recreation; utility corridors; and minerals (DIRS 176043-BLM 1998, p. 2). Relevant land-use management objectives related to land and realty, corridors, and access are summarized below (DIRS 176043-BLM 1998, Appendix A, p. 16).

- Land and realty
 - Dispose of approximately 710 square kilometers (175,000 acres) of public lands through sale, exchange or recreation and public-purpose patent to provide for the orderly expansion and development of southern Nevada.
 - All public lands within the planning area, unless otherwise classified, segregated or withdrawn, and with the exception of Areas of Critical Environmental Concern and *Wilderness Study Areas*, are available for land-use leases and permits at the discretion of the BLM.
 - Terminate or modify any unused, outdated, or unnecessary classifications/segregations and withdrawals on public lands to reduce the area of segregation in the plan area.
 - Acquire private lands to enhance the recovery of special status species, protect valuable resources, and facilitate the management of adjacent BLM lands.
- Corridors

All Areas of Critical Environmental Concern and all lands within 0.4 kilometer (0.25 mile) of significant caves, exclusive of any designated corridors, are designated as right-of-way avoidance areas. (There are no Areas of Critical Environmental Concern within the Caliente rail alignment region of influence; the closest area is 140 kilometers [84 miles] south of common segment 6.)
- Access and recreation
 - Ensure that a wide range of recreation opportunities are available for recreation users in concert with protecting the natural resources on public lands that attract users.
 - Provide opportunities for off-road vehicle use while protecting wildlife habitat, cultural resources, hydrological and soil resources, non-motorized recreation opportunities, natural and aesthetic values, and other uses of the public land.

The Las Vegas Proposed Resource Management Plan/Final Environmental Impact Statement briefly mentions the Yucca Mountain Project in sections titled “Income and Employment” and “Social Setting, Attitudes, and Values.” In the Income and Employment section the document notes that there could be population growth in Amargosa Valley as a result of construction and operation of the Yucca Mountain Project. In the Social Setting, Attitudes, and Values section the document notes that people residing in Las Vegas (urbanites) expressed a higher concern than people residing in rural locations about wildlife and *ecosystem* values when recording their risk assessment for the proposed Yucca Mountain Project in a 1995 social research survey conducted by the University of Nevada Las Vegas (DIRS 176043-BLM 1998, pp. 3-81 and 3-82).

3.2.2.4.2 Project-Related Public Land Withdrawals

The BLM announced Public Land Order 7653 on December 28, 2005 (70 *Federal Register* [FR] 76854). The Order withdrew approximately 1,249 square kilometers (308,600 acres) of public lands within the Caliente rail corridor from surface and mineral entry for 10 years to allow DOE to evaluate the lands for the potential construction, operation, and maintenance of the proposed railroad to Yucca Mountain. The withdrawal applies only to BLM-administered public lands. The withdrawal area extends approximately 0.8 kilometer (0.5 mile) from either side of the centerline of the proposed rail alignment. The actions covered by this withdrawal meet the BLM definition of *casual use* as set forth in 43 Code of Federal Regulations (CFR) 2801.5. On January 10, 2007, the BLM announced that DOE had filed an application requesting a second land withdrawal (72 *FR* 1235). The Department filed the application to cover post-scoping changes in the Caliente rail alignment and to address the addition of the Mina rail alignment. The application requested the withdrawal of an additional 842 square kilometers (208,037 acres) of public lands from surface and mineral entry through December 27, 2015, so DOE could evaluate the lands for the potential construction, operation, and maintenance of a railroad to Yucca Mountain. Chapter 6 of this Rail Alignment EIS includes detailed information about the land withdrawal process.

The BLM granted DOE a right-of-way reservation (N-47748) for Yucca Mountain *site characterization* activities (DIRS 102218-BLM 1988, all). This reservation comprises 210 square kilometers (52,000 acres). The land in this reservation is open to public use, with the exception of about 20 square kilometers (5,000 acres) near the site of the proposed *repository* that were withdrawn in 1990 from the mining and mineral leasing laws to protect the physical integrity of the repository block. The lands in

Withdrawal: Withholding an area of federal land from settlement, sale, location, or surface entry under some or all of the general land laws, for the purpose of limiting activities under those laws to maintain other public values in the area or reserving the area for a particular public purpose or program

Casual use: Activities ordinarily resulting in no or negligible disturbance of the public lands, resources, or improvements. Examples of casual use include surveying, marking routes, and collecting data to use to prepare grant applications.

Right-of-way: The public lands the BLM authorizes a holder to use or occupy under a grant.

Grant: Any authorization or instrument (for example, easement, lease, license, or permit) the BLM issues under Title V of the Federal Land Policy and Management Act (43 U.S.C. 1761 *et seq.*).

Mineral entry closure: The land is not available for the location of mining claims because the land has been withdrawn from public use, including the operation of the General Mining Law (DIRS 181386-BLM 2001, 43 CFR 3830.5).

Surface entry closure: Land closed to surface entry cannot be used for appropriation of any non-federal interest or claim (other than mining claims), land sales, any public land disposal action, or other action that would cause the title for the land to be transferred away from the Federal Government (DIRS 176452-DOE 2005; 43 CFR 3809.5).

this reservation are not withdrawn from the mining and mineral leasing laws and contain a number of *unpatented mining claims* (DIRS 155970-DOE 2002, p. 3-9). This existing right-of-way reservation would be the basis for the planned land withdrawal for the Yucca Mountain Site, as described in the *Supplemental Environmental Impact Statement for a Geologic Repository for the Disposal of Spent Nuclear Fuel and High-Level Radioactive Waste at Yucca Mountain, Nye County, Nevada* (DIRS 155970-DOE 2002, DOE/EIS-0250F-S1), where the land would transfer from BLM administrative responsibility to DOE control.

3.2.2.4.3 Department of Defense-Managed Land, Nevada Test and Training Range

The U.S. Department of Defense administers the Nevada Test and Training Range, which the U.S. Air Force uses for training. The Caliente rail alignment would not cross onto the Nevada Test and Training Range land. Detailed information about land use and resources on the Nevada Test and Training Range is available in the *Proposed Nevada Test and Training Range Resource and Management Plan and Final Environmental Impact Statement* (DIRS 178103-BLM 2003, all).

The airspace above the Nevada Test and Training Range and some adjacent locations consist of the Desert and Reville Military Operations Areas and five “restricted areas”: R-4806E, R-4806W, R-4807A, R-4807B, and R-4809 (DIRS 103472-USAF 1999, p. 3.1-2).

Airspace to the east of the Nevada Test and Training Range is designated as the Desert Military Operations Area and airspace to the north is designated as the Reville Military Operations Area. These Areas are used for air-to-air intercept training, which consists of high speed operations, abrupt maneuvers, and supersonic flight. These areas are not considered restricted airspace and civil aircraft, under certain restrictions, are permitted to fly through a military operations area when it is in use while exercising certain precautions. Civil aircraft are allowed in these locations because the types of military flight maneuvers conducted in these areas are considered nonhazardous and therefore, compatible, with other airspace uses (DIRS 103472-USAF 1999, pp. 3.1-4 and 3.1-6). Portions of the Caliente rail alignment that would be on land under the Desert Military Operations Area include the Caliente and Eccles alternative segments; Caliente common segment 1; Garden Valley alternative segments 1, 2, 3, and 8; Caliente common segment 2, South Reville alternative segments 2 and 3; and a portion of Caliente common segment 3. More than half the length of common segment 3 would be on land under the Reville Military Operations Area.

Restricted airspace consists of areas where nonparticipating aircraft are subject to restriction during scheduled periods when hazardous activities are being performed. Restricted areas designated as joint use by the Federal Aviation Administration allow air traffic control to route non-participating aircraft through this airspace when it is not in use or when appropriate separation can be provided. Those areas not designated as joint use cannot be accessed by either nonparticipating civil or military aircraft at any time (DIRS 103472-USAF 1999, p. 3.1-3).

Restricted area R-4807A is designated joint use and land beneath it is comprised of an electronic battlefield with numerous tactical targets and manned electronic combat threat simulators. Portions of the Caliente rail alignment that would be on land below R-4807A include portions of common segment 5; the Oasis Valley alternative segments 1 and 2; and a portion of common segment 6 (DIRS 103472-USAF 1999, pp. 3.1-3, 3.1-4, and 3.1-6).

Restricted area R-4808S is controlled by DOE for Nevada Test Site activities and is designated joint use. The Federal Aviation Administration Los Angeles Air Route Traffic Control Center also uses R-4808S for civil aircraft overflights (DIRS 103472-USAF 1999, pp. 3.1-3, 3.1-4, and 3.1-6). A portion of common segment 6 would be on land below R-4808S as it approached the Yucca Mountain Site.

3.2.2.4.4 DOE-Managed Land, Nevada Test Site

Portions of common segment 6 and some railroad operations support facilities would be on Nevada Test Site land (see Figure 3-25), which DOE administers. Detailed information about current and future uses of the Nevada Test Site is available in *Final Environmental Impact Statement for the Nevada Test Site and Off-Site Locations in the State of Nevada* (DIRS 101811-DOE 1996, all). As discussed previously, land that makes up the proposed Yucca Mountain Site would be withdrawn and transferred to DOE control. Currently, a Memorandum of Agreement between the DOE National Nuclear Security Administration and the Office of Civilian Radioactive Waste Management allows the use of about 230 square kilometers (58,000 acres) on the Nevada Test Site for Yucca Mountain Project activities.

3.2.2.4.5 U.S. Forest Service Land

The Caliente rail alignment would pass within 3.2 kilometers (2 miles) of a portion of the Humboldt-Toiyabe National Forest, which the Ely Ranger District of the U.S. Forest Service manages and which would be outside the rail line construction right-of-way.

3.2.2.5 General Environmental Setting and Land-Use

Major public land uses along the Caliente rail alignment include grazing, mineral and energy extraction, and recreation. The rail alignment would cross numerous public roads and trails that provide access to public and private land and would cross BLM-authorized rights-of-way for utilities.

3.2.2.5.1 BLM Grazing Allotments

The Taylor Grazing Act of 1934 (43 U.S.C. 315-3160), as amended, authorizes the Federal Government to issue permits for grazing livestock in grazing districts to settlers, residents, and other livestock owners for an annual payment of reasonable fees. An applicant who owns a base property or controls a water source may apply to the BLM for a lease or permit to use public lands for the grazing of livestock. The BLM grazing administration regulations (43 U.S.C. 4100.0-5) define a base property as land that has the capability to produce crops or forage that can be used to support authorized livestock for a specified period of the year, or water that is suitable for consumption by livestock and is available and accessible to livestock when the public lands are used for livestock grazing. The grazing allotments are leased or permitted for 10 years and may be renewed under specific circumstances.

Livestock permitted on grazing allotments include cattle, sheep, goats, horses, and burros. Cattle and sheep are the typical livestock grazed within the Caliente rail alignment region of influence. The grazing lease or permit specifies the types and numbers of livestock based on the property acreage, the period of use, and the amount of use in *animal unit months*. The intent of assigning animal unit months is to allow grazing on public lands without exceeding the capacity of the allotment to sustain livestock (43 CFR Part 4100).

Animal unit month: A standardized unit of measurement of the amount of forage necessary for the complete sustenance of one animal for 1 month; also, a unit of measurement of grazing privileges that represents the privilege of grazing one animal for 1 month (43 CFR Part 4100).

Depending on the combination of common segments and alternative segments, the Caliente rail alignment would cross up to 24 active grazing allotments, and 3 inactive allotments (Ralston, Montezuma, and one labeled Unused) (see Figures 3-26 through 3-33). Tables 3-6 and 3-7 list information about grazing allotments within the Caliente rail alignment region of influence.

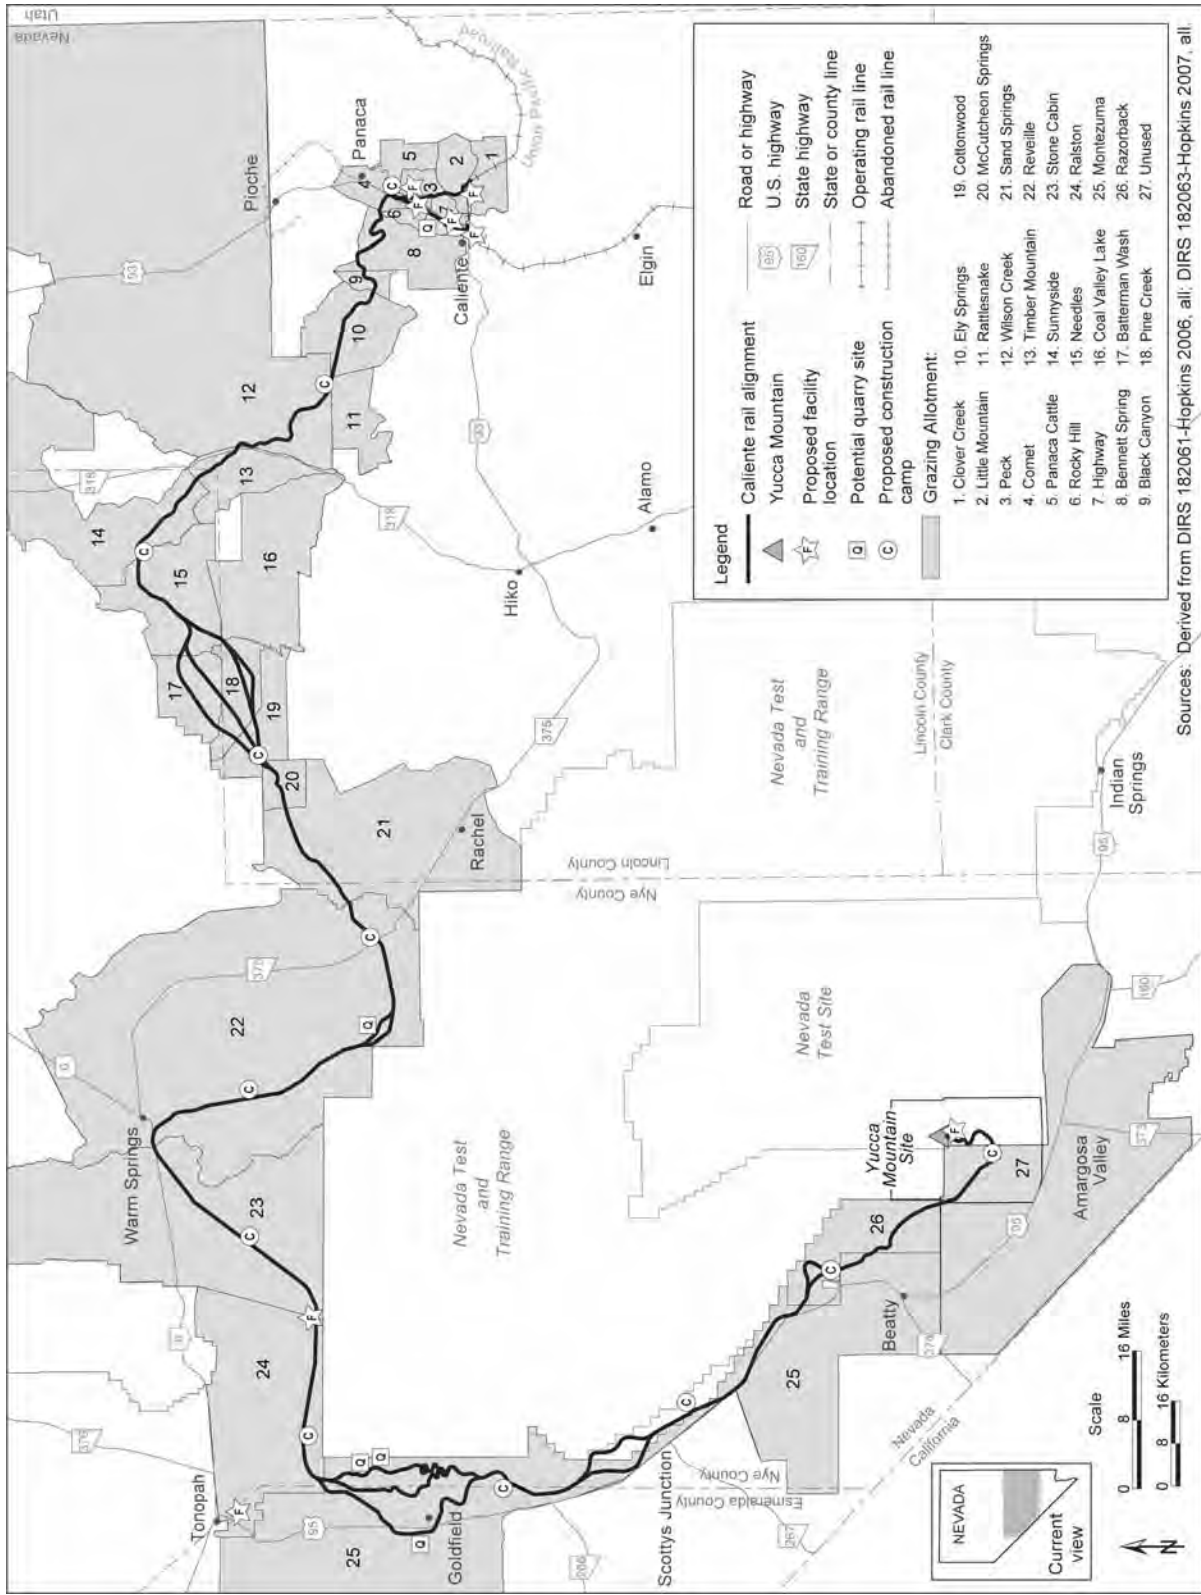


Figure 3-26. Grazing allotments along the Caliente rail alignment.

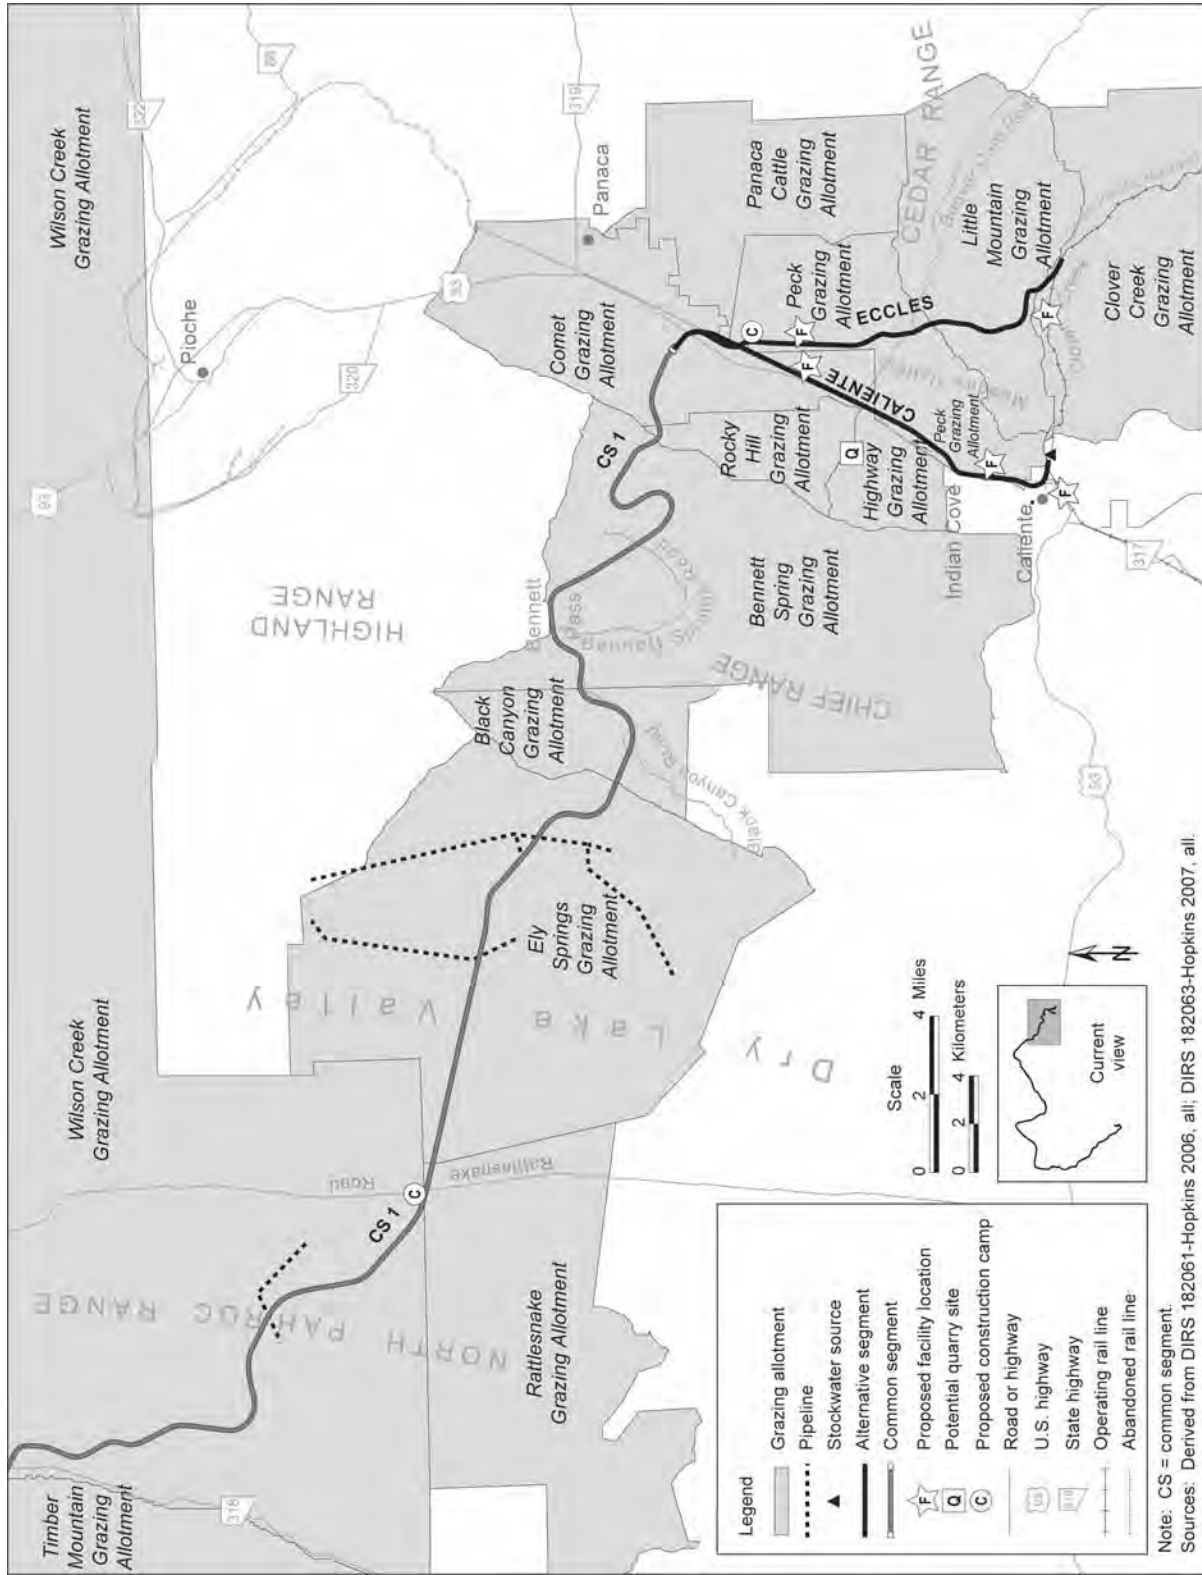


Figure 3-27. Grazing allotments with stockwater features within map area 1.

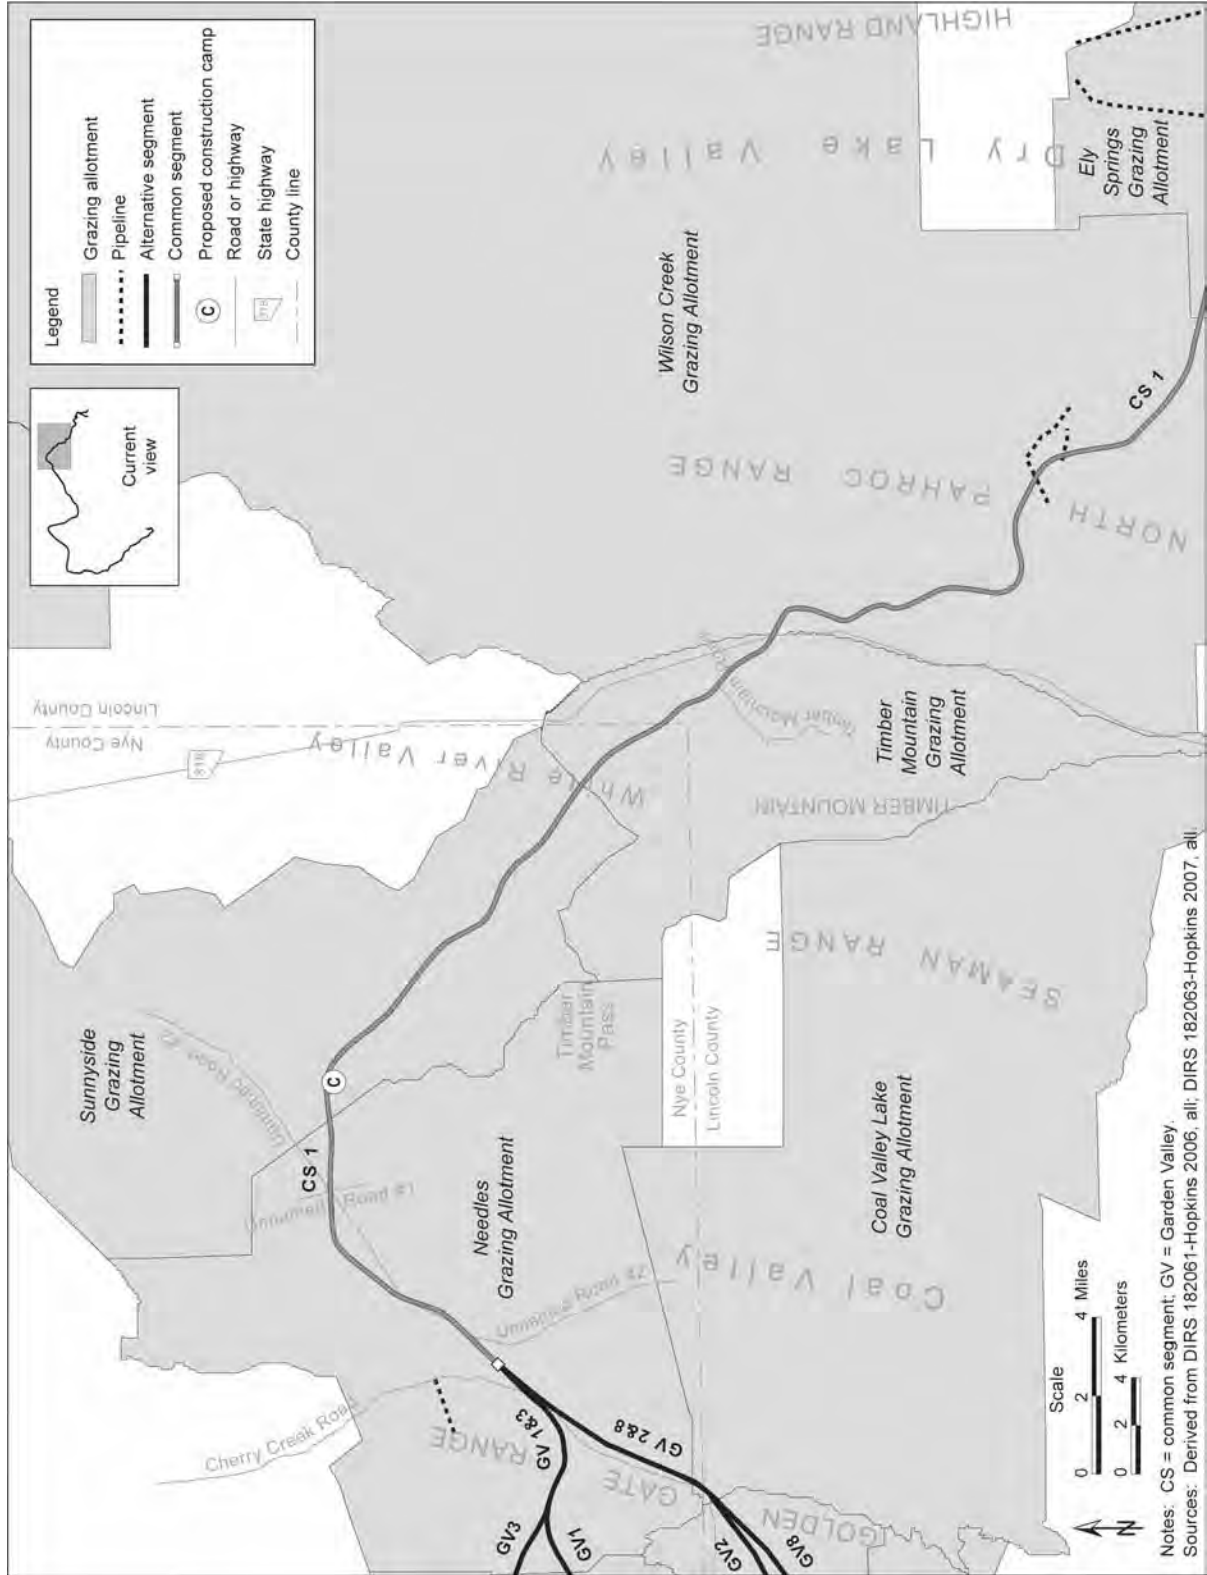


Figure 3-28. Grazing allotments with stockwater features within map area 2.

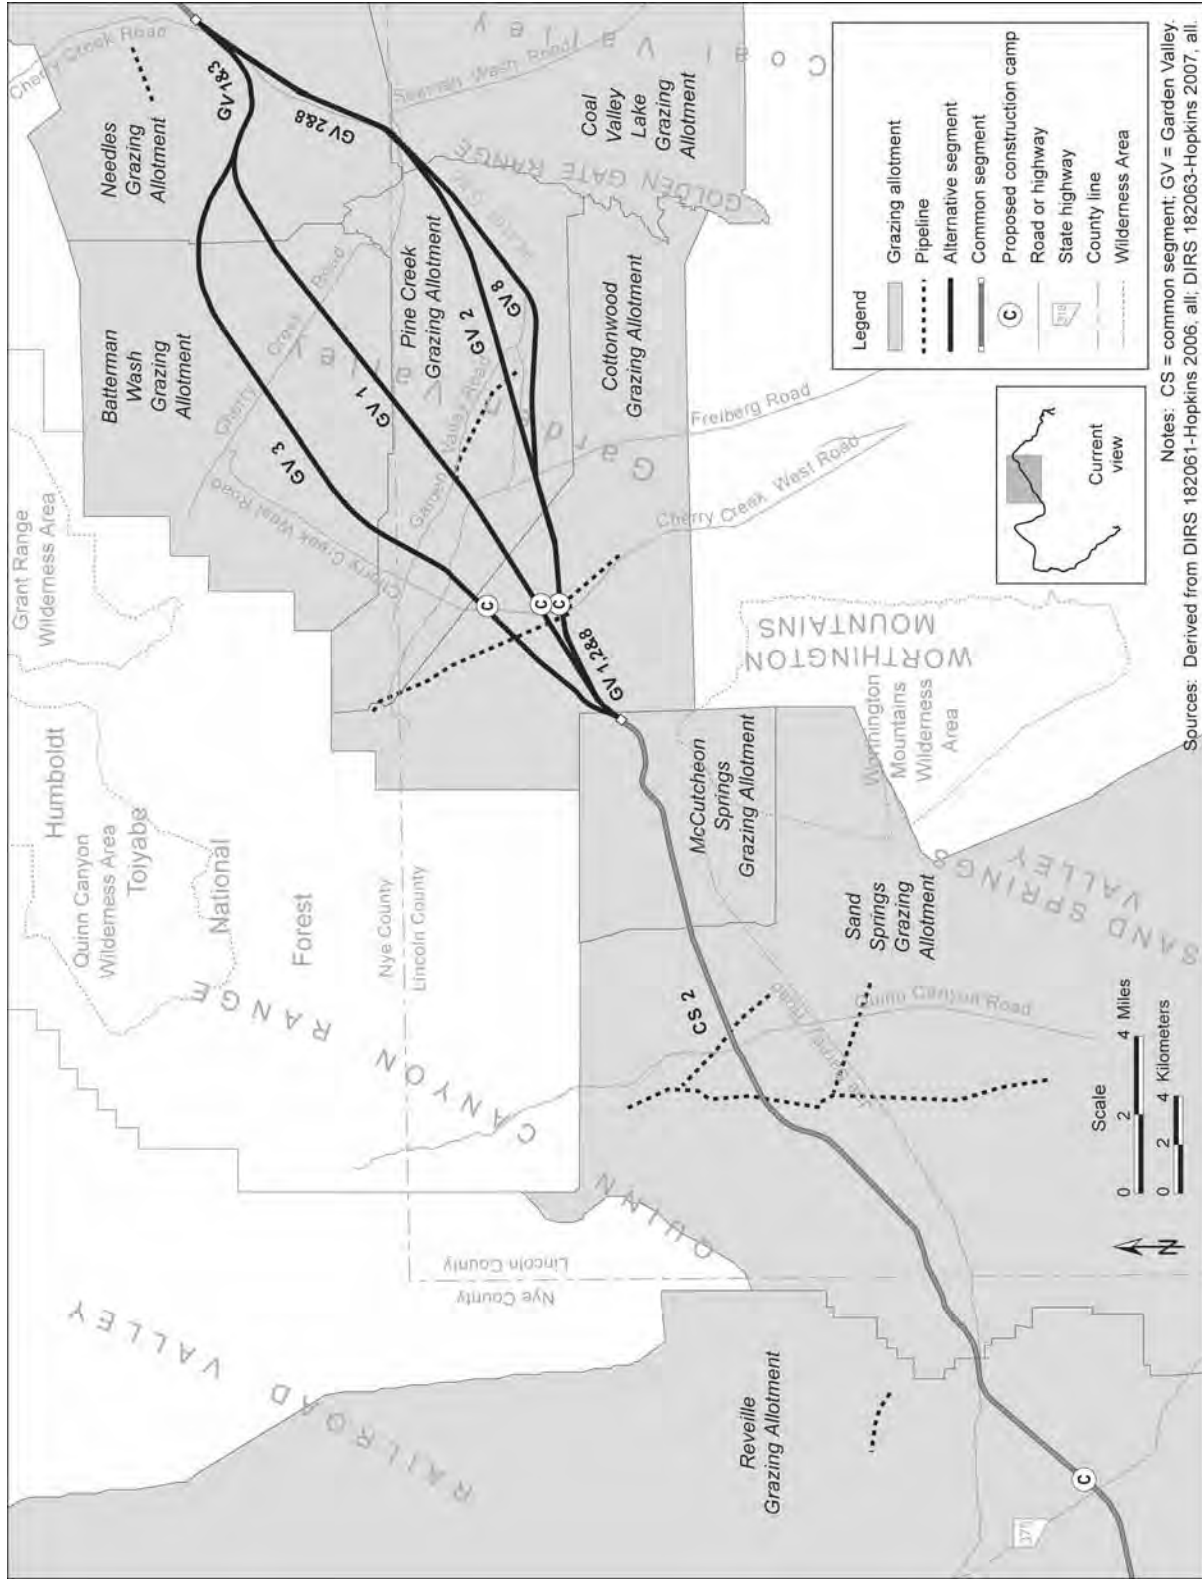


Figure 3-29. Grazing allotments with stockwater features within map area 3.

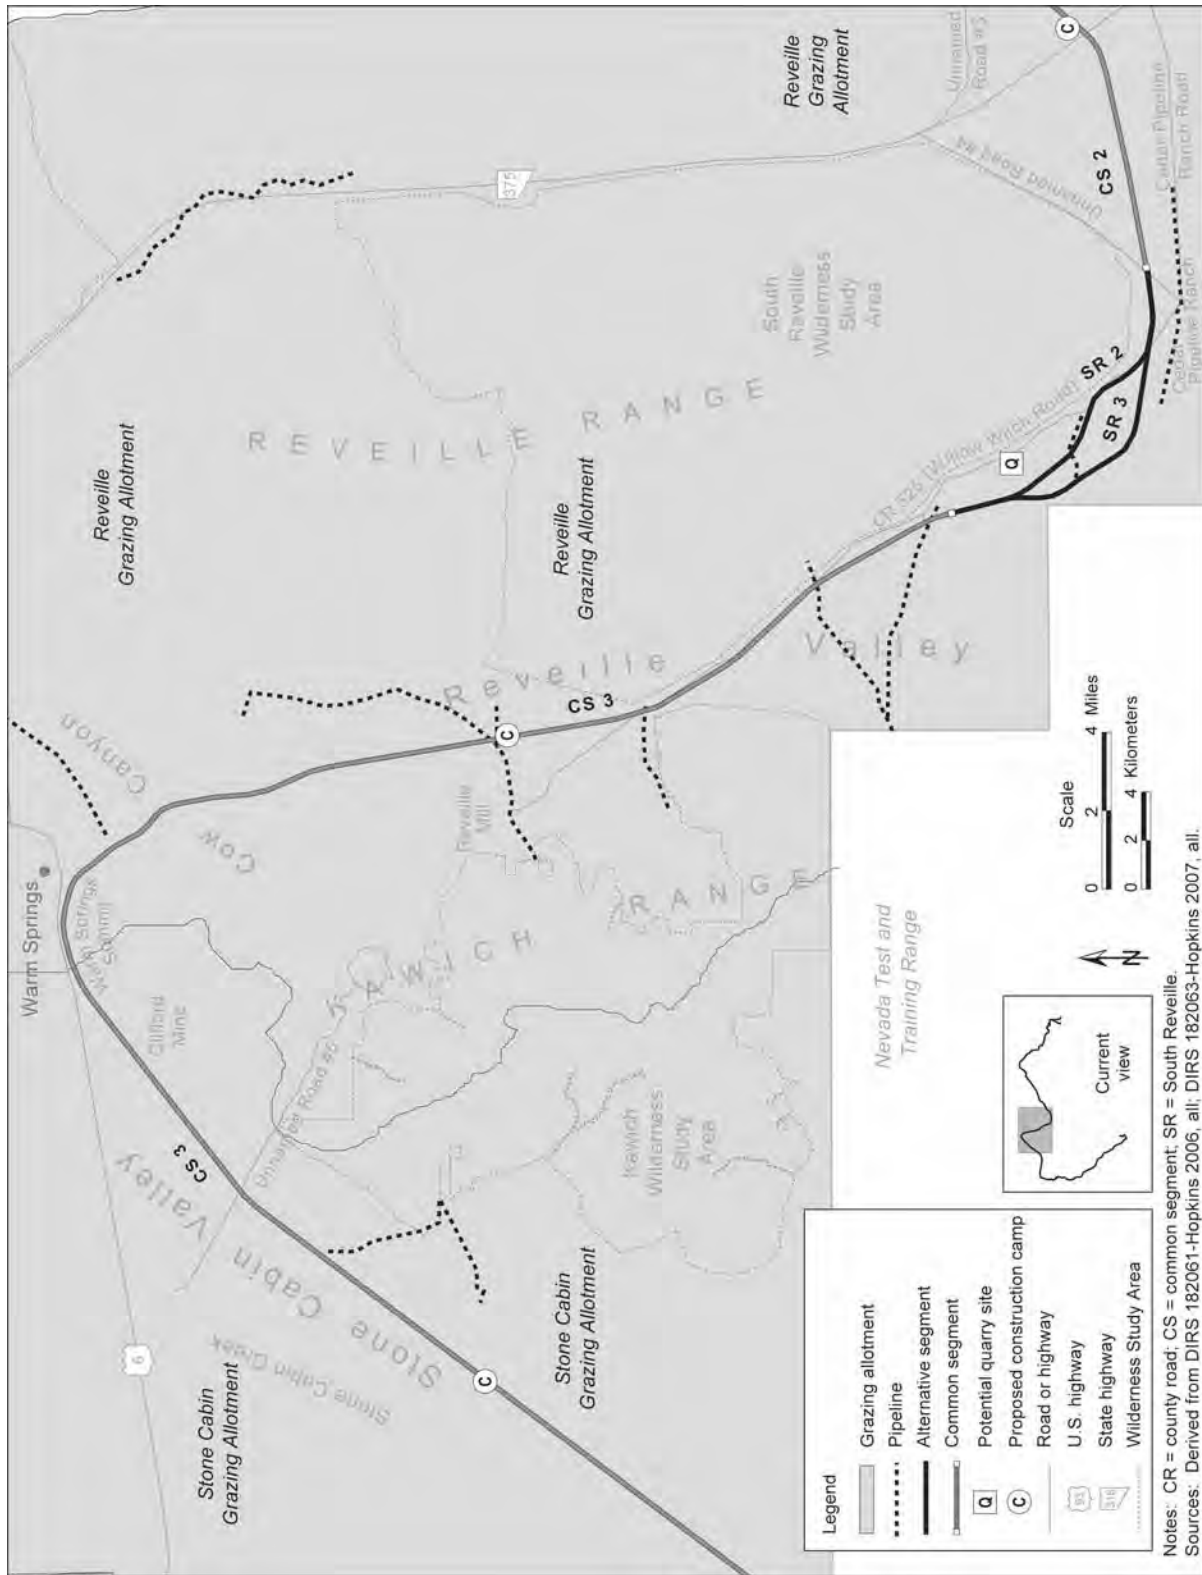


Figure 3-30. Grazing allotments with stockwater features within map area 4.

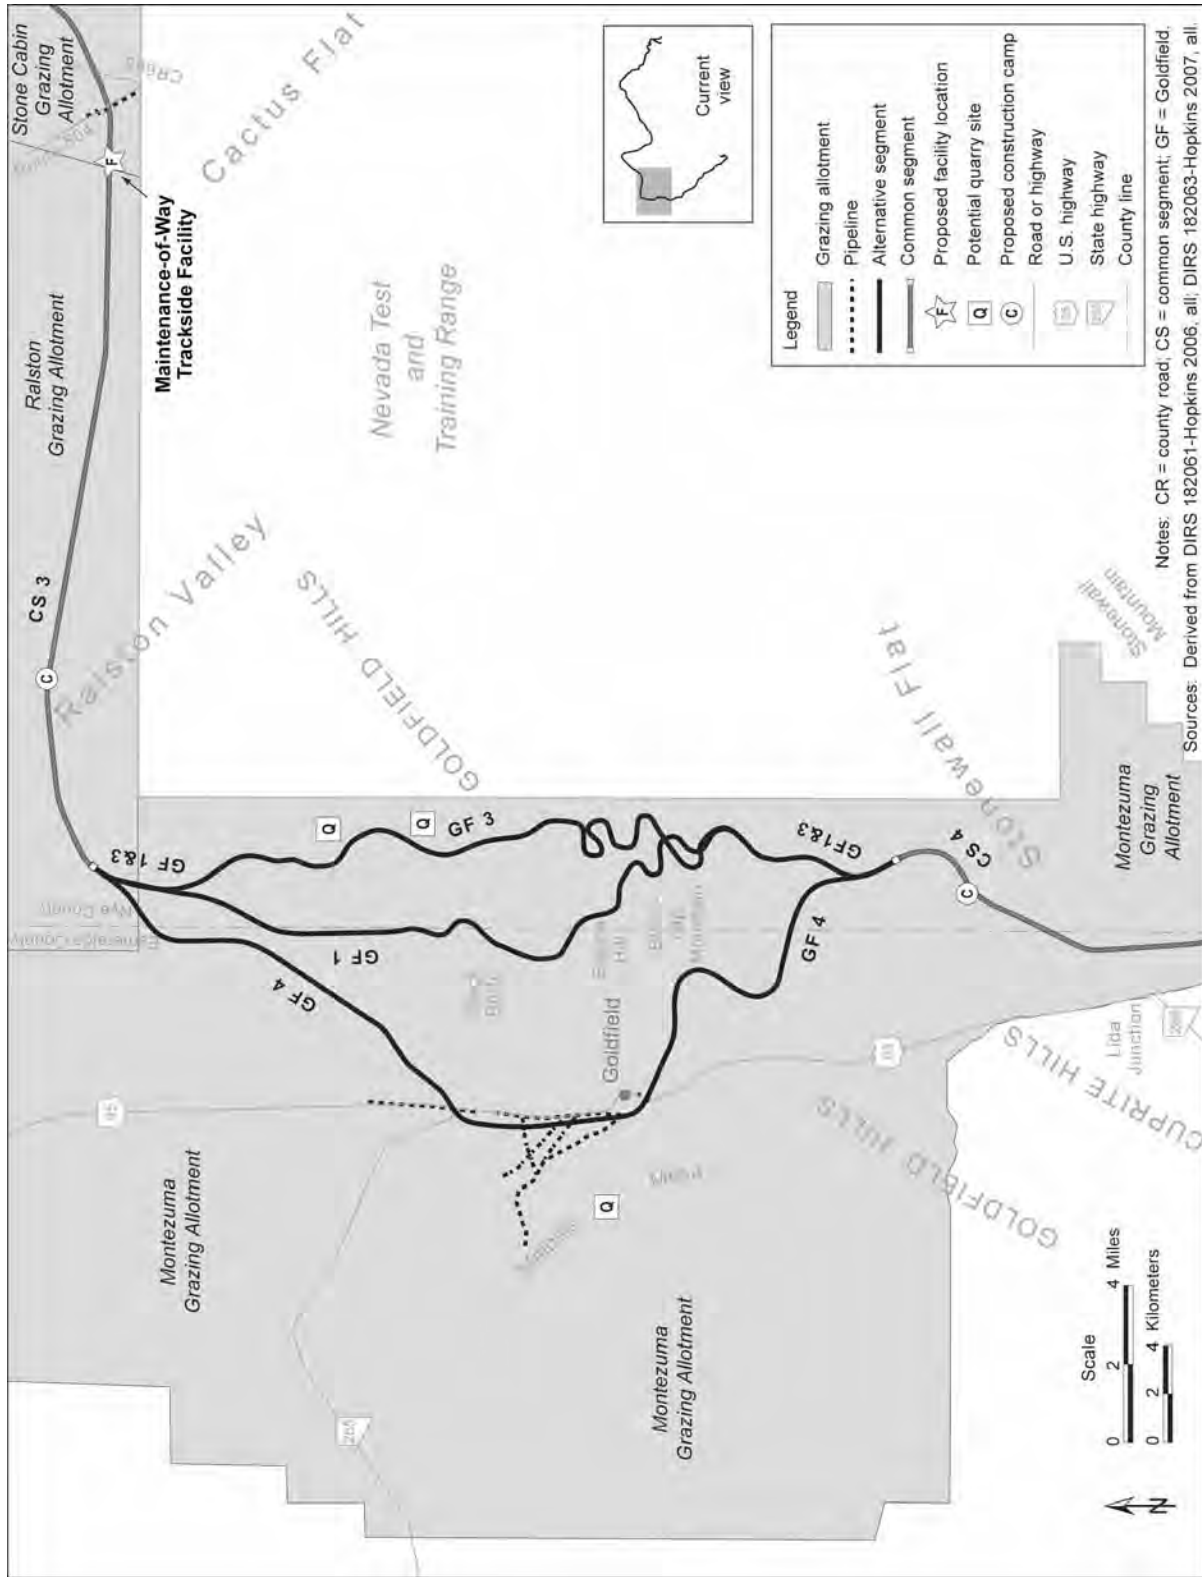


Figure 3-31. Grazing allotments with stockwater features within map area 5.

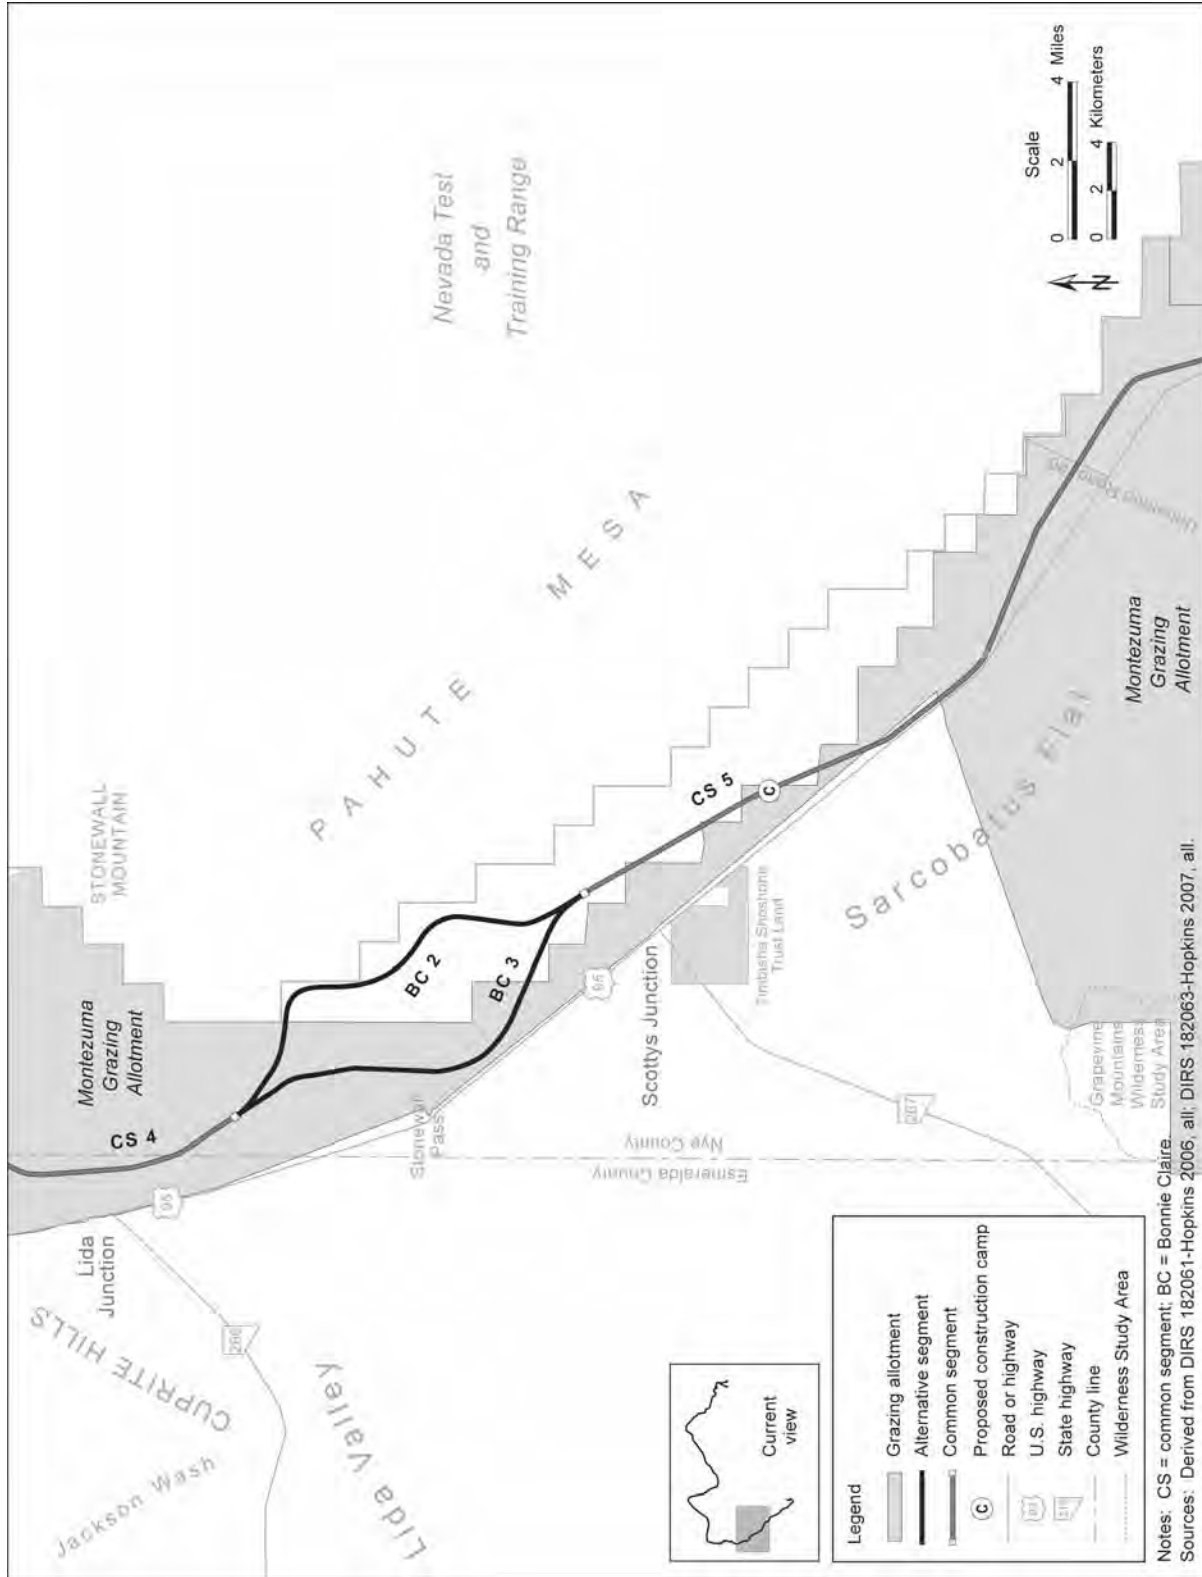


Figure 3-32. Grazing allotments with stockwater features within map area 6.

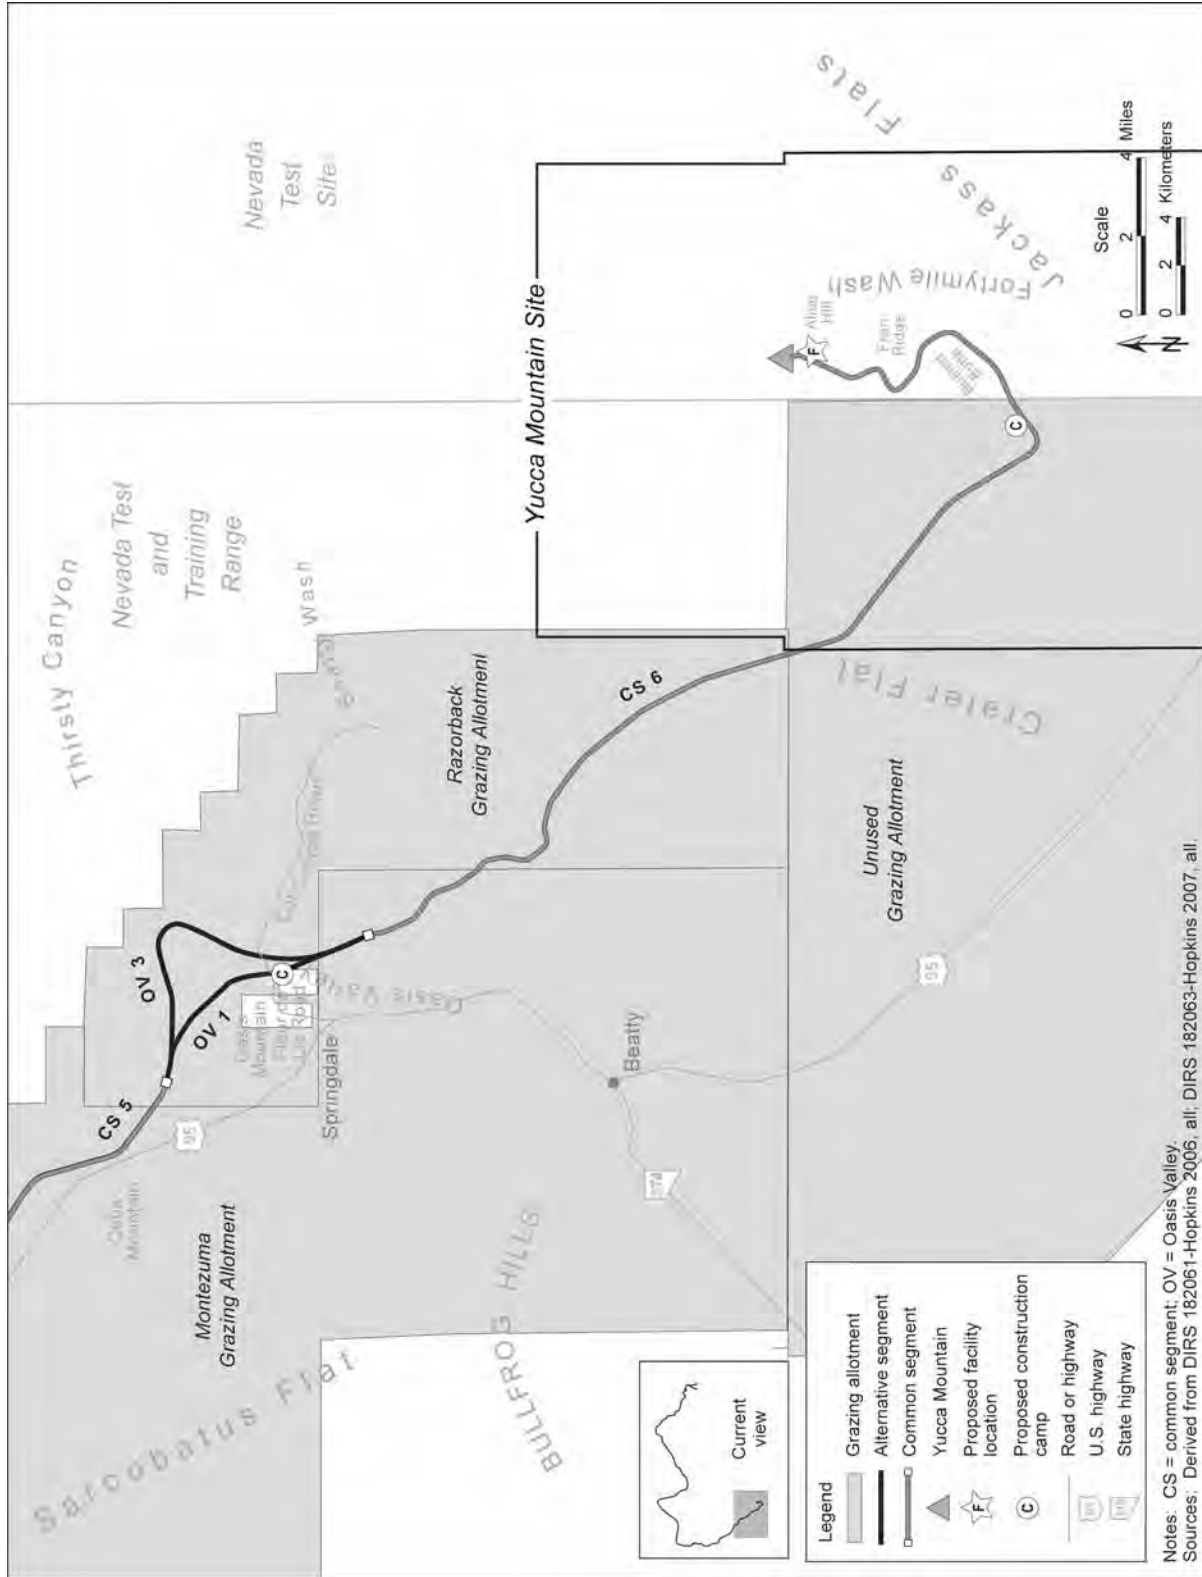


Figure 3-33. Grazing allotments with stockwater features within map area 7.

Table 3-6. Grazing allotment lands within the Caliente rail alignment construction right-of-way (page 1 of 3).

Rail line segment/facility	Grazing allotment	Rail alignment crossing distance (kilometers) ^a	Area that would be within the construction right-of-way or disturbed (square kilometers) ^b
Eccles alternative segment	Clover Creek	1.1	0.15
Eccles alternative segment	Little Mountain	5.8	1.82
Eccles alternative segment ^d	Peck	8	2.43
Eccles alternative segment	Comet	3.2	0.44
Caliente alternative segment	Comet	8.9	0.71
Caliente alternative segment	Panaca Cattle	0.32	0.02
Construction camp 1 – Caliente alternative segment	Peck	c	0.08
Potential quarry CA-8B	Highway	c	1.25
Potential quarry CA-8B	Peck	c	0.07
Caliente common segment 1	Comet	3.7	1.1
Caliente common segment 1	Rocky Hill	0.7	0.2
Caliente common segment 1	Bennett Spring	17.1	5.07
Caliente common segment 1	Black Canyon	5.1	1.59
Caliente common segment 1	Ely Springs Cattle	18.8	5.75
Caliente common segment 1	Rattlesnake	1.8	0.53
Caliente common segment 1	Wilson Creek	24.3	7.41
Caliente common segment 1	Timber Mountain	10.3	3.11
Caliente common segment 1	Sunnyside	18	5.51
Caliente common segment 1	Needles	14.8	4.26
Garden Valley alternative segment 1	Needles	9.5	2.89
Garden Valley alternative segment 1	Batterman Wash	8.5	2.6
Garden Valley alternative segment 1	Pine Creek	7.7	2.35
Garden Valley alternative segment 1	Cottonwood	7.5	2.19
Garden Valley alternative segment 1	McCutcheon Springs	1.7	0.44
Garden Valley alternative segment 2	Coal Valley Lake	1.2	0.38
Garden Valley alternative segment 2	Pine Creek	15	4.57
Garden Valley alternative segment 2	Cottonwood	8.9	2.58
Garden Valley alternative segment 2	Needles	8.8	2.7
Garden Valley alternative segment 2	McCutcheon Springs	1.8	0.38
Garden Valley alternative segment 3	Needles	9.7	2.9
Garden Valley alternative segment 3	Pine Creek	4.4	1.4

Table 3-6. Grazing allotment lands within the Caliente rail alignment construction right-of-way (page 2 of 3).

Rail line segment/facility	Grazing allotment	Rail alignment crossing distance (kilometers) ^a	Area that would be within the construction right-of-way or disturbed (square kilometers) ^b
Garden Valley alternative segment 3	Batterman Wash	14.815	4.475
Garden Valley alternative segment 3	Cottonwood	6.5	1.992.0
Garden Valley alternative segment 3	McCutcheon Springs	2.31.6	0.6850
Garden Valley alternative segment 8	Coal Valley Lake	1.4	0.42
Garden Valley alternative segment 8	Pine Creek	1165.8	4.23.96
Garden Valley alternative segments 1, 2, 3, and 8	Needles	8.82.2	2.70.48
Garden Valley alternative segments 1, 2, and 8	McCutcheon Springs	1.8	01.389
Garden Valley alternative segment 8	Cottonwood	8.9	2.6
Caliente common segment 2	Sand Springs	22.0	6.687
Caliente common segment 2	McCutcheon Springs	8.7	2.50
Caliente common segment 2	Reveille	10.911	6.80
South Reveille alternative segment 2	Reveille	1119	2.375.56
South Reveille alternative segment 3	Reveille	1219	2.846.03
Potential quarries NN-9A and NN-9B	Reveille	c	0.312
Potential quarry NN-9B	Reveille	c	1.3
Caliente common segment 3	Reveille	46	130
Caliente common segment 3	Stone Cabin	46	14
Caliente common segment 3	Ralston	28.729	8.64
Goldfield alternative segment 1	Ralston	3.52.7	1.071
Goldfield alternative segment 1	Montezuma	29.641	15.5712
Goldfield alternative segment 3	Montezuma Ralston	103.35	13.41.1
Goldfield alternative segments 1, 3, and 4	Montezuma Ralston	346.0	014.92
Goldfield alternative segment 4	Ralston	3.149	0.351.2
Goldfield alternative segment 4	Montezuma	41.245.4	10.7613.27
Caliente common segment 4	Montezuma	11	3.5
Bonnie Claire alternative segment 2	Montezuma	5.6	1.7
Bonnie Claire alternative segment 3	Montezuma	15	4.7
Common segment 5	Montezuma	28	7.9
Common segment 5	Razorback	2.3	0.71

Table 3-6. Grazing allotment lands within the Caliente rail alignment construction right-of-way (page 3 of 3).

Rail line segment/facility	Grazing allotment	Rail alignment crossing distance (kilometers) ^a	Area that would be within the construction right-of-way or disturbed (square kilometers) ^b
Common segment 5	Magruder	2.9	0.24
Oasis Valley alternative segment 1	Razorback	8.0	2.3
Oasis Valley alternative segment 1	Montezuma	1.8	0.54
Oasis Valley alternative segment 3	Razorback	12	3.8
Oasis Valley alternative segment 3	Montezuma	1.8	0.53
Potential quarry NS-3A	Montezuma	c	0.35
Potential quarry NS-3B	Montezuma	c	0.14
Potential quarry ES-7	Montezuma	c	0.14
Common segment 6	Razorback	18	5.4
Common segment 6	Montezuma	6.4	2.1
Common segment 6	Unused	15	4.7

a. To convert kilometers to miles, multiply by 0.62137.

b. To convert square kilometers to acres, multiply by 247.10.

c. Rail line would not cross allotment; however, the facility would occupy the area listed in the next column.

d. Includes construction camp 1.

Table 3-7. Features of grazing allotments within the Caliente rail alignment region of influence (page 1 of 2).

Grazing allotment	Area (square kilometers) ^a	Active animal unit months (for cattle and year-round, unless otherwise specified)	Stockwater features that would be within the region of influence ^b
Clover Creek ^c	93	613	None
Little Mountain ^c	75	400 (May 1 to October 31)	None
Peck ^c	71	397	None
Comet ^c	37	214	None
Panaca Cattle ^c	66	453	None
Highway ^c	17	118	None
Rocky Hills ^c	18		None
Bennett Spring ^c	200	3,498 sheep (October 16 to April 30)	None
Black Canyon ^c	34	1,105 (October 16 to April 30)	None
Ely Springs Cattle ^c	220	4,248	Caliente common segment 1 would cross two pipelines.
Rattlesnake ^c	120	1,180 (October 16 to May 30)	None
Wilson Creek ^{c,d}	4,360	34,059 cattle and 14,191 sheep	Caliente common segment 1 would cross one pipeline.

Table 3-7. Features of grazing allotments within the Caliente rail alignment region of influence (page 2 of 2).

Grazing allotment	Area (square kilometers) ^a	Active animal unit months (for cattle and year-round, unless otherwise specified)	Stockwater features within the region of influence ^b
Timber Mountain ^c	180	2,156 cattle and 217 sheep (November 1 to April 10)	None
Sunnyside ^c	890	5,402 (June 1 to October 31)	None
Needles ^c	350	1,044 cattle (October 1 to February 28) and 1,635 sheep (October 1 to April 15)	None
Batterman Wash ^c	160	1,294 cattle (November 15 to June 15) and 799 sheep (November 1 to April 30)	None
Pine Creek ^c	140	2,667 (May 1 to December 31)	Garden Valley alternative segment 2 would cross one pipeline.
Coal Valley Lake ^c	470	4,426 cattle (September 1 to May 5) and 395 sheep (November 1 to April 10)	None
McCutcheon Springs ^c	74	446	None
Sand Springs (#1066) ^c	1,010	7,055	Caliente common segment 2 would cross two pipelines.
Reveille ^e	2,660	25,730	Caliente common segment 3 would cross five pipelines.
Stone Cabin ^e	1,580	13,963	Caliente common segment 3 would cross one pipeline.
Ralston ^e	1,490		None
Montezuma ^e	2,180		Goldfield alternative segment 4 would cross six pipelines.
Razorback ^e	300	959	None
Unused ^f	2,130		None

a. To convert square kilometers to acres, multiply by 247.10. Land area values rounded to two significant digits except values over 1,000, which are rounded to the nearest 10.

b. Source: GIS for water resources.

c. Source: DIRS 174518-BLM 2005.

d. Agreement decision stating permittee will take non-use (voluntary or for conservation and protection of range lands). Therefore, total active use occurring on the allotment would be less than shown.

e. Source: DIRS 173224-BLM 1997 (area of allotment may include private land).

f. Source: DIRS 173845-Resource Concepts 2005.

Access to a water source is an essential requirement for livestock grazing in the high desert of Nevada. In accordance with the Nevada State Water Law, the State Engineer in the Nevada Division of Water Resources may issue permits for water rights to applicants who can demonstrate a beneficial use for the water. Once permitted, water rights are treated as property rights and can be bought and sold

(DIRS 178301-State of Nevada [n.d.], all). Because water rights greatly influence the uses and value of land in this generally arid region, any impacts to water rights can directly affect land use. (See Section 3.2.6 for a description of *groundwater* resources.)

It is essential to provide adequate water for livestock within reasonable distances of grazing areas. Stockwater is water that is physically diverted from the natural water course or storage of water for use by livestock or wildlife. There are several methods for developing stockwater, including spring developments; wells, ponds, or dugouts; and pipelines with a trough or tank for storage. Table 3-7 lists stockwater features within each Caliente rail alignment segment.

3.2.2.5.2 Mineral and Energy Resources

3.2.2.5.2.1 Mineral Resources. Commercial prospecting for minerals of value began in southern Nevada in the mid-1800s and continues to the present. Minerals currently mined include metallic and nonmetallic minerals. Gold and silver are the most valuable metallic minerals mined in Nevada. Nonmetallic minerals include borate, limestone, clay, building stones, silica, aggregates, gypsum, and salt used in industrial processes and building materials (DIRS 150524-Tingley 1998, all).

There is potential mining activity on private land (patented mining claims) and public land (unpatented mining claims). Figure 3-34 shows mining districts and areas near the Caliente rail alignment. Figures 3-34 through 3-41 show the locations of sections with unpatented mining claims in relation to the construction right-of-way.

The Caliente rail alignment would cross some *mining areas* and mining districts, as discussed below. Section 4.2.2.2.3 discusses potential impacts to individual mining claims.

Caliente common segment 1 would cross the northernmost portion of the Seaman Range Mining District. The vast majority of historic mining activity in the district occurred more than 5 kilometers (3 miles) south and southwest of Caliente common segment 1 (DIRS 173841-Shannon & Wilson 2005, p. 104). In the past, this district has been mined for mercury, uranium, gold, zinc, copper, and jasperoid.

The South Reveille alternative segments and Caliente common segment 3 would pass within 2 miles of the Reveille Valley Mining Area. Exploration work in this area since 1988 has focused on finding near-surface, bulk-mineable, precious metal mineralization. Redhawk Resources is conducting this exploration under a 90-year lease agreement with private owners under the Alien Gold Project (DIRS 173841-Shannon & Wilson 2005, pp. 95 and 96).

A portion of Caliente common segment 3 would cross the Clifford Mining District, which is near Warm Springs. The Clifford Mining District is generally south of U.S. Highway 6 in Stone Cabin Valley, trending southwest from Warm Springs. The geology of this district is favorable for gold and silver (DIRS 173841-Shannon & Wilson 2005, pp. 83 to 86). Ore-grade mineralization and exploration programs in the area have led to gold production.

Goldfield alternative segments 1, 3, and 4 would cross the Goldfield Mining District. Goldfield is the largest center of mining within the region of influence. The Goldfield Mining District consists of the Goldfield Main, McMahon Ridge, and Gemfield areas, and is in the Goldfield Hills to the northeast and southwest of Goldfield, Nevada. An additional area (referred to as the Tom Keane area) has been the subject of 2003 exploration efforts. The Goldfield Project, owned by Metallic Ventures Gold, Inc., consists of 385 patented and 849 unpatented claims (wholly owned or controlled) covering more than 83 square kilometers (20,600 acres) in Esmeralda and Nye Counties (DIRS 173841-Shannon & Wilson 2005, pp. 60, 62, and 72).

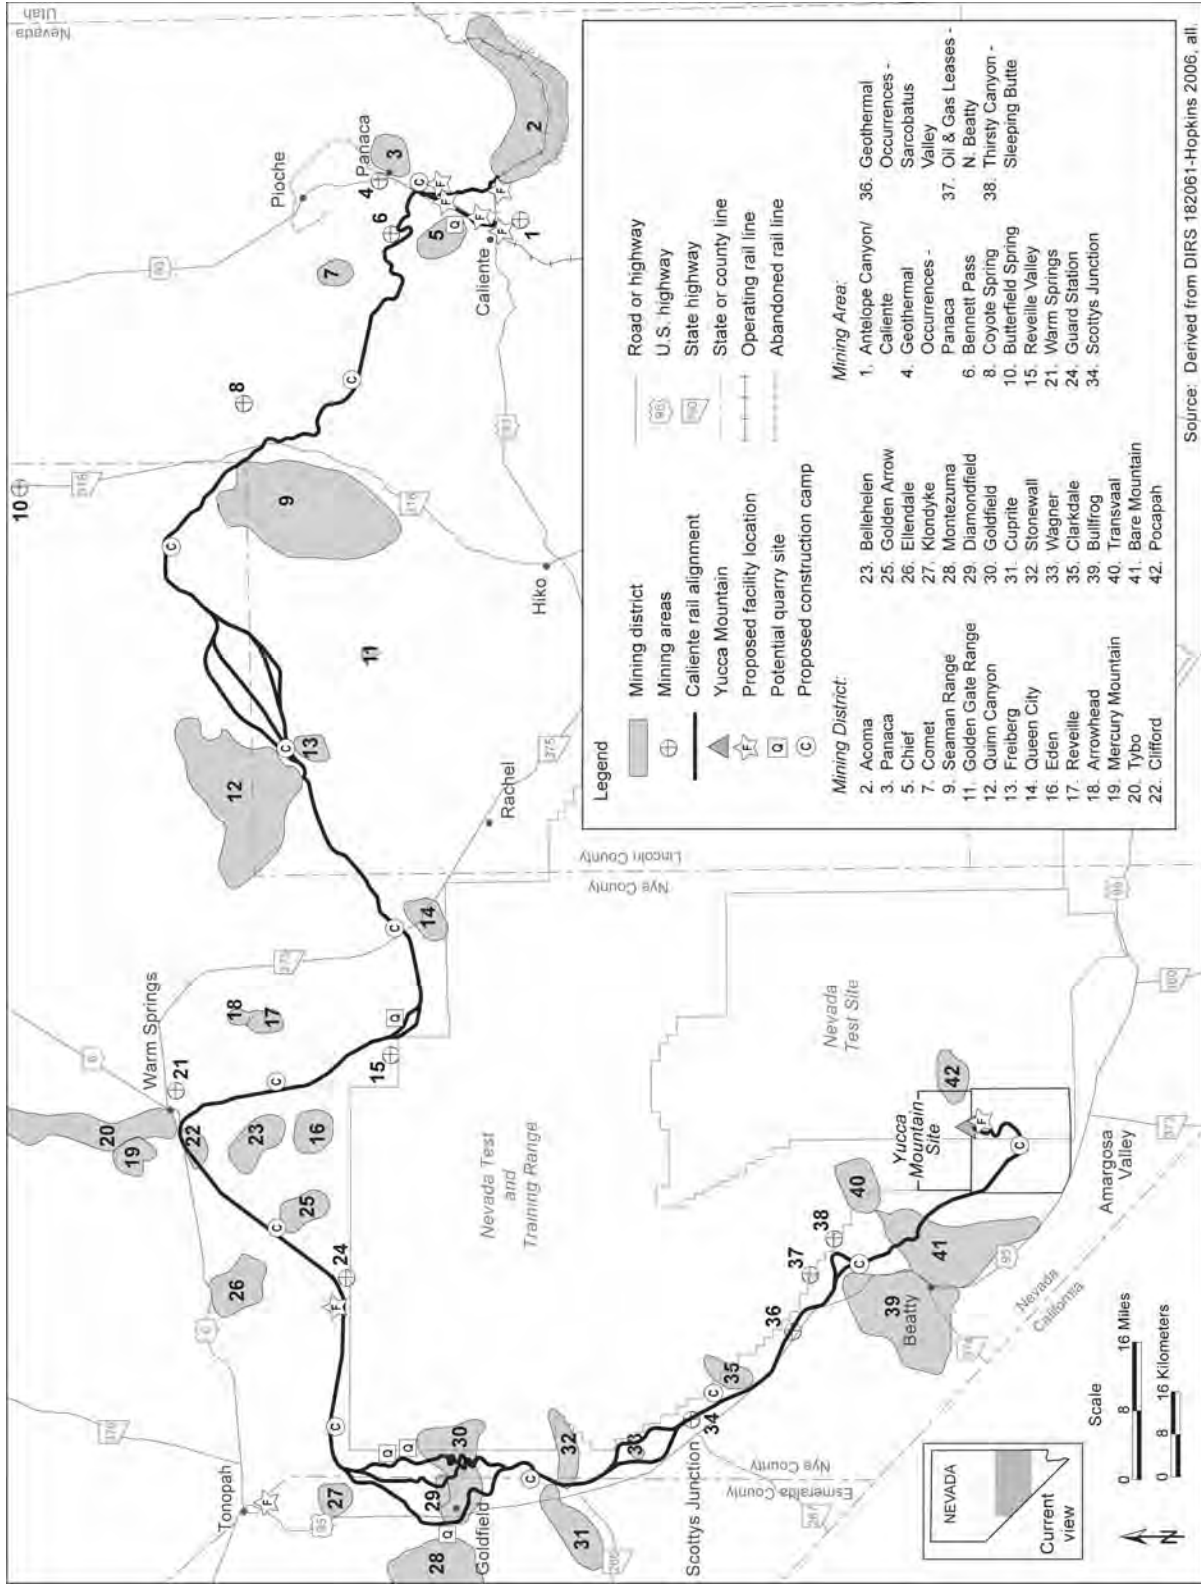


Figure 3-34. Mineral and energy resources along the Caliente rail alignment.

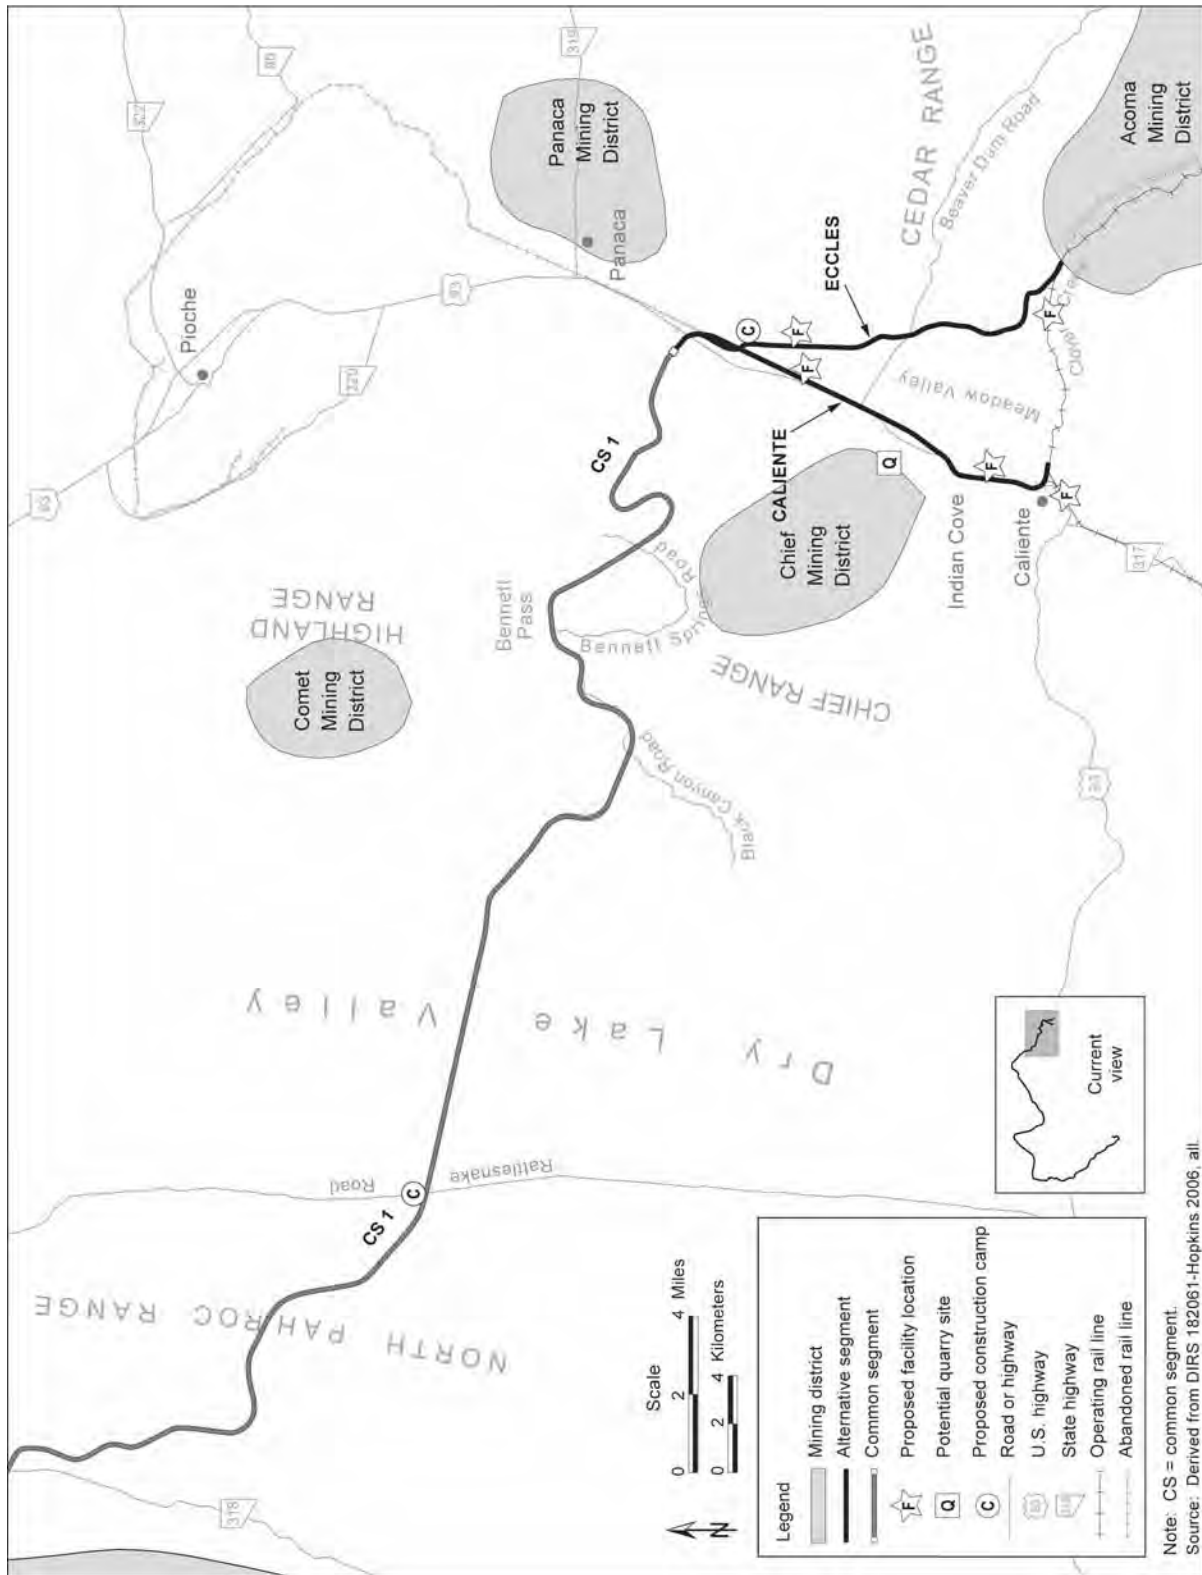


Figure 3-35. Mineral and energy resources within map area 1.

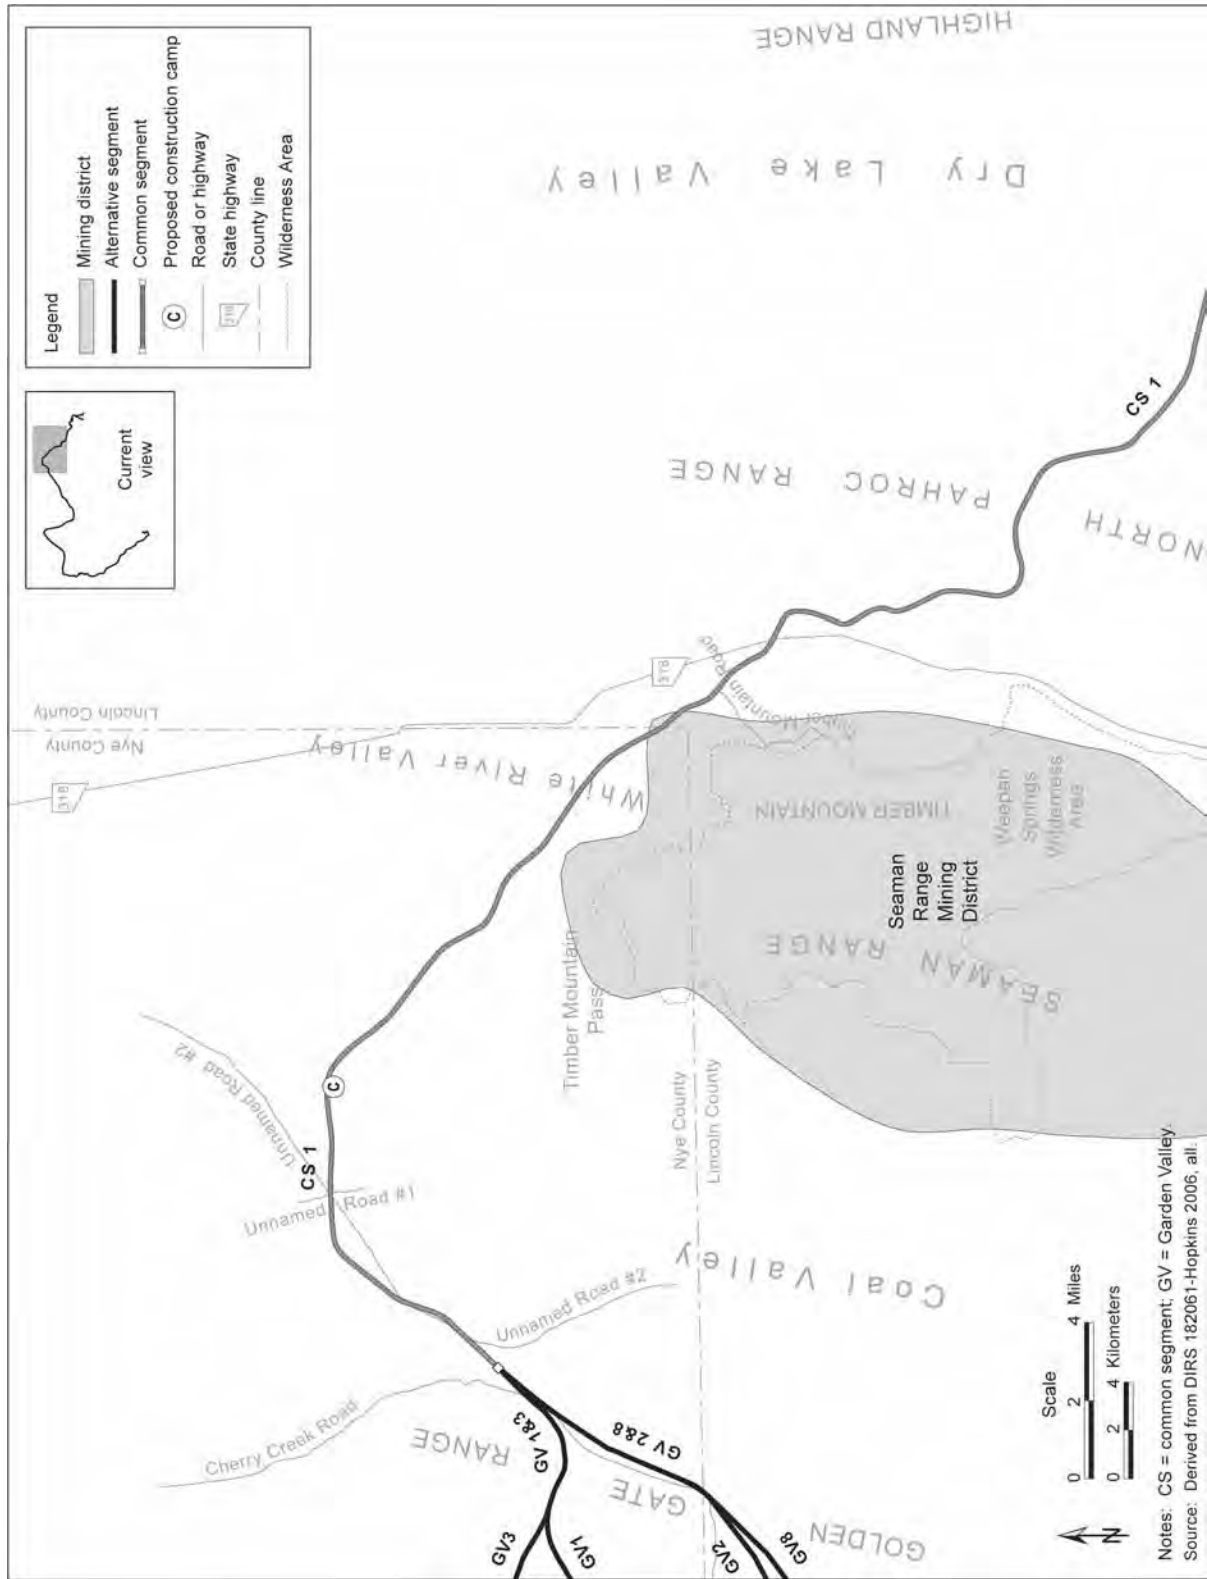


Figure 3-36. Mineral and energy resources within map area 2.

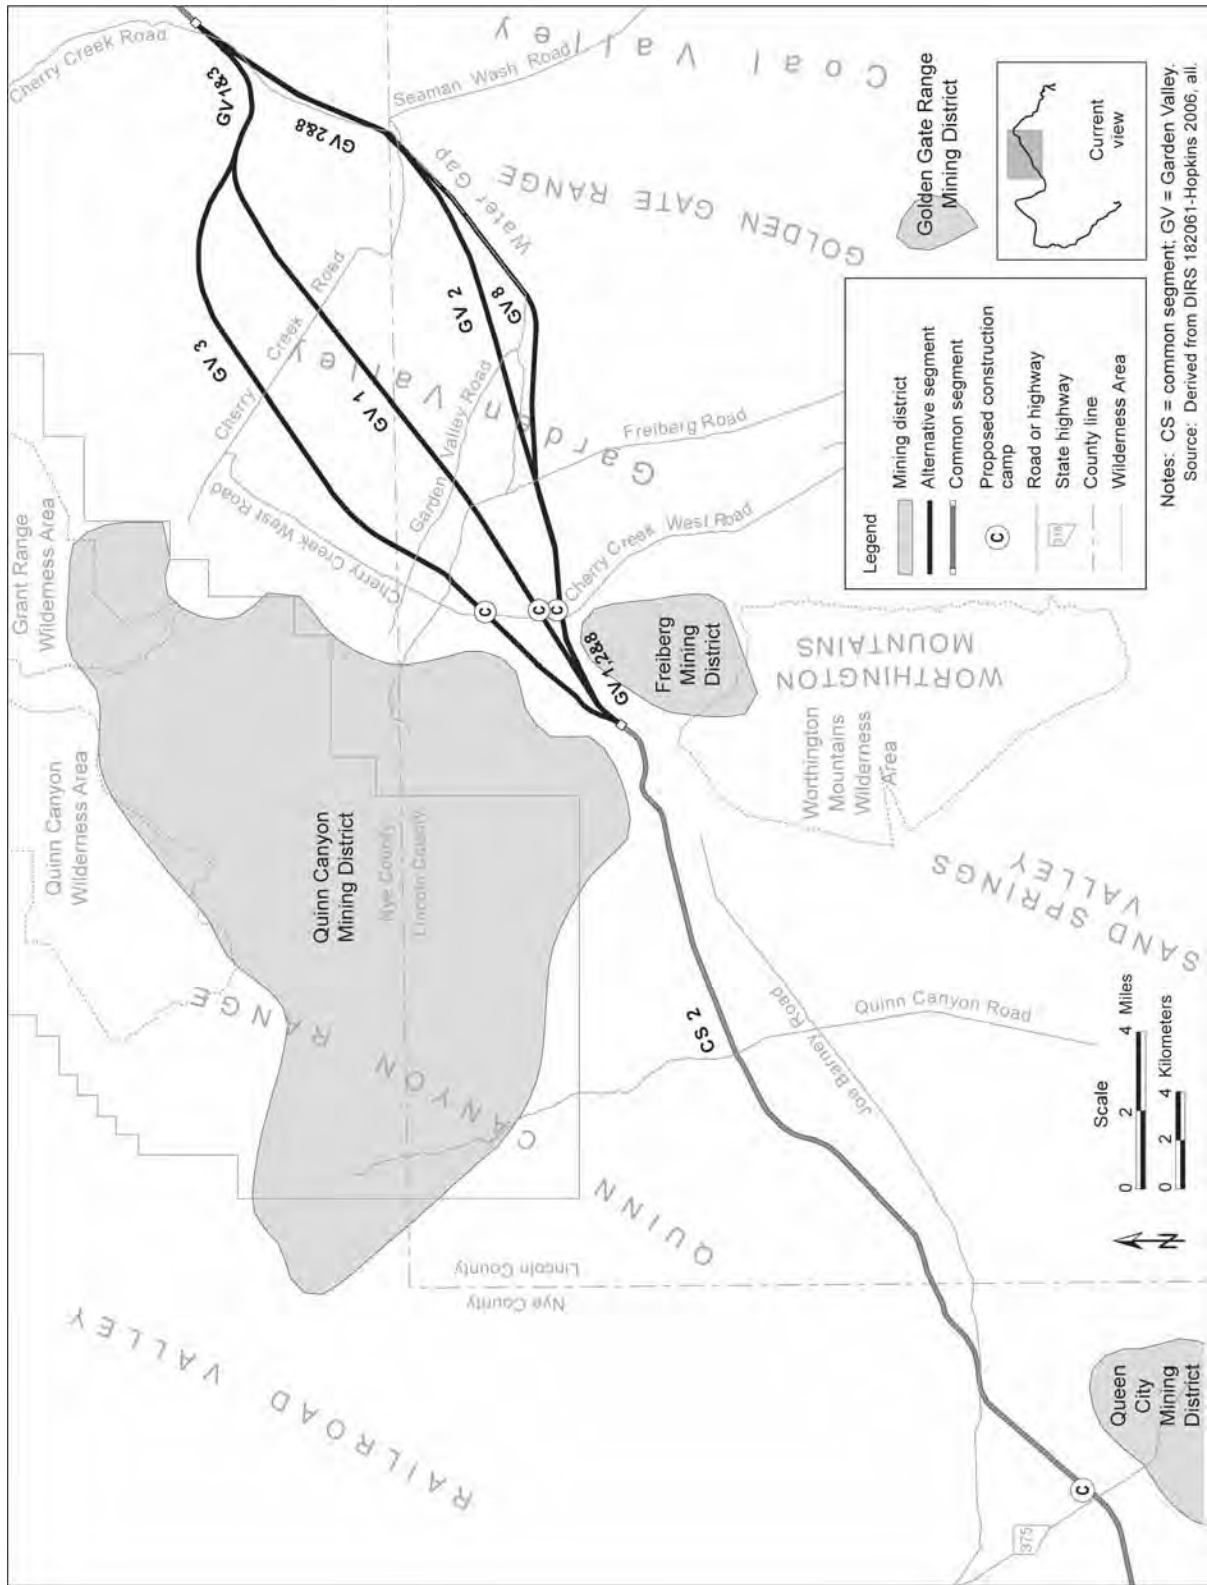


Figure 3-37. Mineral and energy resources within map area 3.

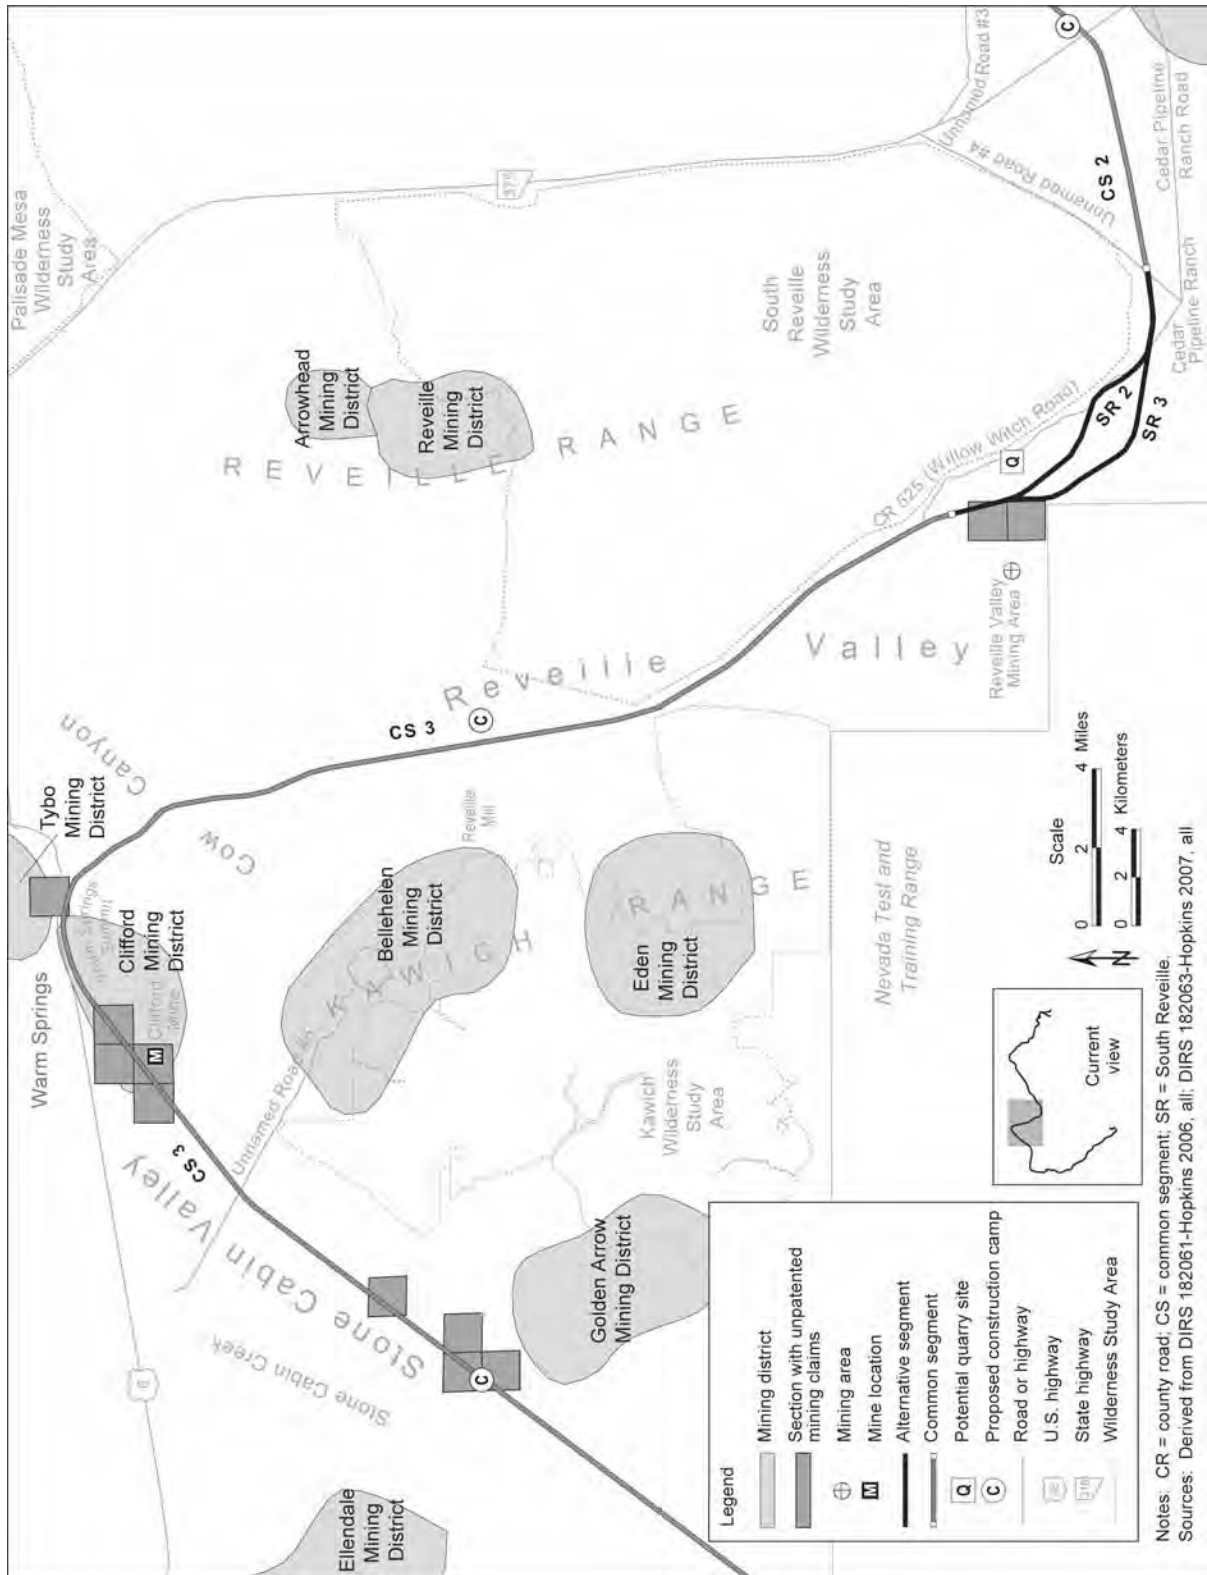


Figure 3-38. Mineral and energy resources within map area 4.

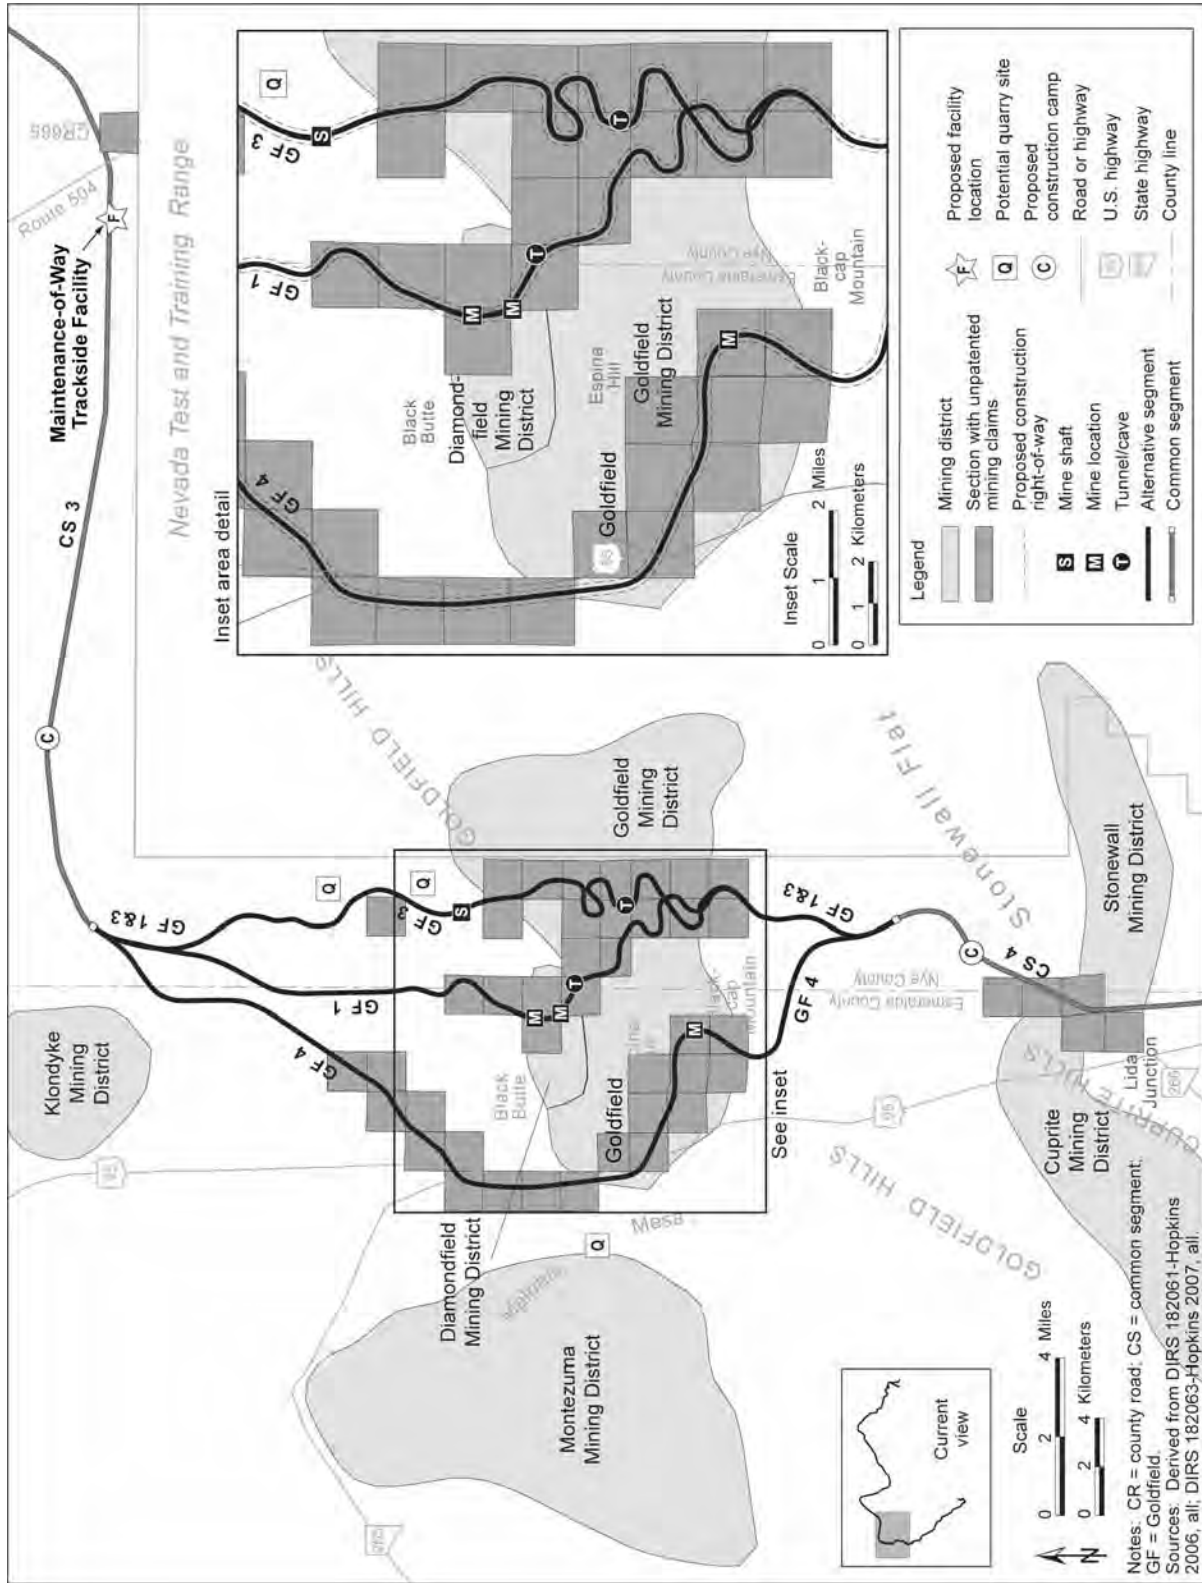


Figure 3-39. Mineral and energy resources within map area 5.

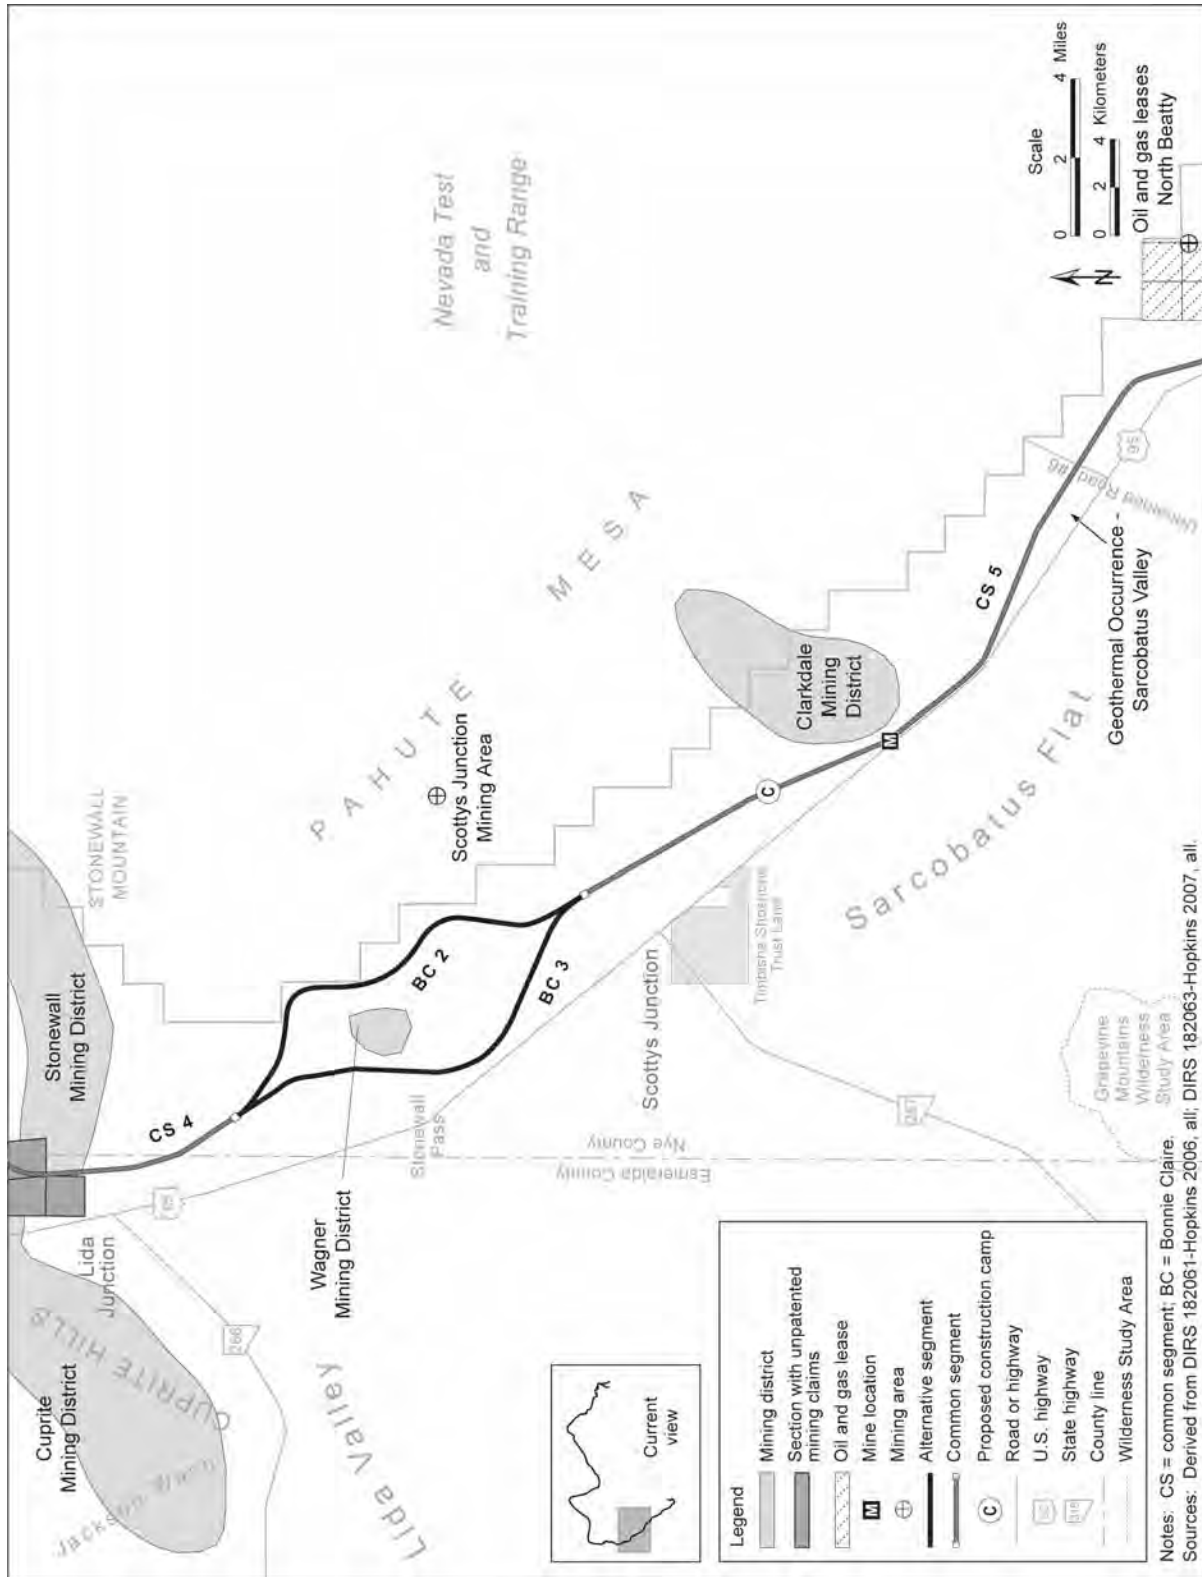


Figure 3-40. Mineral and energy resources within map area 6.

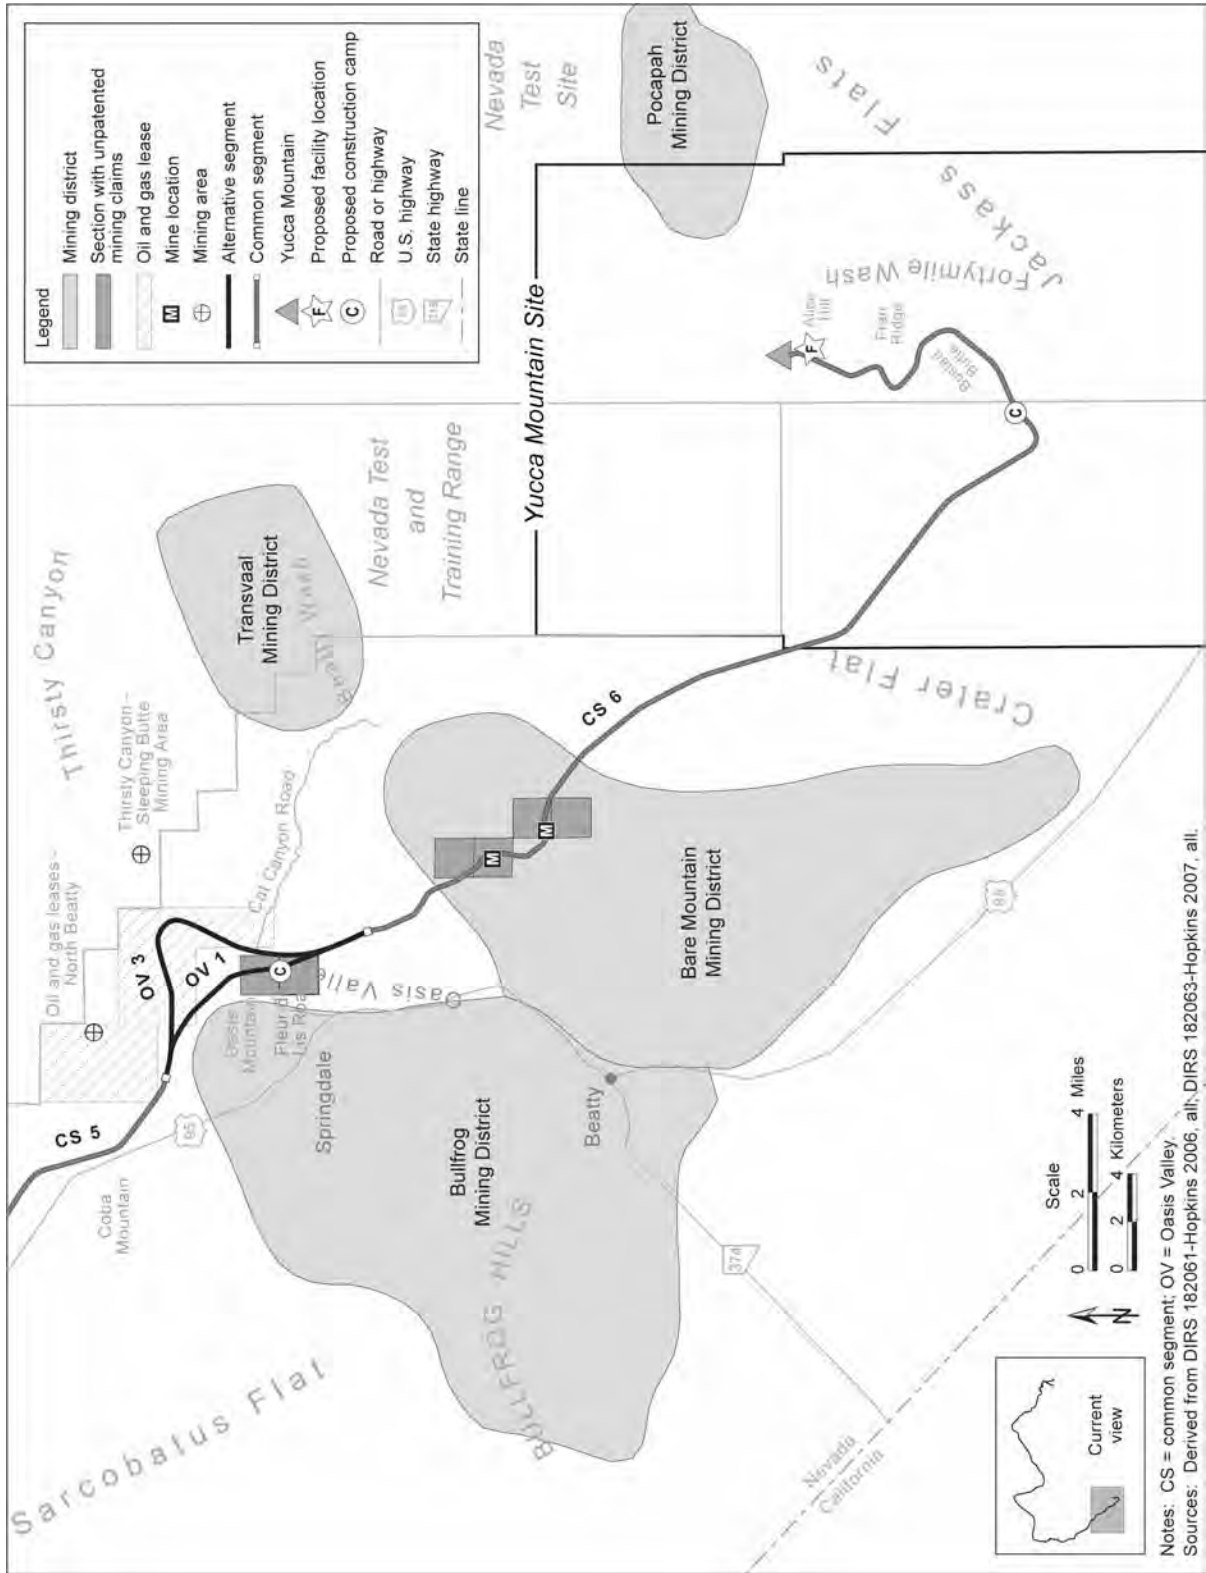


Figure 3-41. Mineral and energy resources within map area 7.

Goldfield alternative segment 1 would cross the Diamondfield Mining District, which is approximately 8 kilometers (5 miles) northeast of Goldfield and is approximately 1.6 kilometers (1 mile) long. There is limited published information on this district, which is known to include ore bodies containing gold and silver. The total recorded value of production of the district is approximately \$50,000, but actual production could be as much as \$1 million to \$2 million (DIRS 173841-Shannon & Wilson 2005, p. 70).

A portion of Caliente common segment 4 would cross the westernmost portion of the Stonewall Mining District, although most of the past mining activity in this district is approximately 5 kilometers (3 miles) east of the common segment. This district was reportedly prospected for gold and silver as early as 1905 (DIRS 173841-Shannon & Wilson 2005, p. 56). Veins of gold and silver currently under exploration in this district are prominent at areas mined in the past and continue easterly away from the rail alignment.

The Bonnie Claire alternative segments would be west of the Scottys Junction Mining Area and the Wagner Mining District would lie between these segments. Neither segment's construction right-of-way would cross these mining locations. The Wagner Mining District has a number of patented mining claims although none would fall within the construction right-of-way for either Bonnie Claire alternative segment. The main rock types within the Wagner Mining District are shale, quartzite, and intercalated limestone. There was evidence of active exploration efforts in this district by several companies in 2005 (DIRS 173841-Shannon & Wilson 2005, p. 55).

The closest mining districts to common segment 5 would be Clarkdale Mining District to its east and Bullfrog Mining District to its south where it would meet the Oasis Valley alternative segments. The Oasis Valley alternative segments are between the Bullfrog Mining District and the Thirsty Canyon-Sleeping Butte Mining Area. The Clarkdale Mining District contains discontinuous, narrow zones containing some gold and silver mineralization (DIRS 173841-Shannon & Wilson 2005, p. 52). The Bullfrog Mining District contains small, localized areas of gold, silver and lesser copper mineralization (DIRS 173841-Shannon & Wilson 2005, p. 46). The Thirsty Canyon-Sleeping Butte Mining Area has been historically quarried for decorative rock and building stone (DIRS 173841-Shannon & Wilson 2005, p. 49).

Common segment 6 would cross the northeastern portion of the Bare Mountain Mining District, although the vast majority of past mining activity occurred more than 3 kilometers (2 miles) south of this common segment. The district contains gold-bearing veins, and some veins contain silver. The district also contains a variety of minerals and semi-precious stones, including opal, chalcopyrite, malachite, azurite, galena, pyrite, limonite, hematite, fluorite, fluorspar, and gypsum (DIRS 173841-Shannon & Wilson 2005, pp. 38, 41, and 42).

The only patented mining claims that would fall within or intersect the Caliente rail alignment construction right-of-way would be along the Goldfield alternative segments (see Table 3-4). Table 3-8 lists the number of sections containing unpatented mining claims the rail line construction right-of-way could cross. The existence of abandoned or active mining tunnels and shafts near the rail alignment would also be a concern for safety reasons. There are several tunnels, shafts, and underground mines within the construction right-of-way along the Goldfield alternative segments. There is one tunnel along Goldfield alternative segment 1, four underground mines/shafts along Goldfield alternative segment 3, and one tunnel along Goldfield alternative segment 4. DOE obtained the data on locations of tunnels and caves, mining shafts, and underground mines from the Nevada Bureau of Mines and Geology (DIRS 181617-Hopkins 2007). However, none of the tunnels, shafts, and underground mines in this dataset that fall within the construction right-of-way is identified as having been field verified by the Nevada Bureau of Mines and Geology. Furthermore, this dataset might not include very old tunnels, shafts, and underground mines that were not recorded.

3.2.2.5.2.2 Energy Resources.

The Basin and Range Province is considered a favorable area for geothermal resources because it has higher-than-average heat flow and is an area of crustal expansion, where faults can provide permeable reservoirs and conduits for deep circulation of water, and the crust is so thin it has a higher-than-average heat flux. Several hundred wells have been drilled in Nevada to discover high-temperature geothermal steam resources (DIRS 173841-Shannon & Wilson 2005, p. 32).

Geothermal resources are present as hot springs and thermal waters near Caliente Hot Springs, Bennett Spring, Pedro Spring, Sarcobatus Flat, Scottys Junction, Panaca (Owl Warm Springs), Cedar Spring, Stonewall Flat, and Beatty Warm Springs (DIRS 173841-Shannon & Wilson 2005, pp. 23 and 24). There are geothermal occurrences (springs and wells) in Sarcobatus Valley along U.S. Highway 95 south of Scottys Junction (DIRS 173841-Shannon & Wilson 2005, p. 50). However, there would be no geothermal resources within the construction right-of-way of any of the Caliente rail alignment alternative segments or common segments.

Fourteen sections of land constitute a single oil and gas lease (one permittee) 19 kilometers (12 miles) north of Beatty along the southwest flank of Pahute Mesa in southern Nye County (DIRS 179587-Wilson 2007, all). For reference, a section is a unit of land equal to 2.6 square kilometers (1 square mile), as defined under the public land survey system. Oasis Valley alternative segment 3 would cross 7 of the 14 sections and Oasis Valley alternative segment 1 would cross 2 sections of this oil and gas lease block.

3.2.2.5.3 Recreation

This section describes the recreational areas within or near the Caliente rail alignment region of influence. Figures 3-42 through 3-49 show recreational areas near the Caliente rail alignment.

3.2.2.5.3.1 Lincoln County. There are two state parks in the vicinity of the Caliente rail alignment in Lincoln County. The Kershaw-Ryan State Park is approximately 2.4 kilometers (1.5 miles) south of the City of Caliente, along State Route 317 (Rainbow Canyon Road). This park is approximately 3.2 kilometers (2 miles) southwest of the Caliente alternative segment and not within the region of influence. The Cathedral Gorge State Park is 2.6 kilometers (1.6 miles) west of U.S. Highway 93, approximately 5.3 kilometers (3.3 miles) northeast of Caliente common segment 1, and not within the region of influence.

Recreation on BLM-administered lands in Lincoln County has traditionally been dispersed. Primary recreation activities in Lincoln County include hunting, camping, exploration and site-seeing, off-highway vehicle competition events, and rock-art viewing.

Table 3-8. Number of unpatented mining claims that may intersect with the Caliente rail alignment construction right-of-way.^a

Rail line segment	Numbers of sections with unpatented mining claims	Unpatented mining claims across all sections ^b
South Reveille 2	2	72
South Reveille 3	2	72
Caliente common segment 3	10	166
Goldfield 1	14	474
Goldfield 3	14	359
Goldfield 4	19	538
Caliente common segment 4	5	169
Oasis Valley 1	2	14
Oasis Valley 3	2	14
Common segment 6	4	34

a. Source: DIRS 181617-Hopkins 2007.

b. Data are provided by Township, Range, and Section and might not fall within the rail line construction right-of-way. DOE would need to verify the actual numbers and locations of unpatented mining claims before applying for a right-of-way grant.

Under the preferred alternative of the Draft Ely District Resource Management Plan (DIRS 174518-BLM 2005, p. 2.4-36), the BLM would designate two **Back Country Byways** (Silver State Trail Byway and Rainbow Canyon Byway) near the Caliente rail alignment. The Silver State Off-Highway Vehicle Trail is approximately 420 kilometers (260 miles) long and consists of a series of existing backcountry roads that are open for use by off-highway vehicle enthusiasts. Caliente rail alignment common segment 1 would cross the most trails, including the Silver State Off-Highway Vehicle Trail in two places (see Figure 3-43). The northern portion of the proposed Rainbow Canyon Back Country Byway would include portions of U.S. Highway 93 in Caliente. The Caliente and Eccles alternative segments would cross the Byway. The Rainbow Canyon Back Country Byway is made up of paved and unpaved **class 3 or 4 roads**.

A Back Country Byway is a vehicle route that traverses scenic corridors utilizing secondary or back country road systems (DIRS 181598-BLM [n.d.]).

The Draft Ely District Resource Management Plan preferred alternative would also designate Chief Mountain as an off-highway vehicle use emphasis area (see Figure 3-43). The Chief Mountain area is frequently used for off-highway vehicles. The south access point is at Oak Springs Summit on the north side of U.S. Highway 93 approximately 8 kilometers (5 miles) west of Caliente. Portions of common segment 1 would cross this proposed off-highway vehicle use emphasis area.

A number of BLM-permitted off-highway vehicle races and special recreation events take place annually in areas around the Caliente rail alignment common segments and alternative segments in Lincoln County (DIRS 178416-Nevada Rail Partners 2007, all). The largest number of BLM-approved race routes are in and around Caliente and Panaca, and the Eccles and Caliente alternative segments would each cross previously used routes approximately 10 times. Caliente common segment 1 would cross previously used routes approximately 20 times, primarily east of Dry Lake Valley and in the Pahroc Range. Recent off-highway vehicle events in the area have included the Las Vegas to Reno Race and the Silver State 300. Most approved race routes are on existing roads and trails.

There are two Wilderness Areas along the Caliente rail alignment in Lincoln County – the Weepah Springs Wilderness Area and the Worthington Mountains Wilderness Area. Caliente common segment 1 would be 1.6 kilometers (1 mile) from the Weepah Springs Wilderness Area at its closest point (see Figure 3-44). Caliente common segment 2 would be 0.9 kilometer (0.6 mile) from the Worthington Mountains Wilderness Area at its closest point (see Figure 3-45).

The Weepah Springs and Worthington Mountains Wilderness Areas are predominantly natural areas, with only some evidence of localized human activity. Recreational uses of both areas include day hiking; backpacking; caving; photography; horseback riding; rockhounding; big game and upland bird hunting; wildflower viewing; bird watching, sightseeing; and **heritage tourism** (DIRS 176796-Winslow 2006, p. 3).

Particularly scenic locales in these Wilderness Areas include natural arches, caves, vistas from the ridgeline of the Worthington Mountains and the summit of Timber Mountain in the Weepah Springs Wilderness Area. Caliente rail alignment common segment 2 would be 3.2 kilometers (2 miles) from the Humboldt-Toiyabe National Forest at its closest point. The Ely Ranger District of the U.S. Forest Service manages this part of the Forest, which is bordered by Railroad Valley on the west and Garden Valley on the east. Hunting, photography, wildlife viewing, camping, and hiking are the dominant recreation uses of the area. Most of the recreational use is along Little Cherry Creek and Hooper Canyon. Approximately 33 kilometers (21 miles) of poor- or very-poor-condition trails are either not used or are only lightly used (DIRS 176796-Winslow 2006, all). Access to this part of the Humboldt-Toiyabe National Forest is by unimproved roads from State Highway 318 or State Highway 375, which the Caliente rail alignment would not cross.

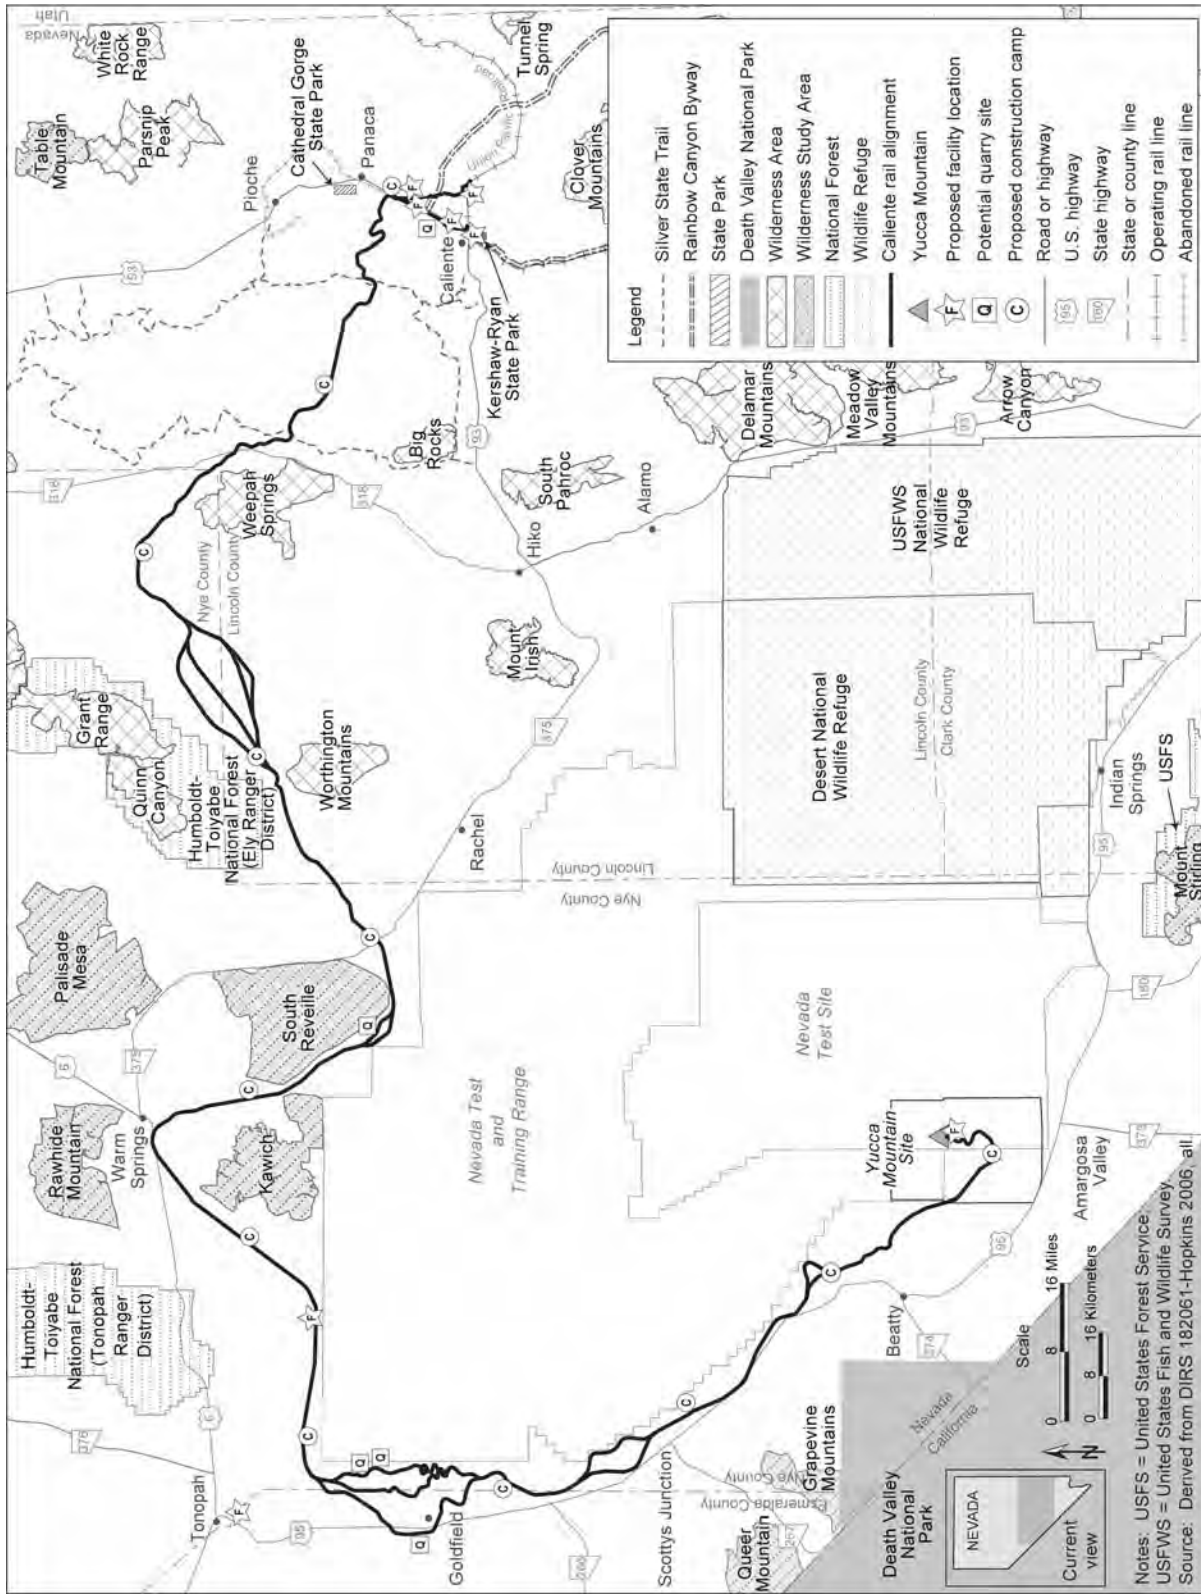


Figure 3-42. Recreation areas and roads along the Caliente rail alignment.

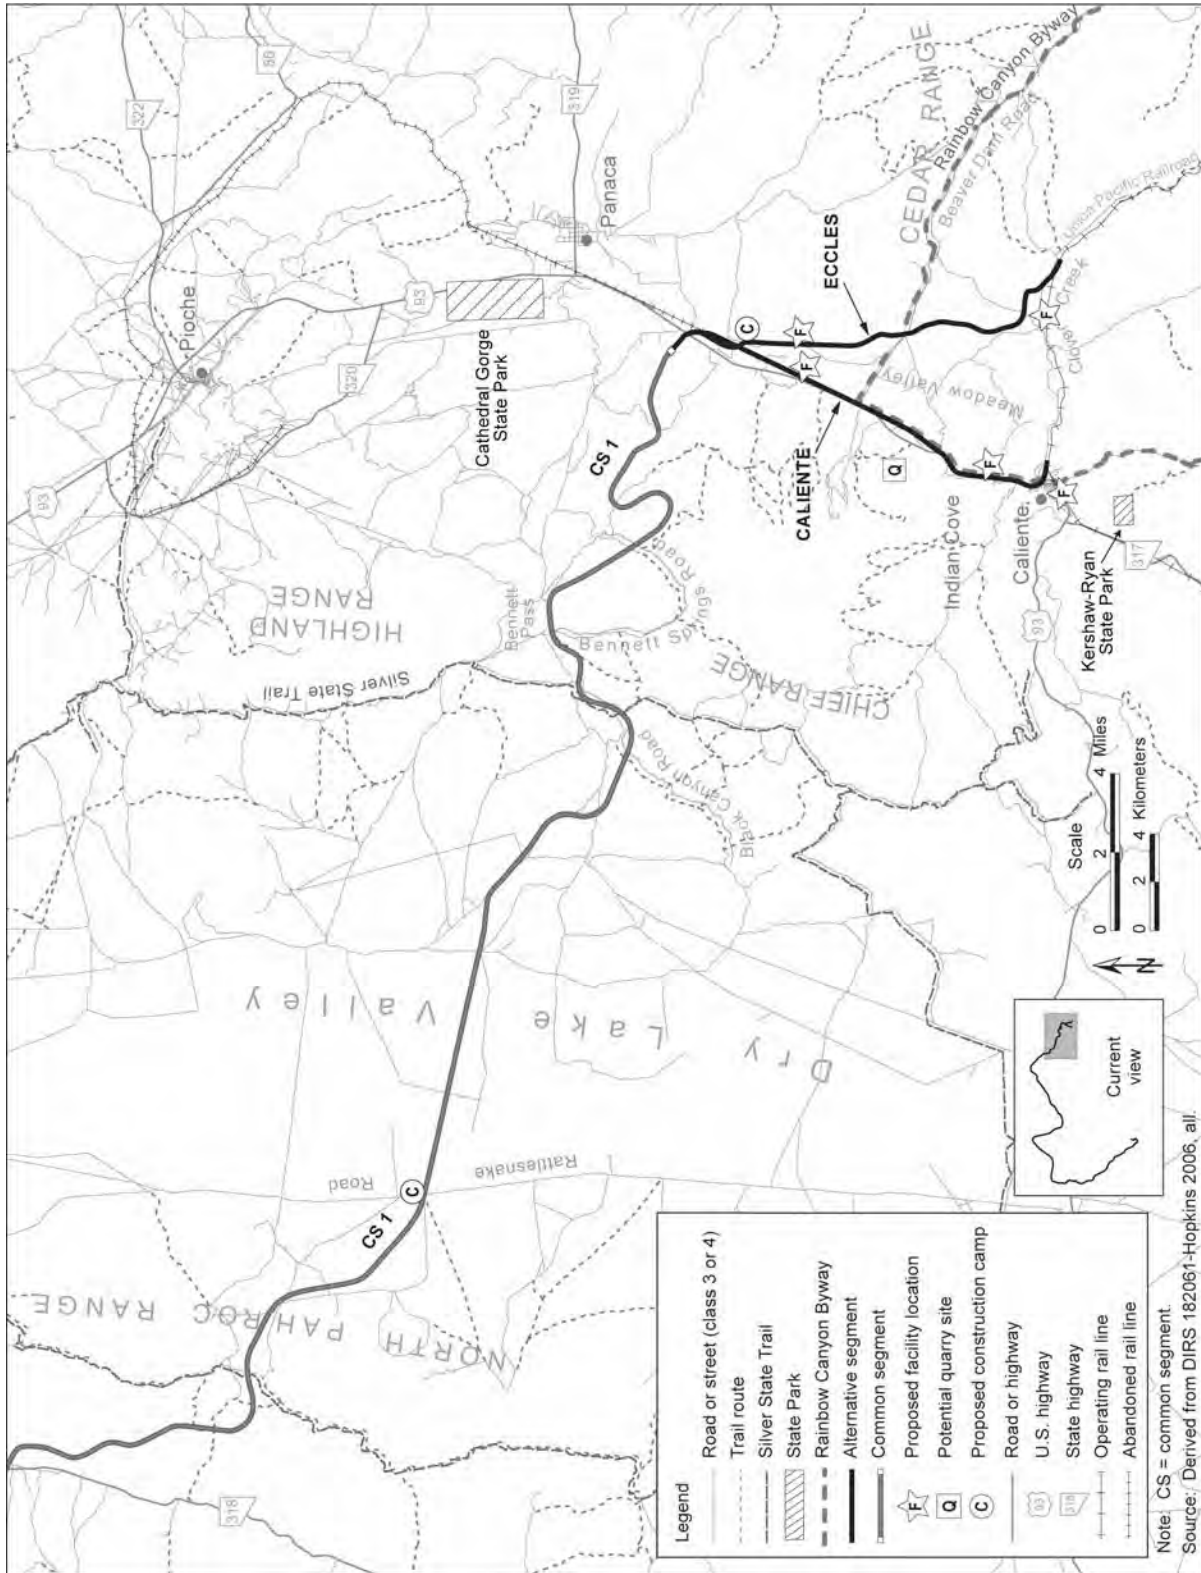


Figure 3-43. Recreation areas and roads within map area 1.

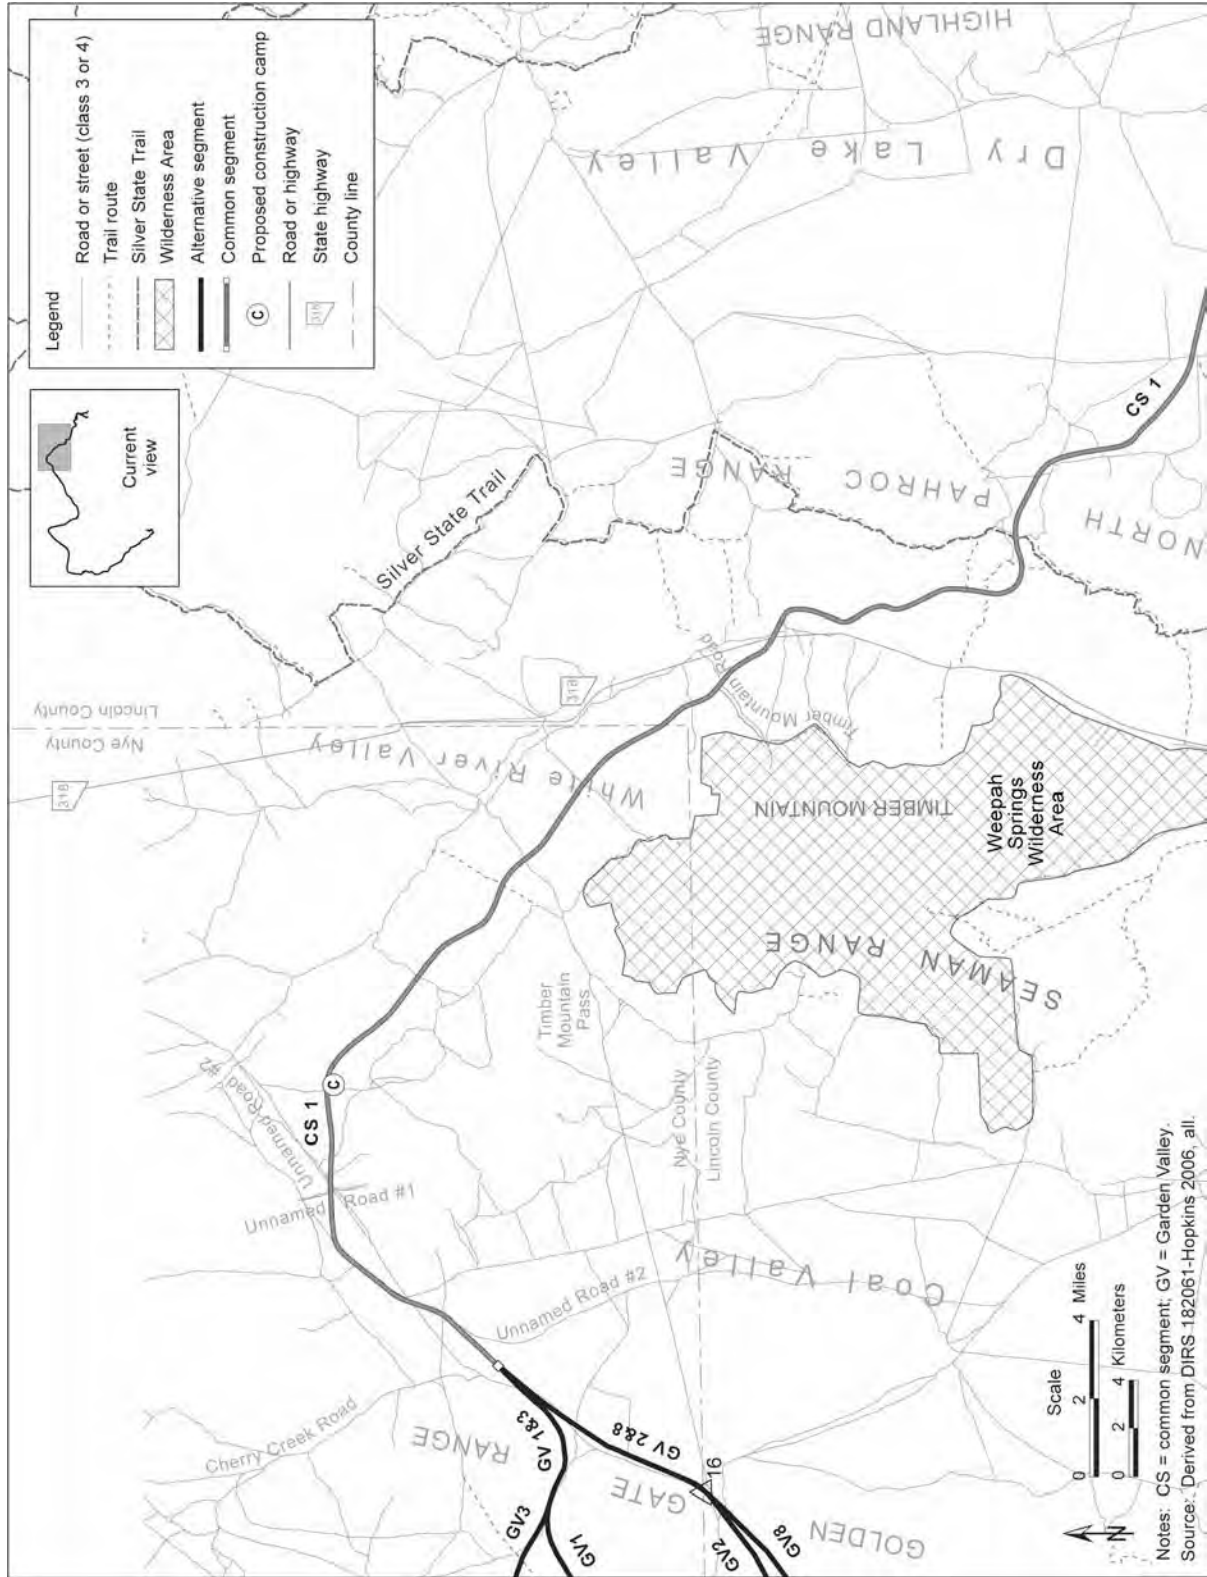


Figure 3-44. Recreation areas and roads within map area 2.

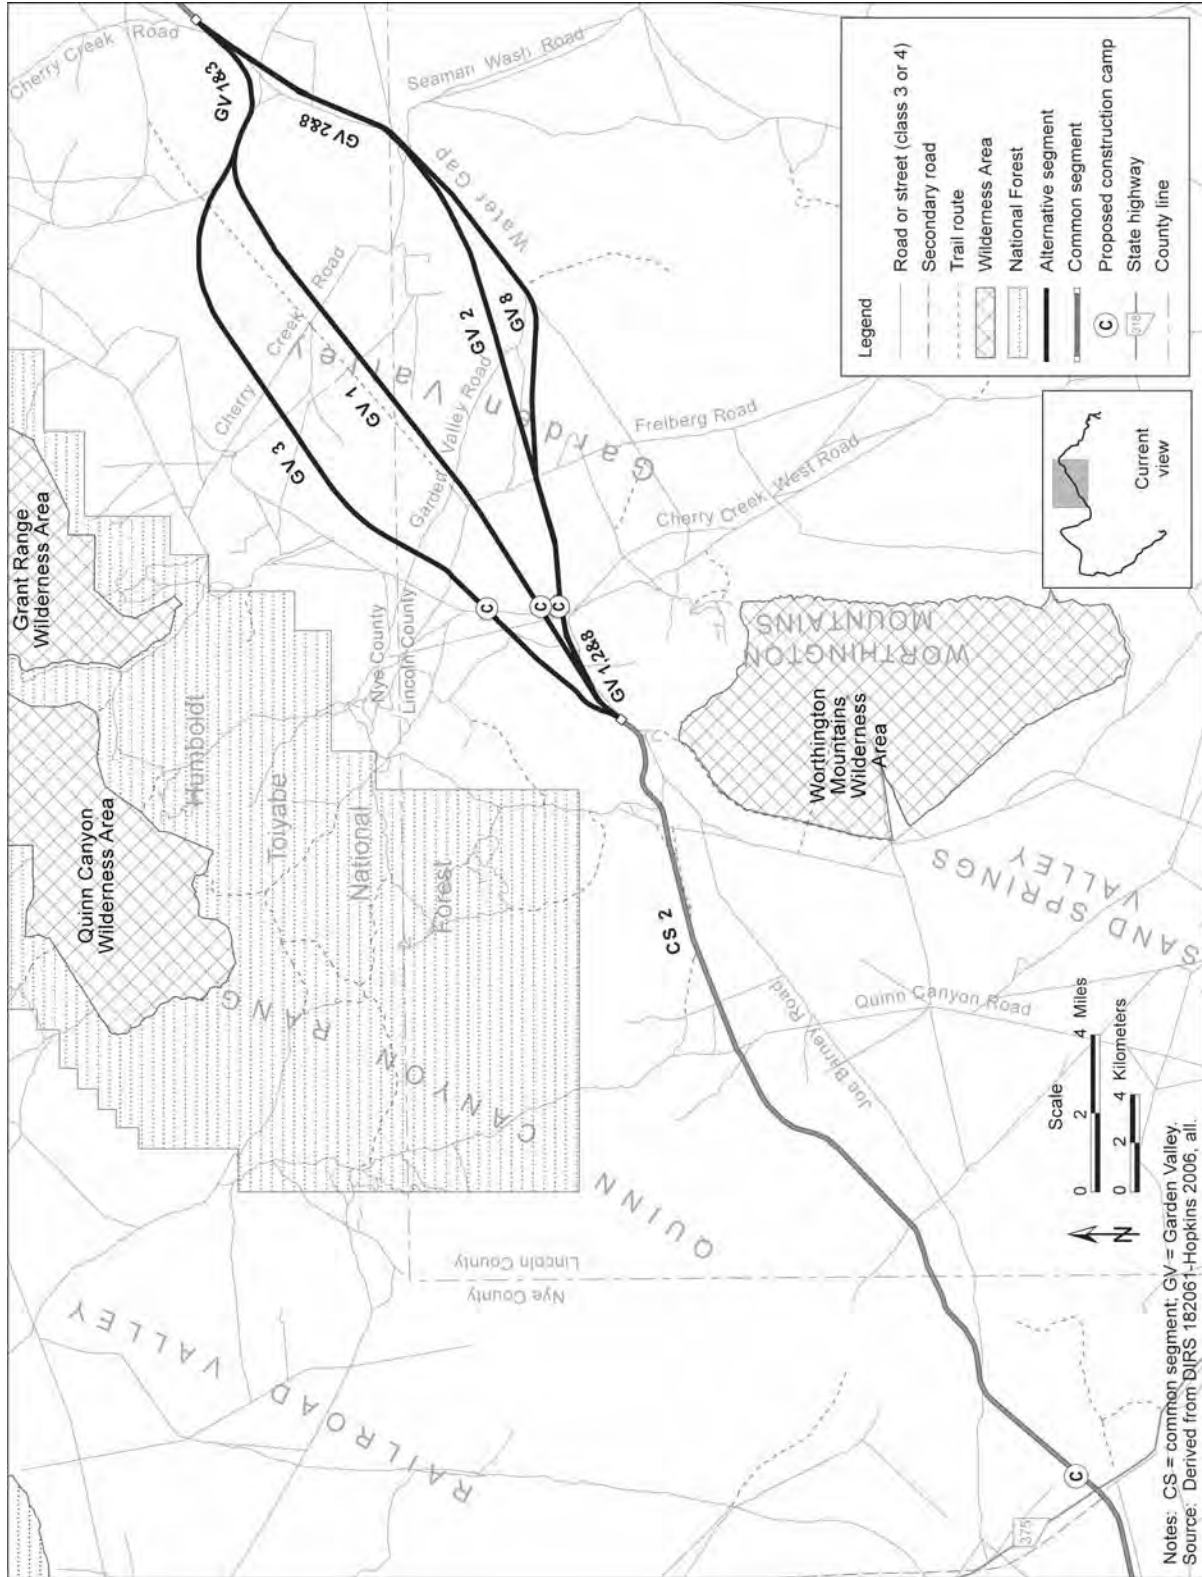


Figure 3-45. Recreation areas and roads within map area 3.

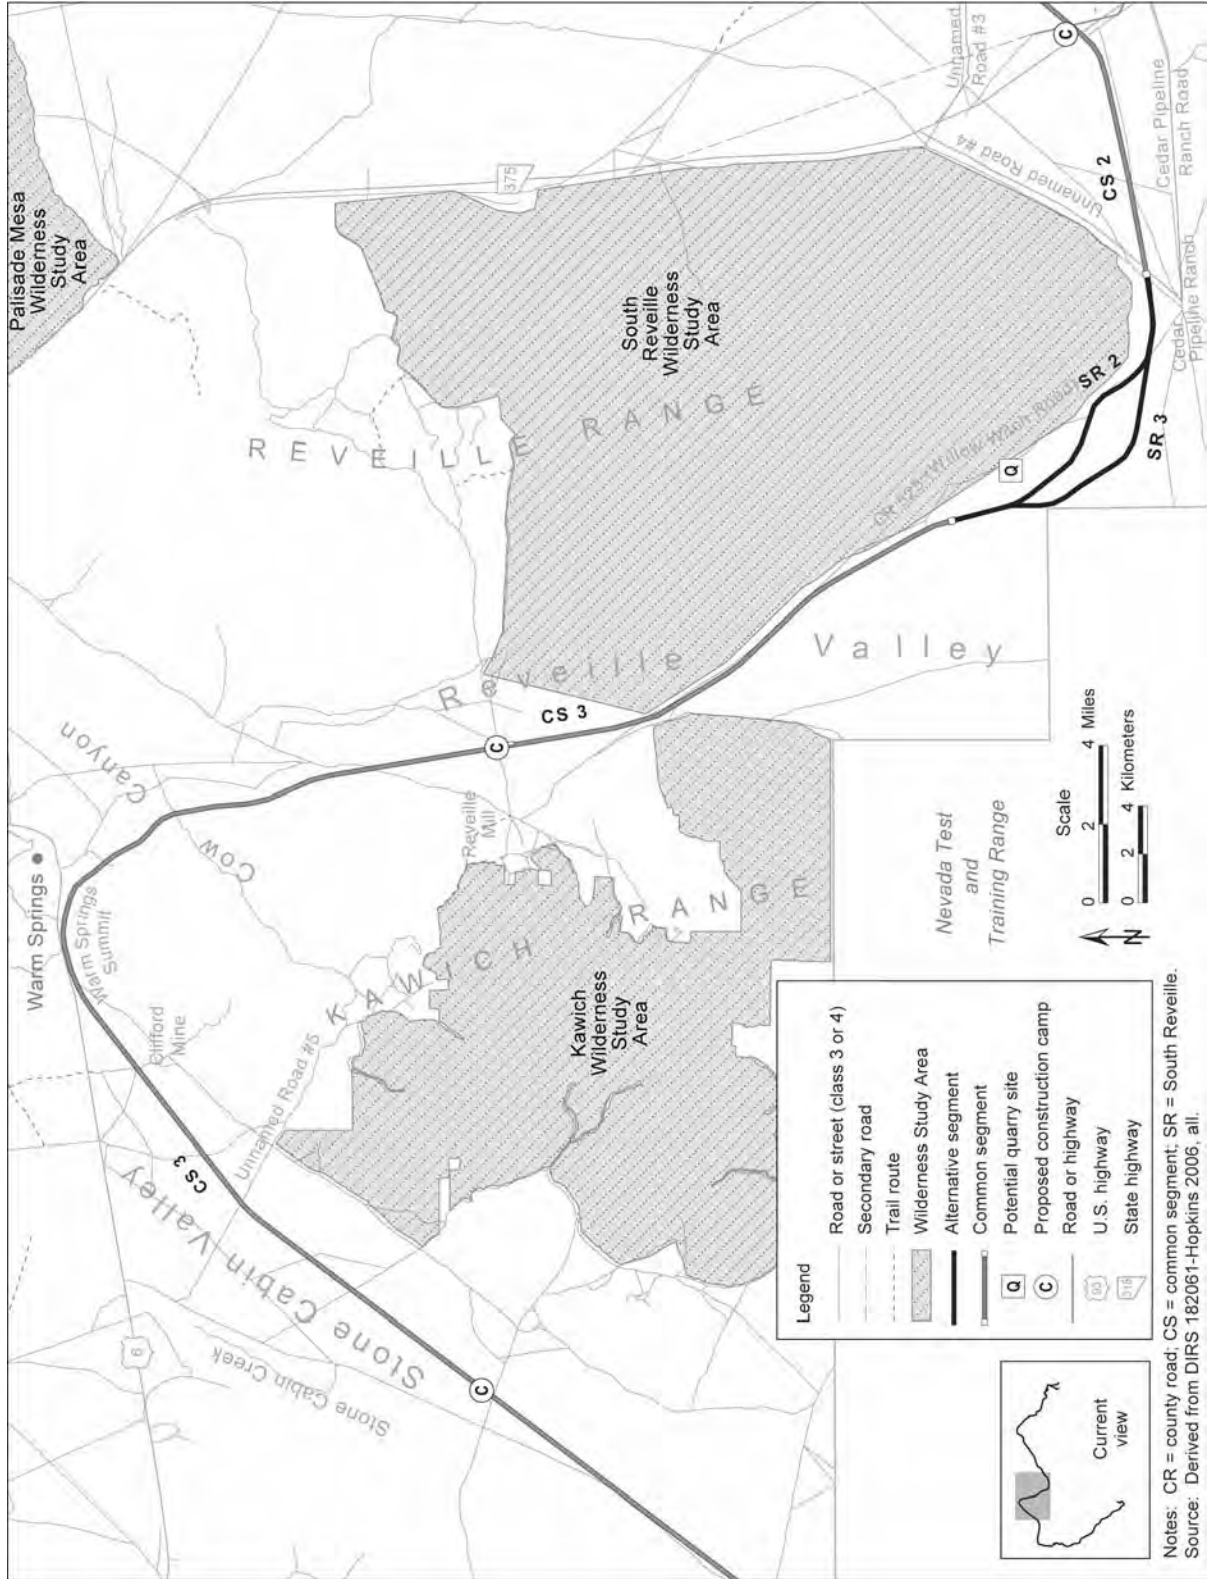


Figure 3-46. Recreation areas and roads within map area 4.

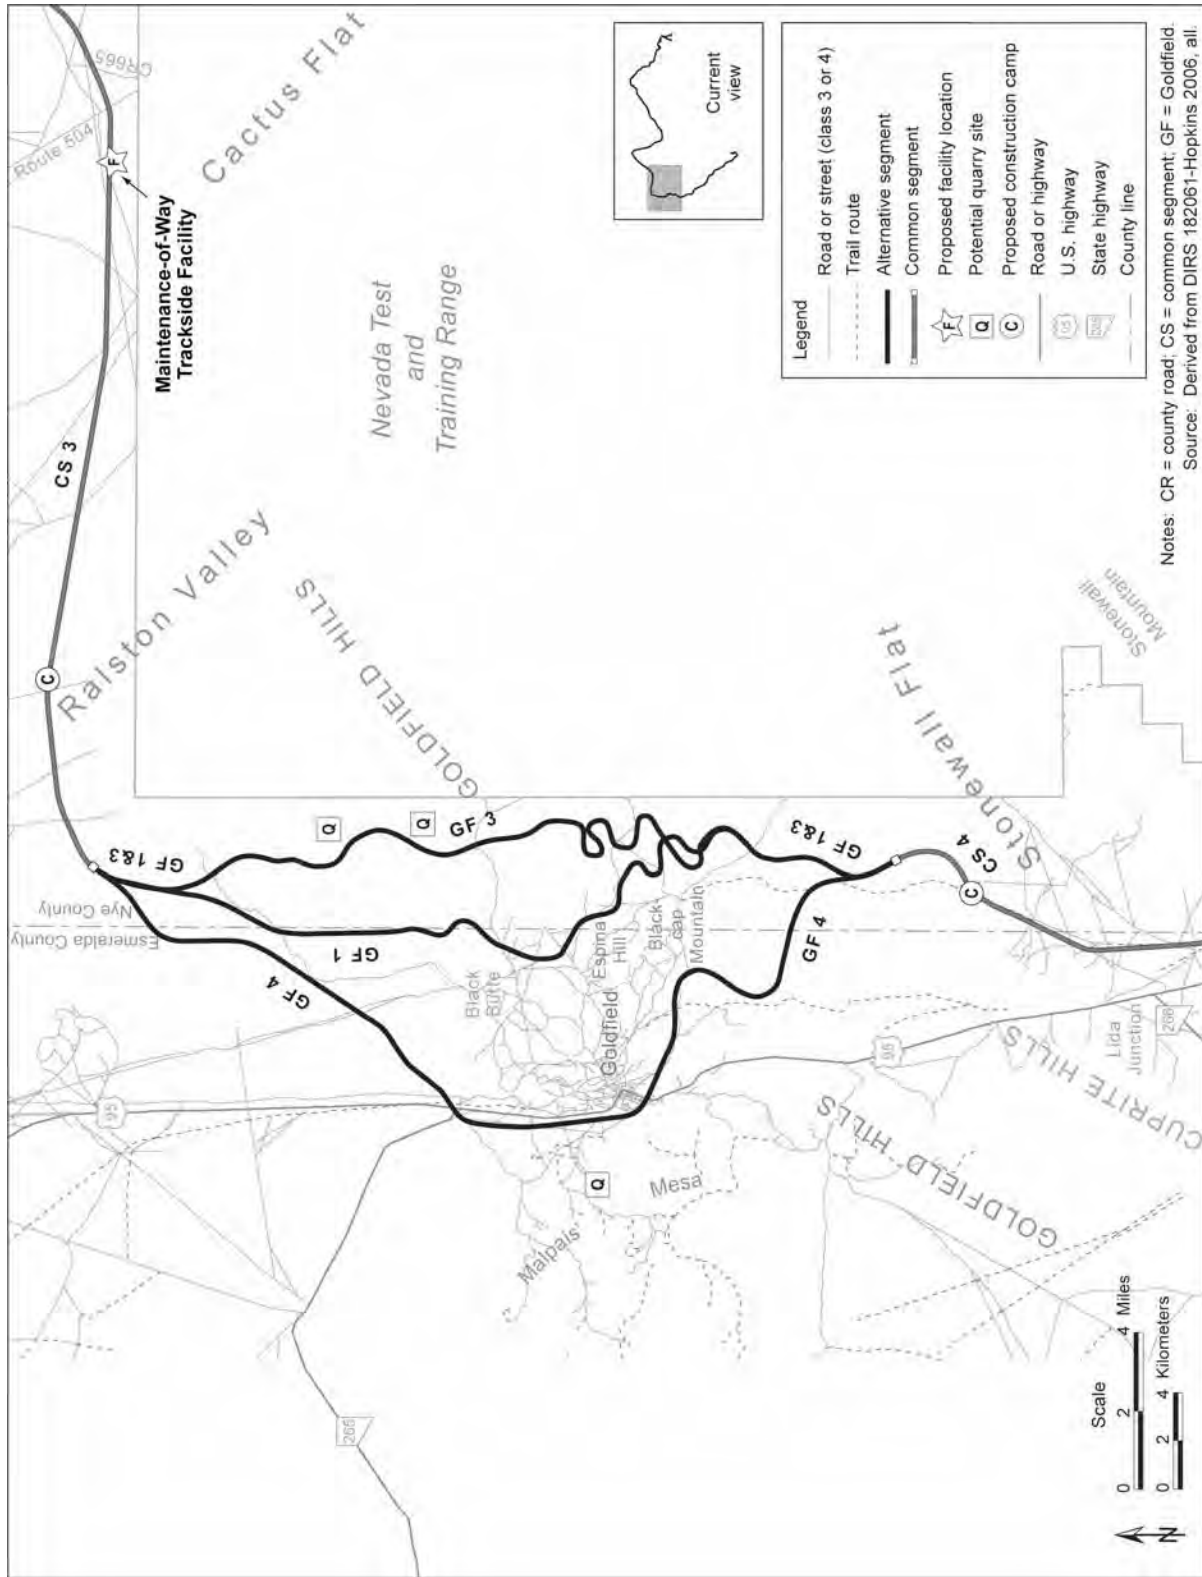


Figure 3-47. Recreation areas and roads within map area 5.

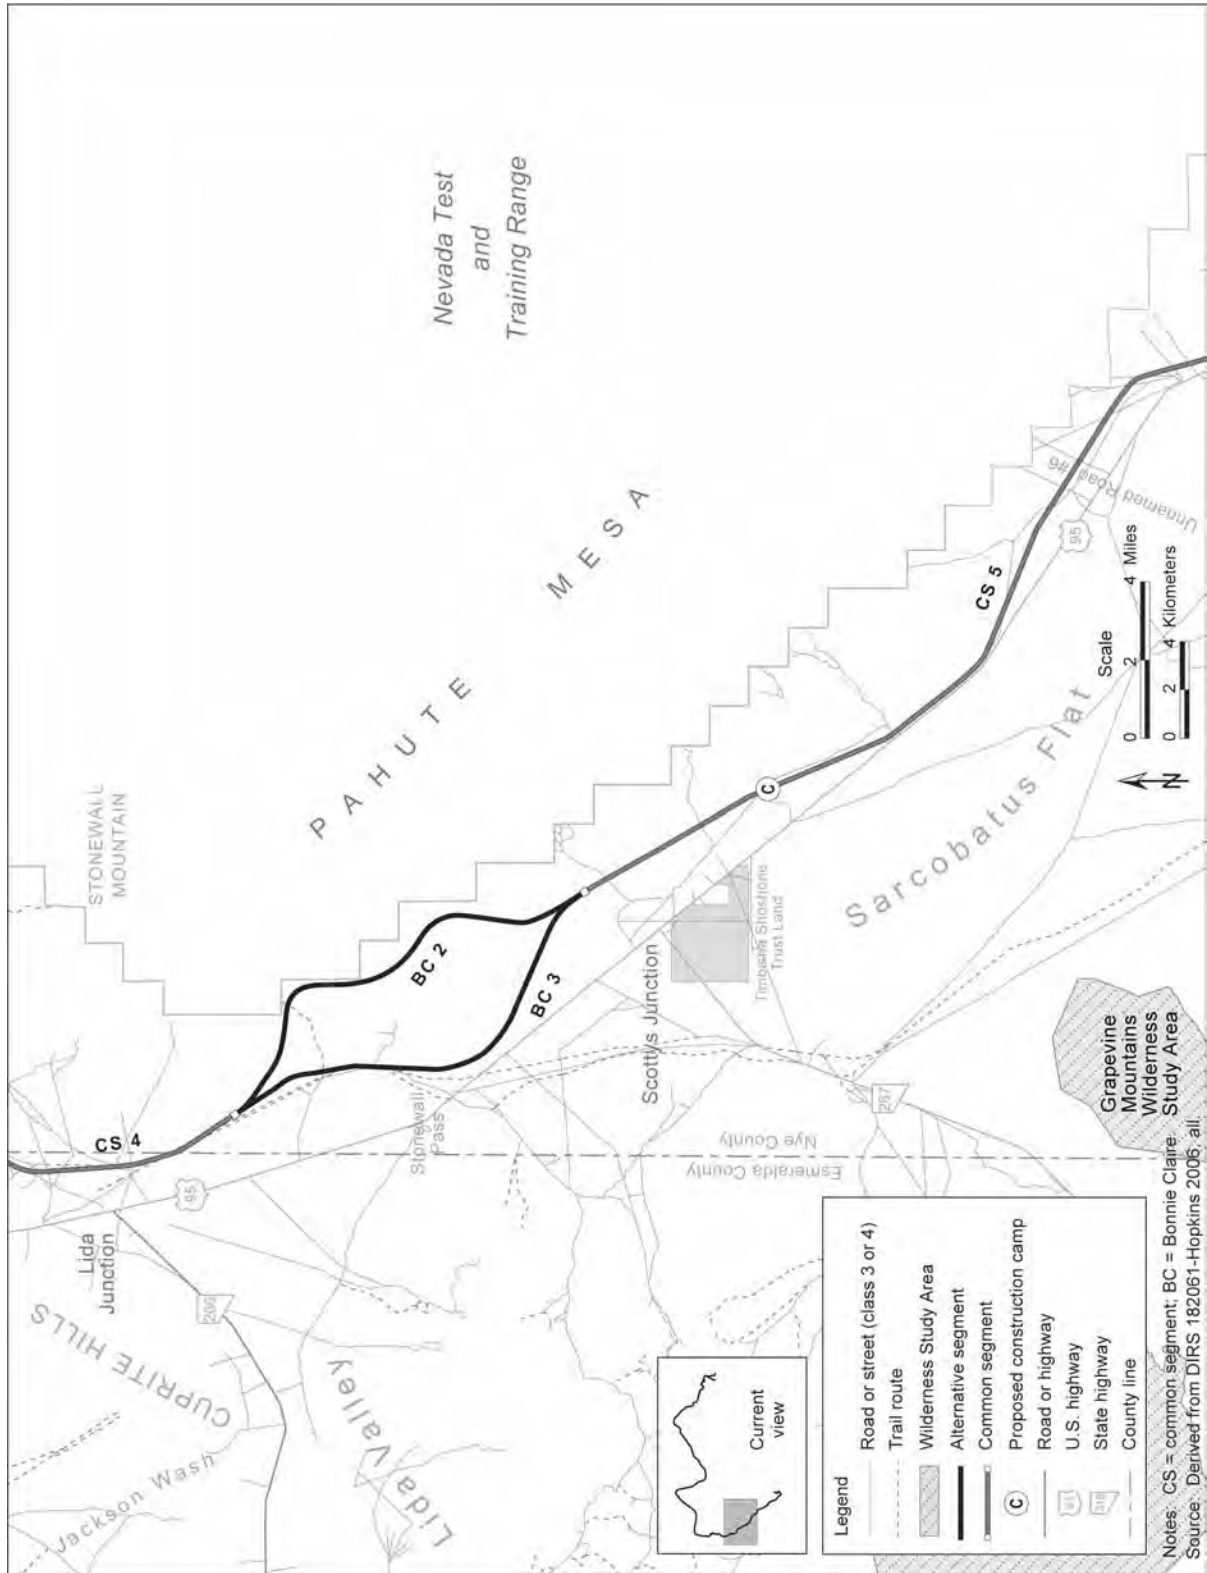


Figure 3-48. Recreation areas and roads within map area 6.

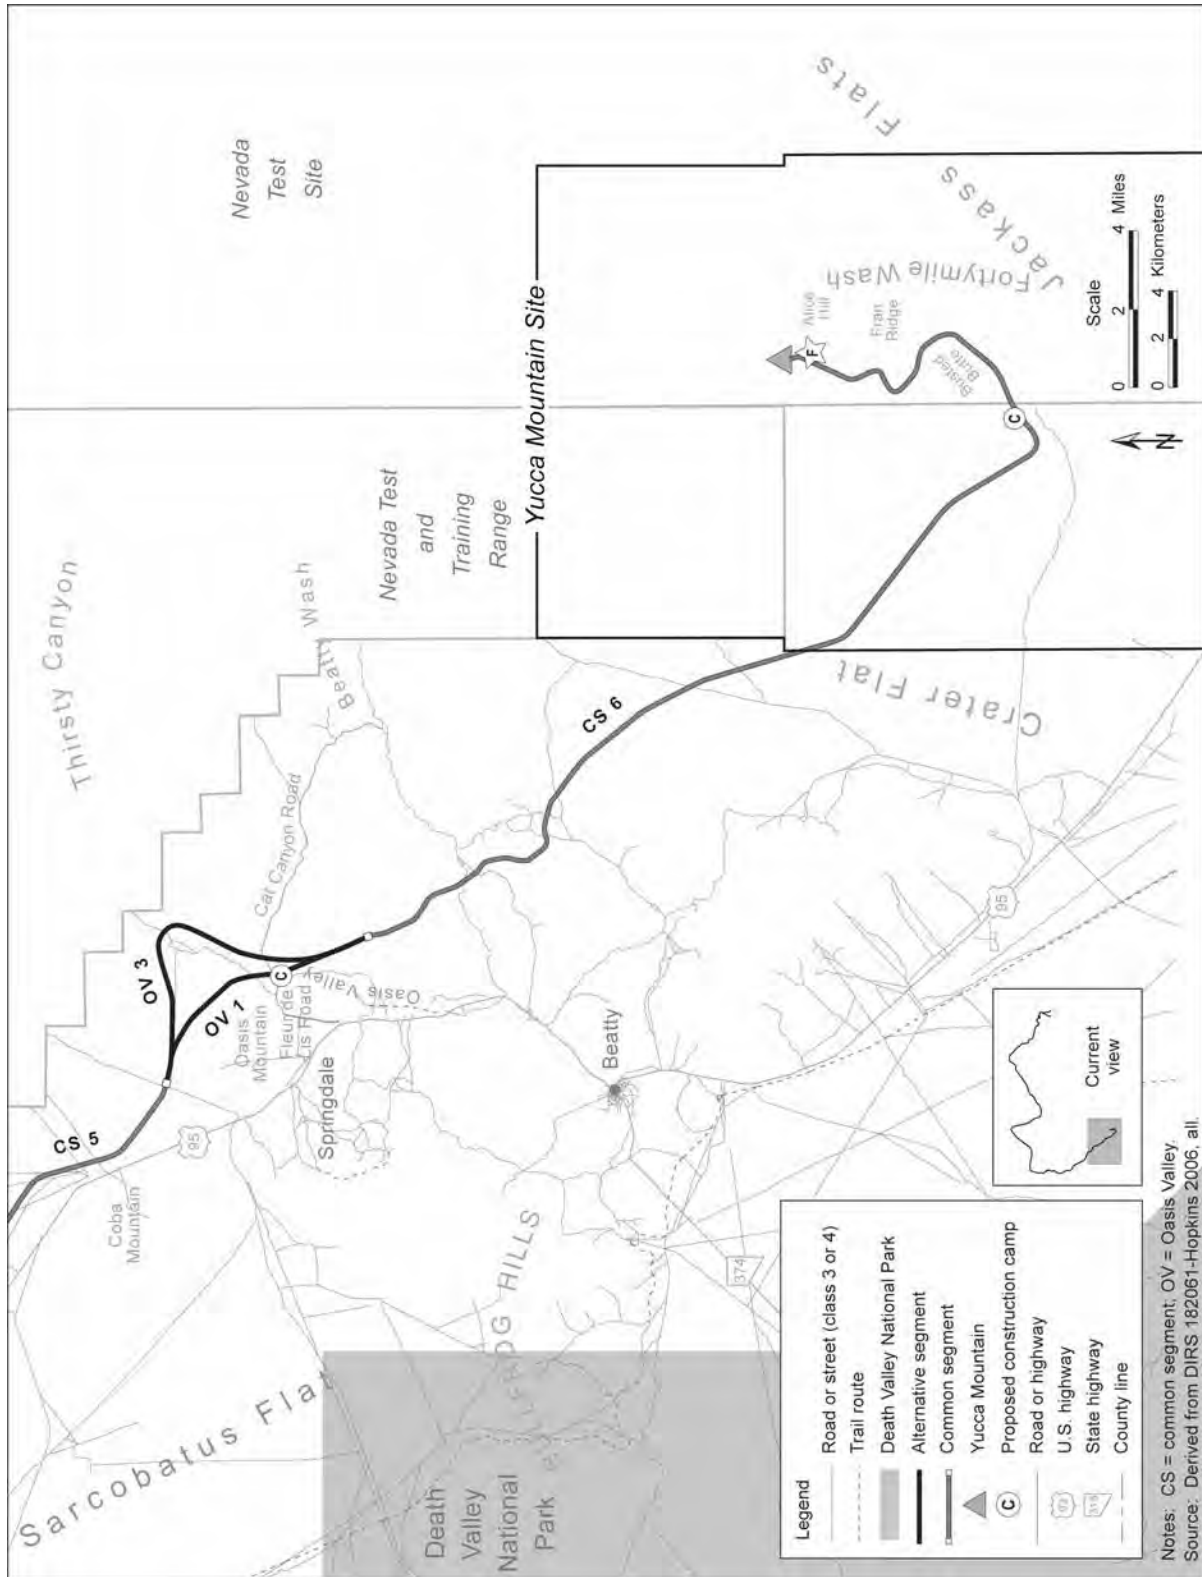


Figure 3-49. Recreation areas and roads within map area 7.

3.2.2.5.3.2 Nye County. Recreation on BLM-administered lands in Nye County is generally dispersed, and there would be no developed recreation sites within 1.6 kilometers (1 mile) of the Caliente rail alignment (see Figure 3-46). Dispersed recreation opportunities in Nye County include hunting, camping, exploration and sightseeing, and off-highway vehicle recreation and competition events.

There are two Wilderness Study Areas along the Caliente rail alignment in Nye County – the Kawich Wilderness Study Area and the South Reveille Wilderness Study Area. Caliente common segment 2 would be within 0.3 kilometer (0.2 mile) of the Kawich Wilderness Study Area at its closest point. The South Reveille Wilderness Study Area would be 30 meters (100 feet) from the centerline of Caliente common segment 2. The Kawich Wilderness Study Area consists of rugged, mountainous country with a high central plateau and several mountain peaks. The South Reveille Wilderness Study Area is a thick, multi-ridged swath of steep-sided mountain rising to crests and flat-topped summits between 2,400 and 2,700 meters (8,000 and 9,000 feet). Sheer cliffs form the mountain sides in many places and large canyons with steep walls run out to the edge of the valleys (DIRS 176796-Winslow 2006, p. 5).

Very few BLM-permitted off-highway vehicle races and special recreation events occur within the region of influence for the Caliente rail alignment common segments and alternative segments in Nye County (DIRS 178416-Nevada Rail Partners 2007, all). Both common segments 3 and 6 would cross race routes several times. All approved race routes the rail line would cross are on existing roads and trails.

3.2.2.5.3.3 Esmeralda County. Recreation in Esmeralda County is generally dispersed and includes competitive off-highway vehicle events, sometimes near the proposed rail alignment. The county is home to numerous largely abandoned towns and historical sites, many of which are in old mining districts, and areas for hunting and fishing (DIRS 176770-Duval et al. 1976, p. 28). No Areas of Critical Environmental Concern (see Section 3.2.2.4.1) fall within the rail alignment region of influence in Esmeralda County. The closest Wilderness Area or Wilderness Study Area to the rail alignment would be Queer Mountain Wilderness Study Area, which would be approximately 20 kilometers (12 miles) away from common segment 5, far outside the construction right-of-way.

A number of BLM-permitted off-highway vehicle races and special recreation events take place annually in areas around the Caliente rail alignment common segments and alternative segments in Esmeralda County (DIRS 178416-Nevada Rail Partners 2007, all). Recent permitted recreation events in the area have included the Las Vegas to Reno Race and the Nevada 1000 Race off-highway vehicle events. The largest number of BLM-approved race routes occur in and around Tonopah and Goldfield, and Goldfield alternative segment 4 would cross multiple routes. Most approved race routes are on existing roads and trails.

3.2.2.5.4 Land Access

The Caliente rail alignment would cross a number of class 3 or 4 roads and unpaved trail routes (see Table 3-9). The intersections of the Caliente rail alignment with these roads and trails could impact access to public lands (for recreational and land management activities) and to private property.

3.2.2.5.5 Utilities

3.2.2.5.5.1 Utility Rights-of-Way. Figures 3-50 through 3-57 show the major utilities and utility corridor networks in the region of influence. The figures do not identify smaller, local electric distribution lines, typically in the 14- to 25-kilovolt range, with linear right-of-way reservations along major roads, or local water, sewer, power, or telephone lines serving individual residences or businesses, or their corresponding rights-of-way.

A **class 3 road** is a light-duty, paved or improved road.

A **class 4 road** is an unimproved, unsurfaced road (includes track roads in back country).

Trail routes are trails and roads passable only with a 4-wheel drive vehicle (also called Jeep trails).

Source: DIRS 181386-BLM 2001.

Table 3-9. Trails and class 3 or 4 roads the Caliente rail alignment alternative segments and common segments would cross.

Segment	Lincoln County roads	Lincoln County trails	Nye County roads	Nye County trails	Esmeralda County roads	Esmeralda County trails
Eccles alternative segment ^a	8	0	0	0	0	0
Caliente alternative segment ^a	7	0	0	0	0	0
Caliente common segment 1 ^b	19	7	12	1	0	0
Garden Valley alternative segment 1	6	0	2	1	0	0
Garden Valley alternative segment 2	9	0	3	0	0	0
Garden Valley alternative segment 3	6	0	4	1	0	0
Garden Valley alternative segment 8	10	1	3	0	0	0
Caliente common segment 2	7	1	5	0	0	0
South Reveille alternative segment 2	0	0	1	0	0	0
South Reveille alternative segment 3	0	0	1	0	0	0
Caliente common segment 3	0	0	30	0	0	0
Goldfield alternative segment 1	0	0	6	0	9	0
Goldfield alternative segment 3	0	0	5	0	0	0
Goldfield alternative segment 4	0	0	0	1	41	2
Caliente common segment 4	0	0	2	1	11	0
Bonnie Claire alternative segment 2	0	0	0	1	0	0
Bonnie Claire alternative segment 3	0	0	2	2	0	0
Common segment 5	0	0	14	0	0	0
Oasis Valley alternative segment 1	0	0	3	0	0	0
Oasis Valley alternative segment 3	0	0	3	0	0	0
Common segment 6	0	0	7	0	0	0

a. Both the Caliente and Eccles alternative segments would cross the Rainbow Canyon Back Country Byway.

b. Caliente common segment 1 would cross the Silver State Trail in two places.

3.2.2.5.5.2 Utility Corridors. As stated in Section 3.2.2.4.1, BLM resource management plans designate utility and transportation corridors to consolidate the location of new and existing rights-of-way whenever feasible. Table 3-10 lists the extent to which DOE would construct each Caliente rail alignment segment within BLM-designated corridors.

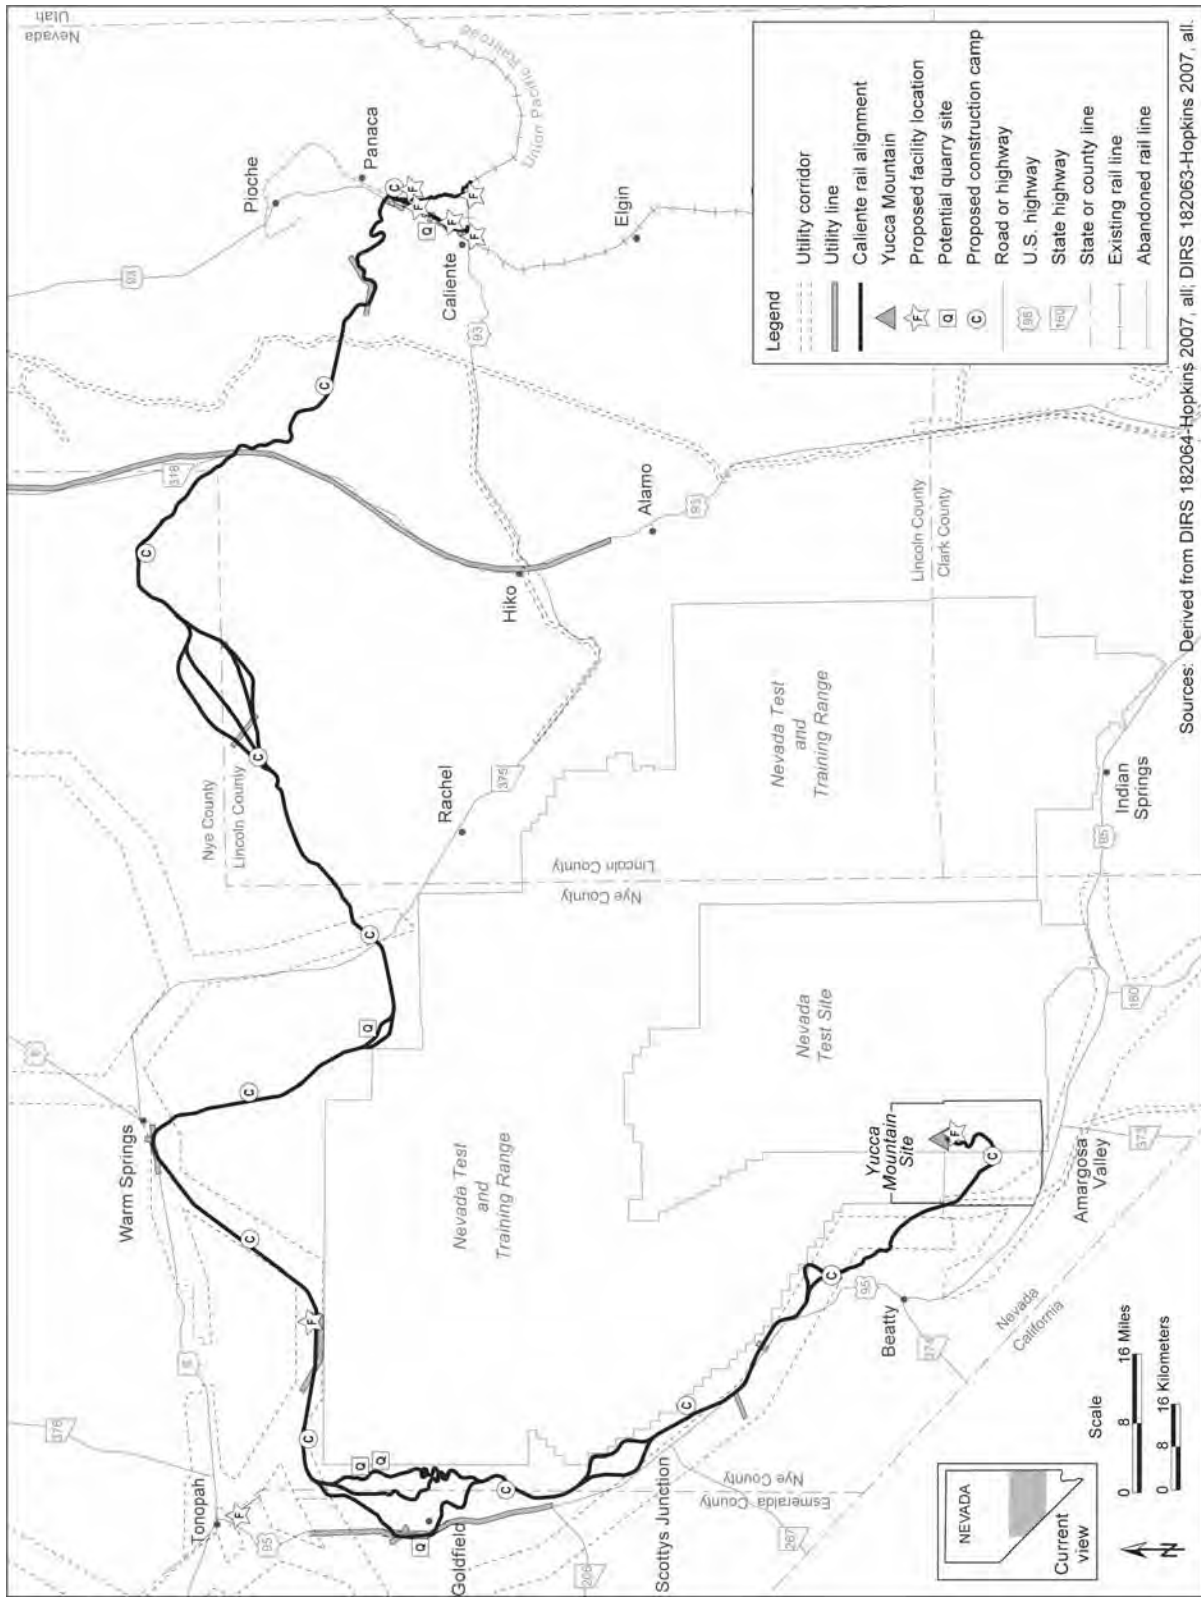


Figure 3-50. Utility corridors along the Caliente rail alignment.

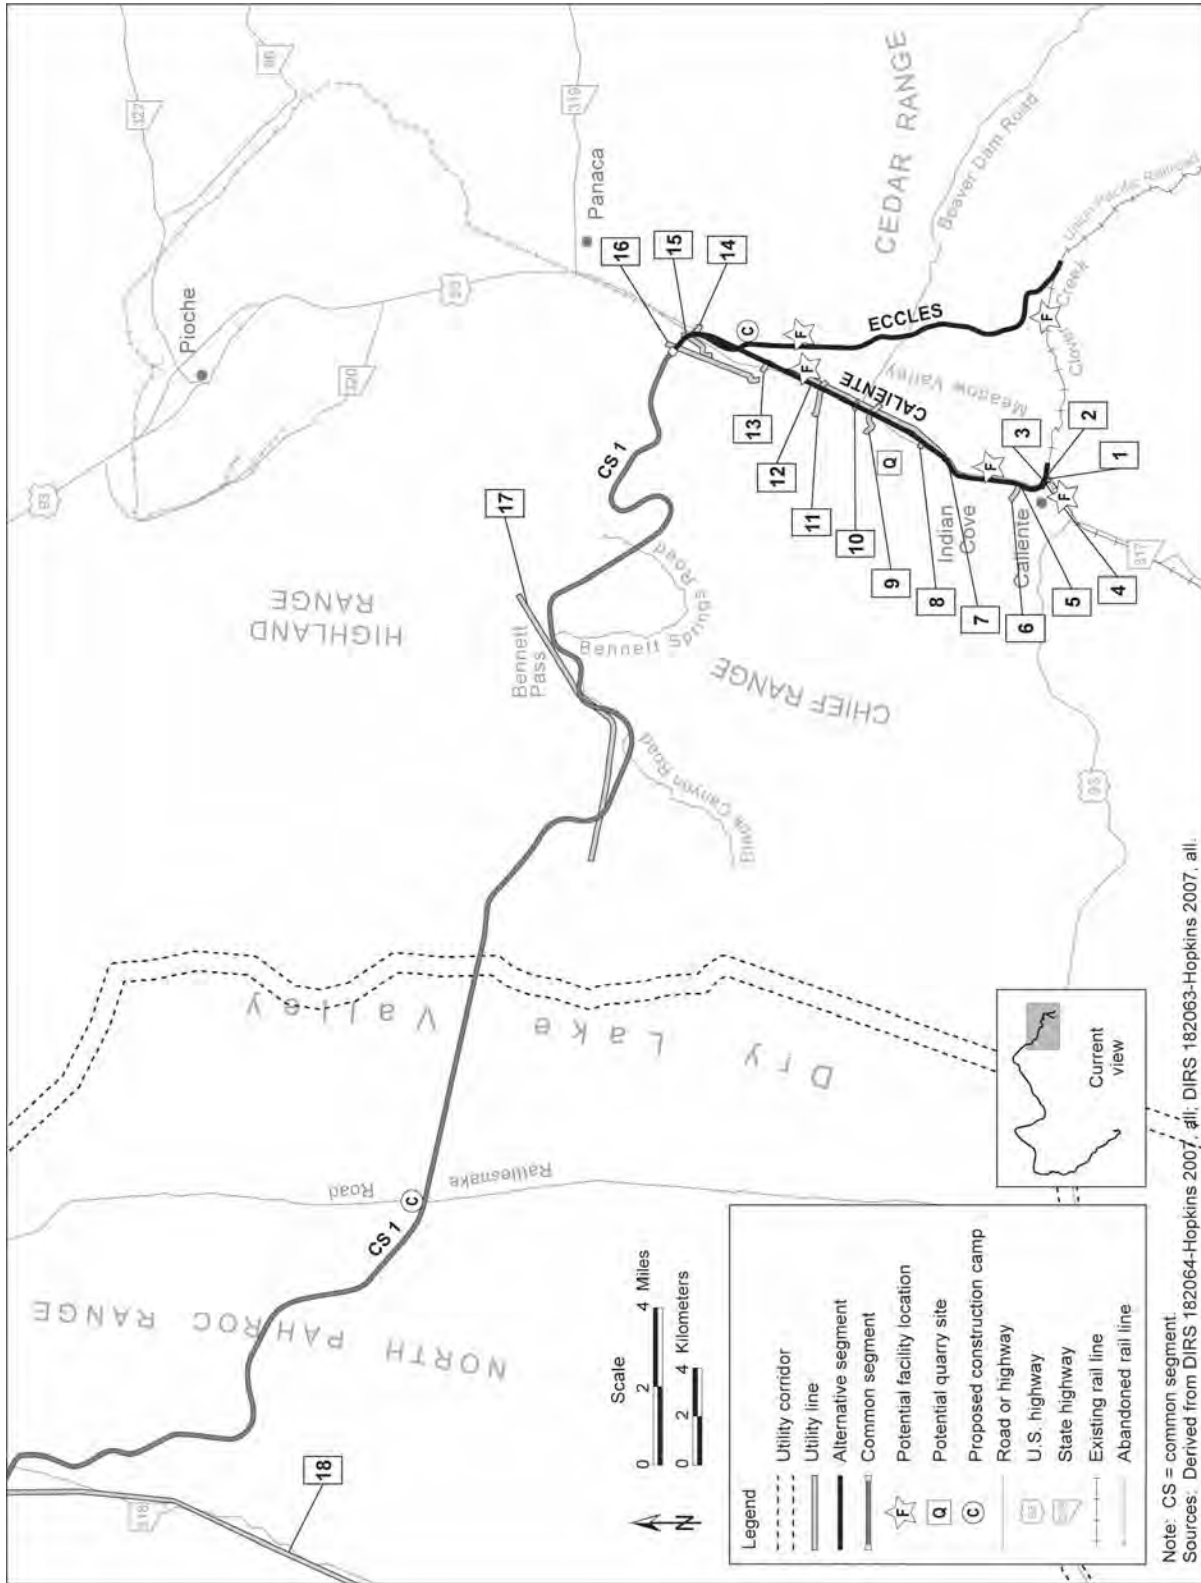


Figure 3-51. Utility corridors within map area 1.

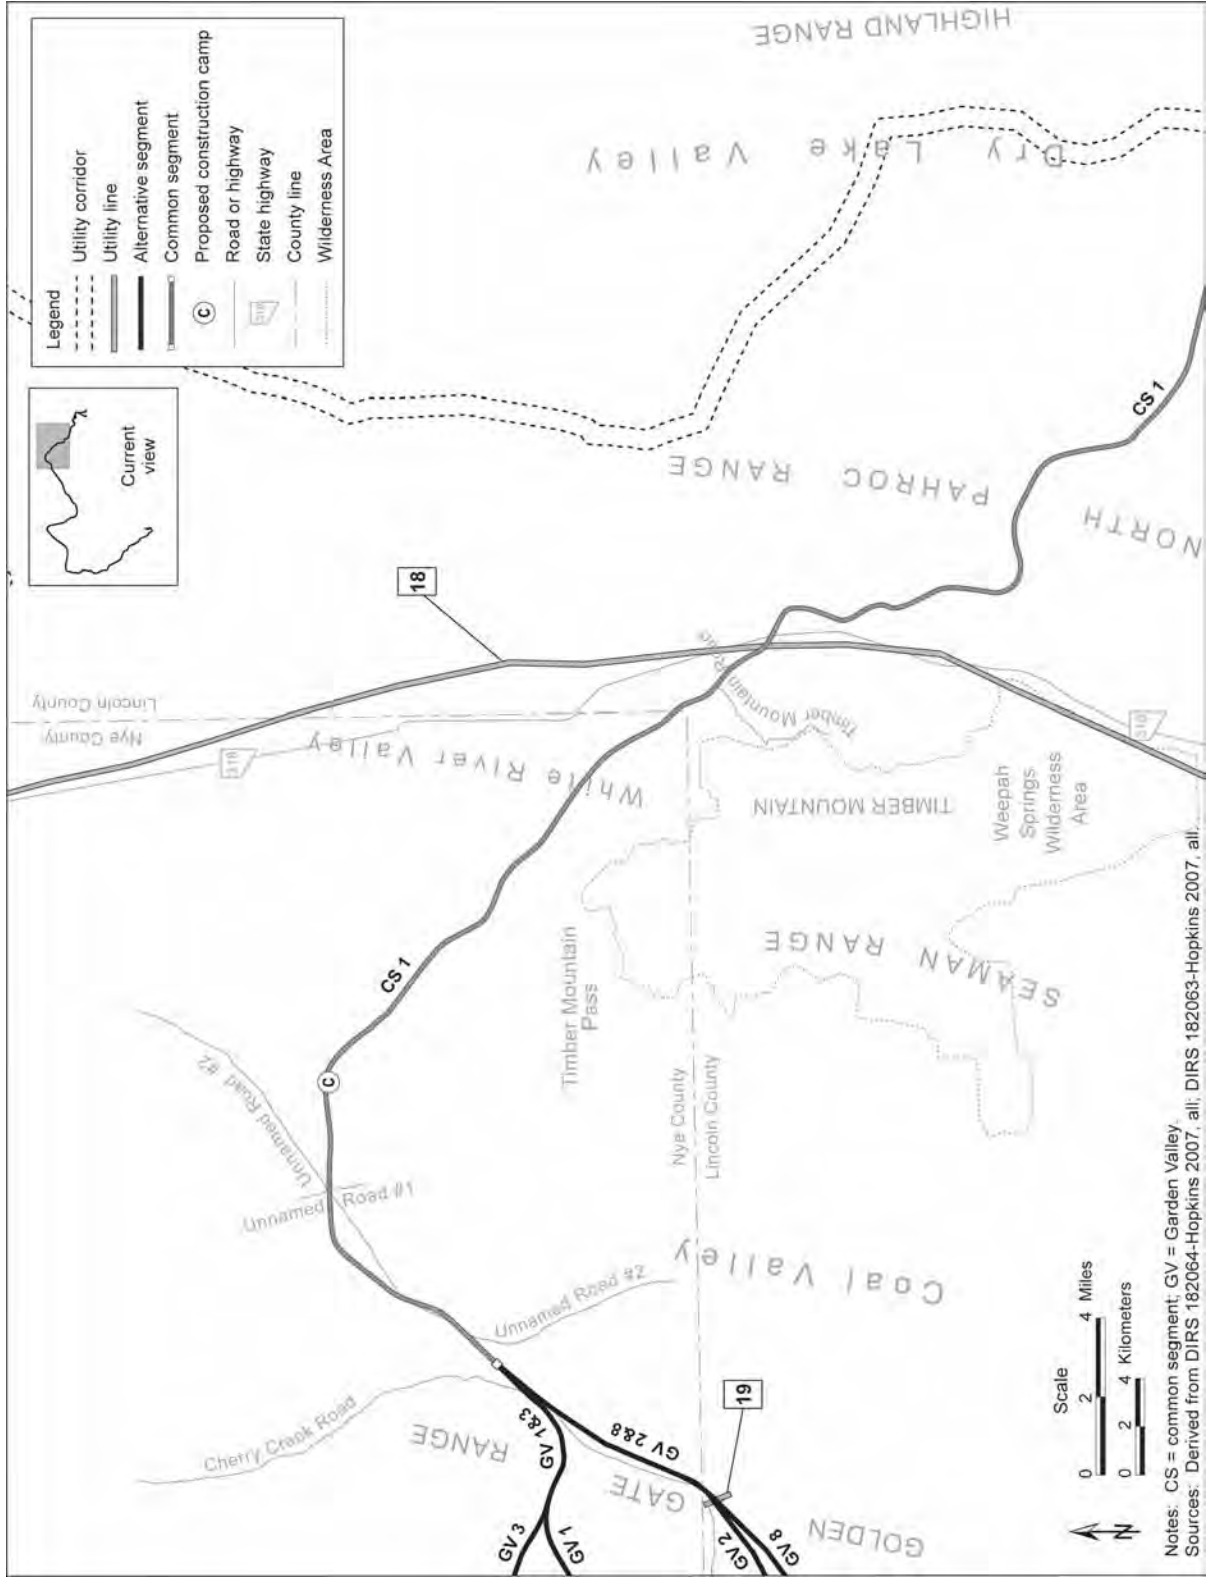


Figure 3-52. Utility corridors within map area 2.

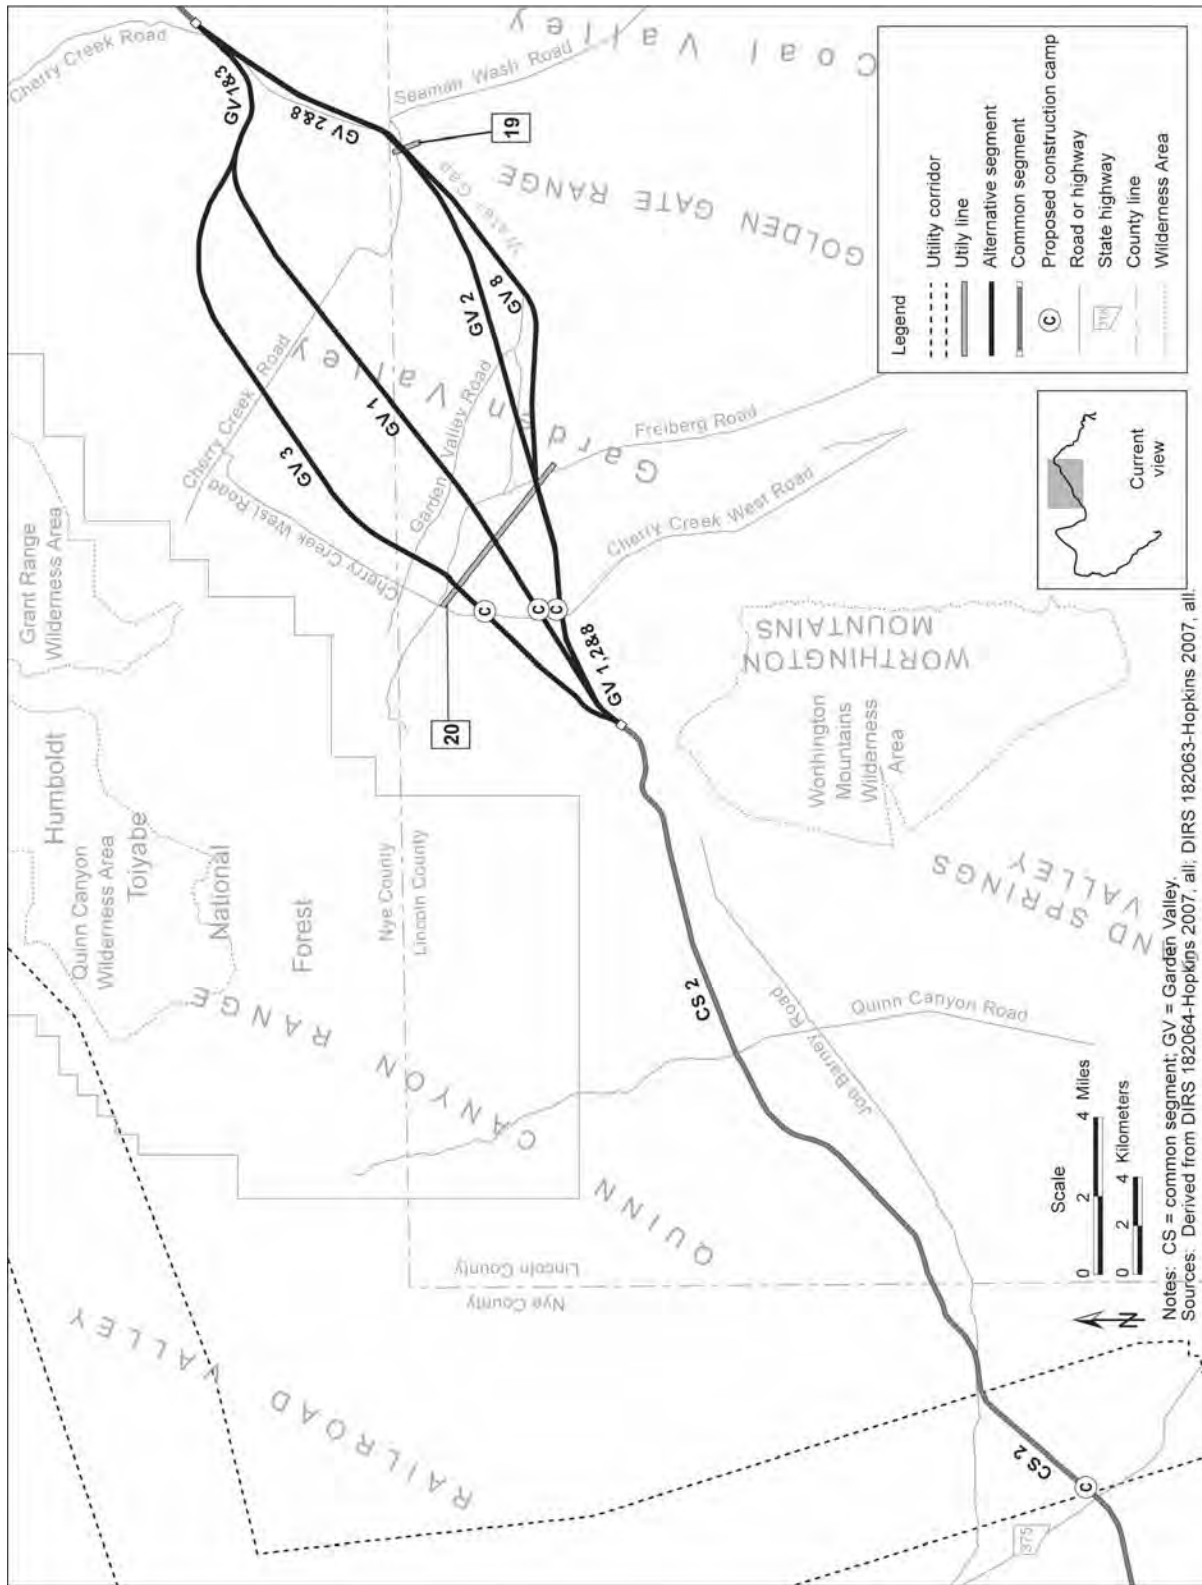


Figure 3-53. Utility corridors within map area 3.

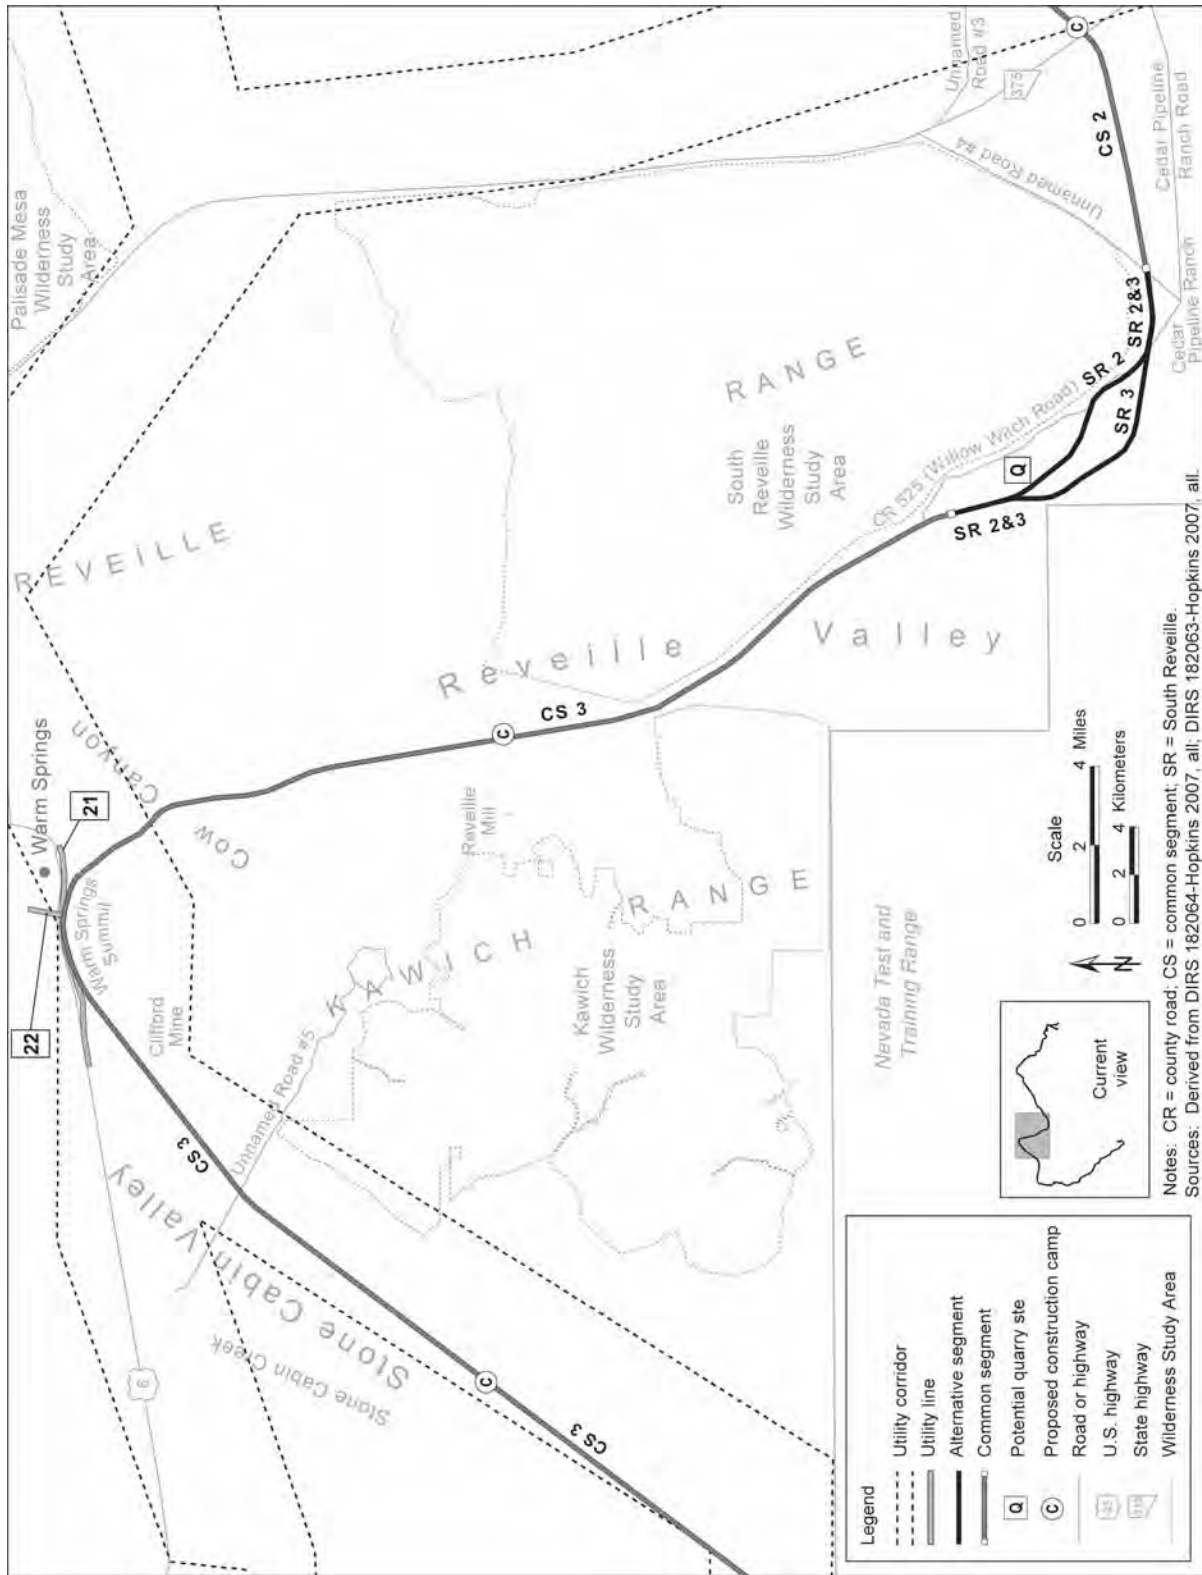


Figure 3-54. Utility corridors within map area 4.

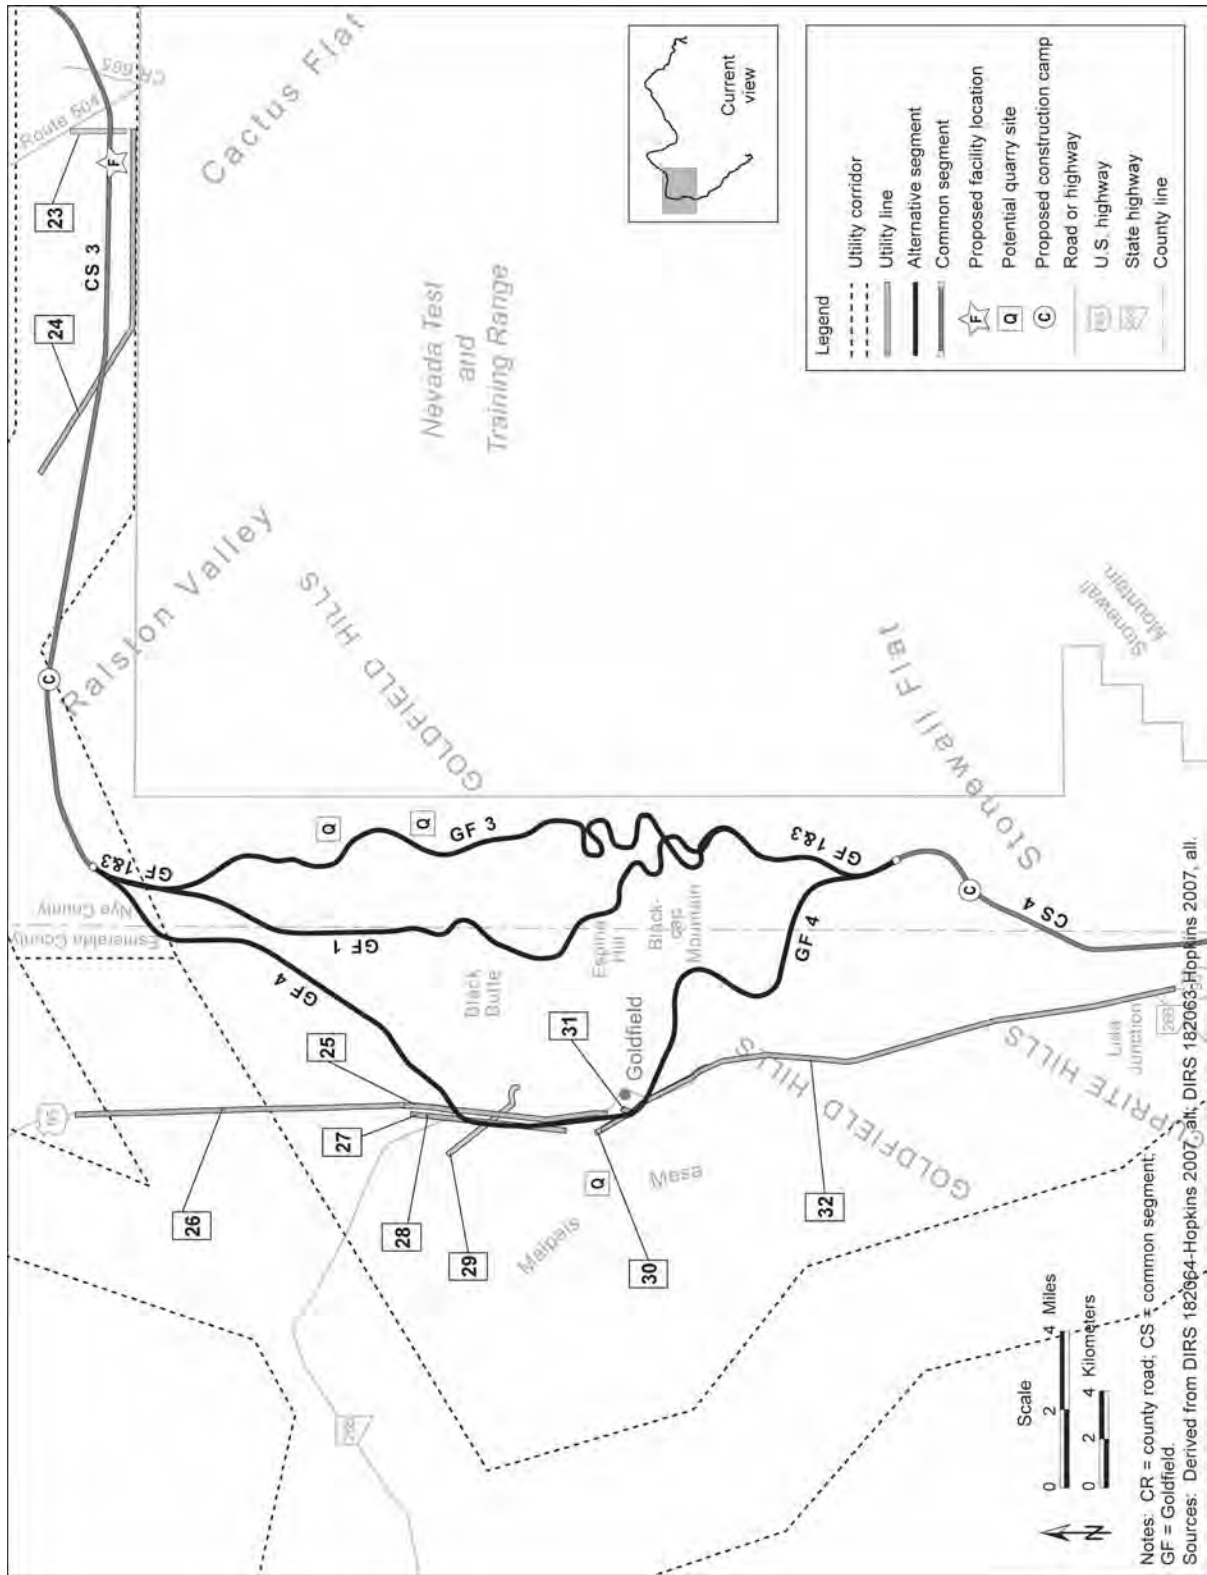


Figure 3-55. Utility corridors within map area 5.

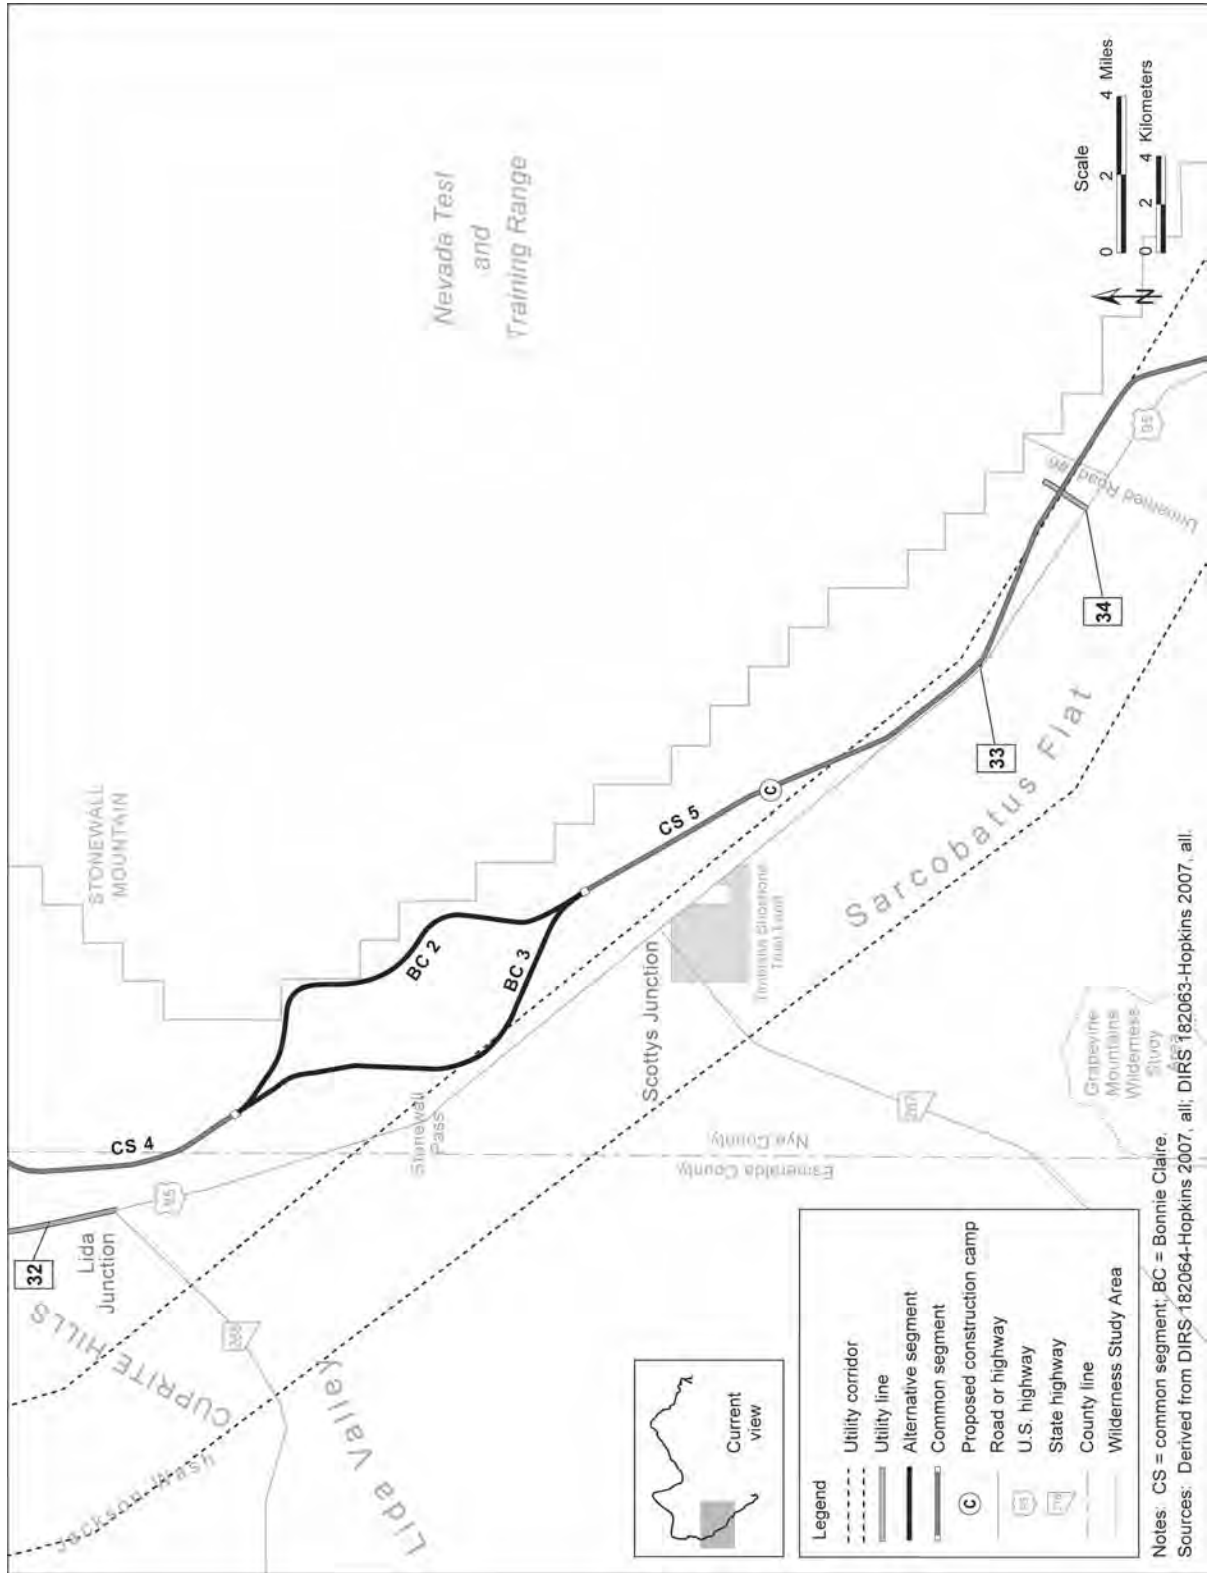


Figure 3-56. Utility corridors within map area 6.

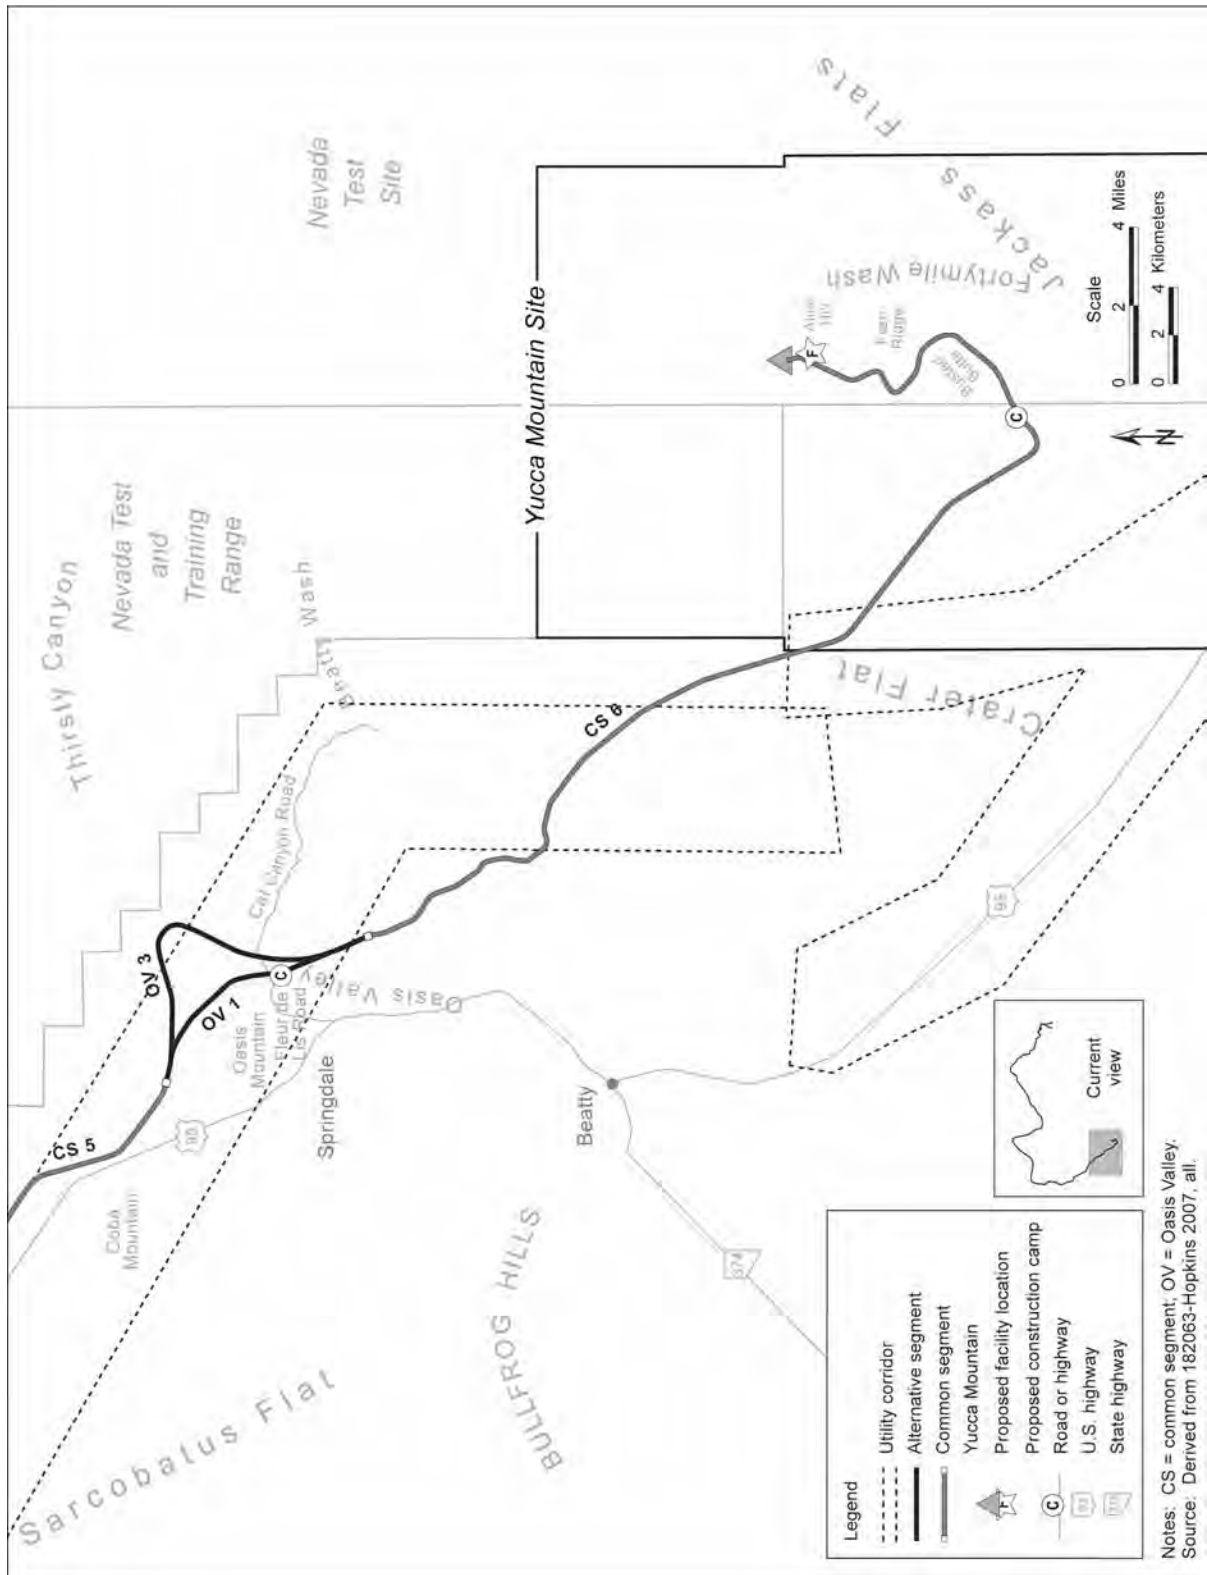


Figure 3-57. Utility corridors within map area 7.

Table 3-10. Rail line segments within designated utility or transportation corridors.^a

Segment	Resource management plan	Distance (kilometers) ^b within BLM-designated corridors	Total distance (kilometers) of segment	Percent within BLM-designated corridor
Caliente alternative segment	Draft Ely	0	18	0
Eccles alternative segment	Draft Ely	0	18	0
Caliente common segment 1	Draft Ely	0.8	114	0.7
Garden Valley alternative segment 1	Draft Ely	0	35	0
Garden Valley alternative segment 2	Draft Ely	0	36	0
Garden Valley alternative segment 3	Draft Ely	0	38	0
Garden Valley alternative segment 8	Draft Ely	0	37	0
Caliente common segment 2	Tonopah	6.2	18	3.4
Caliente common segment 2	Draft Ely	0	31	0
South Reveille alternative segment 2	Tonopah	0	19	0
South Reveille alternative segment 3	Tonopah	0	19	0
Caliente common segment 3	Tonopah	80	113	71
Goldfield alternative segment 1	Tonopah	3.2	47	6.8
Goldfield alternative segment 3	Tonopah	3.2	50	6.4
Goldfield alternative segment 4	Tonopah	5.1	53	9.6
Caliente common segment 4	Tonopah	0	12	0
Bonnie Claire alternative segment 2	Tonopah	0	20	0
Bonnie Claire alternative segment 3	Tonopah	1.6	20	8
Common segment 5	Tonopah	20	41	49
Oasis Valley alternative segment 1	Tonopah	8.3	10	83
Oasis Valley alternative segment 3	Tonopah	10	14	71
Common segment 6	Tonopah	7.8	24	33
Common segment 6	Las Vegas	4.0	27	15

a. Source: DIRS 181617-Hopkins 2007.

b. To convert kilometers to miles, multiply by 0.62137.

Table 3-11 identifies locations of where the rail line construction right-of-way and the possible locations for the *Staging Yard* could cross utility corridors. Figures 3-51 through 3-57 do not show all of the individual crossings because some of the locations are very close together. Utility lines listed in Table 3-11 are depicted on the figures by the location number designated in the table. For clarification, see Volume III-A of this Rail Alignment EIS, Map Atlas. Table 3-12 identifies utilities corridors at potential quarry sites.

The locations of potential utility crossings shown on figures and listed in tables are approximate and would be reviewed and verified after completion of the final rail design.

Table 3-11. Potential Caliente rail alignment utility crossings^a (page 1 of 2).

Rail line segment/facility	Identified utilities and utility corridors ^{b,c,d}	Construction right-of-way crossings	Location number ^e
Caliente alternative segment	Transmission/power line	1	1
Caliente alternative segment	Transmission/power line	2	2
Caliente alternative segment	Transmission/power line	2	3
Caliente alternative segment	Transmission/power line	1	4
Caliente alternative segment	Transmission/power line	1	5
Caliente alternative segment	Transmission/power line	1	6
Caliente alternative segment	Transmission/power line	3	7
Caliente alternative segment	Transmission/power line	1	8
Caliente alternative segment	Transmission/power line	1	9
Caliente alternative segment	Transmission/power line	1	10
Caliente alternative segment	Transmission/power line	1	11
Caliente alternative segment	Transmission/power line	1	12
Caliente alternative segment	Transmission/power line	1	13
Caliente-Upland Staging Yard	Transmission/power line	1	7
Caliente-Upland Staging Yard	Transmission/power line	1	12
Caliente-Indian Cove Staging Yard	Transmission/power line	1	5
Caliente-Indian Cove Staging Yard	Transmission/power line	1	6
Caliente-Upland Staging Yard	Transmission/power line	1	7
Caliente-Upland Staging Yard	Transmission/power line	1	12
Caliente-Indian Cove Staging Yard	Transmission/power line	1	5
Caliente-Indian Cove Staging Yard	Transmission/power line	1	6
Eccles alternative segment	Transmission/power line	1	14
Caliente common segment 1	Transmission/power line	1	15
Caliente common segment 1	Transmission/power line	1	16
Caliente common segment 1	Transmission/power line	2	17
Caliente common segment 1	Telephone line	1	18
Garden Valley alternative segment 1	Unidentified line	1	19
Garden Valley alternative segment 2	Unidentified line	1	19
Garden Valley alternative segment 2	Unidentified line	1	20
Garden Valley alternative segment 3	Unidentified line	1	20
Garden Valley alternative segment 8	Unidentified line	1	19
Caliente common segment 2	None	None	None
South Reveille alternative segments	None	None	None
Caliente common segment 3	Transmission/power line	2	21

Table 3-11. Potential Caliente rail alignment utility crossings^a (page 2 of 2).

Rail line segment/facility	Identified utilities and utility corridors ^{b,c,d}	Construction right-of-way crossings	Location number ^e
Caliente common segment 3	Transmission/power line	1	22
Caliente common segment 3	Transmission/power line	1	23
Caliente common segment 3	Transmission/power line	1	24
Goldfield alternative segment 1	None	None	None
Goldfield alternative segment 3	None	None	None
Goldfield alternative segment 4	Transmission/power line	1	25
Goldfield alternative segment 4	Telephone line	1	26
Goldfield alternative segment 4	Transmission/power line	1	27
Goldfield alternative segment 4	Transmission/power line	1	28
Goldfield alternative segment 4	Transmission/power line	1	29
Goldfield alternative segment 4	Transmission/power line	1	30
Goldfield alternative segment 4	Transmission/power line	1	31
Goldfield alternative segment 4	Telephone line	1	32
Caliente common segment 4	None	None	None
Bonnie Claire alternative segments	None	None	None
Common segment 5	Transmission/power line	1	33
Common segment 5	Transmission/power line	1	34
Oasis Valley alternative segments	None	None	None
Common segment 6	None	None	None

a. Sources: DIRS 181617-Hopkins 2007.

b. Electric distribution lines along major roads might not have been identified. Utilities serving individual residences or businesses are not identified.

c. To convert meters to feet, multiply by 3.2808.

d. Lines listed as “unidentified” are so listed in the Geographic Information System database.

e. Location numbers are shown on Figures 3-51 to 3-57.

Table 3-12. Potential quarry site utility crossings.^a

Potential quarry site	Identified utilities and utility corridors	Number of crossings
CA-8B	Transmission/power line	1
CA-8B	Transmission/power line	1
CA-8B	Transmission/power line	1
ES-7	Water line	1
ES-7	Water line	1
ES-7	Transmission/power line	1

a. Source: DIRS 181617-Hopkins 2007.

3.2.3 AESTHETIC RESOURCES

This section describes the aesthetic (visual) setting in the region of influence along the Caliente rail alignment. Section 3.2.3.1 describes the region of influence for aesthetic resources; Section 3.2.3.2 describes the methods DOE used to classify visual values; and Section 3.2.3.3 describes the environmental setting and characteristics for aesthetic resources along the Caliente rail alignment.

3.2.3.1 Region of Influence

The region of influence for aesthetic resources is the viewshed around all Caliente rail alignment alternative segments, common segments, and proposed locations of rail line construction and operations support facilities.

BLM guidance subdivides landscapes into three *distance zones* based on relative visibility from travel routes or observation points. “Foreground-middleground” zone includes areas less than 5 to 8 kilometers (3 to 5 miles) away. “Background” zone includes areas visible beyond the foreground-middleground zone but usually less than 24 kilometers (15 miles) away. Areas not seen as foreground-middleground or background are in the “seldom-seen” zone (DIRS 101505-BLM 1986, Section IV). To ensure that seldom-seen views were included in this analysis, DOE used a conservative region of influence extending 40 kilometers (25 miles) on either side of the centerline of the Caliente rail alignment.

3.2.3.2 Methodology for Classifying Visual Values

Most of the lands along the Caliente rail alignment are BLM-administered public lands. Therefore, DOE used BLM methodologies for evaluating visual values. The BLM considers visual resources when addressing aesthetic issues during BLM planning. These resources include natural or manmade physical features that give a landscape its character and value as an environmental factor. The BLM uses a visual resource management system to classify the aesthetic value of its lands and to set management objectives (DIRS 173052-BLM 1984, all).

Scenic quality is a measure of the visual appeal of a tract of land. Areas are rated based on key factors including landform, vegetation, water, color, adjacent scenery, scarcity, and cultural modifications (DIRS 101505-BLM 1986, Section II).

Sensitivity levels are a measure of public concern for scenic quality. Areas are ranked high, medium, or low based on types of users, amount of use, public interest, adjacent land uses, and whether they are special areas (DIRS 101505-BLM 1986, Section III).

The BLM classification of visual resource value, the visual resource inventory, involves assessing visual resources and assigning them to one of four visual resource management classes based on three factors: *scenic quality*, visual sensitivity (*sensitivity levels*), and distance from travel or observation points (DIRS 101505-BLM 1986, all). The BLM uses a combination of the ratings of these three factors to assign a visual resource inventory class to a piece of land, ranging from Class I to Class IV, with Class I representing the highest visual values. Each visual resource class is

subsequently associated with a management objective, defining the way the land may be developed or used. Each BLM district assigns visual resource management classes to its lands during the resource management planning process. Table 3-13 lists the BLM management objectives for visual resource classes.

The BLM uses visual resource contrast ratings to assess the visual impacts of proposed projects and activities on the existing landscape (DIRS 173053-BLM 1986, all).

Table 3-13. BLM visual resource management classes and objectives.^a

Visual resource class	Objective	Acceptable changes to land
Class I	Preserve the existing character of the landscape.	Provides for natural ecological changes but does not preclude limited management activity. Changes to the land must be small and must not attract attention.
Class II	Retain the existing character of the landscape.	Management activities may be seen but should not attract the attention of the casual observer. Changes must repeat the basic elements of form, line, color, and texture of the predominant natural features of the characteristic landscape.
Class III	Partially retain the existing character of the landscape.	Management activities may attract attention but may not dominate the view of the casual observer. Changes should repeat the basic elements in the predominant natural features of the characteristic landscape.
Class IV	Provides for management activities that require major modifications of the existing character of the landscape.	Management activities may dominate the view and be the major focus of viewer attention. An attempt should be made to minimize the impact of activities through location, minimal disturbance, and repeating the basic elements.

a. Source: DIRS 101505-BLM 1986, Section V.B.

The Bureau looks at basic elements of design to determine levels of contrast created between a proposed project and the existing viewshed. Depending on the visual resource management objective for a particular location, varying levels of contrast are acceptable.

Contrast ratings are determined from locations called key observation points, which are usually along commonly traveled routes such as highways or frequently used county roads or in communities. To identify key observation points along the Caliente rail alignment, DOE considered the following factors: angle of observation, number of viewers, how long the project would be in view, relative project size, season of use, and light conditions. BLM guidance (DIRS 173053-BLM 1986, Section IIC) recommends that key observation points for linear projects, such as the proposed railroad, include the following:

- Most-critical viewpoints (for example, views from communities at road crossings)
- Typical views encountered in representative landscapes, if not covered by critical viewpoints
- Any special project or landscape features such as river crossings and substations

3.2.3.3 Visual Setting and Characteristics

3.2.3.3.1 General Visual Setting and Characteristics

The Class IV lands in the Caliente rail alignment region of influence consist of landscapes that are generally flat in form and horizontal in line, with gray and brown colors from soil and rock, and texture ranging from flat to slightly rough, depending on whether the broad flat valleys and alluvial fans include any topographic features such as hills, buttes, or eroded stream channels. Vegetation is usually small, low, and rounded in form (for example, grasses, shrubs, and small trees), horizontal in line, brown or gray-green in color, and light-to-medium in texture with irregular spacing. Structures are rare, but could include transmission towers, ranch buildings, or similar structures. Class III lands generally include more

varied forms, lines, colors, and textures, including vertical lines in topography and vegetation, brighter greens in vegetation, visible blues from water, and dense texture from forested lands or rough texture in eroded rock. Class I and II lands are mostly in mountains that include forested areas and open rock exposures, with mixed forms including slopes and ridges; rounded lines; a wide range of rock and soil colors, and vegetation that changes color with the seasons; and variable texture that is often dense in forested areas.

Special areas are lands where measures must be taken to protect visual values. Special areas often include designated natural areas, Wilderness Study Areas, scenic rivers, and scenic roads. Special areas are not necessarily unique or picturesque, but the management objective for a special area is to preserve its natural characteristics (DIRS 101505-BLM 1986, Section III.5).

Sections 3.2.3.3.2.1 through 3.2.3.3.2.12 describe visual resources along and near the Caliente rail alignment alternative segments and common segments. The discussions highlight resources of high visual value, identify current visual resource management classifications, *special areas*, and key observation points.

DOE excerpted visual resource management classifications for lands along the Caliente rail alignment primarily from BLM resource management plans from districts the alignment would cross (DIRS 173224-BLM

1997, all; DIRS 103079-BLM 1998, all; DIRS 174518-BLM 2005, all). The BLM Las Vegas and Ely Districts provided Geographic Information System data from their resource management plans as a source for mapping the visual resource management classes in their districts (DIRS 103079-BLM 1998, Map 2-9; DIRS 174518-BLM 2005, Map 2.4-5). Geographic Information System data used in this analysis from the BLM Ely District corresponds to the preferred alternative in the *Draft - Resource Management Plan/Environmental Impact Statement for the Ely District* (Draft Ely Resource Management Plan; DIRS 174518-BLM 2005, all). DOE used information from this draft resource management plan because BLM Ely District personnel indicated that it would be better to use the most recent visual inventory data (DIRS 174635-Quick 2005, all), even though visual resource management classes will not be confirmed until the Draft Ely Resource Management Plan is finalized.

The Department based visual resource classification boundaries for the BLM Battle Mountain District on the *Tonopah Resource Management Plan and Record of Decision* (DIRS 173224-BLM 1997, pp. 6, 7, and 27, and Map 8), and developed visual resource management classifications for non-BLM lands using BLM methodology (DIRS 173053-BLM 1986, all; DIRS 173052-BLM 1984, all), considering scenic quality ratings reported in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, pp. 3-158 and 3-159) where available. DOE confirmed visual resource management classifications in telephone communications and meetings with BLM personnel responsible for visual resource management for the Las Vegas and Battle Mountain Districts (DIRS 174631-Quick 2005, all; DIRS 174632-Quick 2005, all; DIRS 176988-Quick 2006, all).

Figure 3-58 is a map of visual resource management classifications for lands surrounding the Caliente rail alignment based on the sources identified above. As the figure shows, most of the lands surrounding the alternative segments and common segments are Class IV lands, which are common to the area. However, there are a few locations where the alternative segments and common segments would cross Class II or III lands or be very close to Class I, II, or III lands.

DOE selected 37 key observation points along the Caliente rail alignment to evaluate the visual impacts of constructing and operating the proposed railroad. Figure 3-58 also shows the locations of key observation points. Appendix D, Aesthetics, contains photos taken at each key observation point. Table 3-14 lists visual resource management classes in the viewshed of each key observation point.

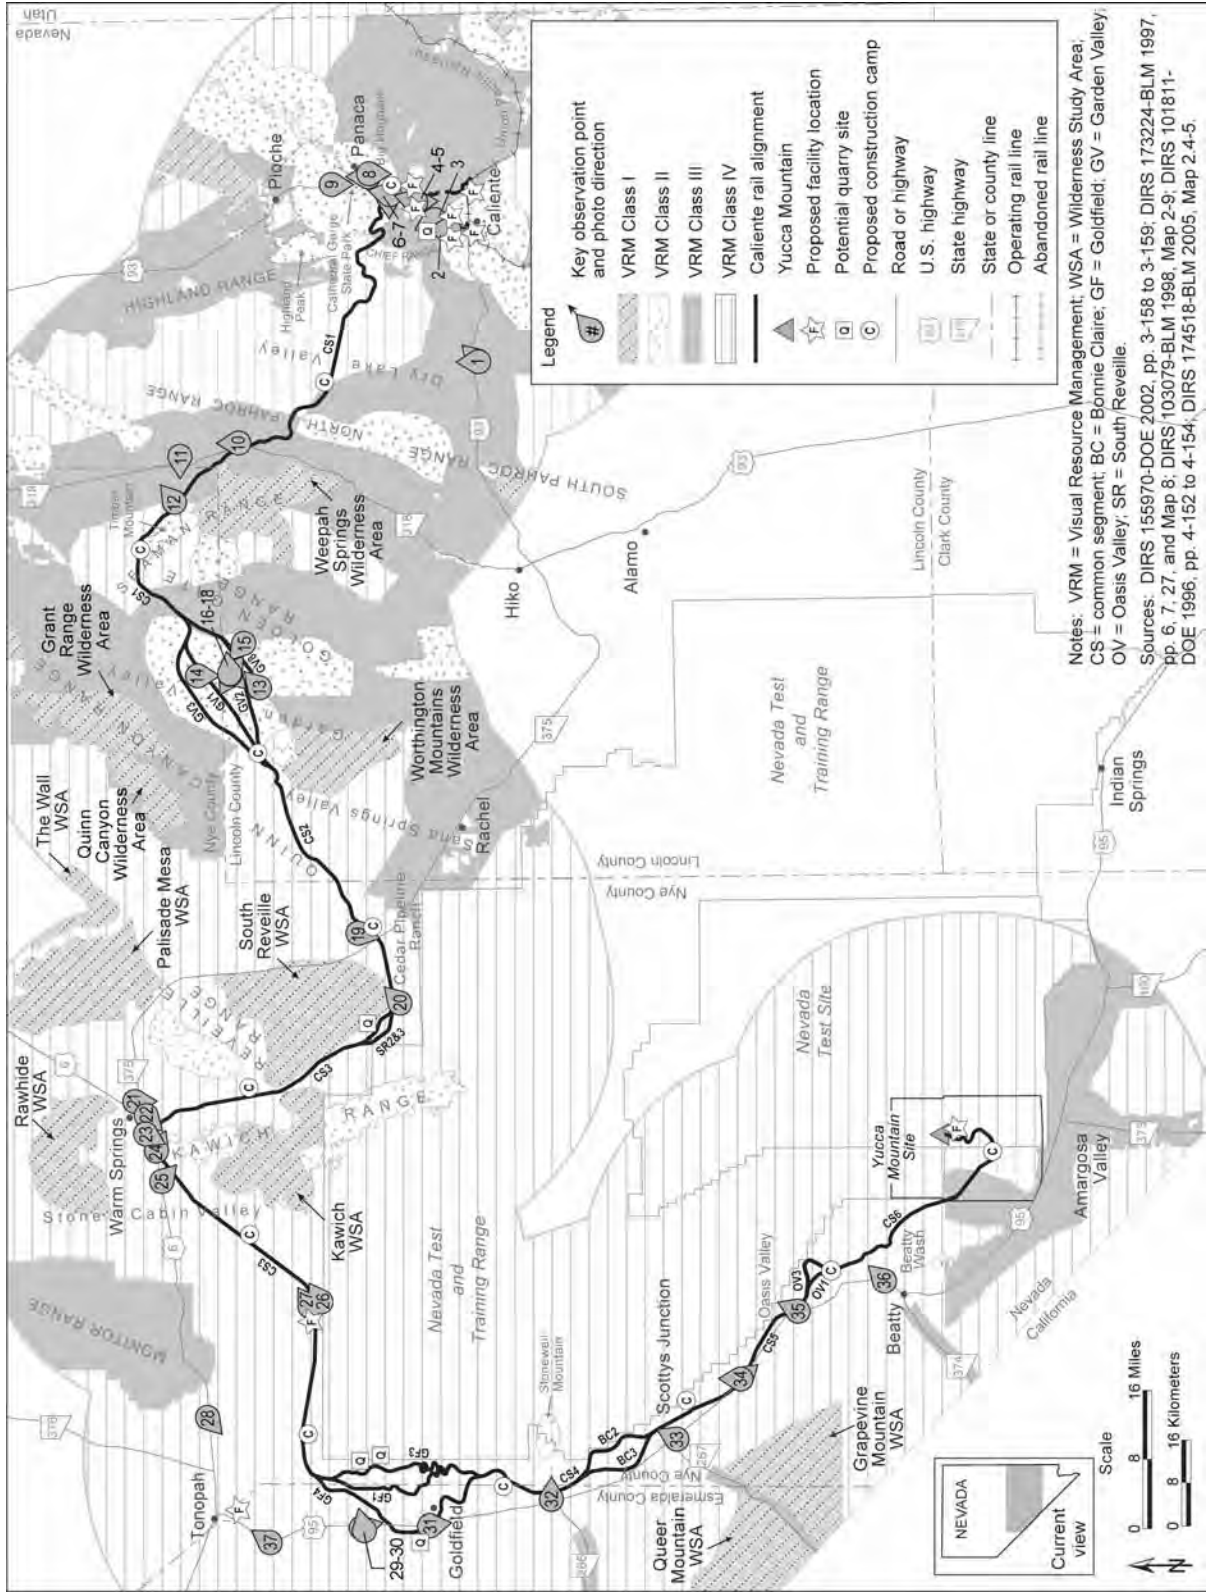


Figure 3-58. Visual resource management classifications and key observation points along the Caliente rail alignment.

Table 3-14. Key observation points and visual resource management classes in the Caliente rail alignment viewshed^a (page 1 of 2).

Key observation point	Location	Visual resource management classes ^b
1	U.S. Highway 93 at Dry Lake Valley	Surrounding lands (III and IV), Highland and Chief Ranges (II and III)
2	Caliente-Indian Cove option for the Staging Yard	Surrounding lands (III)
3	Conveyer that would cross U.S. Highway 93 to feed Staging Yard, Caliente-Indian Cove option	Surrounding lands (II)
4	Conveyor that would cross U.S. Highway 93 to feed Staging Yard, Caliente-Upland option	Surrounding lands (III)
5	Caliente-Upland option for the Staging Yard	Surrounding lands (III)
6	Where rail line would cross U.S. Highway 93	Surrounding lands (III)
7	U.S. Highway 93 north of where rail line would cross	Surrounding lands (III), Big Hogback (II)
8	U.S. Highway 93 at State Route 319	Surrounding lands (III)
9	Miller Point - Cathedral Gorge	Surrounding lands (III), Cathedral Gorge State Park (II)
10	Where rail line would cross State Route 318	Surrounding lands (III), Weepah Springs Wilderness (I)
11	Off county road west of State Route 318 north of where rail line would cross	Surrounding lands (III), Timber Mountain (II), Weepah Springs Wilderness (I)
12	Where rail line would cross Timber Mountain Pass Road	Surrounding lands (III), Timber Mountain (II), Weepah Springs Wilderness (I)
13 and 15	County roads on south side of Garden Valley	Garden Valley (II), Golden Gate Range (III), Quinn Canyon Range (III), Quinn Canyon Wilderness (I), Grant Range Wilderness (I), Worthington Mountains (II), Worthington Mountains Wilderness (I)
14	County road in middle of Garden Valley	Garden Valley (II), Golden Gate Range (III), Quinn Canyon Range (III), Quinn Canyon Wilderness (I), Grant Range Wilderness (I), Worthington Mountains (II), Worthington Mountains Wilderness (I)
16 to 18	Top of <i>City</i> structure elements	Garden Valley (II), Golden Gate Range (III), Quinn Canyon Range (III), Quinn Canyon Wilderness (I), Grant Range Wilderness (I), Worthington Mountains (II), Worthington Mountains Wilderness (I)
19	State Route 375 near where rail line would cross	Surrounding lands (IV)
20	Cedar Pipeline Ranch	Surrounding lands (IV), Kawich Range (II), Reveille Range (II), Quinn Canyon Range (III), South Reveille Wilderness Study Area (I)
21	State Route 375 near U.S. Highway 6	Surrounding lands (IV), Kawich Range (II), Kawich Wilderness Study Area (I)
22	U.S. Highway 6 near State Route 375	Surrounding lands (IV), Kawich Range(II), Kawich Wilderness Study Area (I)
23	U.S. Highway 6 on east side of Warm Springs Summit	Surrounding lands (IV), Kawich Range (II)

Table 3-14. Key observation points and visual resource management classes in the Caliente rail alignment viewshed^a (page 2 of 2).

Key observation point	Location	Visual resource management classes ^b
24	Warm Springs Summit	Surrounding lands (IV), Kawich Range (II)
25	U.S. Highway 6 at a mine access road	Surrounding lands (IV), Kawich Range (II), Kawich Wilderness Study Area (I)
26	Nevada Test and Training Range Road near where rail line would cross	Surrounding lands (IV), Kawich Wilderness Study Area (I)
27	Nevada Test and Training Range Road	Surrounding lands (IV), Kawich Wilderness Study Area (I)
28	U.S. Highway 6 at Test and Training Range Road	Surrounding lands (IV)
29	U.S. Highway 95 north of Goldfield	Surrounding lands (IV)
30	U.S. Highway 95 at north end of Goldfield	Surrounding lands (IV)
31	Where rail line would cross U.S. Highway 95 south of Goldfield	Surrounding lands (IV)
32	U.S. Highway 95 at State Route 266	Surrounding lands (IV), State Route 266 (III), Stonewall Mountain (II)
33	U.S. Highway 95 at State Route 267	Surrounding lands (IV), State Route 267 (III)
34	U.S. Highway 95 (typical cut)	Surrounding lands (IV)
35	U.S. Highway 95 north of Oasis Valley (typical landscape)	Surrounding lands (IV)
36	U.S. Highway 95 and Beatty Wash access road	Surrounding lands (IV)
37	U.S. Highway 95 at proposed Maintenance-of-Way Headquarters Facility	Surrounding lands (IV)

a. Appendix D contains photographs taken from each key observation point.

b. Sources: DIRS 155970-DOE 2002, pp. 3-158 and 3-159; DIRS 173224-BLM 1997, pp. 6, 7, and 27, and Map 8; DIRS 103079-BLM 1998, Map 2-9; DIRS 101811-DOE 1996, pp. 4-152 to 4-154; DIRS 174518-BLM 2005, Map 2.4-5.

Following BLM guidance, DOE selected most key observation points along travel routes or at use or potential use areas, and included critical viewpoints and typical views. DOE also selected multiple points within Garden Valley, along county roads used primarily by a small number of residents, for two reasons: (1) During the scoping period for this Rail Alignment EIS, commenters expressed concern about visual impacts in Garden Valley because of *City*, a large outdoor complex of sculptural and architectural forms on private land, currently under construction; (2) Garden Valley is considered a special recreation management area for visual values under multiple alternatives of the Draft Ely Resource Management Plan (DIRS 174518-BLM 2005, all). Section 3.2.3.3.2 highlights areas of high visual value and other special areas, and identifies key observation points from which DOE analyzed impacts to these areas.

3.2.3.3.2 Specific Visual Settings and Characteristics along Alternative Segments and Common Segments

3.2.3.3.2.1 Alternative Segments at the Interface with the Union Pacific Railroad Mainline.

The Caliente rail alignment would begin in or near the City of Caliente with either the Caliente or the Eccles alternative segment. The Caliente alternative segment would begin in a Class II area around the City of Caliente, while the Eccles alternative segment would begin in a Class III area farther east. Big Hogback, a Class II visual resource, would be visible from either alternative segment but would be more than 4 kilometers (2.5 miles) in the background of views across the alternative segments from the U.S.

Highway 93. The Caliente and Eccles alternative segments would approach within 6.1 kilometers (3.8 miles) of the southern boundary of Cathedral Gorge State Park, a Class II special area.

The Caliente alternative segment would cross or be very near Class III lands for approximately 4 to 5 kilometers (2.5 to 3.1 miles) and would cross approximately 1.1 kilometers (0.7 mile) of Class II lands north of the City of Caliente. The Eccles alternative segment would cross approximately 4 to 5 kilometers of Class III lands and would approach within approximately 400 meters (1,300 feet) of Class II lands for approximately 1 to 2 kilometers (0.6 to 1.2 miles).

Key observation points (indicated in parentheses) for the Caliente and Eccles alternative segments provide a view of where the rail line would cross under U.S. Highway 93 (6); views from the intersection of U.S. Highway 93 and State Route 319 toward Big Hogback and Cathedral Gorge (8); a view from Cathedral Gorge toward the alignment (9); and views of the Caliente-Upland and Caliente-Indian Cove options for the Staging Yard (5 and 2, respectively). In addition, a key observation point (3) provides a view of the place where a conveyor would cross U.S. Highway 93 to the Staging Yard Caliente-Indian Cove option if DOE developed potential quarry CA-8B (see Figure 2-25) as a source of ballast. Another key observation point (4) provides a view of the place where a conveyor would cross U.S. Highway 93 to the south of the Staging Yard Caliente-Upland option.

3.2.3.3.2 Caliente Common Segment 1 (Dry Lake Valley Area). Caliente common segment 1 would cross through the pass between the Highland Range and the Chief Range, through Dry Lake Valley, through the North Pahroc and Seaman Ranges, and on to the Golden Gate Range. Part of the Highland Range is Class II. Much of the Seaman Range falls into the Weepah Springs Wilderness, a Class I area; two areas are Class II, including Timber Mountain; while the north and south ends of the Seaman Range are Class III or IV.

As shown in Figure 3-58, Caliente common segment 1 would cross Class II lands in the area of the Highland and Chief Ranges, and Class IV land in Dry Lake Valley. Caliente common segment 1 would be approximately 2 kilometers (1.2 miles) north of the Class II lands of the Pahroc Range and would cross Class III lands between the Pahroc Range and Timber Mountain. The segment would approach within a few hundred meters of the northeastern point of Weepah Springs Wilderness, but would not cross any Class I land. It would also approach within a few hundred meters of the Class II slopes of Timber Mountain, at the north end of the Seaman Range, but remain in Class III and IV lands. Finally, Caliente common segment 1 would cross Class IV and then Class III lands from Timber Mountain to Garden Valley.

A key observation point on State Route 318 provides a view of the location where the Caliente rail alignment would cross the highway (10). A key observation point on a county road just off State Route 318 provides a view over the rail alignment on the slopes of Timber Mountain (11), while another key observation point provides a view of the rail alignment crossing the county road on those slopes (12). Two key observation points provide views across Dry Lake Valley and toward the Chief and Highland Ranges (1 and 7, respectively).

3.2.3.3.2.3 Garden Valley Alternative Segments. The Garden Valley alternative segments would cross the Golden Gate Range and Garden Valley, and pass between the Worthington Mountains and the Quinn Canyon Range. The Golden Gate Range is a Class III area. The portion of the Quinn Canyon Range that bounds Garden Valley on the northwest is managed by the U.S. Forest Service. The Quinn Canyon Range is generally considered Class III in this evaluation, with the exceptions of the Quinn Canyon and Grant Range Wilderness Areas (approximately 8 kilometers [5 miles] from Garden Valley alternative segment 3 at their closest) which are analyzed as Class I. The Worthington Mountains include the Class I Worthington Mountains Wilderness, and lower slopes that are Class III or Class IV. As shown in Figure 3-58, the valley floor and the hills and lower slopes of ranges around Garden Valley are

considered Class II. The Draft Ely Resource Management Plan proposes Garden Valley as a Class II Special Recreation Management Area for visual values (DIRS 174518-BLM 2005, p. 2.5-111).

City is a complex of abstract sculptural and architectural forms made from earth, rock, and concrete extending over 2.4 kilometers (1.5 miles) on private land in Garden Valley. The largest feature to date is approximately 21 to 24 meters (70 to 80 feet) high and 0.4 kilometer (0.25 mile) long. *City* is designed in five phases and could be completed by 2010 supported by private funding.

Several key observation points (13 to 18) both inside and outside the sculpture provide views across one or more of the Garden Valley alternative segments. The DOE selection of key observation points within the sculpture area and along lightly traveled county roads is more conservative than standard BLM methodology for areas of low visual sensitivity, which calls for viewpoints at locations where a significant number of viewers are expected. There are no public roads within the sculpture area, and views from key observation points on county roads outside the sculpture area do not include the sculpture. DOE selected the additional key observation points to better inform decisionmakers about managing for the visual values in the Class II lands and Special Recreation Management Area, and to provide data to address concerns about visual impacts in Garden Valley raised in public comments offered during the scoping period for this Rail Alignment EIS.

3.2.3.3.2.4 Caliente Common Segment 2 (Quinn Canyon Range Area). Caliente common segment 2 would run to the north of the Worthington Mountains, pass within 8.4 kilometers (5.2 miles) of the Class I Worthington Mountains Wilderness and travel through the Class IV land in the south end of the Quinn Canyon Range. The segment would continue through Class IV land but would come within 6.6 kilometers (4.1 miles) of the Class II slopes of the southern end of the Reveille Range, and 9.2 kilometers (5.7 miles) of the Class I South Reveille Wilderness Study Area. A key observation point provides views from State Route 375 across common segment 2 near the highway crossing and a proposed construction camp (19).

3.2.3.3.2.5 South Reveille Alternative Segments. The South Reveille alternative segments would begin near Cedar Pipeline Ranch, between the Reveille and Kawich Ranges, and extend northwest through Class IV lands. The Reveille Range is a Class II area and includes the Class I South Reveille Wilderness Study Area. The more northerly South Reveille alternative segment 2 would approach within about 5 kilometers (3.1 miles) of the Wilderness Study Area and come within 1.3 kilometers (0.8 mile) of the Class II land at the base of the range, while South Reveille alternative segment 3 would pass farther south from these areas. The Kawich Range is Class II in the area of these alternative segments, although the range would be more than 10 kilometers (6.2 miles) away at its closest point. Key observation point 20 is near Cedar Pipeline Ranch.

3.2.3.3.2.6 Caliente Common Segment 3 (Stone Cabin Valley Area). Caliente common segment 3 would extend north up Reveille Valley and pass through the Kawich Range at Warm Springs summit. It would then proceed through Stone Cabin Valley and around the Nevada Test and Training Range to the Goldfield area. As previously mentioned, the Kawich Range is a Class II area. Caliente common segment 3 would be at least 5 kilometers (3 miles) away from the Class II portions of the Kawich Range as it crossed the Class IV portion of the valley, except near Warm Springs summit, where it would approach within 1 or 2 kilometers (0.6 to 1.2 miles) of the Class II area. The Kawich Range also contains the Class I Kawich Wilderness Study Area to the west of common segment 3. The segment would be within approximately 0.5 kilometer (0.31 mile) of the Wilderness Study Area boundary for approximately 2 kilometers in the Class IV land between the Reveille and Kawich Ranges. This portion of the common segment would also come within approximately 7.9 kilometers (4.9 miles) of the southern edge of the Rawhide Mountains Wilderness Study Area, which is north of Warm Springs. As common segment 3 passed Warm Springs summit and headed southwest and then west along the boundary of the

Nevada Test and Training Range, it would cross Class IV lands exclusively. Key observation points provide views from State Route 375 and U.S. Highway 6 across Caliente common segment 3 (21 through 23) on the east side of Warm Springs summit, views at Warm Springs summit and approaching it from the west (24 and 25), and views across common segment 3 from U.S. Highway 6 (28) and from the road leading into the Nevada Test and Training Range (26 and 27).

3.2.3.3.2.7 Goldfield Alternative Segments. The Goldfield alternative segments would pass through the Class IV hills northwest of Stonewall Mountain, which is a Class II area. Key observation points include a view across all three Goldfield alternative segments toward potential quarry NS-3A (29), a view across Goldfield alternative segment 4 from north Goldfield (30), a view of the place Goldfield alternative segment 4 would cross U.S. Highway 95 at the south end of Goldfield (31), and a view of the proposed Maintenance-of-Way Headquarters Facility from U.S. Highway 95 (37).

3.2.3.3.2.8 Caliente Common Segment 4 (Stonewall Flat Area). Caliente common segment 4 would begin south of Goldfield and proceed past Stonewall Mountain and beyond the intersection of U.S. Highway 95 and State Route 266. Caliente common segment 4 would be in Class IV land and would never pass closer than 6.9 kilometers (4.3 miles) of the Class II Stonewall Mountain area. The BLM manages State Route 266 west of U.S. Highway 95 as a Class III area. Lida Junction, the intersection of U.S. Highway 95 and State Route 266, is a key observation point for the view toward Stonewall Mountain (32).

3.2.3.3.2.9 Bonnie Claire Alternative Segments. The Bonnie Claire alternative segments would cross Class IV lands to the southwest of the Nevada Test and Training Range and past Scottys Junction at the intersection of U.S. Highway 95 and State Route 267, which the BLM manages as a Class III area west of U.S. Highway 95. A key observation point at Scottys Junction provides a view northeast toward the alternative segments (33).

3.2.3.3.2.10 Common Segment 5 (Sarcobatus Flat Area). Common segment 5 would cross Class IV land between the Bonnie Claire area and the Oasis Valley area. There are no visual resources of concern along this common segment and, therefore, no key observation points.

3.2.3.3.2.11 Oasis Valley Alternative Segments. The Oasis Valley alternative segments would cross Class IV areas through Oasis Valley. Key observation point (35) is north of Springdale, looking east over the Oasis Valley, showing a typical landscape. Key observation point (34) provides a view of a typical *cut*.

3.2.3.3.2.12 Common Segment 6 (Yucca Mountain Approach). Common segment 6 would pass from the Oasis Valley area, near Beatty and across Beatty Wash, through the Nevada Test Site to the Yucca Mountain Site. State Route 374, entering Beatty, is a Class III area. Common segment 6 would cross approximately 10 kilometers (6.2 miles) of Class III lands before it entered the Nevada Test Site, but the segment would be more than 15 kilometers (9.3 miles) from U.S. Highway 95 in this area. Land on the Nevada Test Site is not under BLM jurisdiction. Land on the Nevada Test Site that is visible from U.S. Highway 95 and that the rail line would cross is considered Class IV in this evaluation. Key observation point (36) is north of Beatty, with views from U.S. Highway 95 over the Class IV lands surrounding the access road to Beatty Wash. The viewshed within the wash is considered a contributing element to cultural resources within the wash that are important to American Indians (DIRS 174205-Kane et al. 2005, p. 17). Beatty Wash and the rail line through it would not be visible from the highway. Therefore, DOE did not select key observation points in this area.

3.2.4 AIR QUALITY AND CLIMATE

This section describes the present air quality and climate characteristics along the Caliente rail alignment and summarizes information from *ambient air* monitoring and meteorological data collection in the region. Section 3.2.4.1 describes the region of influence for air quality and climate, Section 3.2.4.2 describes general air quality characteristics in the Caliente rail alignment region of influence, and Section 3.2.4.3 describes the climate characteristics in the Caliente rail alignment region of influence.

3.2.4.1 Region of Influence

The region of influence for air quality and climate along the Caliente rail alignment is the air basins in Lincoln, Nye, and Esmeralda Counties. Historic data on pollutant emissions inventories and compliance status for the State of Nevada are calculated at the county level, and these data provide a basis for determining existing air quality in the region of influence for use in analyzing potential impacts to air quality (see Section 4.2.4).

However, air-emissions fixed-point sources such as quarries and linear sources such as operating railroads can subject certain locations (for example, population centers) to higher localized levels of pollutants than a regional analysis would suggest. Therefore, DOE also selected more focused study locations within the region of influence in which to model air quality impacts on specific receptors. These locations are the two largest population centers near the Caliente rail alignment (the City of Caliente in Lincoln County and Goldfield in Esmeralda County), and potential quarry sites northwest of the City of Caliente (CA-8B) and in South Reveille Valley (NN-9B).

3.2.4.2 Existing Air Quality

Air quality is determined by measuring concentrations of certain pollutants in the atmosphere. The U.S. Environmental Protection Agency designates an area as being *in attainment* for a particular pollutant if ambient concentrations of that pollutant are below the National *Ambient Air Quality Standards*. The pollutants regulated under the State of Nevada and National Ambient Air Quality Standards are *ozone, carbon monoxide, nitrogen dioxide, sulfur dioxide, particulate matter* with an aerodynamic diameter less than or equal to 10 micrometers (PM_{10}) and particulate matter with an aerodynamic diameter less than or equal to 2.5 micrometers ($PM_{2.5}$), and lead. Collectively, these pollutants are referred to as *criteria air pollutants*. Table 3-15 lists the National Ambient Air Quality Standards for both the primary public health standard and the secondary public welfare standards in comparison to State of Nevada Ambient Air Quality Standards.

Areas in violation of one or more of these standards are classified as *nonattainment areas*. If there is not enough air quality data to determine the status of a remote or sparsely populated area, then the U.S. Environmental Protection Agency lists the area as unclassifiable. However, for regulatory purposes, unclassifiable areas are considered to be in attainment. All portions of the Caliente rail alignment would be within areas classified as in attainment for all National Ambient Air Quality Standards.

The most comprehensive source of representative data on ambient concentrations of gas-phase air pollutants for the region of influence is a special study at Yucca Mountain covering a 4-year period from October 1991 to September 1995 (DIRS 102877-CRWMS M&O 1999, all). The limited amount of air quality data reflects choices made by national and state agencies to focus monitoring resources either on population centers or pristine areas such as national parks. Additional data on particulate matter are available based on monitoring at three sites in the vicinity of Yucca Mountain from 1989 to 1997 (DIRS 102877-CRWMS M&O 1999, all; DIRS 102876-CRWMS M&O 1997, all; DIRS 147777-SAIC 1992, all; DIRS 147780-SAIC 1992, all), from three sites from 1998 to 2001 (DIRS 173738-DOE

Table 3-15. State of Nevada and National Ambient Air Quality Standards^a (page 1 of 2).

Pollutant ^b	Average time ^c	Nevada standards concentration ^b	National primary standards ^b	National secondary standards ^b	Notes regarding the air quality standard
Ozone	1 hour	0.12 ppm (235 µg/m ³)	None	Same as primary	The expected number of days per calendar year with a maximum hourly average concentration above the standard is less than or equal to 1.
	8 hour	None	0.08 ppm (195 µg/m ³)	Same as primary	The 3-year average of annual fourth-highest daily maximum.
Ozone, Lake Tahoe Basin	1 hour	0.10 ppm (195 µg/m ³)	None	None	The expected number of days per calendar year with a maximum hourly average concentration above the standard is less than or equal to 1.
Carbon monoxide	8 hours	9 ppm (10,500 µg/m ³) for elevations less than 1,500 meters ^d above mean sea level	9 ppm (10,500 µg/m ³) at any elevation	None	Not to be exceeded more than once per year.
		6 ppm (7,000 µg/m ³) for elevations greater than 1,500 meters above mean sea level			
Carbon monoxide (at any elevation)	1 hour	35 ppm (40,500 µg/m ³)	35 ppm (40,500 µg/m ³)		
Nitrogen dioxide	Annual arithmetic mean	0.053 ppm (100 µg/m ³)	0.053 ppm (100 µg/m ³)	Same as primary	Not to be exceeded.
Sulfur dioxide	Annual arithmetic mean	0.03 ppm (80 µg/m ³)	0.03 ppm (80 µg/m ³)	None	Not to be exceeded.
	24 hours	0.14 ppm (365 µg/m ³)	0.14 ppm (365 µg/m ³)		Not to be exceeded more than once per year.
	3 hours	0.5 ppm (1,300 µg/m ³)	None	0.5 ppm (1,300 µg/m ³)	
Particulate matter as PM	Annual arithmetic mean	50 µg/m ³	Revoked ^e	Revoked ^e	The 3-year average of the weighted annual mean concentration at each monitor within an area.
	24 hours	150 µg/m ³	150 µg/m ³		Not to be exceeded more than once per year. ^f

Table 3-15. State of Nevada and National Ambient Air Quality Standards^a (page 2 of 2).

Pollutant ^b	Average time ^c	Nevada standards concentration ^b	National primary standards ^b	National secondary standards ^b	Notes regarding the air quality standard
Particulate matter as PM _{2.5}	Annual arithmetic mean	None	15 µg/m ³	Same as primary	The 3-year average of the weighted annual mean concentration from single or multiple community-oriented monitors.
	24 hours	35 µg/m ³	35 µg/m ³		The 3-year average of the 98th percentile of 24-hour concentrations at each population-oriented monitor within an area. ^g
Lead ^h	Quarterly arithmetic mean	1.5 µg/m ³	1.5 µg/m ³	Same as primary	Not to be exceeded.
Hydrogen sulfide ^h	1 hour	0.08 ppm (112 µg/m ³)	None	None	Not to be exceeded.

- a. Sources: Nevada Administrative Code Section 445B.22097 and 40 CFR 50.4 through 50.11.
- b. PM₁₀ = particulate matter with an aerodynamic diameter less than or equal to 10 micrometers; PM_{2.5} = particulate matter with an aerodynamic diameter less than or equal to 2.5 micrometers; ppm = parts per million; µg/m³ = micrograms per cubic meter.
- c. Time over which pollutant is measured.
- d. To convert meters to feet, multiply by 3.2808.
- e. The U.S. Environmental Protection Agency revoked the annual PM₁₀ standard effective December 18, 2006 (71 FR 60853, October 17, 2006).
- f. The 24-hour state standard is attained when the expected number of days per calendar year with a 24-hour average concentration above the standard is equal to or less than 1. The expected number of days per calendar year is based on an average of the number of exceedances per year for the last 3 years.
- g. The 24-hour state standard is attained when the second highest of a 3-year rolling average of the 24-hour concentration at each monitor is less than the standard.
- h. The proposed railroad would not emit lead or hydrogen sulfide; they are included here for completeness.

2002, p. 42), and from two sites from 2002 through 2005 (DIRS 168842-DOE 2003, p. 42; DIRS 173740-DOE 2004, p. 36; DIRS 176801-Wills 2005, p. 38; DIRS 179948-DOE 2006, p. 40). While these data sets pertain to locations more than 160 kilometers (100 miles) from the easternmost part of the Caliente rail alignment, DOE believes they are representative of the ambient air quality along most of the Caliente rail alignment, because neither area has large emission sources or metropolitan areas that would otherwise affect air quality. However, local natural sources of particulate matter, such as barren land or dry lake beds, could generate higher localized concentrations of particulate matter.

In the vicinity of the eastern portion of the Caliente rail alignment, the closest location for which there are recorded air quality data is Mesquite, Nevada, at which ozone and particulate matter measurements are taken. However, because Mesquite is outside the air quality and climate region of influence (Mesquite is in Clark County) and is more than 100 kilometers (65 miles) from its closest point to the Caliente rail alignment, and because there has been substantial construction activity and population growth in Mesquite in recent years, Mesquite’s air quality is not representative of the area of the Caliente rail alignment.

In the vicinity of the western portion of the Caliente rail alignment, the closest location (other than the Yucca Mountain Site) for which there are recent air quality data is Pahrump, Nevada. However, Pahrump, which is in the extreme southern tip of Nye County, is 65 kilometers (40 miles) southeast of the rail alignment, and only monitors particulate matter. In recent years there have been exceedances of the National Ambient Air Quality Standards for particulate matter in Pahrump because there has been substantial construction activity and population growth in the Pahrump Valley. In September 2003,

Pahrump entered into a Memorandum of Understanding (DIRS 178128-Nevada Division of Environmental Protection 2003, p. 5) with the U.S. Environmental Protection Agency, the State of Nevada, and Nye County to develop an air quality improvement plan, with quantified emission-reduction measures so that the emission reduction strategies will be adequate to ensure the area stays in attainment of the particulate matter standards and with the objective that the area would be in attainment by 2009. Pahrump has a background monitoring site intended to represent natural background concentrations of the northern Mojave Desert; however, some disturbed land in the vicinity of the monitor makes the site only representative of the local background in the Pahrump Valley. Because of Pahrump's distance from the Caliente rail alignment and heavy construction activity and population growth, its air quality is not representative of the area of the Caliente rail alignment.

The DOE Environmental Safety and Health Department began air quality monitoring in the Yucca Mountain vicinity in 1989. Figure 3-59 shows station locations. The air quality network originally consisted of Sites YMP1 and YMP5; DOE added sites YMP6 and YMP9 in 1992.

DOE designed the air quality and meteorological monitoring program to comply with the U.S. Environmental Protection Agency's *On-Site Meteorological Program Guidance for Regulatory Modeling Applications* (DIRS 101822-EPA 1987, all) and *Ambient Monitoring Guidelines for Prevention of Significant Deterioration (PSD)* (DIRS 108989-EPA 1987, all), and with U.S. Nuclear Regulatory Commission meteorological monitoring guidance (ANSI/ANS-2.5-1984, *Standard for Determining Meteorological Information at Nuclear Power Sites* and Regulatory Guide 1.23, Rev. 0, *Onsite Meteorological Programs*).

DOE monitored the criteria gaseous pollutants of carbon monoxide, nitrogen dioxide, ozone, and sulfur dioxide at YMP1 from October 1991 through September 1995. DOE also monitored the concentration of PM₁₀ at YMP1; the ambient air quality monitoring program included sampling of PM₁₀ every sixth day, based on the U.S. Environmental Protection Agency's representative schedule of sampling.

YMP5, the second site measuring PM₁₀, represented background conditions away from site activities at Yucca Mountain. Measurements at YMP5 began in April 1989 and continued until 2002.

In October 1992, DOE added two sites to measure PM₁₀:

- YMP6, along the western border of the Nevada Test Site where the Test Site meets the U.S. Air Force land in upper Yucca Wash, measured particulate matter that might be transported from Midway Valley toward the northwest through Yucca Wash (discontinued September 1999).
- YMP9, at Gate 510 on the southern border of the Nevada Test Site, north of Amargosa Valley.

Tables 3-16 and 3-17 summarize the results of the particulate-matter air quality monitoring programs. More information on the results of the sampling program is available in *Environmental Baseline File for Meteorology and Air Quality* (DIRS 102877-CRWMS M&O 1999, all); *Meteorological Monitoring Program Particulate Matter Ambient Air Quality Monitoring Report January through December 1996* (DIRS 102876-CRWMS M&O 1997, all); *Particulate Matter Ambient Air Quality Data Report for 1989 and 1990* (DIRS 147777-SAIC 1992, all); and *Particulate Matter Ambient Air Quality Data Report for 1991* (DIRS 147780-SAIC 1992, all).

Between 1989 and 1997, the highest 24-hour PM₁₀ measurement was 67 micrograms per cubic meter. This measurement, made at Site YMP5 in 1995, is approximately 45 percent of the regulatory standard of 150 micrograms per cubic meter (40 CFR 50.4 through 50.11).

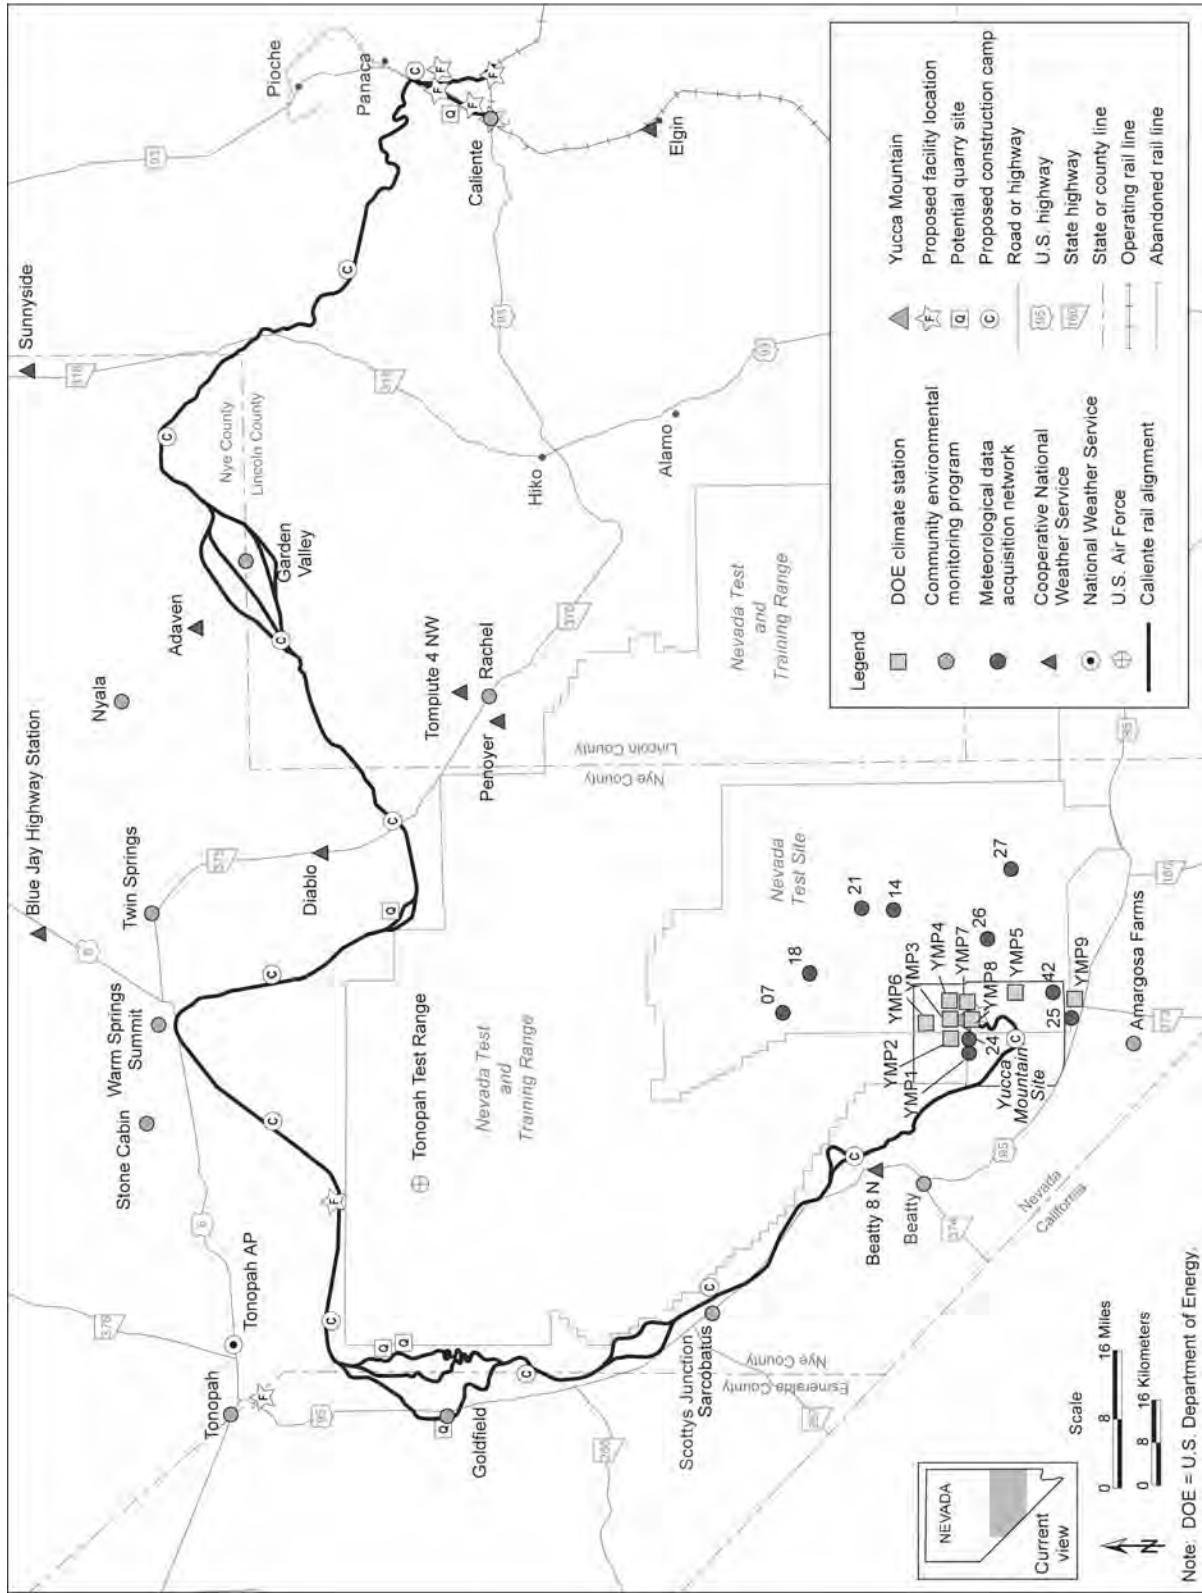


Figure 3-59. Air quality and climate stations along the Caliente rail alignment.

Table 3-16. Summary of PM₁₀ concentrations at sites in the vicinity of Yucca Mountain (1989 to 1997).^{a,b,c}

Sampler ^d	Averaging time	1989	1990	1991	1992	1993	1994	1995	1996	1997	High
Site YMP1	24-hour highest	41	62	33	30	30	39	21	60	31	62
	Second highest	27	49	25	24	22	26	20	23	21	49
	Annual average	12	12	10	12	10	10	10	10	9	12
Site YMP5	24-hour highest	40	51	45	49	21	42	67	57	26	67
	Second highest	38	43	33	27	20	23	21	35	19	43
	Annual average	13	10	10	12	9	9	10	10	9	13
Site YMP6	24-hour highest	NA	NA	NA	NA	21	25	14	32	59	59
	Second highest	NA	NA	NA	NA	21	20	13	21	18	21
	Annual average	NA	NA	NA	NA	9	7	7	9	8	9
Site YMP9	24-hour highest	NA	NA	NA	31	21	39	15	57	29	57
	Second highest	NA	NA	NA	31	21	19	14	28	19	31
	Annual average	NA	NA	NA	NA	9	8	7	10	8	10

a. Sources: DIRS 102877-CRWMS M&O 1999, p. 13; DIRS 102876-CRWMS M&O 1997, p. 13; DIRS 147777-SAIC 1992, p. 13; DIRS 147780-SAIC 1992, p. 13.

b. Concentrations are shown in micrograms per standard cubic meter ($\mu\text{g}/\text{m}^3$).

c. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; NA = samples were not taken during the corresponding monitoring period.

d. YMP = Yucca Mountain Project.

The second-highest value at any monitoring site, which is the basis for a violation of the ambient air quality standard, was 49 micrograms per cubic meter at Site YMP1 in 1990, which is 33 percent of the PM₁₀ standard.

The annual averages were between 6 and 13 micrograms per cubic meter (Site YMP9 [1998] and Site YMP5 [1989], respectively), which is less than 30 percent of the historical annual standard (50 micrograms per cubic meter).

Table 3-17 lists the annual highest and second-highest 24-hour concentrations, and the annual average PM₁₀ concentration for the period 1998 to 2005 for YMP1, YMP5, and YMP9, and shows the measured levels of ambient particulate matter were well below the Nevada particulate-matter standards. Table 3-18 lists Site YMP1 results for monitoring of gaseous criteria pollutants (carbon monoxide, nitrogen dioxide, ozone, and sulfur dioxide) for each year of the 4-year monitoring period (1991 to 1995); for comparison, the National Ambient Air Quality Standards are also shown.

Ambient concentrations of carbon monoxide and sulfur dioxide were below the threshold of reliable detection of the instrument. Nitrogen dioxide occasionally registered values of a few hundredths of parts per million by volume, typically associated with nearby vehicle activity. The number of hours per operating quarter with measurements above the threshold was between 1 and 161, which occurred from October through December 1993. The results listed in Table 3-18 are expressed in the units of the applicable standard (for example, annual average of nitrogen dioxide), and the listed values are based on the threshold of reliable detection for that instrument.

Table 3-17. Summary of PM₁₀ concentrations at sites in the vicinity of Yucca Mountain (1998 to 2005).^{a,b,c}

Sampler	Averaging time	1998	1999	2000	2001	2002	2003	2004	2005	High
Site YMP1	24-hour highest	30	18	38	23	52	33	24	32	52
	Second highest	17	34	34	19	37	17	19	29	37
	Annual average	8	8	11	8	10	8	8	9	11
Site YMP5	24-hour highest	26	24	45	27	NA	NA	NA	NA	45
	Second highest	18	21	39	25	NA	NA	NA	NA	39
	Annual average	7	8	12	10	NA	NA	NA	NA	12
Site YMP9	24-hour highest	22	18	36	22	43	39	27	26	43
	Second highest	20	17	33	19	39	38	21	26	39
	Annual average	6	8	11	9	10	11	9	9	11

a. Sources: DIRS 173738-DOE 2002, p. 42; DIRS 168842-DOE 2003, p. 44; DIRS 173740-DOE 2004, p. 36; DIRS 176996-DOE 2005, p. 38; DIRS 179948-DOE 2006, p. 40.

b. Concentrations are shown in micrograms per standard cubic meter (µg/m³).

c. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; NA = samples were not taken during the corresponding monitoring period.

Table 3-18. Site YMP1 maximum observed ambient gaseous air quality concentration in comparison to the Nevada Standards for Air Quality and the National Ambient Air Quality Standards (in parts per million by volume).^a

Pollutant	Nevada and NAAQS ^b	Year 1 (10/91 to 9/92)	Year 2 (10/92 to 9/93)	Year 3 (10/93 to 9/94)	Year 4 (10/94 to 9/95)
Carbon monoxide	35 (1 hour)	0.2	0.2	0.2	0.2
	9 ^c (8 hour)	0.2	0.2	0.2	0.2
Nitrogen dioxide	0.053 (annual)	0.0020	0.0020	0.0021	0.0021
Ozone ^d (for Nevada ambient air quality only)	0.12 (1 hour)	0.096 (1 hour)	0.093 (1 hour)	0.081 (1 hour)	0.083 (1 hour)
	0.08 (8 hour)				
Sulfur dioxide	0.5 (3 hour)	0.002	0.002	0.002	0.002
	0.14 (24 hour)	0.002	0.002	0.002	0.002
	0.03 (annual)	0.002	0.002	0.002	0.002

a. Source: DIRS 102877-CRWMS M&O 1999, p. 14; 40 CFR 50.4 through 50.11.

b. NAAQS = National Ambient Air Quality Standards.

c. Nevada Standards for Air Quality: less than 5,000 feet above mean sea level.

d. The 1-hour ozone standard of 0.12 parts per million, in place during the listed years, was phased out in 2005 and replaced with an 8-hour ozone standard of 0.08 parts per million.

DOE believes these measurements of particulate matter, carbon monoxide, nitrogen dioxide, and sulfur dioxide are representative of the air quality along the Caliente rail alignment because the region of influence has no large emission sources or metropolitan areas that would otherwise affect its air quality. However, in areas close to barren land or dry lake beds, there could be higher particulate-matter concentrations.

Ozone was the only gaseous criteria pollutant to routinely register ambient levels above the instrument threshold. Ozone levels never exceeded the regulatory limit for the 1-hour average standard (0.12 parts

per million by volume). The highest 1-hour average was 0.096 parts per million. Note that the 1-hour average standard was withdrawn in 2005, and has now been replaced with an 8-hour average standard (0.08 parts per million). Ozone is formed in the atmosphere under the presence of sunlight, **nitrogen oxides**, and **volatile organic compounds**. Ozone typically has the highest concentrations during warm weather because strong sunlight and high temperatures are more conducive to higher ambient concentrations. Approximately 90 percent of the warm-season hours had concentrations between 0.020 and 0.060 parts per million; only 44 hours had concentrations in excess of 0.080 parts per million.

Available data for Death Valley National Park (for 1995 to 2004), 50 kilometers (31 miles) west of the westernmost portion of the Caliente rail alignment, reported a highest 1-hour average ozone concentration of 0.095 parts per million (DIRS 176115-EPA 2005, all), which is similar to the ozone values measured at Yucca Mountain. Ozone concentrations along more eastern parts of the Caliente rail alignment are anticipated to be even lower because of their greater distance from emission sources.

No ambient monitoring data were available for lead. However, DOE expects concentrations of lead to be far below the regulatory standard because there are no industrial sources in the region of influence (or near enough to transport this **contaminant** into the region of influence), and lead-based gasoline, previously the principal source of lead in the air, has been phased out.

No ambient monitoring data were available for PM_{2.5}; however, because PM_{2.5} is a subset of PM₁₀, PM_{2.5} can be estimated from measurements of ambient PM₁₀. In the region of influence, nearly all PM₁₀ would be generated from the resuspension of surface-level soil and mineral materials. A U.S. Department of Agriculture study on wind erosion in the western United States found that over all soils, the fraction of PM₁₀ as PM_{2.5} was about 15 percent, ranging from 10 to 30 percent (DIRS 173838-Hagen 2001, p. 1). To be conservative, DOE applied the upper end of this range (30 percent) to the ambient PM₁₀ data collected at Yucca Mountain (Sites YMP1, YMP5, and YMP9) over the past 8 years (1998 through 2005), and the resulting data indicated the highest expected 24-hour concentration of PM_{2.5} would be 16 micrograms per cubic meter, and the highest expected annual average concentration would be 4 micrograms per cubic meter. These figures are 46 and 26 percent of the standards for PM_{2.5}. Table 3-19 summarizes these results and indicates that PM_{2.5} would be well below the National Ambient Air Quality Standards at all locations along the Caliente rail alignment.

3.2.4.3 Climate

The Caliente rail alignment would cross **desert** and **semi-desert** areas that generally have abundant hours of cloud-free days, low annual precipitation, and large daily ranges in temperature.

To characterize the existing climate, DOE collected meteorological data from 41 meteorological monitoring stations within the Caliente rail alignment region of influence (see Figure 3-59 and Table 3-19).

The following four groups operated these stations:

- National Oceanic and Atmospheric Administration
- Community Environmental Monitoring Program
- DOE Environment, Safety and Health Programs Department Network
- U.S. Air Force

The Meteorological Data Acquisition Network is a network of meteorological stations operated by the National Oceanic and Atmospheric Administration, Air Resources Laboratory/Special Operations and Research Division.

Table 3-19. Maximum observed ambient air quality concentrations at sites in the vicinity of Yucca Mountain (1998 to 2005) compared to the National Ambient Air Quality Standards for particulate matter.^{a,b,c}

Sampler	Nevada and NAAQS ^d	1998	1999	2000	2001	2002	2003	2004	2005	High
PM ₁₀	24 hour: 150	30	24	45	27	52	39	27	32	52
	Annual: 50 ^e	8	8	12	10	10	11	9	9	12
Estimated ^f PM _{2.5}	24 hour: 35	9	7	14	8	16	12	8	10	16
	Annual: 15	2	2	4	3	3	3	3	3	4

- a. Sources: DIRS 173738-DOE 2002, p. 42; DIRS 168842-DOE 2003, p. 44; DIRS 173740-DOE 2004, p. 36; DIRS 176996-DOE 2005, p. 38; DIRS 179948-DOE 2006, p. 40; and 40 CFR 50.4 through 50.11.
- b. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; PM_{2.5} = particulate matter with an aerodynamic diameter equal to or less than 2.5 micrometers.
- c. Concentrations are shown in micrograms per standard cubic meter.
- d. NAAQS = National Ambient Air Quality Standards.
- e. The U.S. Environmental Protection Agency revoked the annual PM₁₀ standard effective December 18, 2006. (71 Federal FR 60853, October 17, 2006).
- f. Estimated based on upper-end range of PM₁₀ data assuming 30 percent of PM₁₀ is PM_{2.5} (DIRS 173838-Hagen 2001, p. 1).

The Community Environmental Monitoring Program is a joint effort between the DOE Nevada Operations Office, the University of Nevada Desert Research Institute, and the Community College System of Nevada, and is a network of monitoring stations in communities surrounding the Nevada Test Site that check the *environment* for *radioactivity* and check a variety of meteorological parameters. The U.S. Air Force has historically operated a meteorological station from time to time on the Nevada Test and Training Range at the Tonopah Test Range and archives this data with the Air Force Combat Climatology Center.

DOE acquired data not directly available through these programs through the Western Regional Climate Center (DIRS 165987-WRCC 2002, all), which maintains historical climate databases for most of the climate and operational National and Military Weather Service stations throughout the western United States, including a network of stations that collect daily climate observations.

Table 3-20 lists the station operators and their respective elevations in the Caliente rail alignment air quality and climate region of influence. All stations collected temperature and precipitation data, and Table 3-20 also identifies those stations that collected wind speed and direction data. The range of elevations over which weather data were collected is approximately the same as the elevation range of the Caliente rail alignment – from 746 meters (2,450 feet) at the Amargosa Farms Station to 2,293 meters (7,520 feet) at the Warm Springs Summit Station.

The Caliente rail alignment would cross a variety of topographic features, ranging from mountain passes to sage-covered deserts. Alignment elevations range from 1,341 meters (4,400 feet) near the City of Caliente in Lincoln County to 2,293 meters (7,520 feet) at the Warm Springs Mountain Summit in Nye County and back down to 1,080 meters (3,540 feet) near the end of the Caliente rail alignment at Yucca Mountain. These elevation changes drive a wide variation in temperature and precipitation.

From east to west, the Caliente rail alignment would lie within and be exposed to the climatic conditions of the Nevada counties of Lincoln, Nye, and Esmeralda, as described in Sections 3.2.4.3.1 through 3.2.4.3.3.

3.2.4.3.1 Lincoln County

In Lincoln County, the Caliente rail alignment would cross two mountain ranges and cross the Dry Lake Valley, representing an elevation range of approximately 1,200 to 2,000 meters (3,900 to 6,600 feet),

Table 3-20. Meteorological stations in the Caliente rail alignment air quality and climate region of influence^{a,b} (page 1 of 2).

Station name	Elevation (in meters) ^c	Operator	Wind data
Pioche	1,883	CEMP	Yes
Caliente	1,341	CEMP	Yes
Elgin	1,042	WRCC	NA
Sunnyside	1,615	WRCC	NA
Garden Valley	1,614	CEMP	Yes
Adaven	1,905	WRCC	NA
Tempiute 4 Northwest	1,490	WRCC	NA
Rachael	1,448	CEMP	Yes
Nyala	1,484	CEMP	Yes
Penoyer	1,463	WRCC	NA
Diablo	1,556	WRCC	NA
Blue Jay Highway Station	1,622	WRCC	NA
Twin Springs	1,615	CEMP	Yes
Warm Springs Summit	2,293	CEMP	Yes
Tonopah Test Range	1,691	Air Force	Yes
Stone Cabin	1,787	CEMP	Yes
Tonopah	1,836	CEMP	Yes
Tonopah Airport	1,655	WRCC	NA
Goldfield	1,734	CEMP	Yes
Sarcobatus Flat	1,226	CEMP	Yes
Beatty 8 North	1,082	WRCC	NA
Beatty	1,007	CEMP	Yes
Amargosa Farms	746	CEMP	Yes
07	1,663	MEDA	NA
14	1,432	MEDA	NA
18	1,533	MEDA	NA
21	1,512	MEDA	NA
24	1,505	MEDA	NA
25	835	MEDA	NA
26	1,133	MEDA	NA
27	1,370	MEDA	NA
42	880	MEDA	NA
NTS 60 (YMP1)	1,136	DOE	NA

Table 3-20. Meteorological stations in the Caliente rail alignment air quality and climate region of influence^{a,b} (page 2 of 2).

Station Name	Elevation (in meters) ^c	Operator	Wind data
Fortymile Wash (YMP5)	952	DOE	NA
Gate 510 (YMP9)	838	DOE	NA
Knothead Gap (YMP8)	1,130	DOE	NA
Sever Wash (YMP7)	1,080	DOE	NA
Yucca Mountain (YMP2)	1,478	DOE	NA
Coyote Wash (YMP3)	1,278	DOE	NA
Alice Hill (YMP4)	1,234	DOE	NA
WT-6 (YMP6)	1,315	DOE	NA

a. Source: DIRS 165987-WRCC 2002.

b. CEMP = Community Environmental Monitoring Program; DOE = DOE Environment, Safety and Health Programs Department Network; MEDA = Meteorological Data Acquisition Network; NA = not available; NTS = Nevada Test Site; WRCC = Western Regional Climate Center; YMP = Yucca Mountain Project.

c. To convert meters to feet, multiply by 3.2808.

and would pass through another portion of Lincoln County from approximately Garden Valley to near the Quinn Canyon Range. Annual average temperatures along the rail alignment through Lincoln County range from approximately 13° Celsius (55° Fahrenheit) at lower elevations to approximately 7° Celsius (45° Fahrenheit) at higher elevations. Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer months. Daily temperature variations are smaller during winter months, and less pronounced at higher elevations. At the lower elevations, summertime mean maximum temperatures are approximately 35° Celsius (95° Fahrenheit), and are accompanied by low relative humidity (commonly less than 10 percent). Winter mean minimum temperatures are around minus 8° Celsius (18° Fahrenheit) in December and January (DIRS 165987-WRCC 2002, all).

In the eastern portion of Lincoln County, maximum precipitation occurs during the winter months (January through March), and a secondary peak occurs during July through September, associated with occasional thunderstorms. At higher elevations, annual average precipitation is greater than 250 millimeters (10 inches); at lower elevations, average precipitation is 250 millimeters or less. Daily precipitation levels can be high, and historical maximums have exceeded 76 millimeters (3 inches) per day in the vicinity of the Caliente rail alignment. These maximums have historically occurred during the winter months, and could cause localized flooding, particularly if the ground has been saturated by recent rainfall. The occasional summer thunderstorms can produce heavy rains that can cause flash floods.

The western portion of Lincoln County is drier, averaging closer to 130 millimeters (5 inches) of precipitation per year, primarily occurring January through April.

From November through April, precipitation in Nye County along the Caliente rail alignment might fall as snow. Mean average snowfall in the lower valleys is about 250 millimeters (10 inches). At higher elevations, the average snowfall is between 500 and 1,000 millimeters (20 and 40 inches) per year.

Local topography strongly influences winds in Lincoln County along the Caliente rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Wind speeds are highest in the spring and occasionally generate dust storms. The extreme highest wind speeds are along ridgetops and mountain summits. Annual average wind speeds in the valleys range from 1.3 meters per second (2.9 miles per hour) at the Caliente station to about 2.2 meters per second

(4.9 miles per hour) at the Garden Valley station. Calm conditions (wind speeds of less than 0.6 meter per second [1.3 miles per hour]) are most frequent at the Caliente station, and characterize slightly more than one-third of all hours; the Garden Valley station has calm conditions about 15 percent of the time.

3.2.4.3.2 Nye County

Through southern Nye County, the Caliente rail alignment would lie to the east of the southern Sierra Nevada Range, a large mountain *barrier* that prevents much of the moist Pacific Ocean air from reaching the area. The result is lower-elevation areas that are largely desert or semidesert. The Caliente rail alignment would cross a variety of topographic features within the region, from mountain passes to sage-covered deserts. Elevations range from 2,293 meters (7,520 feet) at the Warm Springs Mountain Summit to 1,080 meters (3,540 feet) near the end of the Caliente rail alignment at Yucca Mountain, and present a wide variation in temperature and precipitation. In general, the climatic features can be described as abundant hours of cloud-free days, low annual precipitation (less than 250 millimeters [10 inches] per year), and large daily ranges in temperature.

In Nye County, the mean annual temperature along the Caliente rail alignment ranges from approximately 16° Celsius (61° Fahrenheit) at lower elevations to approximately 10° Celsius (50° Fahrenheit) at the highest elevations. Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer months. Daily temperature variations are smaller during winter months, and less pronounced at higher elevations. At the lowest elevations along the Caliente rail alignment, summertime maximum temperatures frequently exceed 38° Celsius (100° Fahrenheit), and are accompanied by low relative humidity (commonly less than 10 percent).

Annual precipitation averages less than 250 millimeters (10 inches) per year at all locations across southern Nye County, and most precipitation occurs during the winter. Along the Caliente rail alignment, precipitation is lowest from the Sarcobatus Flat station to the Beatty station, averaging just 75 to 100 millimeters (3 to 4 inches) per year because of the *rain shadow* effects from the Sierra Nevada and Amargosa Range. At higher elevations, a secondary peak in rainfall (associated with increased thunderstorm activity) occurs during the late summer months; at lower elevations, this precipitation often evaporates before reaching the ground. The thunderstorms occasionally produce heavy rains that can cause flash floods. Daily precipitation levels can be high, and historical maximums have reached 60 millimeters (2.4 inches) at the Sarcobatus Flat station, with a number of locations exceeding 40 millimeters (1.6 inches).

From November through April, precipitation in Nye County along the Caliente rail alignment might fall as snow. Mean average snowfall in the lower valleys is about 50 to 130 millimeters (2 to 5 inches). At higher elevations, the average snowfall is between 130 and 380 millimeters (5 and 15 inches) per year.

Local topography in Nye County strongly influences winds along the Caliente rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Wind speeds are highest in the spring, and occasionally generate dust storms at playas. The extreme highest wind speeds are along ridgetops and mountain summits. The maximum wind speed recorded at Warm Springs Summit was 34 meters per second (76 miles per hour), and winds of more than 40 meters per second (90 miles per hour) have been recorded along ridgetops at the Nevada Test Site station. Annual average wind speeds are much lower – from 5.4 meters per second (12 miles per hour) at the Warm Springs Summit station to 1.7 meters per second (3.8 miles per hour) at the Stone Cabin station. Along the Caliente rail alignment through southern Nye County, calm conditions (wind speeds of less than 0.6 meter per second [1.3 miles per hour]) are most frequent at the Stone Cabin station, and characterize wind conditions in the area about 12 percent of the time. In southern Nye County, annual average wind speeds are much lower, with annual average speeds of 2.4 meters per second (5.4 miles per

hour) at Sarcobatus Flat and 2.2 meters per second (4.9 miles per hour) at Beatty. Through southern Nye County, calm conditions are most frequent at Sarcobatus Flat station, and characterize wind conditions in the area about 7 percent of the time.

3.2.4.3.3 Esmeralda County

The Caliente rail alignment would cross through a small portion of Esmeralda County near the Goldfield station and would be east of the high peaks of the Sierra Nevada and White Mountain ranges, at an elevation of around 1,700 meters (5,500 feet). This area experiences abundant hours of cloud-free days, low annual precipitation (less than 250 millimeters [10 inches] per year), and large daily ranges in temperature.

Within Esmeralda County, the mean annual temperature along the Caliente rail alignment is approximately 10° Celsius (50° Fahrenheit). Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer months. Summertime mean maximum temperatures are approximately 32° Celsius (90° Fahrenheit), and are accompanied by low relative humidity (commonly less than 10 percent). Winter mean minimum temperatures are approximately minus 7° Celsius (20° Fahrenheit) in December and January.

Annual precipitation in this part of Esmeralda County averages less than 180 millimeters (7 inches) per year, and is heaviest during the winter. During the summer, occasional thunderstorms can produce heavy rains and cause flash floods. Daily precipitation levels occasionally exceed 50 millimeters (2 inches), but on average only 1 day per year has more than 25 millimeters (1 inch) of rain. Precipitation from October through April might fall as snow. Snowfall averages are around 380 millimeters (15 inches).

Local topography in Esmeralda County strongly influences winds along the Caliente rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Highest wind speeds occur in the spring, and occasionally generate dust storms. Annual average wind speeds at the Goldfield station are around 2.7 meters per second (6 miles per hour); slightly more than 5 percent of the time the area experiences calm conditions.

3.2.5 SURFACE-WATER RESOURCES

This section describes surface-water resources along the Caliente rail alignment. Surface-water resources include streams, washes, playas, ponds, wetlands, floodplains, and springs. Section 3.2.5.1 describes the region of influence for surface-water resources along the Caliente rail alignment; Section 3.2.5.2 is a general overview of surface-water features along the rail alignment; and Section 3.2.5.3 describes specific surface-water features for the rail alignment alternative segments and common segments. Sections 3.2.5.2.3 and 3.2.5.2.4 describe wetlands and floodplains, respectively, from a regulatory perspective; Section 3.2.7, Biological Resources, describes wetlands from a habitat perspective. Appendix F (Floodplain and Wetlands Assessment) addresses compliance with Executive Orders 11988, *Floodplain Management*, and 11990, *Protection of Wetlands*, in more detail.

3.2.5.1 Region of Influence

The Caliente rail alignment region of influence for surface-water resources is limited in most cases to the nominal width of the construction right-of-way. Because of the types of land-disturbing activities that would take place during rail line construction, the construction right-of-way would be susceptible to erosion and changes in surface-water flow patterns. Spills (of, for example, fuel, paint, or lubricants) during the railroad construction and operations phases could also affect this area.

In some cases, the region of influence for surface water extends beyond the construction right-of-way. In places where surface-water flow patterns (including floodwaters) could be modified or surface-water drainage could carry eroded soil, sediment, or spills downstream, the region of influence extends beyond the construction right-of-way. Within the region of influence, there could be impacts to floodwaters such that they would back up on the upstream side of the rail line, while there could be impacts to water quality pollutants traveled downstream during a storm event without precipitating out (soils from erosion) or becoming too dilute (petroleum-based lubricants or fuels) to detect. For purposes of analysis, DOE screened the area within 1.6 kilometers (1 mile) of the centerline of the rail alignment for surface-water resources that could be indirectly affected.

3.2.5.2 General Environmental Setting and Characteristics

Important characteristics of hydrologic systems in the region of influence include *ephemeral streams* and playas. Ephemeral surface-water features can be dry over multiple seasons or even years during droughts, but can have multiple periods of flow or standing water during wet periods, as during the winter of 2004-2005. Central and southern Nevada are

Surface-Water Terms

An **ephemeral stream** or ephemeral drainage has a channel bed above the normal water table and only flows in direct response to precipitation or snowmelt within its drainage basin.

An **intermittent stream** or intermittent drainage has a channel bed that fluctuates above or below the normal water table along its length, and might or might not have flow within it during any particular time or at any particular location. The presence of flow within the channel is determined by its channel elevation in relation to the water table, precipitation events, or snowmelt within its drainage basin.

A **wash** or drainage in the western United States generally refers to the dry streambed of an intermittent or ephemeral stream. In this Rail Alignment EIS, wash is used interchangeably with intermittent and ephemeral streams.

A **perennial stream** or perennial drainage receives groundwater into its channel and its stream bed is normally below the water table. During years with normal precipitation, a perennial stream will have constant flow.

A **playa** is normally a dry lake bed that can contain water in response to seasonally high runoff.

Evapotranspiration is a combination of processes through which water is transferred to the atmosphere from evaporation from open water and bare soil, and transpiration from vegetation.

characterized by low precipitation and high annual *evapotranspiration* rates typical of desert climates, as described in Section 3.2.4, Air Quality and Climate. Because of the arid climate and the terrain (that is, north-south trending, parallel mountain ranges with broad, intervening valleys) in this area, surface water generally evaporates before it can flow out of the drainage basin. Typically, surface drainage in this area remains within its topographically defined water basin; that is, surface water generally flows to low areas such as lakes, flats, or playas.

Surface-water systems are typically defined in terms of watersheds (or basins). For water planning and management purposes, the State of Nevada is divided into discrete hydrologic units delineated by 14 major hydrographic regions that are subdivided into 256 hydrographic areas (DIRS 103406-Nevada Division of Water Planning 1992, all). In this Rail Alignment EIS, watersheds (or basins) are referred to as hydrographic regions. A region is defined as a geographic area drained by a single major stream or an area consisting of a drainage system comprised of streams and often natural or manmade lakes.

Overall, most surface-water features described in this section are ephemeral drainage features that intermittently contain flowing water. Meadow Valley Wash and portions of Clover Creek at the beginning of the Caliente rail alignment are the exceptions, where surface-water flow is perennial or more consistently present. This section describes surface-water features in relation to the hydrographic regions in which they are located. Figure 3-60 shows the hydrographic regions within Nevada and the boundaries for the three hydrographic regions the Caliente rail alignment would cross. These regions include the Colorado River Basin, the Central Region, and the Death Valley Basin.

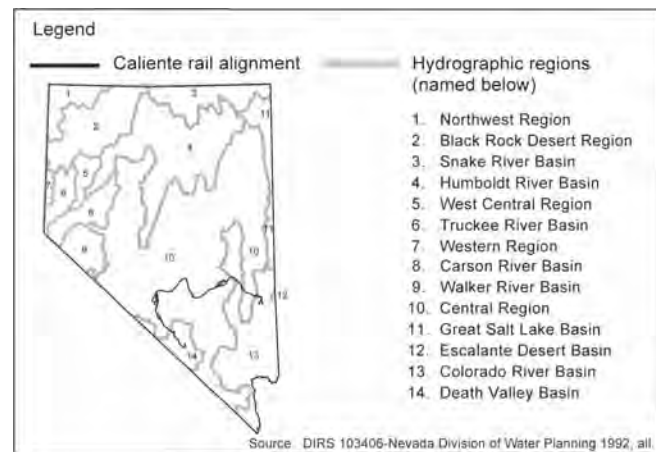


Figure 3-60. Nevada hydrographic regions crossed by the Caliente rail alignment.

3.2.5.2.1 Surface Drainage Features (Streams and Playas)

As described in Section 3.2.1, Physical Setting, the Caliente rail alignment would pass through numerous valleys and over or around numerous mountain ranges. The need for relatively gentle curves and gradients sets physical limitations on the design of the rail line that would require the alignment to follow valley floors that go around mountain ranges, or parallel the mountain ranges in transition zones to change elevation gradually (DIRS 180916-Nevada Rail Partners 2007, Appendix B). Within the valley floors, the rail alignment could parallel predominant drainage channels and cross through or near flats and playas. Some streams within low areas are braided channels where stream flow is divided among multiple channels, which the rail alignment could cross in several locations. Near or within mountain ranges, the alignment typically would be perpendicular to the predominant drainage direction. Therefore, the Caliente rail alignment would encounter a wide variety of surface drainage features.

Drainage features have been classified using Strahler's stream order system (DIRS 176728-Goudie et al., ed. 1981, pp. 50 and 51), which is a method of classifying stream segments based on the number of upstream tributaries. Stream order ranks the size and potential power of streams. Orders range from small streams with no branches (1st Order) up to streams the size of the Mississippi River, which is a 10th Order stream. As two 1st Orders come together, they form a 2nd Order stream. Two 2nd Order streams converging form a 3rd Order stream. Streams of lower order joining a higher order stream do not change the order of the higher order stream.

DOE used stream order to define *notable drainage channels* and as a method to select the number of ephemeral washes shown on figures in Section 3-62. To improve the readability of these figures and provide a means to prioritize the drainage features, the figures depict only rivers, streams, and washes the rail alignment would cross that are 2nd Order streams or higher. Figures in Section 3-62 do not show all the washes and drainages the rail alignment would cross, but provide enough information to support the analysis of potential impacts to surface-water resources. Section 4.2.5 identifies the estimated number of drainage channels the rail alignment would cross by alternative segment and common segment.

Notable drainage channels, as referenced in the text and shown on figures in Section 3.2.5.3, were determined by choosing those channels with a stream order of 2 or greater based on Strahler's ordering system, with the National Hydrography Dataset as a base map.

3.2.5.2.1.1 Surface-Water Quality. Because of the ephemeral nature of surface water in the southern part of Nevada, water-quality data for the region of influence are limited. The State of Nevada does not formally monitor surface water in the Caliente rail alignment region of influence.

Water-quality data for the State of Nevada are available through the Nevada District of the U.S. Geological Survey and the Nevada Division of Environmental Protection. Surface water samples are collected from several major river basins in the state and then analyzed for physical and chemical parameters. The routine water-quality monitoring network includes the following river/basin systems: Walker River, Humboldt River, Colorado River, Lake Tahoe Tributaries, Snake River, Truckee River, Carson River, and Steamboat Creek. The Colorado River Basin is the only hydrographic region in the Nevada Division of Environmental Protection's monitoring system within the region of influence for the Caliente rail alignment (DIRS 176306-NDEP 2005, all).

In accordance with federal regulations, each state is required to submit a report on overall water-quality conditions to the U.S. Environmental Protection Agency every 2 years. According to the Nevada Division of Environmental Protection report for 2005 (DIRS 176306-NDEP 2005, all), agriculture and grazing have the greatest impacts on Nevada's waters, mainly because of *nonpoint source pollution* (such as irrigation, grazing, and flow-regulation practices). Flow reductions have a great impact on streams, limiting dilution of salts, minerals, and pollutants. Temperature, *pH*, dissolved oxygen, nutrients, and suspended solids are the main pollutants of concern in the state. Agricultural sources generate large sediment and nutrient loads. Surface-water quality in Nevada varies greatly from location to location and from month to month with change of flow. In general, concentrations of dissolved solids are higher in the southern part of the state than in the northern part, depending largely on water discharge (DIRS 176316-Bostic et al. 2004, all). Because of dilution by precipitation or snowmelt, dissolved solids concentrations are usually highest during periods of low stream flow and lowest during periods of high stream flow.

No site-specific water chemistry data are available for streams or washes the Caliente rail alignment would cross. No streams the alignment would cross are known to be impaired. DOE previously collected and analyzed surface-water samples for chemical characteristics in the Yucca Mountain region. These analytical data are provided in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 3-40).

3.2.5.2.1.2 Stream Flow. The U.S. Geological Survey has stream-gaging stations (many of which have been discontinued) throughout Nevada. Stream-flow data from these monitoring stations are available through the Geological Survey Nevada District. Table 3-21 lists the range of peak discharges for typical or major streams along the Caliente rail alignment. DOE cross-referenced peak discharge measurements at and near the Nevada Test Site with a Geological Survey fact sheet that discusses significant flooding events in the Amargosa River drainage basin in 1995 and 1998 (DIRS 159895-Tanko and Glancy 2001, Table 2).

Table 3-21. U.S. Geological Survey annual peak flow measurements for selected sites in streams of hydrographic areas along the Caliente rail alignment (page 1 of 3).^a

Hydrologic unit gaging station (station number)	Drainage area (square kilometers) ^b	Annual peak flow range (cubic meters per second) ^c	Typical peak flow month(s)	Years of record (number of counts)
Areas in the Nevada Test Site				
<i>Meadow Valley Wash</i> (Eccles alternative segment, Caliente alternative segment, Caliente common segment 1)				
Meadow Valley Wash near Caliente (09418500)	4,300	0.12 to 68	February and March	1951-2004 (53)
Caselton Wash near Panaca (09418150)	180	0.11 to 48	July through August	1963-1981 (19)
Meadow Valley Wash at Eagle Canyon near Ursine (09417500)	760	0.62 to 20	January and February	1963-2003 (14)
<i>Dry Lake Valley</i> (Caliente common segment 1)				
Dry Lake Valley tributary near Caliente (10245270)	28	0 to 4.4	July	1967-1981 (15)
<i>White River</i> (Caliente common segment 1)				
White River near Lund (09415550)	1,800	0 to 1.3	March	1991-2003 (8)
Crystal Spring near Hiko (09415590)	No data	0.37 to 0.57	June through October	1986-2001 (11)
White River tributary near Sunnyside (09415560)	52	0 to 17	August and September	1966-1982 (15)
<i>Sand Spring-Tikaboo Valleys</i> (Caliente common segment 1; Garden Valley alternative segments 1, 2, 3, and 8; Caliente common segment 2)				
Penoyer Valley tributary near Tempiute (10247860)	3.8	0 to 3.7	July through September	1964-1981 (18)
<i>Hot Creek-Railroad Valleys</i> (Caliente common segment 2; South Reveille alternative segments 2 and 3; Caliente common segment 3)				
Big Creek near Warm Springs (10247200)	31	0.14 to 0.62	May	1991-1994 (4)
Hot Creek tributary near Warm Springs (10247010)	5.4	0.03 to 2.8	August	1964-1981 (17)
<i>Ralston-Stone Cabin Valleys</i> (Caliente common segment 3; Goldfield alternative segments 1, 3, and 4)				
Ralston Valley tributary near Tonopah (10249140)	0.52	0 to 1.4	July and August	1961-1981 (21)
<i>Cactus-Sarcobatus Flats</i> (Goldfield alternative segments 1, 3, and 4; Caliente common segment 4; and common segment 5)				
Stonewall Flat tributary near Goldfield (10248970)	1.4	0 to 4.3	June through August	1964-1985 (20)
<i>Upper Amargosa</i> (Oasis Valley alternative segments 1 and 3; common segment 6)				
Pah Canyon Wash above Fortymile Wash confluence (102512495)	16	2.6	February	1998 (1)

Table 3-21. U.S. Geological Survey annual peak flow measurements for selected sites in streams of subbasins along the Caliente rail alignment (page 2 of 3).^a

Hydrologic unit gaging station (station number)	Drainage area (square kilometers) ^b	Annual peak flow range (cubic meters per second) ^c	Typical peak flow month(s)	Years of record (number of counts)
Areas in the Nevada Test Site				
<i>Upper Amargosa</i> (Oasis Valley alternative segments 1 and 3; common segment 6) (continued)				
Unnamed tributary to Fortymile Wash north of Delirium Canyon (102512496)	2.9	5.1	February	1998 (1)
Delirium Canyon Wash above Fortymile Wash confluence (102512497)	6.2	3.4	February	1998 (1)
Unnamed Tributary to Fortymile Wash south of Delirium Canyon (102512499)	2.1	2.0	February	1998 (1)
Fortymile Wash at narrows (10251250)	670	0 to 85	March	1982-1998 (8)
Yucca Wash near mouth (10251252)	44	0 to 27	February and March	1982-1998 (10)
Pagany Wash near the Prow (102512531)	1.3	0.57 to 1.7	February and March	1995-1998 (2)
Pagany Wash #1 near Well UZ (4102512533)	2.1	0.48 to 1.7	February and March	1993-1998 (2)
Drillhole Wash above UZ (1102512535)	1.8	0 to 0.85	March	1994-1998 (3)
Wren Wash at Yucca Mountain (1025125356)	0.52	0 to 0.85	March	1994-1998 (3)
Split Wash below Quac Canyon Wash (102512537)	0.78	0 to 0.37	February	1994-1998 (3)
Split Wash at Antler Ridge (1025125372)	6.2	0 to 0.06	February	1994-1998 (3)
Drillhole Wash at mouth (10251254)	42	0 to 22	July	1982-1998 (10)
Fortymile Wash near Well J (1310251255)	790	0 to 85	March through July	1984-1998 (7)
Dune Wash near Busted Butte (10251256)	18	0 to 0.40	August	1982-1995 (9)
Topopah Wash at Little Skull Mountain (10251260)	270	0 to 42	August	1984-1998 (8)
Beatty Wash near Beatty (10251215)	250	0 to 25	July through March	1989-1998 (5)
Amargosa River at Beatty (10251217)	1,200	0.03 to 28	March through August	1994-2004 (10)

Table 3-21. U.S. Geological Survey annual peak flow measurements for selected sites in streams of subbasins along the Caliente rail alignment (page 3 of 3).^a

Hydrologic unit gaging station (station number)	Drainage area (square kilometers) ^b	Annual peak flow range (cubic meters per second) ^c	Typical peak flow month(s)	Years of record (number of counts)
Areas near the Nevada Test Site				
<i>Upper Amargosa</i> (Oasis Valley alternative segments 1 and 3; common segment 6) (continued)				
Fortymile Wash near Amargosa Valley (10251258)	820	0 to 94	February through July	1969-2004 (23)
Topopah Wash at Highway 95 near Amargosa Valley (10251261)	390	0.57	February	1998 (1)

a. Sources: DIRS 176325-USGS 2006, p. 29; DIRS 159895-Tanko and Glancy 2001, Table 2.

b. To convert square kilometers to square miles, multiply by 0.3861.

c. To convert cubic meters per second to cubic feet per second, multiply by 35.3.

Most of the drainage channels the Caliente rail alignment alternative segments and common segments would cross typically flow only during significant (heavy) rainfall events, which generally occur only a few times a year. In many years, most of the streams listed in Table 3-21 have little or no flow. From late spring to early fall, precipitation patterns are dominated by convective, short-duration, high-intensity thunderstorms. From late fall to early spring, precipitation patterns are dominated by long-duration, low-intensity, general storm events with both rain and snow possible throughout the area. These two types of precipitation events result in runoff that differs between smaller watersheds (up to 520 square kilometers [200 square miles]) and larger watersheds (greater than 520 square kilometers). For smaller watersheds, the summer thunderstorm events dominate the peak runoff rates, which occur in the tributary channels and washes. However, as watershed size increases, the general storm events eventually dominate the peak rates of runoff. In addition, for all watersheds, the volume runoff is generally greater for the general (winter) storm events than for the thunderstorm (summer) events (DIRS 182755-Parsons Brinckerhoff 2005, p. 12).

In general, stream discharge in Nevada is low in late summer, and then increases through the autumn and winter until the snow melts in the spring. Maximum discharge for the year normally can be expected in May and June, although rain or snow has caused floods from November through March (DIRS 176325-USGS 2006, all). As shown in Table 3-21, the more significant peak-flow scenarios relevant to the Caliente rail alignment occur within the Meadow Valley Wash and Upper Amargosa hydrologic units. The highest peak flows for these hydrographic regions generally occur during late winter due to snowmelt and late summer due to intense precipitation.

The washes that drain the Yucca Mountain Site discharge into the Amargosa River. This ephemeral drainage typically sees very low runoff rates due to minimal precipitation in its basin and is usually dry (DIRS 159895-Tanko and Glancy 2001, p. 1). Precipitation is least along the Caliente rail alignment in this area, from Sarcobatus Flat to Beatty, averaging just 75 to 100 millimeters (3 to 3.9 inches) per year. Most of the annual precipitation typically occurs in late spring to early fall. Fortymile Wash and Topopah Wash are significant tributaries draining the Nevada Test Site area into the Amargosa River with maximum peak flows of 94 cubic meters (3,300 cubic feet) per second and 42 cubic meters (1,500 cubic feet) per second, respectively, during late winter to late summer (see Table 3-21). Section 3.2.5.2.4 describes two significant flooding events (March 1995 and February 1998) in the Amargosa River drainage basin on and near the Nevada Test Site.

3.2.5.2.2 Waters of the United States

Some of the surface-water features along the Caliente rail alignment, such as ephemeral drainages, streams, ponds, and lakes, are considered waters of the United States, especially if there is an interstate connection to commerce. Section 404 of the Clean Water Act (33 U.S.C. 1344) and implementing regulations (33 CFR Part 323) require the U.S. Army Corps of Engineers to regulate discharges of dredge or fill material into waters of the United States. Discharges of dredge or fill material essentially includes all land-disturbing activities accomplished via the use of mechanized equipment.

The placement of structures, such as bridge embankments, bridge piers and abutments, and culverts, would be activities potentially discharging fill materials into waters of the United States. Chapter 6 of this Rail Alignment EIS discusses compliance with Section 404 of the Clean Water Act in more detail.

DOE surveyed all drainages within 400 meters (0.25 mile) of the Caliente rail alignment that are within interstate hydrologic basins to determine if those drainages could be classified as waters of the United States (DIRS 180914-PBS&J 2006, p. 1). This survey also identified and delineated wetlands along the Caliente rail alignment. The alignment-specific discussions in Section 3.2.5.3 detail the results of the survey. Subsequent to DOE surveys performed along the rail alignment, the U.S. Environmental Protection Agency and U.S. Army Corps of Engineers released new guidance to be used when making determinations of waters of the United States subject to jurisdiction under the Clean Water Act.

This guidance provides criteria for making these determinations for adjacent wetlands and non-navigable tributaries of waters of the United States, particularly in relation to ephemeral waters. As a result of this guidance, it is likely that many of the drainages along the rail alignment would not be considered waters of the United States (see Section 4.2.5.2.1 for further discussion).

The U.S. Army Corps of Engineers is responsible for determining whether drainages and wetlands along the rail alignment are regulated under Section 404; therefore, all conclusions in this analysis about the classification of washes and wetlands as waters of the United States are tentative. If DOE pursued the Caliente rail alignment for construction of the proposed railroad, the Department would request that the U.S. Army Corps of Engineers determine the limits of jurisdiction under Section 404 along the alignment before beginning construction.

The term **waters of the United States** is defined in 33 CFR 328.3a. The U.S. Army Corps of Engineers and U.S. Environmental Protection Agency regulate the placement of dredged or fill material into these waters. The definition incorporates channels with ephemeral and intermittent flow that exhibit specific physical features, including channel shape and surrounding vegetation that would provide indications of an **ordinary high water mark**.

Ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas (33 CFR 328.3e).

3.2.5.2.3 Wetlands

Generally, wetlands are lands where saturation with water is the dominant factor that determines how soil develops and the types of plant and animal communities living in the soil and on its surface (DIRS 178724-Cowardin et al. 1979, p. 3). Wetlands can support both aquatic and terrestrial species. The prolonged presence of water creates conditions that favor the growth of specially adapted plants and promote the development of characteristic wetland (*hydric*) soils.

According to the U. S. Environmental Protection Agency and the U. S. Army Corps of Engineers, the regulatory definition of a Section 404 jurisdictional wetland is (33 CFR 328.3b) “those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in

saturated soil conditions.” The U.S. Department of Agriculture Natural Resources Conservation Service and U. S. Fish and Wildlife Service define wetlands somewhat differently, but all four agencies include three basic elements for identifying wetlands: *hydrology*, soils, and vegetation. Wetland communities are recognized as providing many valuable functions that improve the human environment. Wetlands that have surface-water connections to or are adjacent to (bordering, contiguous, neighboring) other waters of the United States are regulated under Section 404 of the Clean Water Act. Wetlands that are isolated – that is, they have no permanent or temporary surface-water connections to interstate water bodies or are not considered adjacent – are not typically regulated under Section 404 unless the use of these isolated wetlands could affect interstate commerce.

Surveys in support of this Rail Alignment EIS have identified wetlands along the Caliente rail alignment (DIRS 180914-PBS&J 2006, all). Tables in Section 3.2.5.3 list wetlands identified during these surveys. Appendix F discusses wetlands along the Caliente rail alignment in more detail, and Section 3.2.7, Biological Resources, discusses wetlands from a habitat perspective.

3.2.5.2.4 Floodplains

The presence of floodplains in the Caliente rail alignment region of influence largely depends on the meteorology and hydrology of the area. Much of the rail alignment would be in areas that are subject to intense rainfall over a short duration (1 to 3 hours), which typically occurs in late spring to early fall. Precipitation in late fall to early spring is dominated by low-intensity rainfall or snow over a long duration (2 to 4 days). In both cases, precipitation has the potential to produce flooding (DIRS 182755-Parsons Brinckerhoff 2005, pp. 12 to 14). Evapotranspiration rates throughout the region of influence are high; therefore, most of the rainfall from summer storms is lost relatively quickly unless a storm is intense enough to produce runoff, or unless there are more storms before the water evaporates (DIRS 182755-Parsons Brinckerhoff 2005, p. 18). Evapotranspiration rates are lower during the winter, and water from precipitation or melting snow has a better chance of resulting in streamflow, thereby increasing the chances of flooding. Much of the runoff quickly infiltrates into rock fractures or into the dry soils, some is carried down alluvial fans in arroyos, and some drains onto dry lakebeds where it might stand for weeks as a lake (DIRS 182755-Parsons Brinckerhoff 2005, p. 18).

Although flow in most washes is rare, the area is subject to flash flooding from intense summer thunderstorms and sustained winter precipitation. When it occurs, intense flooding can include mud and debris flows in addition to water runoff. Thunderstorms in the area can be local and intense, creating runoff in one wash while an adjacent wash receives little or no rain. In rare cases, however, storm and runoff conditions can be extensive enough to result in flow being present throughout the drainage systems. For example, conditions recorded during March 1995 and February 1998 at the Amargosa River and its tributaries indicated that the channels all flowed simultaneously along its primary stream channels to Death Valley. The 1995 event was the first documented case of this flow condition. During the 1995 event, the peak flow near the location where the existing Yucca Mountain access road crosses Fortymile Wash was approximately 100 cubic meters (3,500 cubic feet) per second (DIRS 182755-Parsons Brinckerhoff 2005, p. 18).

In accordance with the requirements of 10 CFR Part 1022, DOE reviewed available authoritative information to determine whether the Caliente rail alignment would be located in wetlands or floodplains. The results of that effort (DIRS 182755-Parsons Brinckerhoff 2005, p. 10) indicated that the only flood map or flood studies available for the areas of the Caliente rail alignment were those completed by the Federal Emergency Management Agency in the form of Flood Insurance Rate Maps. Furthermore, and consistent with the remoteness of the project area, DOE found that Federal Emergency Management Agency maps cover only about 45 percent of the rail alignment (see Appendix F, Table F-1). DOE completed flood studies for several washes on the eastern slope of Yucca Mountain at

the repository site in support of the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Figure 3-12 and pp. 3-37 to 3-39).

In accordance with 10 CFR Part 1022, DOE prepared a floodplain and wetland assessment (see Appendix F) for the Caliente rail alignment. Appendix F provides a detailed discussion of the floodplains the Caliente rail alignment would cross, including figures of the relevant floodplains identified on Federal Emergency Management Agency maps and those identified near the repository site.

3.2.5.2.5 Springs

Springs are the only natural source of perennial surface water throughout the Caliente rail alignment region of influence. Typically, these springs flow year round. The springs often infiltrate naturally into the ground or undergo evapotranspiration, or are captured near the source for local use (such as irrigation). DOE used the U.S. Geological Survey Geographic Names Information System, the National Hydrologic Dataset, and several DOE field studies completed in support of this Rail Alignment EIS to identify springs along the Caliente rail alignment (DIRS 180914-PBS&J 2006, all; DIRS 182755-Parsons Brinckerhoff 2005, all).

3.2.5.3 Surface-Water Features along Alternative Segments and Common Segments

DOE compiled this information using the National Wetland Inventory database, a U.S. Geological Survey dataset of hydrologic features known as the National Hydrological Dataset (DIRS 177714-MO0607NHDFLM06.000), a dataset from the U.S. Geological Survey Geographic Names Information System (DIRS 176979-MO0605GISGNISN.000), and DOE wetland surveys conducted in support of this Rail Alignment EIS (DIRS 180914-PBS&J 2006, all). Specific hydrologic features are divided into two categories: those within 150 meters (500 feet) of the rail alignment centerline and those between 150 meters and 1.6 kilometers (1 mile) from the rail alignment centerline. Both of these categories fall within the region of influence for surface-water resources. The first category is also within the nominal width of the rail line construction right-of-way.

Sections 3.2.5.3.1 through 3.2.5.3.12 describe surface-water resources for each Caliente rail alignment alternative segment and common segment moving along the rail line from east to west (from Caliente, Nevada, to Yucca Mountain). Tables in these sections provide summaries of surface-water features identified in the Caliente rail alignment region of influence. Figures in these sections show the proposed rail line location as it crosses Nevada's physiographic features. A key for these map areas is provided in Chapter 2, Figure 2-4.

3.2.5.3.1 Interface with Union Pacific Mainline Railroad

DOE is considering two alternative segments to connect the rail line to the existing Union Pacific Railroad Mainline: the Caliente alternative segment and the Eccles alternative segment (Figure 3-61). DOE would construct an Interchange Yard at the beginning of either of these two alternative segments. There are two options for siting the Staging Yard along the Caliente alternative segment (Caliente-Upland and Caliente-Indian Cove) and one potential site for the Staging Yard along the Eccles alternative segment (Eccles-North). Potential quarry CA-8B would be to the west of the Caliente alternative segment approximately 4.8 kilometers (3 miles) north of Caliente (see Figure 3-61).

3.2.5.3.1.1 Caliente Alternative Segment. The Caliente alternative segment would originate in the City of Caliente, near the junction of Clover Creek and Meadow Valley Wash. For nearly its entire length, the Caliente alternative segment would be constructed along an abandoned rail *roadbed*.

From Caliente, the alternative segment would run north across Meadow Valley for approximately 16 kilometers (10 miles) running parallel to and crossing Meadow Valley Wash (Table 3-22 and Figure 3-61).

Both Meadow Valley Wash and Clover Creek are part of the interstate tributary system of the Colorado River, a navigable waterway. The Caliente alternative segment would cross several stream channels and washes. DOE field surveys identified nine of these drainage channels that classify as waters of the United States under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, Figure 3A and Table 3), including Clover Creek, Meadow Valley Wash, Bennett Springs Wash, and unnamed washes flowing toward Meadow Valley Wash from side canyons. Construction camp 1 would be in Meadow Valley approximately 2.5 kilometers (1.6 miles) south of the beginning of Caliente common segment 1 (DIRS 180922-Nevada Rail Partners 2007, Figure 4-A). Potential quarry CA-8B would be approximately 2 kilometers (1.2 miles) west of the Caliente alternative segment. The siding that would be constructed to support the proposed quarry would cross three unnamed washes identified as waters of the United States. The Upland option for the Staging Yard would cross one water of the United States within the Staging Yard area.

According to the U.S. Geological Survey, Meadow Valley Wash near Caliente (at gaging station 09418500) has a drainage area of 4,300 square kilometers (1,660 square miles) (see Table 3-21). The Geological Survey collected 53 years of streamflow data (1951 through 2004); the annual peak flow range for streamflow was 0.11 cubic meter (3.9 cubic feet) per second to 68 cubic meters (2,400 cubic feet) per second (see Table 3-21). The maximum discharge of 68 cubic meters per second was recorded on March 5, 1978. There are several irrigation diversions upstream of the gaging station. There are no gaging stations within the region of influence for the Caliente alternative segment (DIRS 176325-USGS 2006, all). No water-quality data are available for drainage channels along the Caliente alternative segment.

There is a relatively large extent of wetlands in the southern portion of the Caliente alternative segment. This segment would be constructed on or adjacent to an existing rail roadbed that runs adjacent to or across DOE-delineated wetland areas for approximately 9.2 kilometers (5.7 miles) along Meadow Valley Wash (see Figures 3-62 and 3-63). DOE delineated all wetlands within 61 meters (200 feet) of the alignment (DIRS 180914-PBS&J 2006, p. 1). The Department did not examine a larger area because it would limit rail line construction activities in this area as much as possible and maintain disturbances within wetlands to an area within 30 meters of the rail alignment centerline. In those areas where the rail line would cross wetlands, the rail line would be constructed along an existing, rail roadbed on upland fill raised above the wetlands in width from about 7 to 16 meters (23 to 52 feet) (DIRS 180914-PBS&J 2006, Figure 4A). The Indian Cove option for the Staging Yard would be in a wetland (DIRS 180914-PBS&J 2006, Figure 4A). Based on field observations, the wetlands extend beyond the rail alignment DOE surveyed. The entire meadow is assumed to be a wetland area. There are no wetlands associated with the Upland option for the Staging Yard. The Interchange Yard would not be in wetlands. Appendix F of this Rail Alignment EIS provides additional information about wetlands.

The Federal Emergency Management Agency has mapped floodplains only for the very southern portion of the Caliente alternative segment. This mapping shows that the alternative segment would cross 100-year floodplains at its starting point in Clover Creek and within Meadow Valley Wash north of the City of Caliente (see Figure 3-64). Based on the topography of these areas, it is reasonable to assume that the portions of Meadow Valley Wash farther upstream to the north would have similar flood levels to the mapped areas. The southern end of the Indian Cove option for the Staging Yard would lie in the mapped 100-year floodplain. Appendix F further describes the floodplains associated with the Caliente alternative segment.

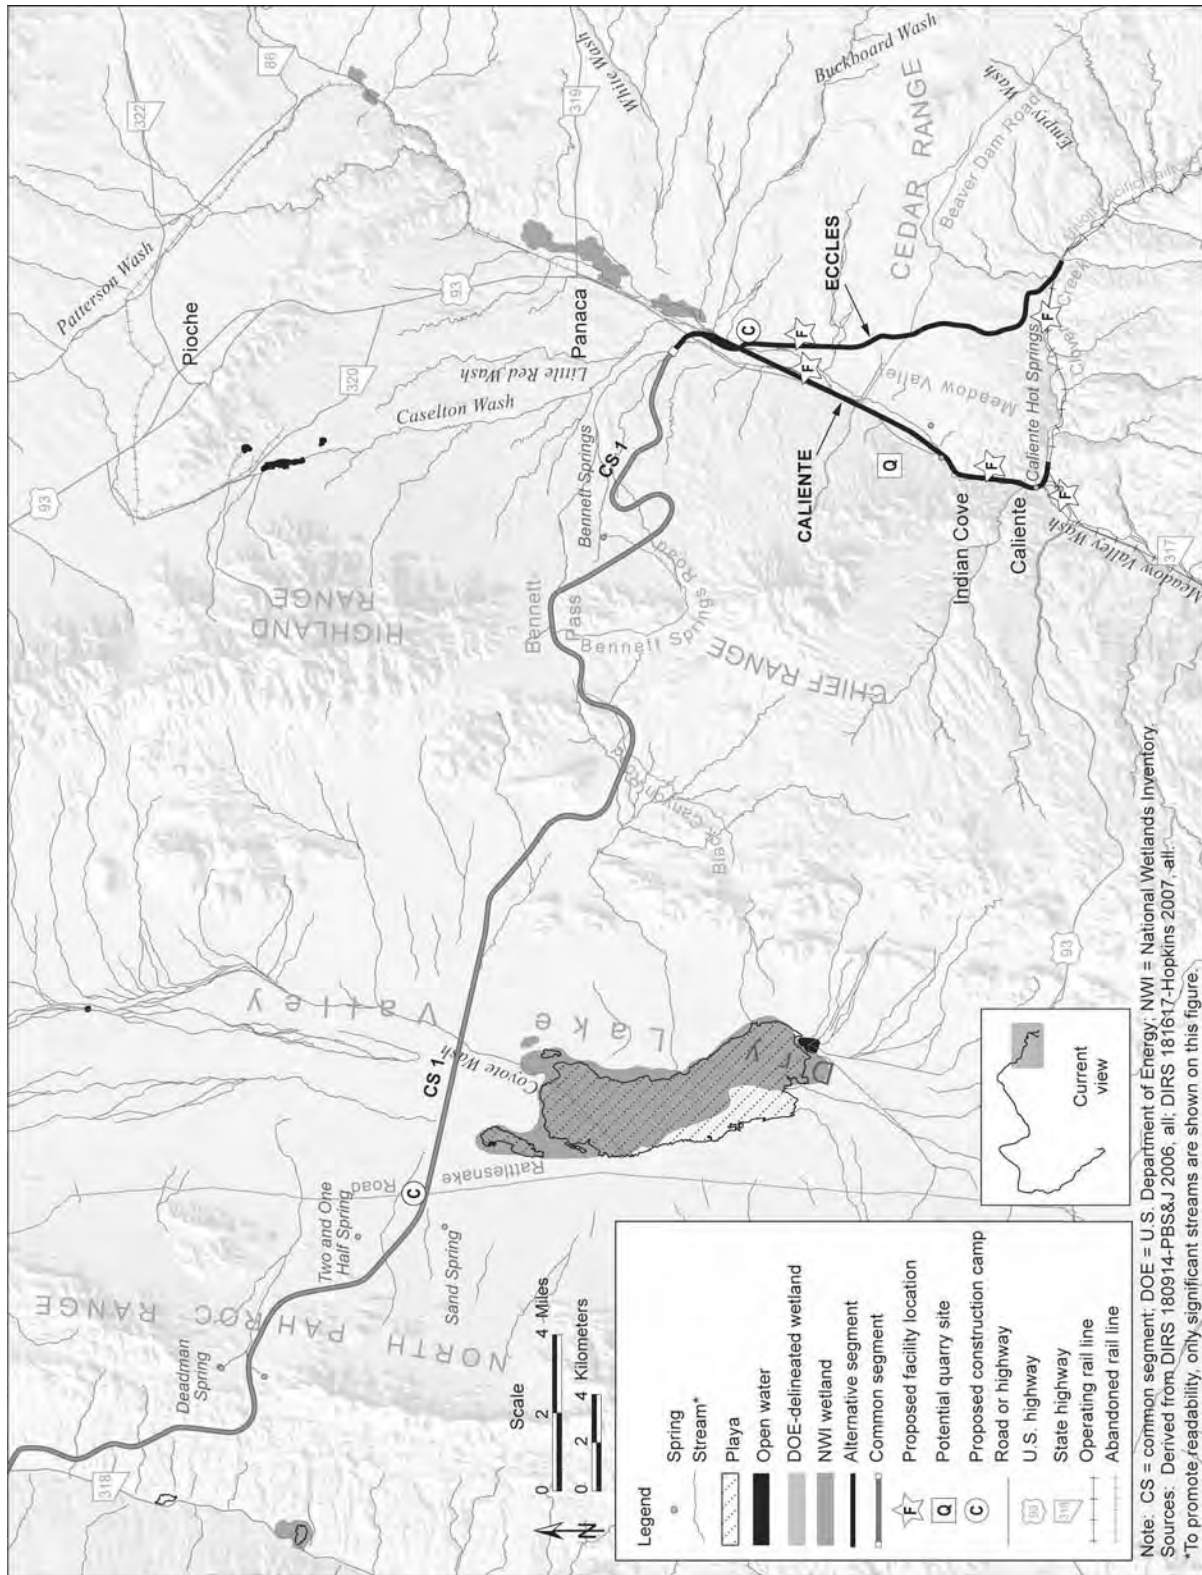


Figure 3.-61. Surface drainage within map area 1.

Table 3-22. Hydrologic features potentially relevant to the Caliente alternative segment.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from the Delmar Mountain Range, the Clover Mountains, the Chief Range, and the Cedar Range down to Meadow Valley through Meadow Valley Wash, Clover Creek, and Miller Spring Wash.	<p>The alignment would run along the Meadow Valley Wash for nearly 16 kilometers and cross Meadow Valley Wash three times.</p> <p>The alignment would cross 12 tributaries leading into Meadow Valley Wash, including Bennett Springs Wash, Cobalt Canyon Wash, Miller Spring Wash, Clover Creek, and White Wash.</p> <p>The alignment would run adjacent to or across wetland areas for approximately 9.2 kilometers of DOE-delineated wetlands within Meadow Valley Wash.</p> <p>Indian Cove option for the Staging Yard would be in a wetland.</p> <p>Caliente Hot Springs 0.02 kilometer east.</p> <p>Unnamed spring 0.1 kilometer northwest.</p>	<p>The alignment would be within 1.6 kilometers of Casselton Wash, Little Red Wash, and 18 unnamed tributaries.</p> <p>Ponds/reservoirs along valley floor.</p> <p>Unnamed spring 0.71 kilometer southeast.</p> <p>Unnamed spring 0.83 kilometer southeast.</p> <p>Unnamed spring 0.75 kilometer southwest.</p>

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 63.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

There are two springs within the Caliente alternative segment construction right-of-way: Caliente Hot Springs is 16 meters (52 feet) east and there is an unnamed spring 0.1 kilometer (0.06 mile) northwest of the alternative segment. There are three other unnamed springs at distances of 0.71 kilometer (0.44 mile) southeast, 0.83 kilometer (0.52 mile) southeast, and 0.75 kilometer (0.47 mile) southwest of the alternative segment. See Table 3-22 for a list of springs.

3.2.5.3.1.2 Eccles Alternative Segment. The Eccles alternative segment would start at the Eccles Siding of the Union Pacific Railroad at Dutch Flat, which is within the Clover Creek drainage, approximately 8 kilometers (5 miles) east of the City of Caliente. Dutch Flat is basically a wide area in an otherwise relatively narrow, east-west oriented canyon where Clover Creek, an ephemeral stream at that location, parallels an existing rail line. The Eccles alternative segment would cross the bed of Clover Creek to connect to the Union Pacific Railroad Mainline in this location. Proceeding north from the Eccles/Dutch Flat area, the Eccles alternative segment would cross Meadow Valley Wash upstream of Caliente and downstream of Panaca, just before joining with Caliente common segment 1 (Table 3-23 and Figure 3-61). The Interchange Yard location proposed for the Eccles alternative segment would be adjacent to and extend into Clover Creek. There are no potential quarry sites along this alternative segment (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Clover Creek is part of the interstate tributary system of the Colorado River, a navigable waterway. All of the washes along this segment are characterized by ephemeral flow. There are no gaging stations within the region of influence for the Eccles alternative segment (DIRS 176325-USGS 2006, all). There are no water-quality data available for drainage channels along this alternative segment.

Of the washes or drainage channels the Eccles alternative segment would cross, DOE field surveys identified 11 stream segments that are designated as waters of the United States under Section 404 of the

Table 3-23. Hydrologic features potentially relevant to the Eccles alternative segment.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from the Delmar Mountain Range, the Clover Mountains, the Chief Range, and the Cedar Range down to Meadow Valley through Meadow Valley Wash, Clover Creek, and Miller Spring Wash.	<p>The segment would cross Meadow Valley Wash, Clover Creek, and unnamed tributaries leading into Meadow Valley Wash, and Clover Creek. Notable crossings would include Bennett Springs Wash, Miller Spring Wash, Empty Wash, and White Wash.</p> <p>Alignment would cross a total of 15 washes.</p> <p>The segment would cross DOE-delineated wetlands along Meadow Valley Wash just south of the end of the segment.</p> <p>The Interchange Yard would extend into Clover Creek.</p>	<p>The segment would lie within 1.6 kilometers of Casselton Wash, Little Red Wash and many unnamed tributaries.</p> <p>DOE-delineated wetlands within 1.2 kilometers of the origin of the Eccles alternative segment.</p> <p>DOE-delineated wetlands within 0.4 kilometer.</p>

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 63.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Clean Water Act (DIRS 180914-PBS&J 2006, Figures 3A and 3B, and Table 3), including Clover Creek, Meadow Valley Wash, Miller Spring Wash, Empty Wash, White Wash, and Bennett Springs Wash. The proposed Interchange Yard for the Eccles alternative segment would cross Clover Creek, which is classified as a water of the United States (DIRS 180914-PBS&J 2006, Figure 3A). The Eccles-North Staging Yard would cross one wash identified as a water of the United States. There are no water-quality data available for drainage channels along this alternative segment.

DOE delineated five wetland areas within 1.2 kilometers (0.8 mile) of the origin of the Eccles alternative segment, one of which is associated with a spring. Although these wetlands would be outside the rail line construction right-of-way, two of them would be within the construction footprint for the Interchange Yard (see Figure 3-65). DOE delineated another wetland area within 0.4 kilometer (0.25 mile) of this alternative segment approximately 1.8 kilometers (1.1 miles) south of where the Eccles alternative segment crosses the Caliente alternative segment as shown on Figure 3-62. The alternative segment would also cross wetlands associated with the Meadow Valley Wash just to the south of the end of the segment. Appendix F provides additional information about these wetlands.

The Federal Emergency Management Agency has no published flood maps for the area of the Eccles alternative segment. Existing flood maps of Clover Creek near Caliente indicate the floodplain associated with Clover Creek terminates before it reaches the Eccles alternative segment. However, flooding that occurred in 2005 in and around Clover Creek, Meadow Valley Wash, and Muddy River washed out and undermined portions of an existing rail line in this area. Rail line construction would require encroachment into Clover Creek. The Interchange Yard along the Eccles alternative segment would cross Clover Creek and be in the floodplain. Appendix F provides more information on floodplains.

3.2.5.3.2 Caliente Common Segment 1 (Dry Lake Valley Area)

From Meadow Valley, Caliente common segment 1 would pass through Bennett Pass, Black Canyon, and Dry Lake Valley (Table 3-24 and Figures 3-61 and 3-66). The common segment would then cross State Highway 318 and the White River Valley before passing around the northern end of the Seaman Range and terminating in Coal Valley. Construction camp 2 would be adjacent to Caliente common segment 1

approximately 37 kilometers (23 miles) northwest of the beginning of the common segment. Construction camp 3 would be directly adjacent to the common segment approximately 15 kilometers (9.3 miles) northeast of the junction of common segment 1 with the Garden Valley alternative segments. There are no potential quarry sites along this common segment (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Common segment 1 would run 1.4 kilometers (0.87 mile) to the north of an unnamed playa in Dry Lake Valley that is 47 square kilometers (18 square miles) in size. During periods of heavy rainfall, runoff from the Highland, Chief, North Pahroc, and Seaman Ranges can produce ephemeral lakes in this playa. There is no flow data available indicating the seasonal duration of the ephemeral lakes. There is ephemeral flow from streams draining upland areas such as Coyote Wash. Flow data for a Dry Lake Valley tributary indicates an annual peak flow range of 0 to 4.4 cubic meters (160 cubic feet) per second (see Table 3-21).

Caliente common segment 1 would continue northwest from Dry Lake Valley, where it would cross State Highway 318 and the White River. The White River Valley hydrographic area has a drainage area of 1,800 square kilometers (700 square miles) (see Table 3-22). The closest U.S. Geological Survey gaging station to common segment 1 is on the White River near Lund, Nevada, approximately 51 kilometers (32 miles) north (upstream) of common segment 1. At the station near Lund, the river's drainage basin is 1,800 square kilometers (700 square miles); annual mean streamflow was 0.79 cubic meter (28 cubic feet) per second recorded in 1993, and 1.3 cubic meters (44 cubic feet) per second in 2001 (DIRS 176325-USGS 2006).

From White River Valley, common segment 1 would pass around the northern end of the Seaman Range and then down into Coal Valley. Coal Valley contains a large playa approximately 30 kilometers (19 miles) long and 8 kilometers (5 miles) wide, with its northern tip reaching the termination of common segment 1. The National Wetlands Inventory dataset identifies Coal Valley Playa as a wetland; however, DOE field studies in support of this Rail Alignment EIS confirmed that there are no hydric soils, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near the alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 3).

Caliente common segment 1 would cross 17 stream channels or washes designated as waters of the United States tributaries of the Colorado River (a navigable river) along its route, as classified by DOE field studies completed in support of this Rail Alignment EIS (DIRS 180914-PBS&J 2006, Figure 3C). DOE also surveyed the White River and its associated drainages and determined that even though the White River drained into the Colorado River in the past, there is no surface-water connection between the two drainage systems. Drainages associated with the White River have been altered over time by changes in topography and geological conditions.

DOE determined that the bottom of the White River Valley is flat and has no discernable channel bed and bank (indicators used to identify waters of the United States) in the area where the rail alignment would cross. At that location, and at other locations to the south, sediment deposited from channels flowing into the valley have blocked downstream flow. Additional field observations within the White River Valley south of the rail alignment (historically downstream) confirmed the lack of a discernable channel bed and bank. Because there are no physical indicators of a stream channel in this portion of the White River Valley, it has been determined that the White River and associated tributaries do not have connectivity to the Colorado River system. Because they have no connectivity to the Colorado River system and do not appear to have a connection with interstate or foreign commerce, they are not considered waters of the United States in this analysis (DIRS 180914-PBS&J 2006, p. 7).

No water-quality data are available for drainage channels along Caliente common segment 1.

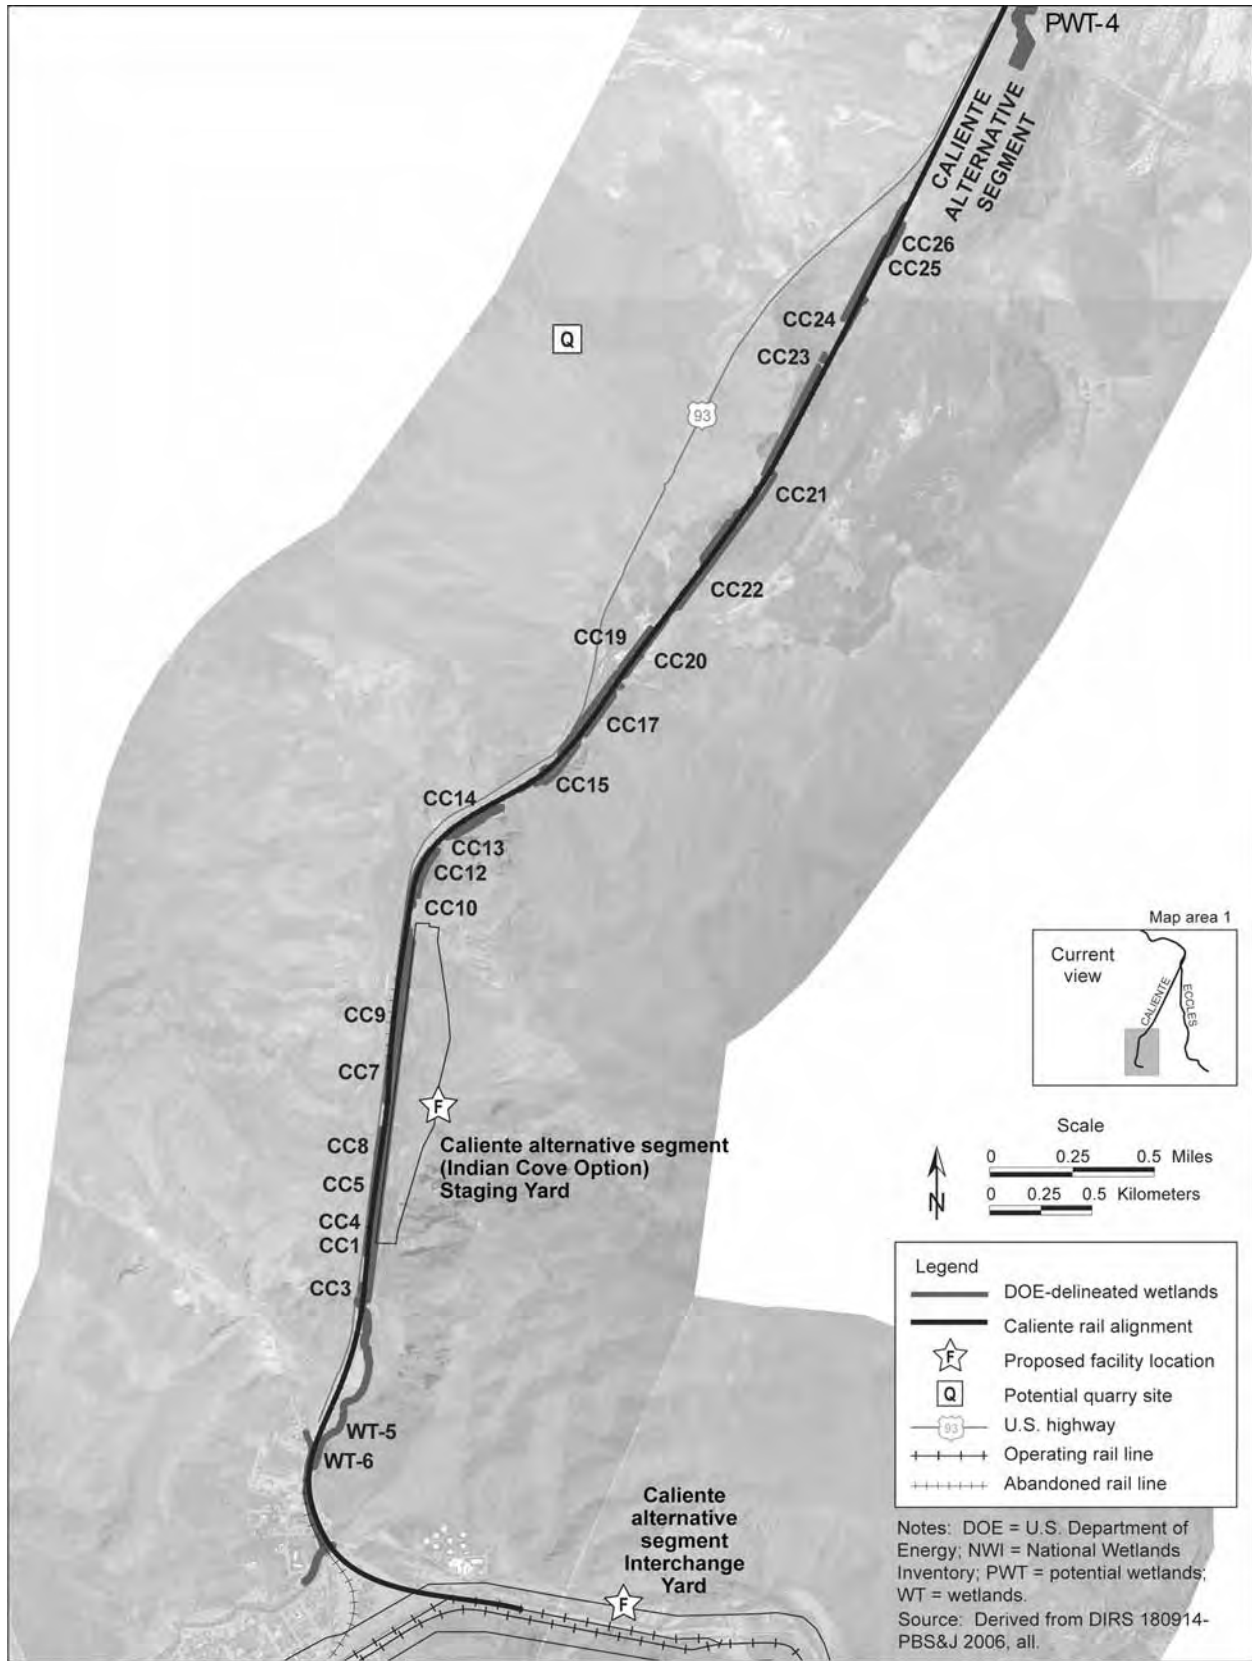


Figure 3-62. Wetlands along the southern portion of Caliente alternative segment.

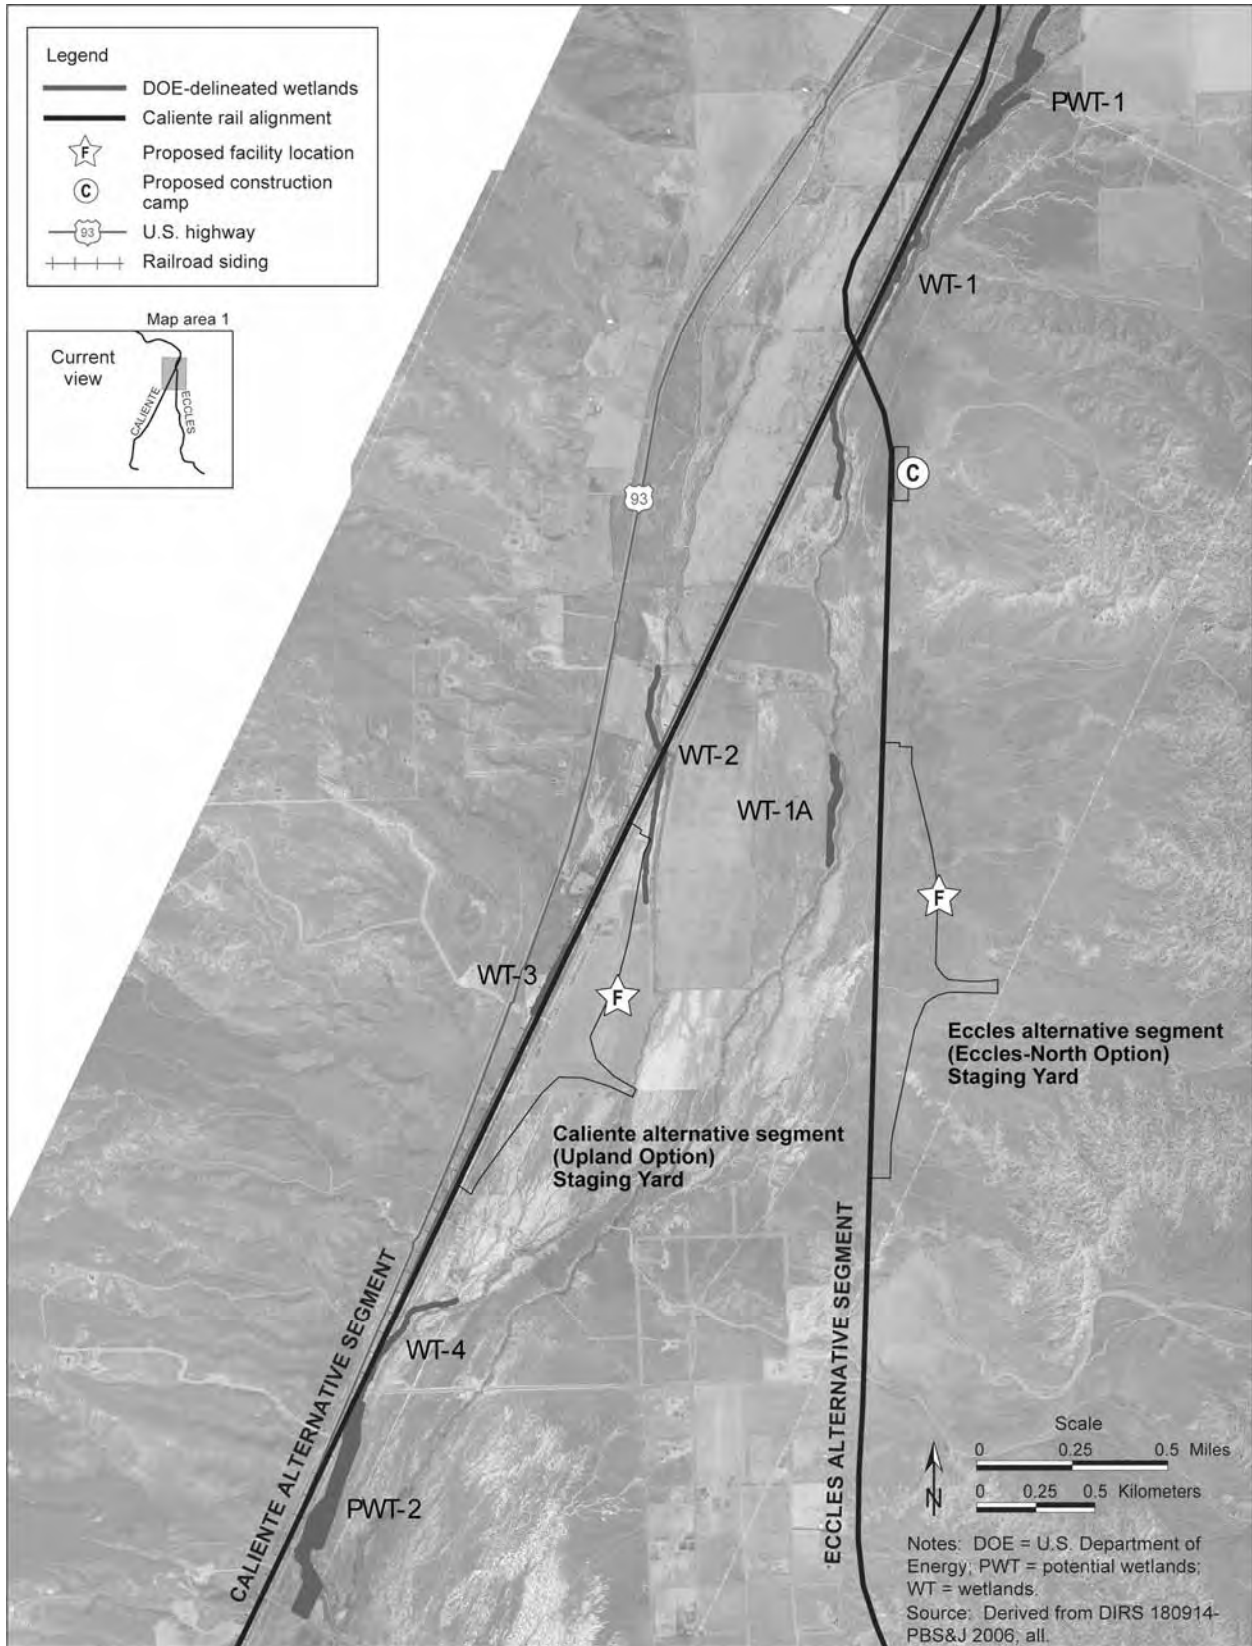


Figure 3-63. Wetlands along northern portion of Caliente alternative segment.

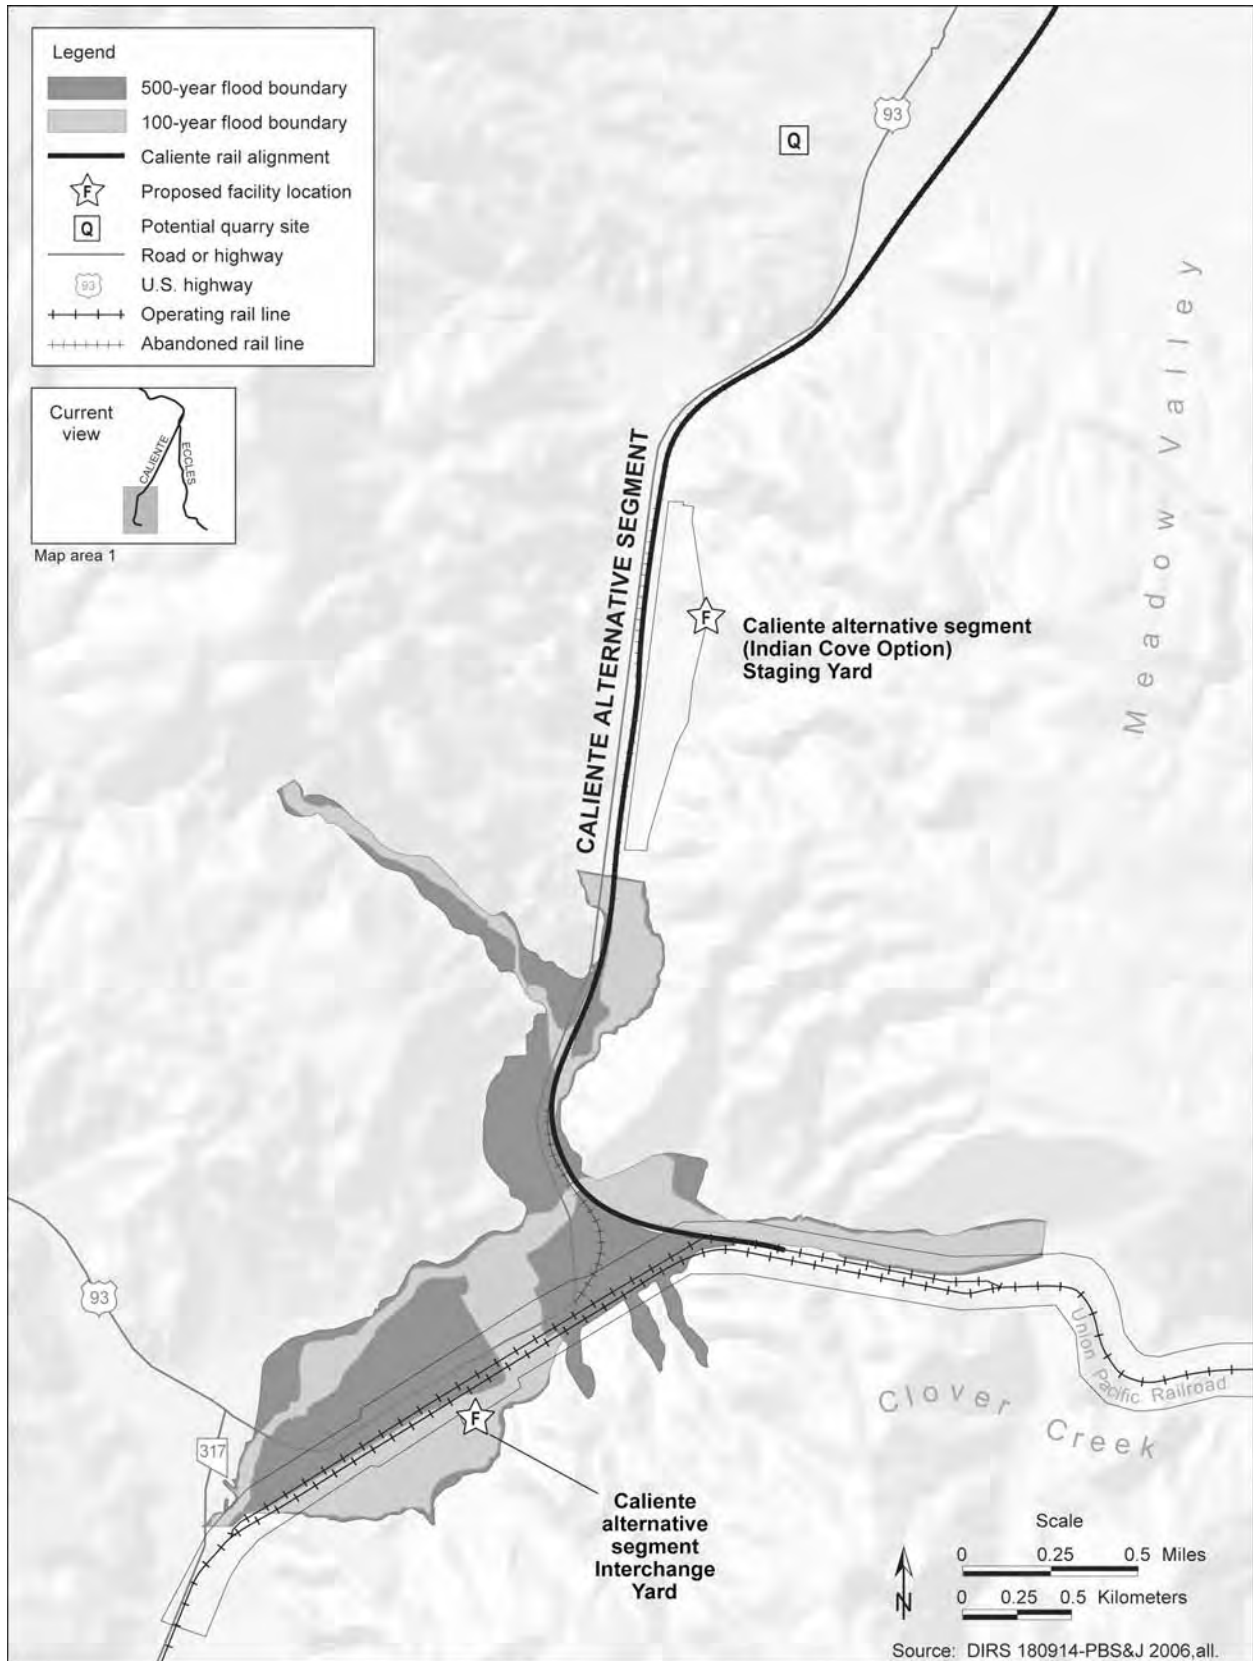


Figure 3-64. FEMA floodplain map for Caliente alternative segment.

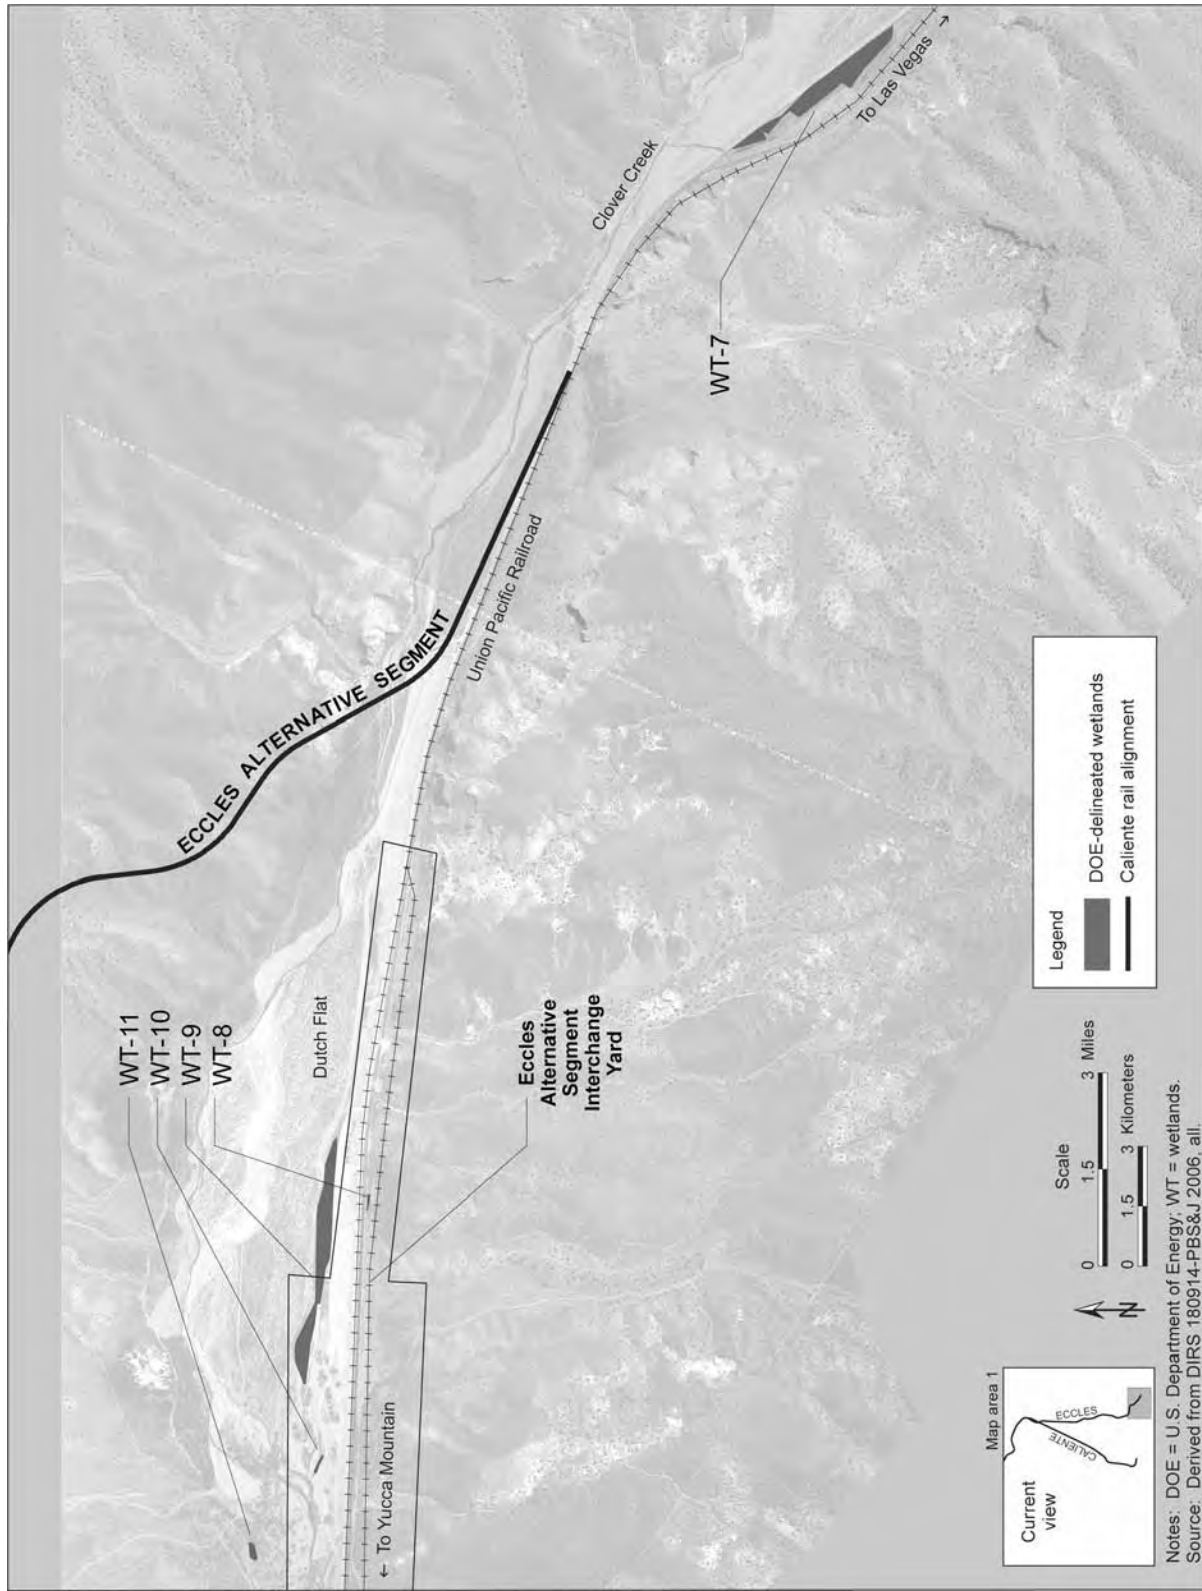


Figure 3-65. Wetlands in vicinity of Eccles Interchange Yard.

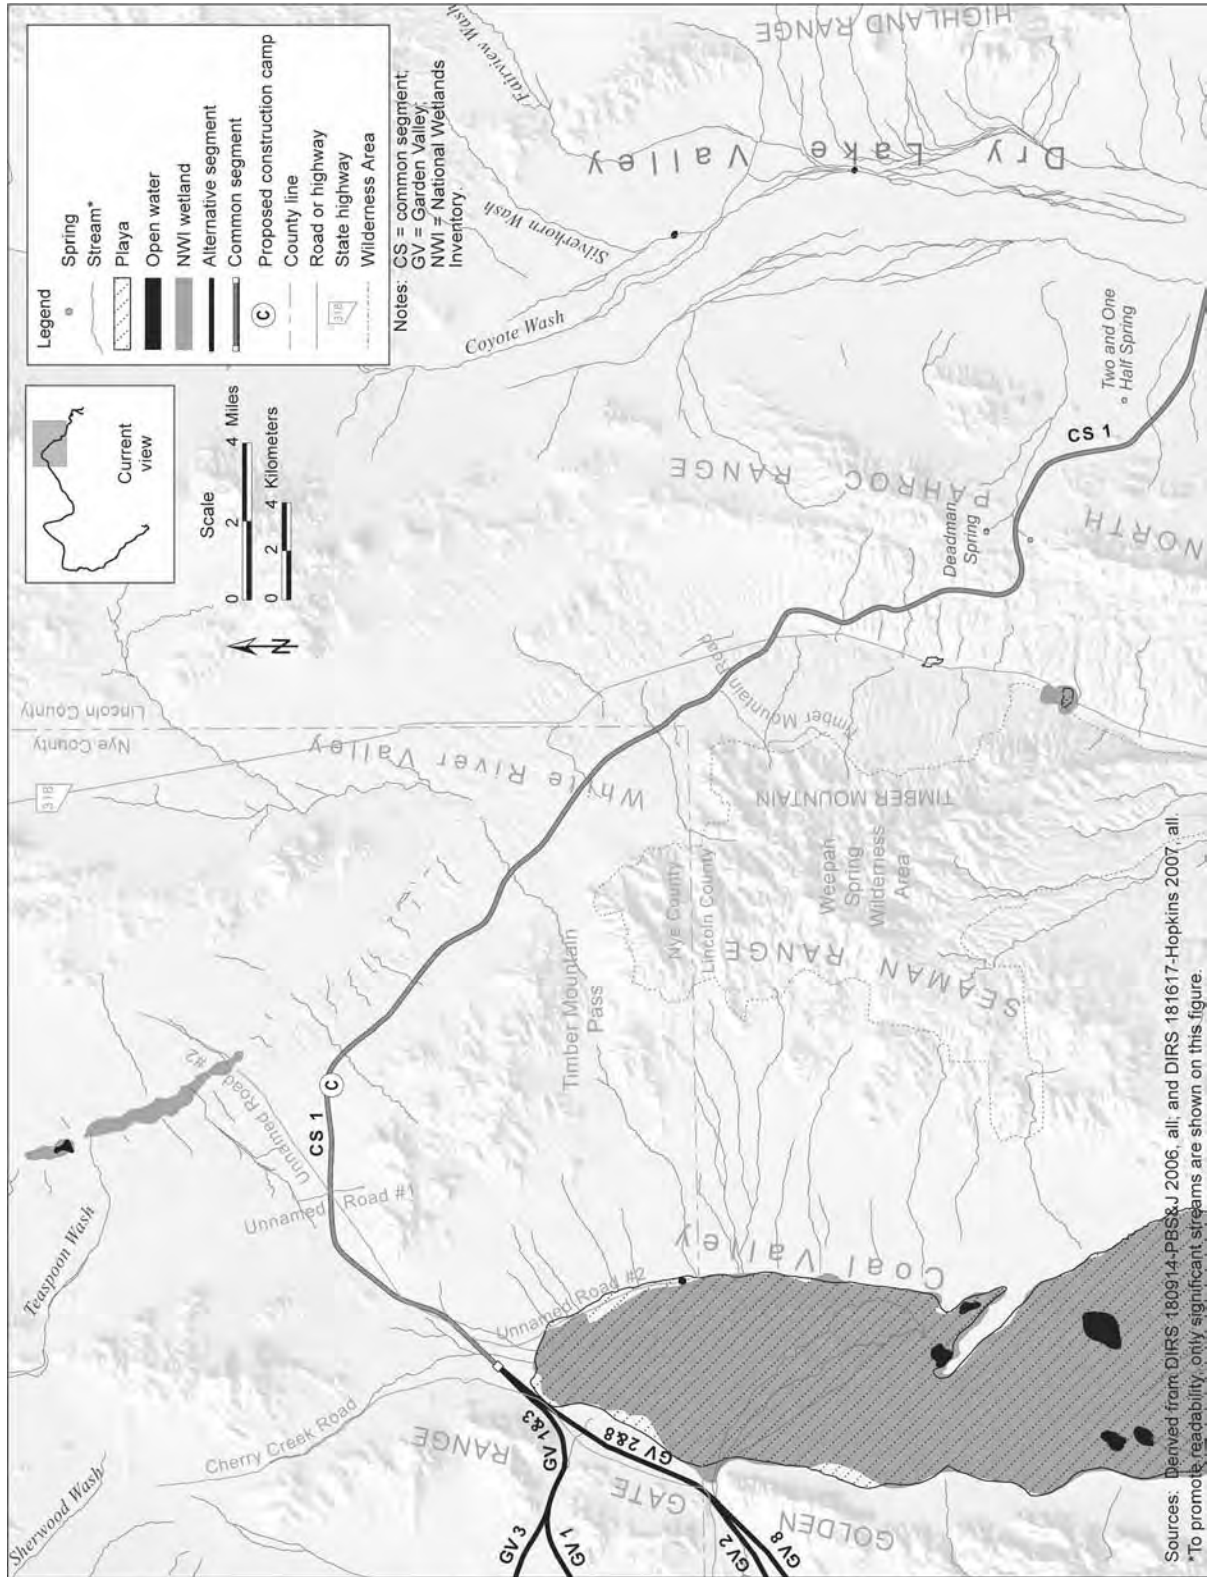


Figure 3.-66. Surface drainage within map area 2.

Table 3-24. Hydrologic features potentially relevant to Caliente rail alignment common segment 1.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<p>Drainage from the Highland Range and the Chief Range. On the east side of these mountain ranges, flow travels down to Meadow Valley Wash. On the west side, the flow travels down through Bennett Pass and Dog Hollow to Coyote Wash and farther to Dry Lake Valley and Cliff Reservoir. Drainage from the east side of the North Pahroc Range to Dry Lake Valley Playa and Cliff Reservoir.</p> <p>Drainage from the Seaman Range and the North Pahroc Range to White River. Drainage from the western side of the Seaman Range to Coal Valley and on to Coal Valley Reservoir.</p>	<p>Segment would cross headwater tributaries of Bennett Springs Wash, Coyote Wash, and 20 unnamed tributaries. Alignment would cross seven of the unnamed tributaries multiple times.</p> <p>Alignment would cross White River and 54 unnamed tributaries, and two unnamed tributaries to the Coal Valley Playa.</p> <p>Alignment would cross a total of 144 washes.</p>	<p>Alignment would be within 1.6 kilometers of Casselton Wash and Little Red Wash. Alignment would cross within 1.2 kilometers of Dry Lake Valley Playa.</p> <p>White River Reservoir, Rye Patch Reservoir, pond/reservoir in the foothills of the Seaman Range.</p> <p>Three DOE-delineated isolated wetlands within 0.63 kilometer.</p> <p>Bennett Springs 1.1 kilometers north.</p> <p>Black Rock Spring 1.2 kilometers south.</p> <p>Deadman Spring 1.1 kilometers north.</p> <p>Sand Spring 1.2 kilometers south.</p> <p>Two and One Half Spring 1.4 kilometers north.</p> <p>Unnamed spring 0.63 kilometer south.</p>

- a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 62-63.
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert kilometers to miles, multiply by 0.62137.

In the North Pahroc Range pass (between White River Valley to the west and Dry Lake Valley to the east), Caliente common segment 1 would pass within 600 meters (2,000 feet) of a small group of three isolated wetlands. DOE delineated these isolated, non-jurisdictional (not regulated under Section 404 of the Clean Water Act), wetlands during the field survey in support of this Rail Alignment EIS (DIRS 180914-PBS&J 2006, Figure 4S). Appendix F provides additional information on these wetlands.

The Federal Emergency Management Agency has published one flood map for part of the area that Caliente common segment 1 would cross. This map covers a portion of land in White River Valley and the adjacent north end of the Seaman Range. According to this flood map, common segment 1 would not cross any floodplains, but the map does show a floodplain approximately 2 kilometers (1.2 miles) northeast of the rail alignment along the White River. It is reasonable to assume that the White River channel is a floodplain. It is also reasonable to assume that the playas of the Dry Lake Valley have associated floodplains. Appendix F provides additional information on floodplains.

There is a series of springs that would be outside the construction right-of-way but within 1.6 kilometers (1 mile), near the summit of the North Pahroc Range pass. Table 3-24 lists these springs. Bennett Springs is on private land in the general area of the eastward approach to Bennett Pass.

3.2.5.3.3 Garden Valley Alternative Segments

In Garden Valley, the Caliente rail alignment has four alternative segments (Table 3-25 and Figure 3-67). The four alternative segments that would cross Garden Valley are designated Garden Valley 1, Garden Valley 2, Garden Valley 3 (the northernmost route) and Garden Valley 8 (the southernmost route).

Table 3-25. Hydrologic features potentially relevant to the Garden Valley alternative segments (page 1 of 2).^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Garden Valley alternative segment 1</i>		
<p>Drainage from the Quinn Canyon Range, the Grant Range, and the Worthington Mountains across Garden Valley and through the Golden Gate Range to join drainage from the Seaman Range and flow farther to Coal Valley and to Coal Valley Reservoir. Alternative segment encompasses a small headwater section of the Sand Spring Valley drainage system.</p>	<p>Segment would cross Cottonwood Creek, Pine Creek, Cherry Creek, Bruno Creek, Sand Creek, and 20 other tributaries.</p> <p>Coal Valley Playa.</p>	<p>30 unnamed washes/tributaries for described drainage systems.</p> <p>Ponds/reservoirs.</p> <p>Modes Hole Spring 1.3 kilometers north.</p>
<i>Garden Valley alternative segment 2</i>		
<p>Drainage from the Quinn Canyon Range, the Grant Range, and the Worthington Mountains across Garden Valley and through the Golden Gate Range to join drainage from the Seaman Range and flow farther to Coal Valley and to Coal Valley Reservoir. Alternative segment encompasses a small headwater section of the Sand Spring Valley drainage system.</p>	<p>Segment would cross Cottonwood Creek, the Golden Gate Range water gap, and 17 other tributaries. The segment would follow the drainage of Garden Valley down though the Golden Gate Range Water Gap and cross the drainage system in multiple places.</p> <p>Coal Valley Playa.</p>	<p>22 unnamed washes/tributaries for described drainage systems.</p>
<i>Garden Valley alternative segment 3</i>		
<p>Drainage from the Quinn Canyon Range, the Grant Range, and the Worthington Mountains across Garden Valley and through the Golden Gate Range to join drainage from the Seaman Range and flow farther to Coal Valley and to Coal Valley Reservoir. Alternative segment encompasses a small headwater section of the Sand Spring Valley drainage system.</p>	<p>Segment would cross Cottonwood Creek, Pine Creek, Cherry Creek, Bruno Creek, Sand Creek, and 23 other tributaries.</p> <p>Coal Valley Playa.</p>	<p>Pond/reservoir.</p> <p>Modes Hole Spring 1.3 kilometers east.</p>

Table 3-25. Hydrologic features potentially relevant to the Garden Valley alternative segments (page 2 of 2).

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Garden Valley alternative segment 8</i>		
Drainage from the Quinn Canyon Range, the Grant Range, and the Worthington Mountains across Garden Valley and through the Golden Gate Range to join drainage from the Seaman Range and flow farther to Coal Valley and to Coal Valley Reservoir. Alternative segment encompasses a small headwater section of the Sand Spring Valley drainage system.	Segment would cross Cottonwood Creek, the Golden Gate Range Water Gap, and 16 other tributaries. Coal Valley Playa.	Ponds/reservoirs. Put Back Spring 0.42 kilometer west.

- a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 61-62.
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert kilometers to miles, multiply by 0.62137.

Construction camp 4 would be along Joe Barney Pass Road, approximately 4.8 kilometers (3 miles) northeast of the junction any of the Garden Valley alternative segments with Caliente common segment 2 (Figure 3-63). There are no potential quarry sites along the Garden Valley alternative segments (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

All four of the Garden Valley alternative segments would cross through the Golden Gate Range, but at two different locations. The southerly alternative segments (Garden Valley 2 and 8) would pass through the topographic feature designated as Water Gap and the northerly alternative segments (Garden Valley 1 and 3) would cross an unnamed pass approximately 7.2 kilometers (4.5 miles) north of Water Gap. In Garden Valley, intermittent surface water from the Quinn Canyon Range, the Grant Range, and the Worthington Mountains drains via Cottonwood Creek and its tributaries through the Golden Gate Water Gap. After the Garden Valley alternative segments pass through the Golden Gate Range, they would cross Garden Valley at different locations on their way to a common point on the north end of the Worthington Mountains. Along Garden Valley alternative segments 1 and 3, surface water flows from the Quinn Canyon Range, the Grant Range, and Worthington Mountains via Cottonwood Creek, Bruno Creek, Sand Creek, Pine Creek, Cherry Creek, and unnamed tributaries through the Golden Gate Water Gap to join drainage from the Seaman Range and flow farther to Coal Valley. In Coal Valley, the water from Garden Valley seeps into basin fill sediments. Garden Valley alternative segment 3, which would loop a bit farther to the north, would cross these drainage features closest to their source in the Quinn Canyon Range. There are no streamflow or water-quality data available for the ephemeral washes the Garden Valley alternative segments would cross.

The Garden Valley alternative segments would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin. Therefore, there are no stream channels or washes identified along the proposed segments designated as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p.7).

The National Wetlands Inventory dataset identifies Coal Valley Playa as a wetland; however, DOE field studies in support of this Rail Alignment EIS confirmed that there are no hydric soils, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near the rail alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 3). Garden Valley alternative segment 2 would skirt (within 1 kilometer [0.62 mile]) Coal Valley Playa. Coal Valley Playa is an area expected to be susceptible to flooding and standing water.

The Federal Emergency Management Agency has not published flood maps of this region; however, it is likely that areas in Garden Valley experience periodic flooding. Garden Valley alternative segment 2 would cross the drainage feature designated as Water Gap, which is described as a topographically constricted area through which several small drainage channels run. Although the area is normally dry, Water Gap must be considered a suspect area for flooding. Appendix F discusses floodplains and wetlands.

There are two springs within the region of influence for the Garden Valley alternative segments. Modes Hole Spring is 1.3 kilometers (0.78 mile) east of Garden Valley alternative segments 1 and 3 and Put Back Spring is 0.42 kilometer (0.26 mile) west of Garden Valley alternative segment 8 (see Figure 3-63).

3.2.5.3.4 Caliente Common Segment 2 (Quinn Canyon Range Area)

Leaving the west end of Garden Valley, Caliente common segment 2 would cross west along the northern edge of Sand Spring Valley, skirting the Quinn Canyon Range, before it crossed into Railroad Valley, and then Reveille Valley (Table 3-26 and Figures 3-67 and 3-68). Construction camp 5 would be along Caliente common segment 2 approximately 11 kilometers (6.5 miles) east of the junction of Caliente common segment 2 and the South Reveille alternative segments. There are no potential quarry sites along common segment 2 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-D).

Caliente common segment 2 would cross several stream channels or washes, as listed in Table 3-26. The segment would run perpendicular to drainage flow from the Quinn Canyon Range to a playa in Sand Spring Valley. After crossing Sand Spring Valley, Caliente common segment 2 would enter Railroad Valley and cross State Highway 375. After crossing State Highway 375 in Railroad Valley, Caliente common segment 2 would cross unnamed washes that originate in the northern tip of the Belted Range (Gray Top Mountain) and drain to the northeast and north in Railroad Valley toward a playa area. Caliente common segment 2 would terminate south of the Reveille Range. There is a notable unnamed wash less than 0.8 kilometer (0.5 mile) to the north of the end of Caliente common segment 2.

Caliente common segment 2 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin. Therefore, there are no stream channels or washes identified along the segment designated as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7). There are no streamflow or water-quality data available for the streams and washes Caliente common segment 2 would cross.

The National Wetlands Inventory dataset does not indicate the presence of wetlands along Caliente common segment 2. Appendix F provides additional information on wetlands along the Caliente rail alignment.

Federal Emergency Management Agency flood maps cover only the west end of Caliente common segment 2 in Railroad and Reveille Valleys. The maps show that Caliente common segment 2 would not cross any floodplains. Appendix F provides additional information on floodplains along the Caliente rail alignment.

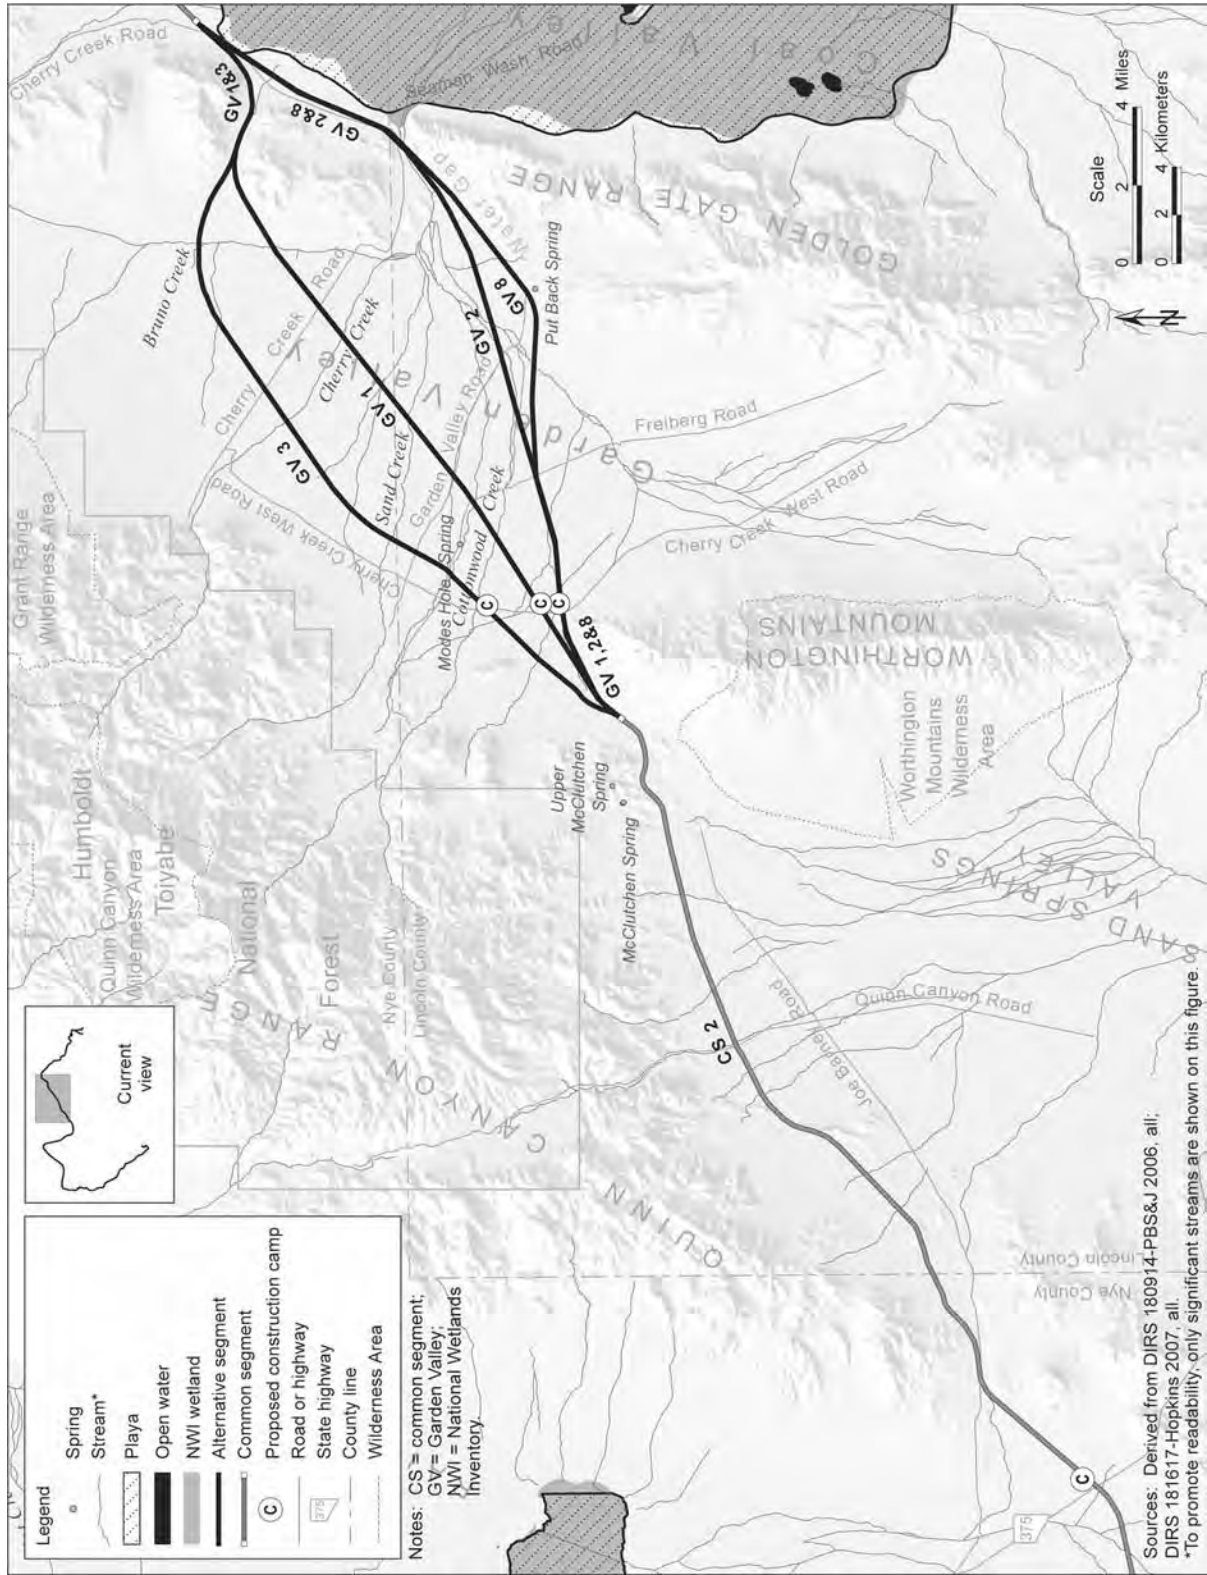


Figure 3-67. Surface drainage within map area 3.

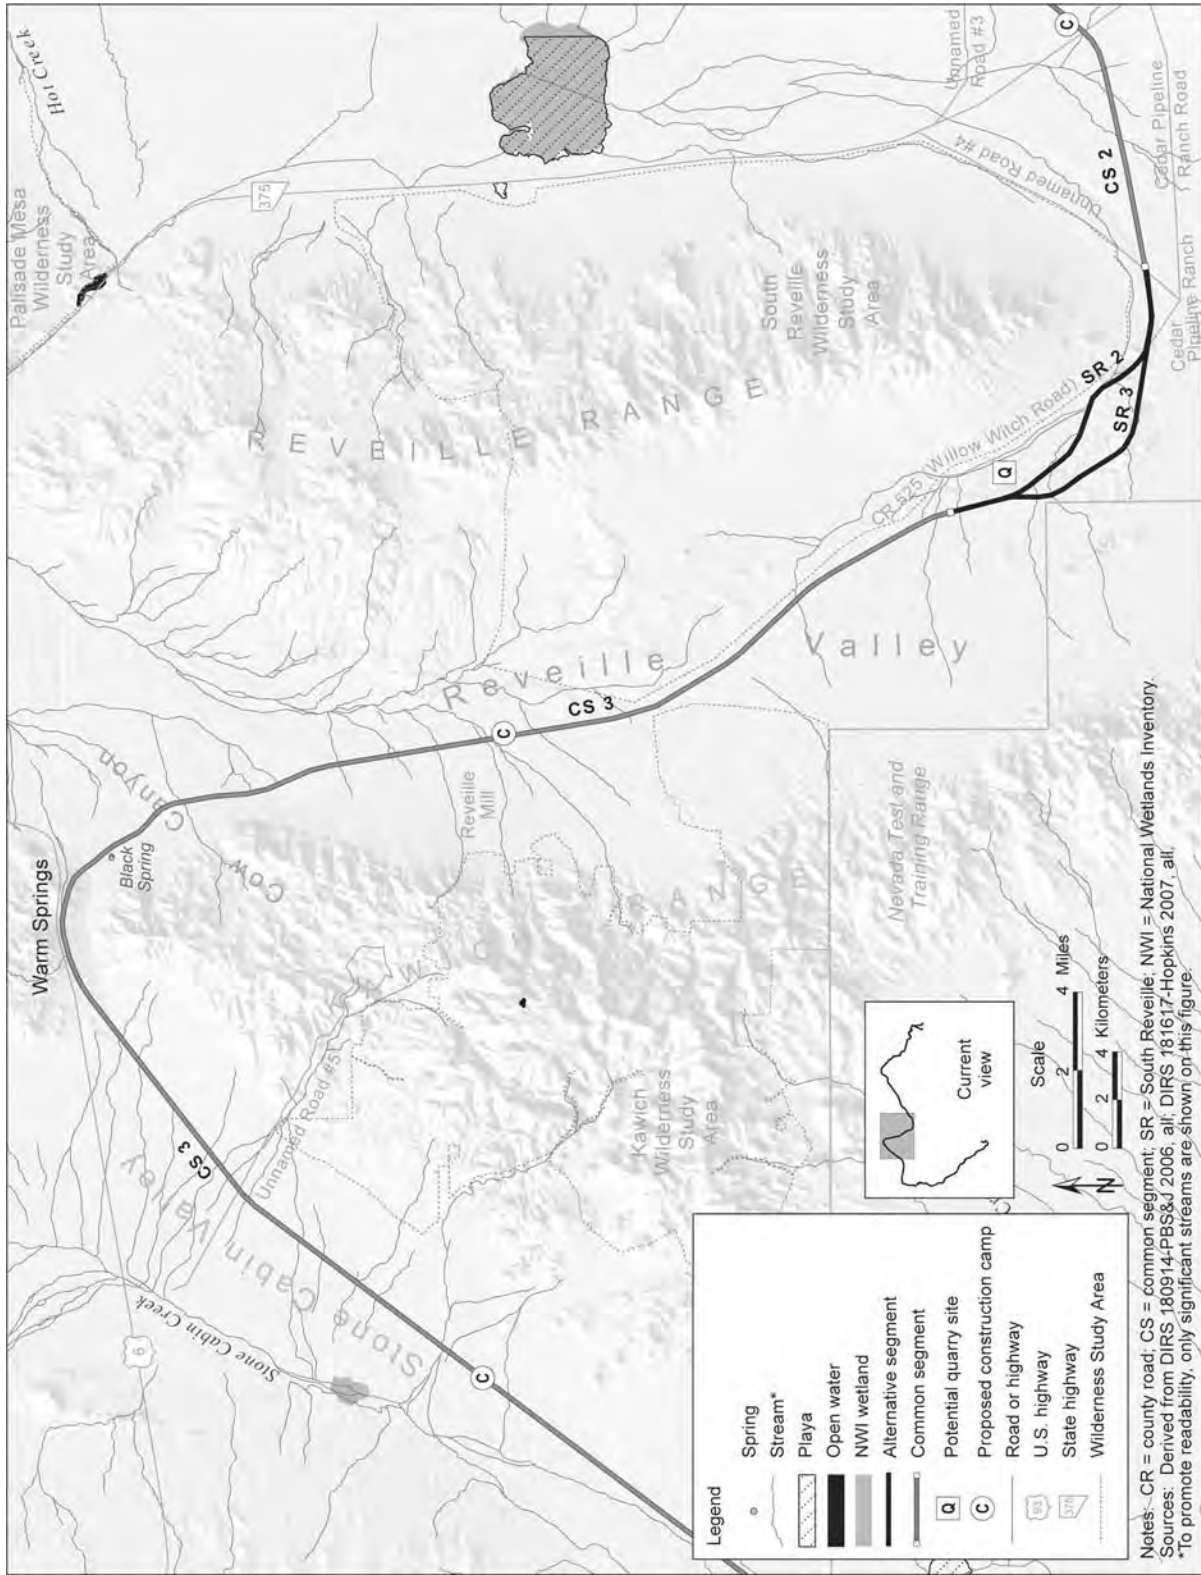


Figure 3-68. Surface drainage within map area 4.

Table 3-26. Hydrologic features potentially relevant to Caliente rail alignment common segment 2.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from the Worthington Mountains and the southern tip of the Quinn Canyon Range to playas in Sand Spring Valley and Railroad Valley, respectively. Drainage from southern end of Reveille Range and northern tip of the Belted Range (Gray Top Mountain) to Railroad Valley.	Segment would cross 27 unnamed tributaries and 8 tributaries to Railroad Valley Wash.	McCutchen Spring 1 kilometer north. Upper McCutcheon Spring 1.2 kilometers north. Cedar Pipeline Ranch Spring 1.6 kilometers south.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 61.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

McCutchen Spring would be 1 kilometer (0.65 mile) north and Upper McCutcheon Spring would be 1.2 kilometers (0.76 mile) north of Caliente common segment 2.

3.2.5.3.5 South Reveille Alternative Segments

Caliente common segment 2 would end near the south end of the Reveille Range where DOE is considering two short alternative segments (South Reveille 2 and 3) (Table 3-27 and Figure 3-68). There are two potential quarry sites, NN-9a and NN-9b, in Reveille Valley to the east of the junction of the South Reveille alternative segments and Caliente common segment 3. Potential quarry site NN-9A would be about 490 meters (1,600 feet) east of where the South Reveille alternative segments converge (as shown on Figure 3-26) before joining Caliente common segment 3. Quarry site NN-9B would be within 300 meters (1,000 feet) north of South Reveille alternative segment 2 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Both alternative segments would be within areas that receive drainage from the Kawich Range and the Reveille Range, which then flows into Railroad Valley. South Reveille alternative segment 2 would proceed north up Reveille Valley, along a notable unnamed braided wash, crossing it several times. South Reveille alternative segment 3 would run farther west before proceeding up Reveille Valley, thus avoiding the wash in this area. Both alternative segments would cross tributaries associated with this braided channel. There are no washes within the areas of the two potential South Reveille quarry sites. However, potential quarry NN-9A would overlie an unnamed tributary of the braided channel.

South Reveille alternative segments 2 and 3 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin. Therefore, there are no stream channels or washes identified along the alternative segments that are designated as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7). There are no streamflow or water-quality data available for the streams and washes these alternative segments would cross.

The National Wetlands Inventory dataset does not indicate the presence of wetlands along either of the South Reveille alternative segments. Appendix F provides additional information on wetlands located along the Caliente rail alignment.

Table 3-27. Hydrologic features potentially relevant to the South Reveille alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>South Reveille alternative segment 2</i>		
Drainage from the Kawich Range and the Reveille Range to Reveille Valley and on to Railroad Valley.	<p>Segment would cross tributaries to the unnamed notable braided wash running from Reveille Valley into Railroad Valley.</p> <p>Segment would run along and cross the same notable braided wash from Reveille Valley into Railroad Valley for approximately of 3.1 kilometers.</p> <p>Segment would cross a total of 9 washes.</p>	None.
<i>South Reveille alternative segment 3</i>		
Drainage from the Kawich Range and the Reveille Range to Reveille Valley and on to Railroad Valley.	<p>Segment would cross tributaries to unnamed braided wash running from Reveille Valley into Railroad Valley.</p> <p>Segment would cross a total of 11 washes.</p>	None.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 61.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Federal Emergency Management Agency flood maps cover all of the land area of these two short alternative segments. Although South Reveille alternative segment 2 would run alongside a notable unnamed braided wash, it would not cross it. South Reveille 2 would run through a 3.1-kilometer (1.9-mile) stretch of the 100-year floodplain associated with five of the tributaries that drain to the notable unnamed braided wash. South Reveille alternative segment 3, farther away from the wash, would not cross any 100-year floodplains. Appendix F provides additional information on the floodplains South Reveille alternative segment 2 would encounter.

There are no springs within the South Reveille alternative segments regions of influence.

3.2.5.3.6 Caliente Common Segment 3 (Stone Cabin Valley Area)

Caliente common segment 3 would run northward through the Reveille Valley (Table 3-28 and Figures 3-68 and 3-69) and then skirt the western side of the Kawich Range in a southerly direction approximately 3.2 to 4.8 kilometers (2 to 3 miles) from and parallel to Stone Cabin Valley. DOE would construct the Maintenance-of-Way Trackage Facility in the southwestern portion of Stone Cabin Valley near the northern boundary of the Nevada Test and Training Range. The Maintenance-of-Way Trackage Facility would be on the north side of the common segment approximately 26 kilometers (16 miles) east of its junction with the Goldfield alternative segments (Figure 3-65). **Construction camps** 6, 7, and 8 would be along Caliente common segment 3. There are no surface-water features at or near the proposed locations of the Maintenance-of-Way Trackage Facility or construction camps. There are no potential quarry sites along this common segment (DIRS 180922-Nevada Rail Partners 2007, Figure 3-F).

Table 3-28. Hydrologic features potentially relevant to Caliente common segment 3.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from the Kawich Range and the Reveille Range to Reveille Valley and on to Hot Creek Valley.	36 tributaries/washes, 33 flowing toward Reveille Valley and on to Hot Creek Valley; the other 3 unnamed washes flowing toward a playa in Railroad Valley.	Mud Lake Playa. Black Spring 0.31 kilometer east.
Drainage from the Kawich Range and the Reveille Range to Stone Cabin Valley and Reveille Valley, respectively. Drainage from the west side of the Kawich Range flows to Stone Cabin Valley. Drainage from the east side of the Kawich Range flows to Reveille Valley and on to Hot Creek Valley.	Segment would cross 6 tributaries of Stone Cabin Creek/Willow Creek and 15 tributaries of Hot Creek, including Cow Canyon Wash. Segment would run parallel to drainage running to the Reveille Range.	
Drainage from the west side of the Kawich Range, Monitor Range, Monitor Hills, San Antonio Mountains to Stone Cabin Valley and Ralston Valley and on to Mud Lake Playa and Cactus Flats.	Segment would cross Ralston Valley Wash, Saulsbury Wash, and Willow Creek (also referred to as Stone Cabin Creek), and 32 unnamed tributaries. Maintenance-of-Way Tracksides Facility would cross one notable drainage.	

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 54-55, 59, 61.
 b. To convert meters to feet, multiply by 3.2808.
 c. To convert kilometers to miles, multiply by 0.62137.

Drainage from the east side of the Kawich Range and drainage from the Reveille Range flows to Reveille Valley and on to Hot Creek Valley. Drainage from the west side of the Kawich Range flows down to Stone Cabin Valley. Common segment 3 would cross three tributaries to the unnamed braided channel that flows toward Railroad Valley, tributaries that flow on to Hot Creek Valley, including Cow Canyon Wash, and tributaries of Willow Creek in Stone Cabin Valley. The Cow Canyon wash drains northeast to a notable north-flowing wash on the floor of the Reveille Valley.

After crossing Warm Springs Summit, Caliente common segment 3 would turn to the southwest and proceed through Stone Cabin Valley skirting the western side of the Kawich Range in a southerly direction generally parallel to Stone Cabin Valley. Closer to the northern boundary of the Nevada Test and Training Range, common segment 3 would turn west and cross the braided drainage path designated as Willow Creek. Willow Creek provides drainage for the southern end of the Monitor Range (including Monitor Hill) and the western portion of the Kawich Range. Tributaries such as Saulsbury Wash feed into this drainage from north of U.S. Highway 6, and the drainage terminates at Mud Lake Playa, approximately 5.1 kilometers (3.2 miles) south of the termination of common segment 3. It is joined by a second notable tributary of Mud Lake Playa flowing north to southwest out of the central portion of Ralston Valley. A large portion of Mud Lake Playa is within the Nevada Test and Training Range. Common segment 3 would skirt along the northern and western boundaries of this large playa, approximately 1.4 kilometers (0.89 mile) away from the playa.

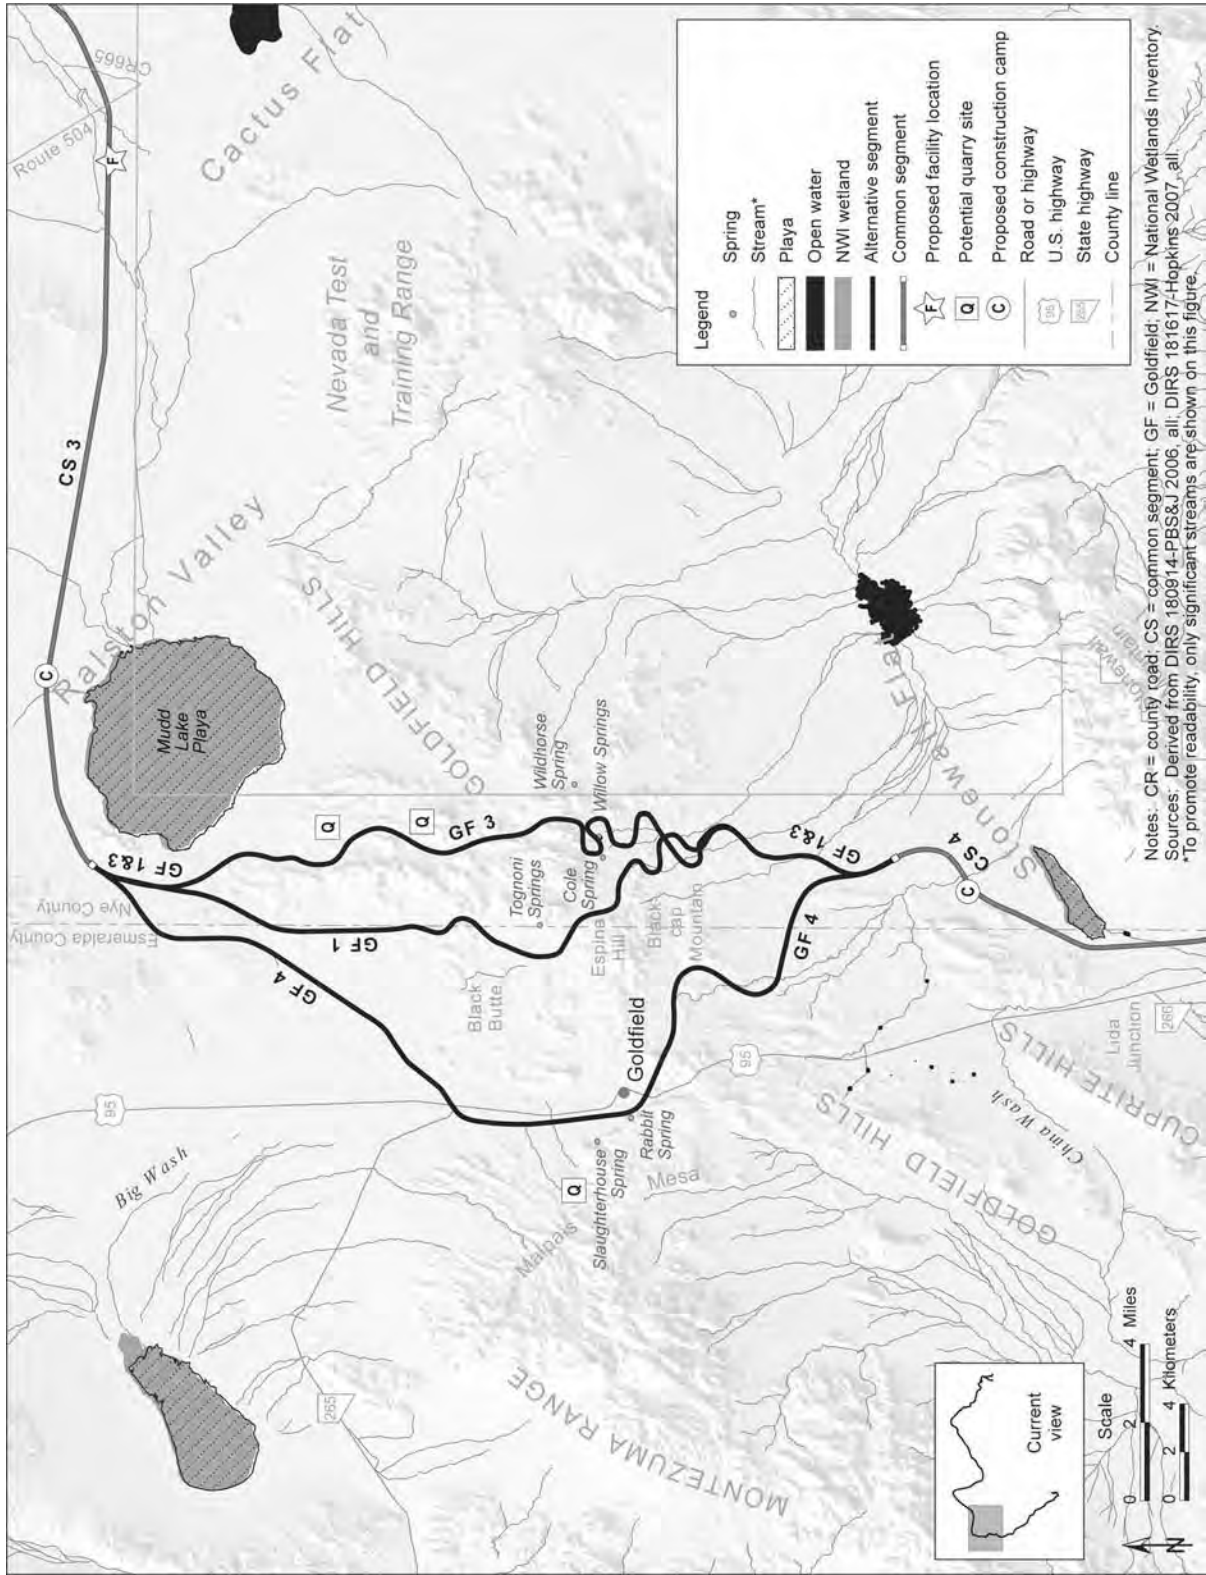


Figure 3-69. Surface drainage within map area 5.

Caliente common segment 3 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180914-PBS&J 2006, p. 7). No streamflow or water-quality data are available for the streams and washes common segment 3 would cross.

The National Wetlands Inventory map classifies Mud Lake Playa as a wetland; however, field studies conducted in support of this Rail Alignment EIS confirmed that there are no hydric soils, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near the rail alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 3). DOE did not identify any other wetlands along common segment 3. Appendix F provides additional information on wetlands along the Caliente rail alignment.

Most of common segment 3 would cross land that has Federal Emergency Management Agency flood map coverage. According to these maps, common segment 3 would not cross floodplains until it neared the vicinity of Mud Lake Playa and its tributaries. From the east, common segment 3 would first encounter a floodplain associated with Stone Cabin Creek and Saulsbury Wash as they converge on the area of the playa. The segment would then cross the floodplain of a notable wash draining the central Ralston Valley and finally cross through two legs of a drainage system coming down from western Ralston Valley. Appendix F provides more information on the floodplains common segment 3 would cross.

Black Spring is within the Caliente common segment 3 region of influence, approximately 0.31 kilometer (0.19 mile) east of the common segment.

3.2.5.3.7 Goldfield Alternative Segments

Turning south at Mud Lake Playa, the Caliente rail alignment has three proposed alternative segments: the western alternative segment (Goldfield 4), a central alternative segment (Goldfield 1), and an eastern alternative segment (Goldfield 3) (Table 3-29 and Figure 3-69). From the point where Caliente common segment 3 would end, Goldfield alternative segment 4 would proceed toward the southwest, passing around the west side of the community of Goldfield. Goldfield alternative segment 1 would pass southward through the center of the Goldfield Hills, first generally along the boundary between Esmeralda and Nye Counties, along the eastern side of Goldfield, and then winding southeastward toward a point beyond which the alternative segment would coincide with the southern portion of Goldfield alternative segment 3. The eastern alternative segment (Goldfield 3) would trend south-southeastward, in a meandering path, to the east of Goldfield and to the west of the western boundary of the Nevada Test and Training Range. The Goldfield alternative segments would end at the western part of Stonewall Flat, approximately 16 kilometers (10 miles) southeast of Goldfield.

There are three potential quarry sites along the Goldfield alternative segments – two along Goldfield alternative segment 3 and one that would be accessible from Goldfield alternative segment 4. Quarry sites NS-3A and NS-3B would be northeast of Goldfield 3 approximately 4 kilometers (2.5 miles) south of its junction with common segment 3. Quarry site ES-7 would be to the west of Goldfield 4 approximately 24 kilometers (15 miles) southwest of its junction with common segment 3 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-F).

Generally, drainage within the area of the Goldfield alternative segments flows from the Goldfield Hills, the Montezuma Range, and the Chispa Hills to Mud Lake, Mud Lake Playa, Alkali Lake Playa, and Stonewall Flat. While still north of Goldfield, Goldfield alternative segments 1 and 4 would cross a notable tributary to Indian Springs Canyon Wash, which drains the northwestern side of the Montezuma Range. Indian Springs Canyon Wash merges with Big Wash along the east side of U.S. Highway 95 and then terminates approximately 10 kilometers (6.2 miles) west of U.S. Highway 95 at the Alkali Lake

Playa. As they passed through the community of Goldfield and the Chispa Hills, each alternative segment would cross numerous unnamed tributaries, as listed in Table 3-29.

Table 3-29. Hydrologic features potentially relevant to the Goldfield alternative segments.a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Goldfield alternative segment 1</i>		
Drainage from the Goldfield Hills and Chispa Hills to Mud Lake, Mud Lake Playa, Alkali Lake Playa, and Stonewall Flat.	Segment would cross tributary to Big Wash and unnamed tributaries that flow to Mud Lake, Stonewall Flat Playa, Mud Lake Playa, and Alkali Lake Playa. Segment would cross a total of 25 washes.	Mud Lake Playa 1.4 kilometers west. Cole Spring 1 kilometer east. Tognoni Springs 1.2 kilometers east.
<i>Goldfield alternative segment 3</i>		
Drainage from the Goldfield Hills and Chispa Hills; to Mud Lake, Mud Lake Playa, Alkali Lake Playa, and Stonewall Flat.	Segment would cross unnamed tributaries that flow to Mud Lake, Stonewall Flat Playa, and Mud Lake Playa. Segment would cross unnamed wash draining southeastern Goldfield Hills to Stonewall Flat. Segment would cross a total of 15 washes. Willow Springs 0.14 kilometer north.	Mud Lake Playa 1.4 kilometers west. Cole Spring 0.33 kilometer west. Wildhorse Spring 1.5 kilometers east.
<i>Goldfield alternative segment 4</i>		
Drainage from the Montezuma Range, Goldfield Hills, and Chispa Hills to Mud Lake, Mud Lake Playa, Alkali Lake Playa, and Stonewall Flat.	Segment would cross 26 unnamed tributaries that flow to Mud Lake, Stonewall Flat Playa, Alkali Lake Playa, and Mud Lake Playa.	Rabbit Spring 0.22 kilometer west. Slaughterhouse Spring 0.97 kilometer west.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 59.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

In the area where Goldfield alternative segments 1, 3, and 4 would end (just before the start of Caliente common segment 4), the alternative segments would cross another notable drainage – an unnamed wash that drains the southeastern Goldfield Hills and into Mud Lake. Goldfield 4 would actually cross this same drainage feature four times – twice at points farther up the hill, then again in the area where it would be the same as the other two Goldfield alternative segments. Goldfield alternative segments 1 and 3 and a small portion of Goldfield alternative segment 3 would skirt around the western end of Mud Lake Playa, approximately 1.3 to 1.5 kilometers (0.83 to 0.94 mile) away.

The Goldfield alternative segments would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin. Therefore, there are no stream channels or washes identified along the alternative segments designated as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7). No streamflow or water-quality data are available for the stream channels and washes these alternative segments would cross.

The potential quarry sites to the northeast of the Goldfield alternative segments, NS-3A and NS-3B, would excavate and extract rock from two hills along the east side of Goldfield alternative segment 3 and a hill centered along Goldfield alternative segment 3. An unnamed wash that would run nearly parallel to Goldfield 3 flows between the two hills DOE would quarry as part of the NS-3A quarry site. This unnamed wash appears to originate from the hills that would be excavated and flows toward Mud Lake Playa. The proposed access road to potential quarry NS-3A would cross one unnamed wash that flows toward Mud Lake Playa. The NS-3B quarry site would not intersect any washes. The potential quarry site to the west of the Goldfield alternative segments, ES-7, would not intersect any surface-water features; however, the proposed access road to this quarry would run alongside and cross one unnamed wash draining this area and would cross another. The first half of this road would run along existing roads, while the final stretch would be newly constructed (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

The National Wetlands Inventory dataset does not indicate the presence of wetlands or identify any hydric soils along the Goldfield alternative segments. Appendix F provides additional information on wetlands along the Caliente rail alignment.

Federal Emergency Management Agency flood maps cover the northern and southern portions of the Goldfield alternative segments, but not the central area that includes the community of Goldfield. According to these maps, the alternative segments would cross a small portion of the floodplain associated with Mud Lake Playa and each alternative segment would cross a small portion of the floodplain associated with the notable drainage channel leading to Stonewall Flat Playa. Appendix F provides more information about this floodplain.

There are several springs in the region of influence for all three Goldfield alternative segments (see Table 3-29). Willow Springs would be within the rail line construction right-of-way 0.14 kilometer (0.09 mile) north of Goldfield alternative segment 3. Cole Spring would be 1 kilometer (0.63 mile) east and Tognoni Springs 1.2 kilometers (0.76 mile) east of Goldfield alternative segment 1. Wildhorse Spring would be 1.5 kilometers (0.91 mile) east and Cole Spring would be 0.33 kilometer (0.21 mile) west of Goldfield 3. Rabbit Spring would be 0.22 kilometer (0.14 mile) and Slaughterhouse Spring 0.97 kilometer (0.6 mile) west of Goldfield alternative segment 4.

3.2.5.3.8 Caliente Common Segment 4 (Stonewall Flat Area)

South of the Goldfield Hills, Caliente common segment 4 would run south, crossing Stonewall Flat and Alkali Flat (both within the Lida Valley) (Table 3-30 and Figures 3-65 and 3-66). Construction camp 9 would be alongside the common segment approximately 5 kilometers (3 miles) south of its junction with the Goldfield alternative segments. There are no potential quarry sites along this common segment (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

The U.S. Geological Survey has designated Stonewall Flat and Alkali Flat as playas. Common segment 4 would pass around the southwest end of Stonewall Flat Playa and then to the east of Alkali Flat Playa. Surface water from Stonewall Flat discharges to Lida Valley. The estimated runoff for Stonewall Flat is 490,000 cubic meters (17 million cubic feet) per year (DIRS 101811-DOE 1996, Section 4.2.5.1). Common segment 4 would cross this drainage path. There are no *perennial streams* in any of the surrounding basins; rather, the many washes that drain the upland areas convey ephemeral flow that ponds on the playas during periods of intense precipitation. Common segment 4 would cross 10 unnamed channels from Stonewall Mountain and the Cuprite Hills.

Caliente common segment 4 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin.

Table 3-30. Hydrologic features potentially relevant to Caliente common segment 4.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from northwest side of Stonewall Mountain and the Cuprite Hills to Stonewall Flat Playa and Lida Valley Alkali Flat Playa.	Jackson Wash, China Wash, and seven unnamed washes.	Alkali Flat/Lida Valley Playa, Stonewall Flat Playa.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 59.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Therefore, there are no stream channels or washes identified along the segment designated as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7). No streamflow or water-quality data are available for the stream channels and washes this common segment would cross.

The National Wetlands Inventory map identifies the playas associated with Stonewall Flat as wetlands; however, field studies conducted in support of this Rail Alignment EIS confirmed that there are no hydric soils, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near the alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 6). There are no wetlands within the region of influence for common segment 4. Appendix F provides additional information on wetlands along the Caliente rail alignment.

Federal Emergency Management Agency flood maps provide coverage for a good portion of common segment 4. The maps show that the common segment would cross 1 kilometer (0.6 mile) of the 100-year floodplain associated with the drainage between Stonewall Flat Playa and Alkali Flat Playa in Lida Valley. Appendix F provides more information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of Caliente common segment 4.

3.2.5.3.9 Bonnie Claire Alternative Segments

Bonnie Claire alternative segment 2 would begin south of Stonewall Flat, exit Lida Valley, and turn to the east, entering Sarcobatus Flat, a large playa. Sarcobatus Flat is bounded by Pahute Mesa on the east and Gold Mountain on the west (Table 3-31 and Figure 3-70). There are no construction camps or quarries proposed for Bonnie Claire 2.

Bonnie Claire 2 would be in an area that receives drainage from Stonewall Mountain, the foothills of Gold Mountain, and Northern Pahute Mesa, which flows toward Lida Valley, Alkali Flat, and the Bonnie Claire area of Sarcobatus Flat. Unnamed washes run northeast to southwest, providing a path for overland flow from Pahute Mesa, including the south and southeast sides of Stonewall Mountain to Sarcobatus Flat. Bonnie Claire 2 would cross a notable braided wash at the north end of Sarcobatus Flat before running adjacent to the same wash for several kilometers. This braided wash flows from Stonewall Pass to the Bonnie Claire area of Sarcobatus Flat. There are no streamflow or water-quality data available for the stream channels and washes Bonnie Claire 2 would cross.

Bonnie Claire 2 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin.

Table 3-31. Hydrologic features potentially relevant to the Bonnie Claire alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Bonnie Claire alternative segment 2</i>		
Drainage from Stonewall Mountain, the foothills of Gold Mountain, Stonewall Pass, and Northern Pahute Mesa to Lida Valley, Alkali Flat, and Bonnie Claire area within Sarcobatus Flat.	Segment would cross 31 unnamed washes, including an unnamed braided wash.	Alkali Flat/Lida Valley Playa.
<i>Bonnie Claire alternative segment 3</i>		
Drainage from the foothills of Gold Mountain, Stonewall Mountain, Stonewall Pass, and Northern Pahute Mesa to Lida Valley, Alkali Flat, and Bonnie Claire area within Sarcobatus Flat.	Segment would cross Alkali Flat/Lida Valley Playa. Segment would cross 23 washes.	None.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, pp. 59, 60, and 68.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Therefore, none of the washes along Bonnie Claire 2 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water (DIRS 180914-PBS&J 2006, p. 3).

There are no wetlands within the region of influence for Bonnie Claire 2.

Federal Emergency Management Agency flood maps cover most of Bonnie Claire 2, but do not include a portion of the land on the eastern side of the segment, which is shown on the maps as an old boundary of the Nevada Test and Training Range. Flood mapping does not extend east of this boundary. The flood maps also show a floodplain for an unnamed drainage feature from Pahute Mesa. The floodplain ends just south of Bonnie Claire 2 near one of the old Nevada Test and Training Range boundaries. It is possible that this floodplain would extend far enough to the northeast to be encountered by Bonnie Claire 2; however, the distance is too far to support such an assumption. In addition, Bonnie Claire 2 would run farther up in the foothill area where the wash would involve few tributaries. Appendix F provides additional information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of Bonnie Claire 2.

Bonnie Claire 3 would begin south of Stonewall Flat, exit Lida Valley, and continue south into Sarcobatus Flat, a large playa. Sarcobatus Flat is bounded by Pahute Mesa on the east and Gold Mountain on the west (Table 3-31 and Figure 3-66). There are no potential quarry sites or proposed construction camps along Bonnie Claire 3.

Bonnie Claire 3 would be in an area that receives drainage from Stonewall Mountain, the foothills of Gold Mountain, and the Northern Pahute Mesa, which flows toward the Lida Valley, Alkali Flat, and the Bonnie Claire area of Sarcobatus Flat. Unnamed washes run northeast to southwest, providing a path for overland flow from Pahute Mesa, including the south and southeast sides of Stonewall Mountain to Sarcobatus Flat.

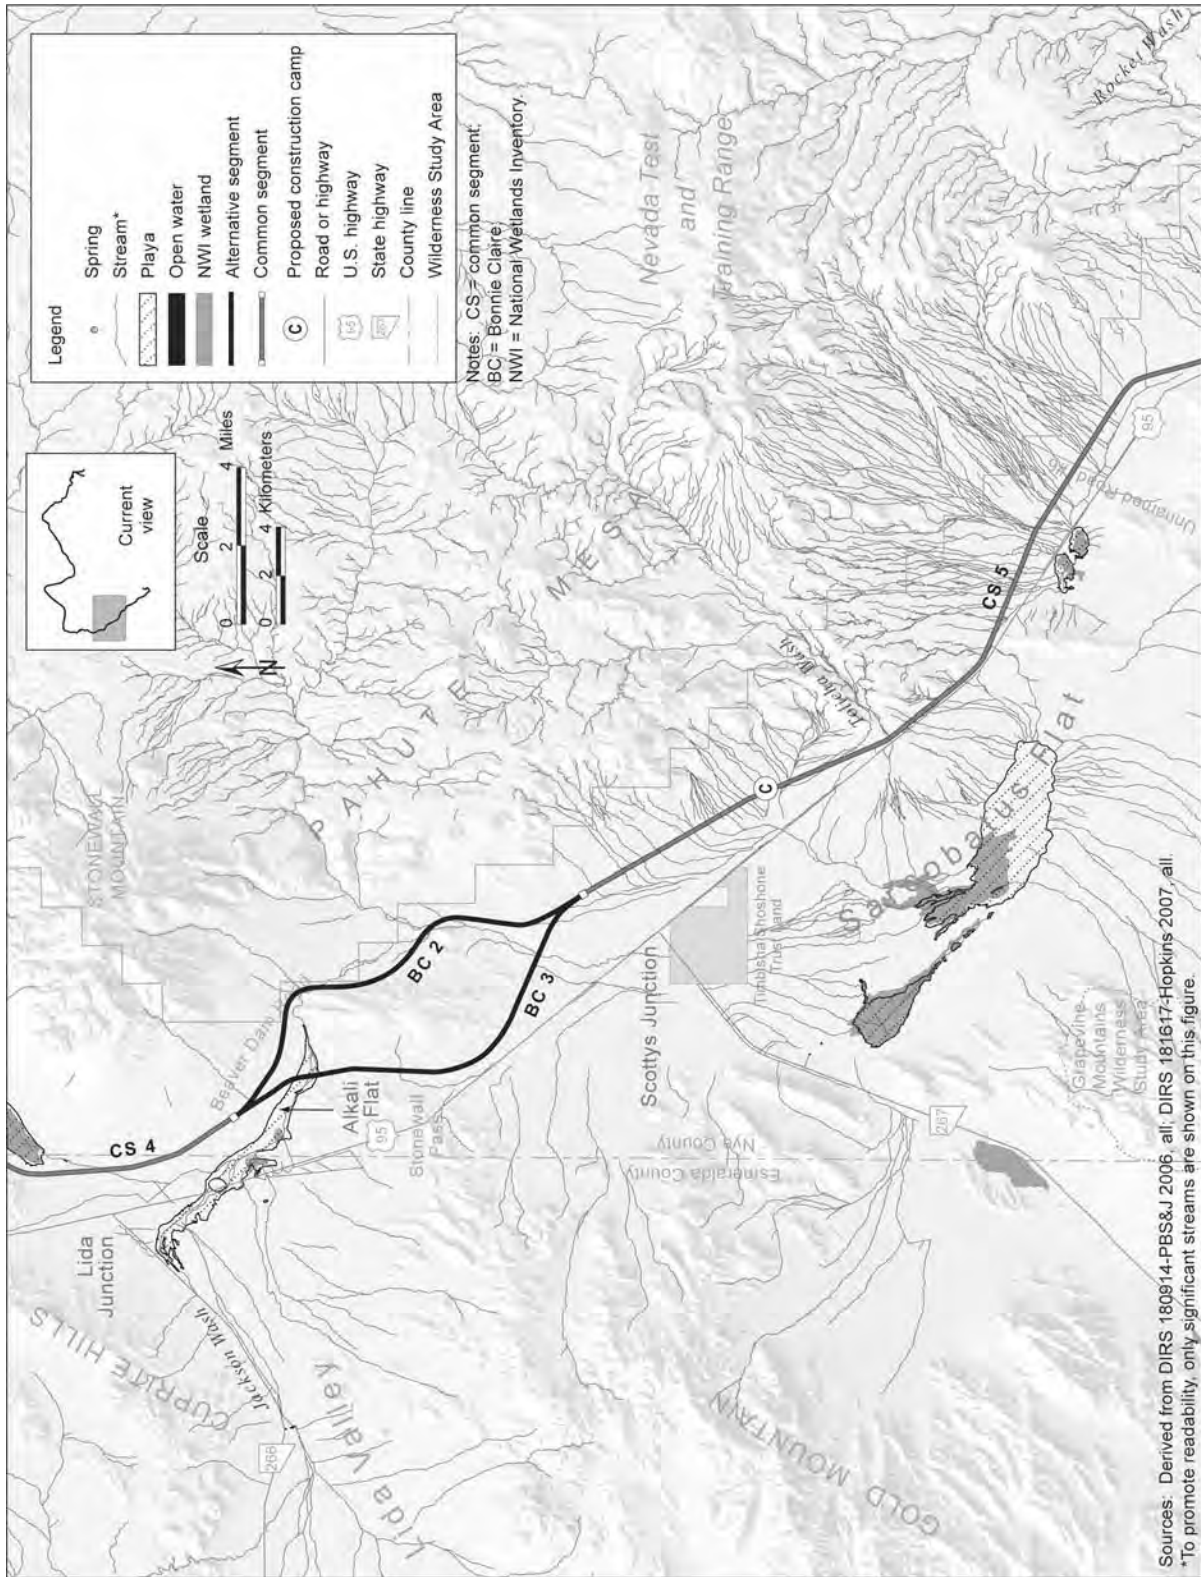


Figure 3-70. Surface drainage within map area 6.

Bonnie Claire 3 would pass through Alkali Flat Playa, a major playa shown in Figure 3-66, and cross a notable braided wash in Sarcobatus Flat. This braided wash flows from Stonewall Pass to the Bonnie Claire area of Sarcobatus Flat. There are no streamflow or water-quality data available for the stream channels and washes Bonnie Claire 3 would cross.

Bonnie Claire 3 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180914-PBS&J 2006, p. 3). Therefore, none of the washes along Bonnie Claire 3 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act because there are no connections to surface-water bodies with a connection to interstate water.

There are no wetlands within the region of influence for Bonnie Claire 3.

Federal Emergency Management Agency flood maps cover most of Bonnie Claire 3, but do not include a portion of the land on the eastern side of the segment, which is shown on the maps as an old boundary of the Nevada Test and Training Range. Flood mapping does not extend east of this boundary. Bonnie Claire 3 would cross a 100-year floodplain associated with Alkali Flat Playa. The flood maps also show a floodplain for an unnamed drainage feature from Pahute Mesa. The floodplain ends just south of Bonnie Claire 3 at one of the old Nevada Test and Training Range boundaries. The floodplain is close enough to Bonnie Claire alternative segment 3 that it is reasonable to assume it would be at a similar width if it extended farther up the wash to where Bonnie Claire 3 would cross. Appendix F provides additional information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of Bonnie Claire 3.

3.2.5.3.10 Common Segment 5 (Sarcobatus Flat Area)

Common segment 5 would begin approximately 3.1 kilometers (1.9 miles) east of U.S. Highway 95 and trend generally southeast, through the Sarcobatus Flat Area, and along the east side of U.S. Highway 95 (Table 3-32 and Figures 3-70 and 3-71). Common segment 5 would end approximately 6.4 kilometers (4 miles) north of Springdale. Construction camp 10 would be adjacent to the rail alignment and east of U.S. Highway 95. Numerous ephemeral washes draining downslope of Pahute Mesa would run through the construction camp. There are no potential quarry sites along common segment 5 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Common segment 5 would cross washes that drain the Tolicha Peak area of Pahute Mesa. Drainage from Pahute Mesa flows from the east into Sarcobatus Flat. The alluvial flat terrain between Tolicha Peak and U.S. Highway 95 is characterized by numerous braided washes. Although Sarcobatus Flat is an extensive topographic feature, there is only one portion designated as a minor playa that would be close to the rail alignment. The northern edge of this small playa is adjacent to U.S. Highway 95, and would be approximately 1.7 kilometers (1.1 miles) south of common segment 5 to the southeast of the point where Tolicha Wash crosses U.S. Highway 95. The segment would then cross surface drainage originating from Tolicha Peak and Springdale Mountain. No streamflow or water-quality data are available for the stream channels and washes common segment 5 would cross.

Common segment 5 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180914-PBS&J 2006, p. 3). Therefore, none of the washes along common segment 5 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface water bodies with a connection to interstate water.

Table 3-32. Hydrologic features potentially relevant to common segment 5.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from Pahute Mesa and Bullfrog Hills flows to playas within Sarcobatus Flat and Bonnie Claire Lake within Sarcobatus Flat.	Segment would cross Tolicha Wash and 123 other washes. The alluvial flat terrain between Tolicha Peak and U.S. Highway 95 is characterized by numerous braided washes. Washes within this type of soil and terrain can shift in number and geography with a variation of precipitation intensity.	Dry lake bed 0.5 kilometer south.

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, pp. 59, 60, 64, and 68.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

The National Wetlands Inventory map identifies the playas associated with Sarcobatus Flat as wetlands, but field studies conducted in support of this Rail Alignment EIS confirmed that there are no hydric soils, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near the rail alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 6). Appendix F provides more information about wetlands in this area.

Federal Emergency Management Agency flood maps provide coverage for almost all of common segment 5. The maps show that the segment would cross a 100-year floodplain associated with Tolicha Wash where it drains toward Sarcobatus Flat. Appendix F provides more information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of common segment 5.

3.2.5.3.11 Oasis Valley Alternative Segments

Oasis Valley alternative segment 1 would begin north of Oasis Mountain and would run southeast for approximately 9.8 kilometers (6.1 miles) before joining common segment 6 (Table 3-33 and Figure 3-71). Construction camp 11 would be along the west side of Oasis Valley 1 approximately 3.1 kilometers (1.9 miles) north of its junction with common segment 6. Several ephemeral washes flowing downslope from Bullfrog Hills and mountains to the east would run through the construction camp. There are no potential quarry sites along Oasis Valley 1 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Oasis Valley alternative segment 1 would cross the Amargosa River and its tributaries. Although referred to as a river, the Amargosa River and tributary branches and washes receive ephemeral flows from winter and summer storms, and perennial flows near springs and seeps. For most of the year, the tributaries carry no water. The Amargosa River has approximately 20 branches and 40 tributary washes in Oasis Valley. The main branch enters the valley from the north through Thirsty Canyon. Most of the drainage into Oasis Valley is from Pahute Mesa (including Oasis and Springdale Mountains to the north) and the Bullfrog Hills to the southwest. There are no streamflow or water-quality data available for this area; however, there is regional data for the Death Valley Basin (DIRS 176325-USGS 2006, all).

The Amargosa River interstate drainage system flows to Death Valley in California. A survey of washes along the Caliente rail alignment identified the Amargosa River and one tributary that Oasis Valley 1 would cross as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7 and Figure 3D).

There are no wetlands identified within the region of influence for Oasis Valley 1.

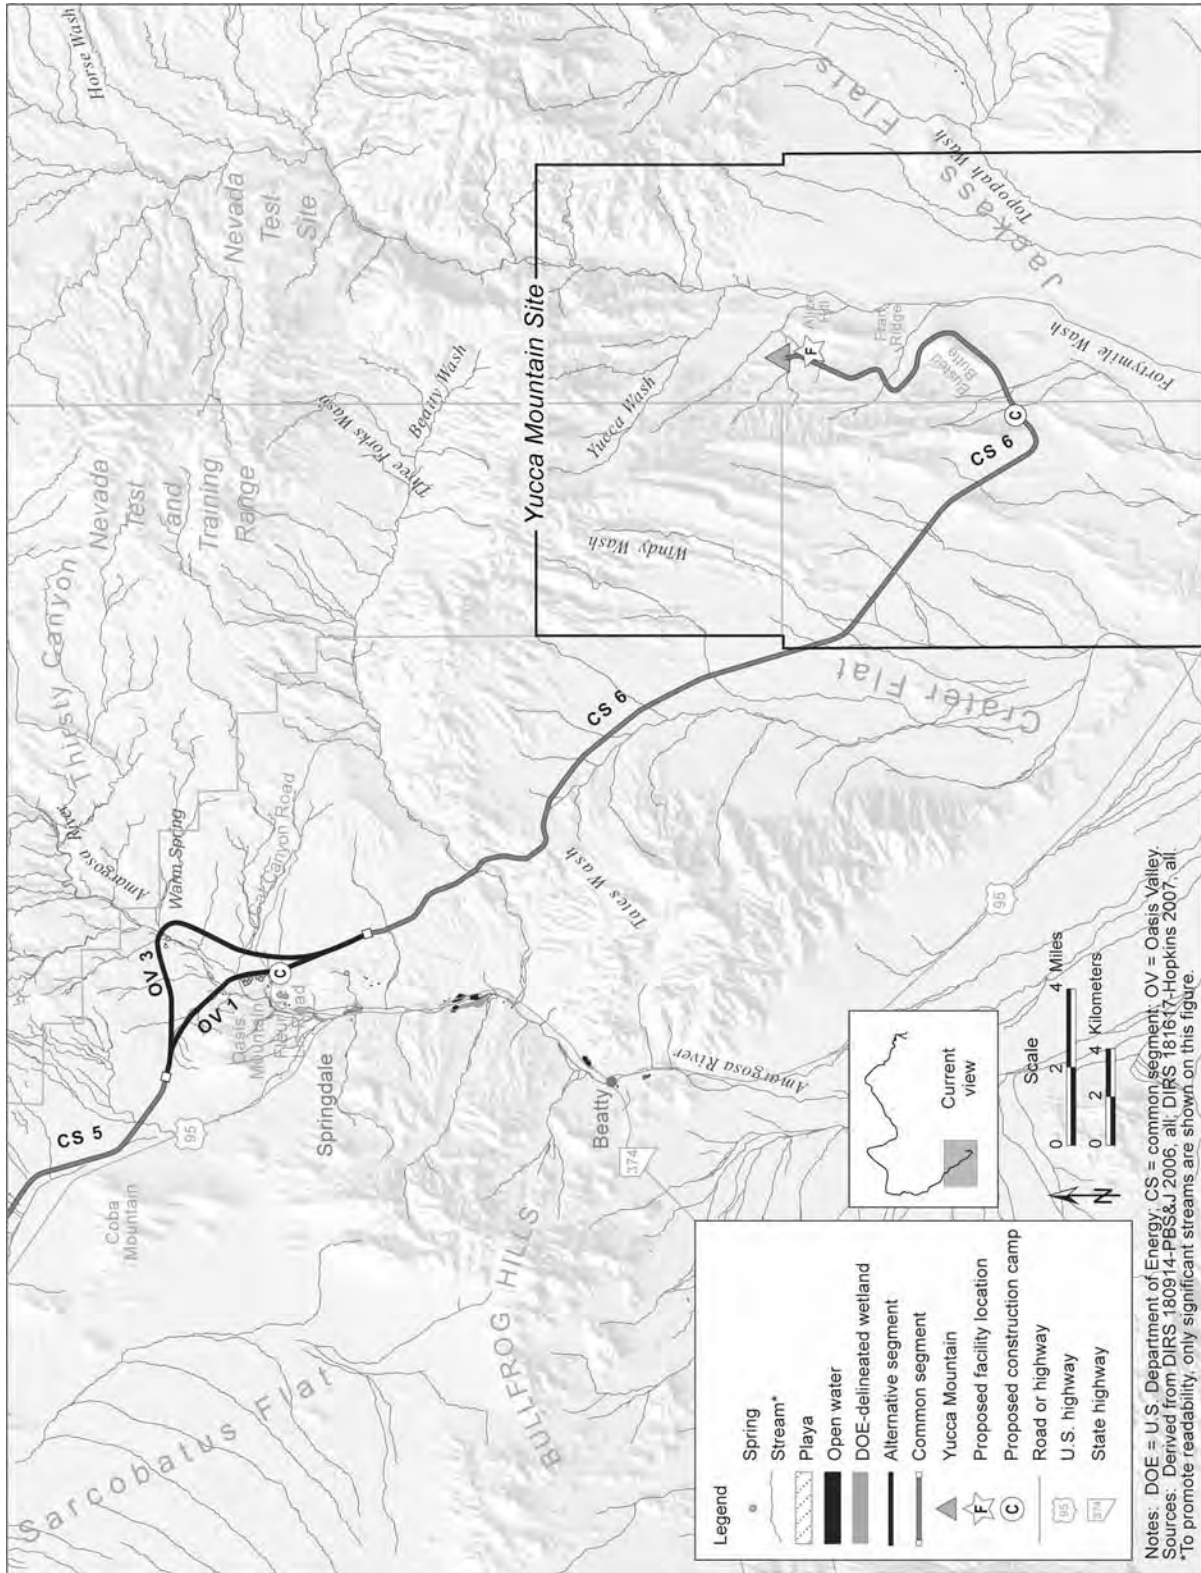


Figure 3-71. Surface drainage within map area 7.

Table 3-33. Hydrologic features potentially relevant to the Oasis Valley alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Oasis Valley alternative segment 1</i>		
Drainage from Bull Frog Hills and the Pahute Mesa, including the Amargosa River and Amargosa River tributaries.	Segment would cross the Amargosa River and 23 unnamed washes.	Unnamed springs: 1.5 kilometers west 0.53 kilometer west 0.74 kilometer west 0.69 kilometer west 0.47 kilometer west 0.59 kilometer west 0.46 kilometer west 0.59 kilometer west 0.67 kilometer west 0.54 kilometer west 0.48 kilometer west 1.4 kilometers west 1.5 kilometers west
<i>Oasis Valley alternative segment 3</i>		
Drainage from Bull Frog Hills and the Pahute Mesa, including the Amargosa River and Amargosa River tributaries.	Segment would cross the Amargosa River, and 27 washes/tributaries to the Amargosa River.	Colson Pond (spring fed) 0.24 kilometer southwest. Small wetland 0.5 kilometer from Colson Pond. Unnamed springs: 0.2 kilometer west 1.1 kilometers west 1.2 kilometers west 1.2 kilometers west 1.3 kilometers west 1.3 kilometers west 1.3 kilometers west 1.4 kilometers west 1.4 kilometers west 1.5 kilometers west 1.5 kilometers west 1.6 kilometers west

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 64.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Federal Emergency Management Agency flood maps provide complete coverage for Oasis Valley 1. The maps show that the segment would cross a 100-year floodplain associated with the Amargosa River. Appendix F provides more information about this floodplain.

There are numerous springs in Oasis Valley and Thirsty Canyon near where Oasis Valley 1 would cross. Oasis Valley 1 would pass within 0.48 kilometer (0.30 mile) of several springs identified as the upper Oasis Valley Ranch Springs (DIRS 169384-Reiner et al. 2002, Figure 3). These springs are near the narrows through which the Amargosa River leaves Oasis Valley. Table 3-33 lists these springs. Oasis Valley alternative segment 3 would begin north of Oasis Mountain, generally run east and then south for approximately 14 kilometers (8.8 miles) and would cross Oasis Valley approximately 0.24 kilometer

(0.15 mile) northeast of Colson Pond before converging with common segment 6 (Table 3-33 and Figure 3-68). There are no potential quarry sites or proposed construction camps along Oasis Valley 3.

Oasis Valley 3 would cross the Amargosa River and its tributaries, as described above for Oasis Valley alternative segment 1.

A survey of washes along the Caliente rail alignment identified the Amargosa River, which Oasis Valley 3 would cross, as a water of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, p. 7 and Figure 3D).

DOE field surveys identified a small wetland associated with an unnamed seep approximately 0.5 kilometer (0.31 mile) from Colson Pond (DIRS 180914-PBS&J 2006, Figure 4T). Appendix F provides additional information about this wetland.

Federal Emergency Management Agency flood maps provide complete coverage for Oasis Valley 3. The maps show that the segment would cross a 100-year floodplain associated with the Amargosa River. Appendix F provides more information about this floodplain.

There are numerous springs in Oasis Valley and Thirsty Canyon near where Oasis Valley 3 would cross (see Table 3-33). Colson Pond is spring fed and would be within 0.24 kilometer (0.15 mile) of the alternative segment. This spring is commonly known as Colson Pond Spring (DIRS 169384-Reiner et al. 2002, Plate 2), but is also referred to as Warm Spring.

3.2.5.3.12 Common Segment 6 (Yucca Mountain Approach)

Common segment 6 would begin at the south juncture of the end of the Oasis Valley alternative segments and proceed to the southeast toward Yucca Mountain (Table 3-34 and Figure 3-71). The proposed location for construction camp 12 is adjacent to the rail line approximately 9.7 kilometers (6 miles) south of the *geologic repository* operations area. There are no potential quarry sites along common segment 6 (DIRS 180922-Nevada Rail Partners 2007, Figure 3-B).

Table 3-34. Hydrologic features potentially relevant to common segment 6.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from northern Yucca Mountain Range, including Tram Ridge, and Timber Mountain.	Segment would cross Beatty Wash, Tates Wash, Windy Wash, Busted Butte Wash, and 39 unnamed washes.	Fortymile Wash Midway Valley Wash
Drainage from Yucca Mountain Range to Crater Flat and Amargosa Valley.		

a. Sources: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, pp. 64 and 65.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

Common segment 6 would cross terrain that drains from the southern end of Pahute Mesa and the Yucca Mountain Range to Crater Flat and the Amargosa River. The first significant tributary common segment 6 would cross is Beatty Wash and its tributaries, which provide drainage from Timber Mountain and Tram Ridge at the northern reaches of Yucca Mountain, to Oasis Valley and the Amargosa River at a point approximately 4.8 kilometers (3 miles) northeast of the community of Beatty. Beatty Wash is one of the largest tributaries of the Amargosa River. Common segment 6 would cross Beatty Wash at the north end of the Yucca Mountain Range, approximately 5.4 kilometers (3.4 miles) southeast of Oasis

Valley. After crossing Beatty Wash, common segment 6 would proceed to the southeast toward Yucca Mountain, where it would cross several tributaries of Tates Wash. Approximately 26 kilometers (16 miles) from the start of common segment 6, the segment would cross Windy Wash and unnamed washes carrying drainage from the eastern side of Yucca Mountain. The segment would then continue around the southern tip of the Yucca Mountain Range before turning northeast, skirting the eastern edge of Busted Butte and continuing between Bow and Fran Ridges.

Near the Yucca Mountain Site, Fortymile Wash, a major wash that flows to the Amargosa River, drains the eastern side of Yucca Mountain (DIRS 169734-CRWMS M&O 2004, p. 7.1-3). The tributaries draining into Fortymile Wash at Yucca Mountain include Yucca Wash to the north; Drill Hole Wash, which, together with a tributary in Midway Valley, drains most of the repository site; and Busted Butte Wash (also known as Dune Wash) to the south. Common segment 6 would cross Busted Butte Wash, some of its unnamed tributaries, and unnamed tributaries of Drill Hole Wash. The segment would not actually cross Drill Hole Wash, but the wash would be within the common segment 6 region of influence. Fortymile Wash runs parallel to the end of common segment 6 at the Yucca Mountain Site, but common segment 6 would not cross the wash. Fortymile Wash is the most prominent drainage through Jackass Flats to the Amargosa River (DIRS 155970-DOE 2002, p. 3-36, Figure 3-11).

All of common segment 6 is within the Amargosa River interstate drainage system in the Death Valley Basin. Of the numerous washes along common segment 6, 14 were identified as waters of the United States, as designated under Section 404 of the Clean Water Act (DIRS 180914-PBS&J 2006, Figures 3D and 3E). The Rail Equipment Maintenance Yard would be where the proposed rail line ends at Yucca Mountain. There are no perennial streams, natural bodies of water, or naturally occurring wetlands at Yucca Mountain (DIRS 155970-DOE 2002, p. 3-35). The facility would overlie an ephemeral stream but would not cross any waters of the United States.

No streamflow or water-quality data are available for drainage channels along common segment 6. There are no wetlands identified within the region of influence for common segment 6. Appendix F provides additional information on wetlands identified along the Caliente rail alignment.

Slightly more than half of common segment 6 has coverage on Federal Emergency Management Agency flood maps. These maps show that common segment 6 would cross a short span of the 100-year floodplain associated with Beatty Wash. Although the flood maps do not provide coverage for the area of the repository on the eastern side of Yucca Mountain, DOE has performed flood studies on several washes in that area, as addressed in the Yucca Mountain FEIS. An overlay of the Caliente rail alignment with Yucca Mountain FEIS Figure 3-12 indicates that common segment 6 would cross short stretches of 100-year floodplains associated with Busted Butte Wash and Drill Hole Wash. The rail line would terminate just before reaching a floodplain associated with Midway Valley Wash (also known as Sever Wash) (DIRS 155970-DOE 2002, pp. 3-38 and 3-39, and Figure 3-12). Appendix F further describes the floodplains associated with common segment 6.

There are no springs identified within 1.6 kilometers (1 mile) of common segment 6. Ute Springs, 270 meters (890 feet) west of U.S. Highway 95 in Oasis Valley, would be within about 0.6 to 0.88 kilometer (0.37 to 0.55 mile) of potential alternative well sites OV9 through OV12 (see Figure 3.7) near U.S. Highway 95 (DIRS 169384-Reiner et al. 2002, Plate 2).

3.2.6 GROUNDWATER RESOURCES

This section describes groundwater resources along the Caliente rail alignment. Section 3.2.6.1 describes the region of influence for groundwater resources; Section 3.2.6.2 is a general overview of groundwater features along the Caliente rail alignment; and Section 3.2.6.3 describes more specific features for each of the Caliente rail alignment alternative segments and common segments.

3.2.6.1 Region of Influence

The region of influence for groundwater resources along the Caliente rail alignment includes aquifers that would underlie areas of railroad construction and operations, portions of groundwater aquifers DOE would use to obtain water for construction and operations support and that would be affected by these groundwater withdrawals, and nearby springs that might be affected by such groundwater withdrawals. The horizontal extent of the region of influence varies depending on the particular aspects of the specific project activity, as follows:

- DOE used the nominal width of the rail line construction right-of-way and the footprints of construction and operations support facilities to define where there would be construction or other land disturbances. These areas could be susceptible to changes in groundwater *infiltration*, discharge (for example, spring discharge), or quality. There could also be damage to, or loss of use of, an existing well (including potential need for well abandonment), if that well fell within the rail *roadbed* or was disturbed during construction activities. Review of the available information on the locations of existing wells indicates that rail roadbed construction would not disturb any existing wells. However, the precise locations of existing wells have not been field-verified and actual well locations might vary from the coordinates identified and cataloged for the wells in State of Nevada and U.S. Geological Survey (USGS) well databases (see Section 3.2.6.2.1).
- DOE used an initial screening-level distance of 1.6 kilometers (1 mile) on either side of the rail alignment centerline and an initial radius of 1.6 kilometers surrounding each proposed new well if that well would be outside of the nominal width of the construction right-of-way to define areas in the general vicinity of the rail alignment and proposed well locations that could also be affected by changes in groundwater discharge or quality at existing wells or springs. DOE used the same distance criteria to identify whether there could be damage to, or loss of use of, an existing well if that well fell within the rail roadbed or was disturbed during construction activities.
- DOE considered both the individual groundwater basins (hydrographic areas) that underlie the Caliente rail alignment and the railroad construction and operations support facilities and adjacent hydrographic areas for evaluating areas that might be affected by proposed groundwater withdrawals for construction or operations support. This would include areas that could be susceptible to changes in groundwater discharge or flow to an adjacent groundwater basin.

3.2.6.2 General Hydrogeologic Setting and Characteristics

This section is an overview of the general hydrogeologic setting and characteristics of groundwater underlying the area along the Caliente rail alignment. Water-resource features, primarily those associated with groundwater, are described primarily in relation to the hydrographic areas in which they lie.

Groundwater in central and southern Nevada is affected by low precipitation and high annual evaporation rates typical of desert climates. Most *recharge* to aquifers in the region of influence is derived from precipitation falling in the higher parts of the interbasin mountain ranges (DIRS 103136-Prudic, Harrill, and Burbey 1993, pp. 2, 58, 84, and 88).

3.2.6.2.1 Groundwater Hydrographic Areas and Groundwater Use in Nevada

To classify hydrographic regions and areas and to facilitate the management of groundwater resources within the State of Nevada, the state has been divided into a series of groundwater basins (designated as hydrographic areas) (DIRS 176488-State of Nevada 2006, all; DIRS 177741-State of Nevada 2005, all; DIRS 106094-Harrill, Gates, and Thomas 1988, all).

Acre-foot is a unit commonly used to measure water volume. It is the quantity of water required to cover 4,047 square meters (1 acre) to a depth of 0.3048 meter (1 foot), and is equal to 1,233.5 cubic meters (325,851 gallons). Section 3.2.6 lists perennial yields, committed groundwater resources, and consumptive use in acre-feet because it is the common unit used by industry and government agencies.

A total of 260 hydrographic areas are recognized within the western United States Great Basin; all or parts of 232 hydrographic areas fall within Nevada (DIRS 106094-Harrill, Gates, and Thomas 1988, all; DIRS 177741-State of Nevada 2005, all).

Three types of aquifers are the principal sources of groundwater found in central and southern Nevada, as follows (DIRS 172905-USGS 1995, all):

- **Alluvial valley fill:** Composed primarily of unconsolidated alluvial sand and gravel. The distribution of sediment size is directly associated with distance from the mountains. In general, the coarsest materials (such as gravel and boulders) were deposited near the mountains, and the finer materials (such as sand, silt, and clay) were deposited in the central parts of the basins or in the lakes and playas. Alluvial fans are important hydrologic features within the hydrographic basins, sometimes serving as targets for groundwater development, and with alluvial valley-fill portions of the basins receiving some of their recharge through the coarse sediment deposits in the alluvial fans. Alluvial deposits consisting of alluvial sand and gravel are present along the courses of modern ephemeral streams or ancestral streams that generally parallel the long axes of the basins. Alluvial deposits underlie most of the Caliente rail alignment.
- **Volcanic-rock aquifers:** Composed primarily of tuffs (ash flows, ash falls), rhyolite, or basalt. Groundwater movement in these materials is often controlled by the number and degree of joint interconnections, *fractures* or faults, or vesicle (small cavities in minerals or rock) interconnection in lavas.
- **Carbonate-rock aquifers:** Composed primarily of limestones and dolomites. The carbonate rocks are commonly highly fractured and are locally fragmented. Groundwater flow in the carbonate rock aquifers is controlled by interconnected fractures.

Tectonic forces superimposed faulting on existing groundwater-bearing formations (aquifers) in this region. As a result, several aquifer units underlying the Caliente rail alignment are fractured and faulted in some locations. These faults and fractures locally can influence groundwater flow patterns within the affected aquifer areas, with such features being capable of acting as either barriers to, or conduits for, groundwater flow (see Appendix G).

Within the Basin and Range Province, any or all of the three basic aquifer types discussed above might be present within a particular area and might constitute three separate, hydraulically distinct, sources of groundwater. Alternatively, any or all of the three aquifer types might underlie an area but might be hydraulically connected to form a single groundwater source (DIRS 172905-USGS 1995, all).

Groundwater levels fluctuate seasonally and annually in response to changes in withdrawal (consumptive use) and climatic conditions, with levels generally rising from late winter to early summer and generally declining from summer to early winter (DIRS 172904-Berris et al. 2002, p. 6). In 2000, an estimated 1.75 billion cubic meters (1.42 million *acre-feet*) of groundwater were pumped in Nevada (DIRS 175964-

Lopes and Evetts 2004, p. 7). Irrigation and stock watering was the primary groundwater use, accounting for approximately 46 percent of the total groundwater withdrawal, followed by mining (approximately 26 percent), drinking-water systems (approximately 14 percent), geothermal production (approximately 8 percent), self-supplied domestic (approximately 5 percent), and miscellaneous (1 percent) (DIRS 175964-Lopes and Evetts 2004, p. 7) (see Figure 3-72). Virtually all major groundwater development in Nevada has been in alluvial valley fill, with withdrawals from approximately the upper 460 meters (1,500 feet) of these aquifers. The carbonate rock aquifers in eastern and southern Nevada supply water to numerous springs (DIRS 106094-Harrill, Gates, and Thomas 1988, all).

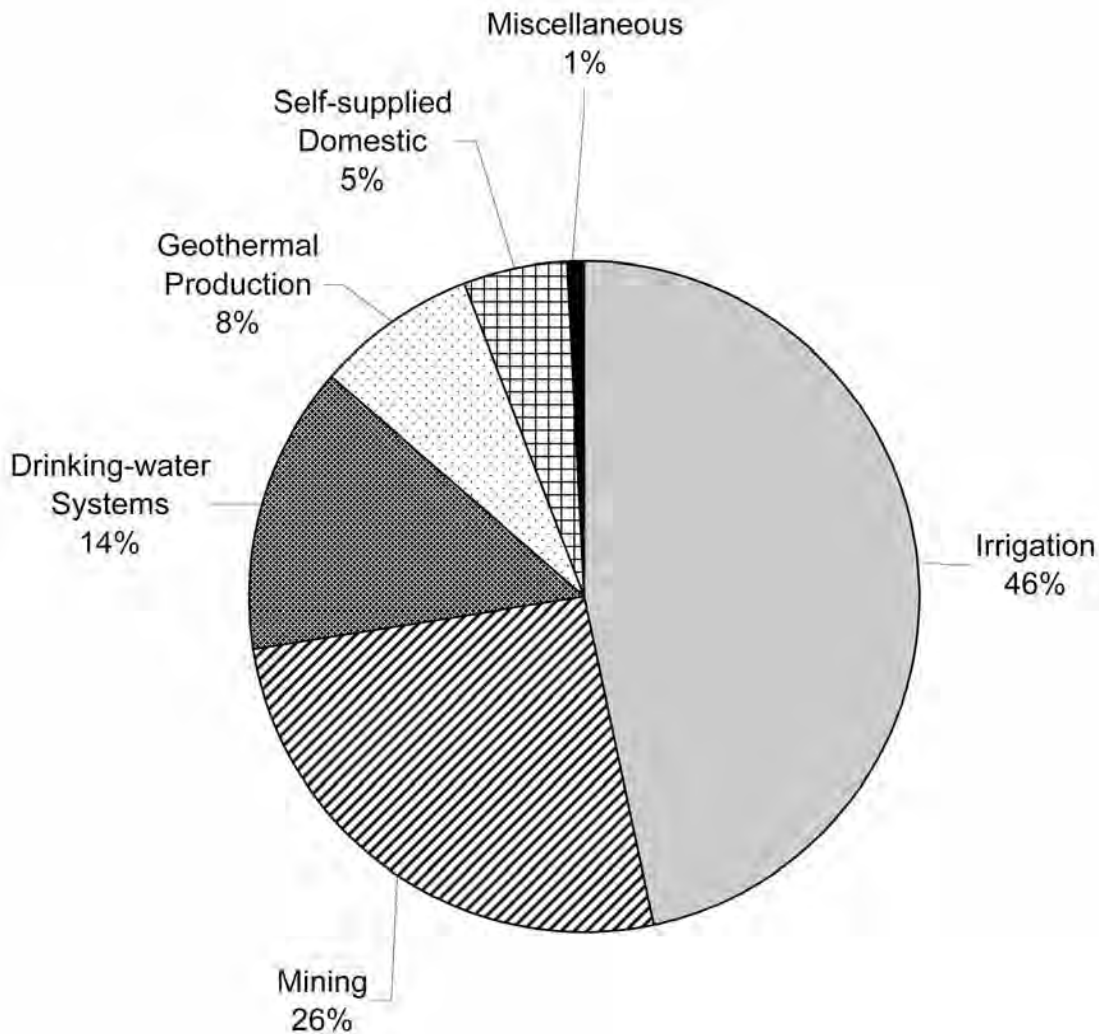


Figure 3-72. Groundwater usage in Nevada in 2000.
(Source: DIRS 175964-Lopes and Evetts 2004, p. 7).

Figure 3-73 shows generalized regional groundwater flow patterns in the vicinity of the Caliente rail alignment. Available information regarding groundwater “interbasin” inflow and outflow (groundwater flow across hydrographic area boundaries) characteristics for hydrographic areas (groundwater basins) within central Nevada (DIRS 177524-Anning and Konieczki 2005, pp. 10 and 11, and Plate 1) indicates interbasin groundwater outflow or groundwater inflow through alluvial valley-fill aquifer materials or through consolidated rock aquifers appears to occur at some locations; at other locations, there appears to be no substantial interbasin groundwater flow occurring through either or both of these aquifer units. The figure depicts generalized flow directions within alluvial valley-fill units and within consolidated rock aquifers, in areas where such flow is inferred to be occurring across hydrographic area boundaries.

This section describes groundwater resources in relation to hydrographic areas. Figure 3-74 shows the 19 hydrographic areas the Caliente rail alignment could cross, depending on alternative segments selected. Table 3-35 lists the estimated annual *perennial yields* for the 19 hydrographic areas, and identifies which are State of Nevada-*designated groundwater basins*. The hydrographic areas are listed in the order the Caliente rail alignment would cross them, beginning near Caliente or Clover Creek Valley, moving westward across Nevada toward Goldfield, and then southward toward Yucca Mountain.

There are a number of published estimates of perennial yield for many of the hydrographic areas in Nevada, and those estimates often differ by large amounts. The perennial-yield values listed in Table 3-35 predominantly come from a single source, the Nevada Division of Water Planning (DIRS 103406-Nevada Division of Water Planning 1992, for Hydrographic Regions 10, 13, and 14); therefore, the table does not show a range of values for each hydrographic area. In the Yucca Mountain area, the Nevada Division of Water Planning identifies a combined perennial yield for hydrographic areas 225 through 230. DOE obtained perennial yields from *Data Assessment & Water Rights/Resource Analysis of: Hydrographic Region #14 Death Valley Basin* (DIRS 147766-Thiel 1999, pp. 6 to 12) to provide estimates for hydrographic areas the Caliente rail alignment would cross: 227A, 228, and 229. That 1999 document presents perennial-yield estimates from several sources. Table 3-35 lists the lowest (that is, the most conservative) values cited in that document, which is consistent with the approach DOE used in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 3-136).

Table 3-35 also summarizes existing annual *committed groundwater resources* for each hydrographic area along the Caliente rail alignment. However, all committed groundwater resources within a hydrographic area might not be in use at the same time. Table 3-35 also includes information on pending annual duties within each of these hydrographic areas. A *pending annual duty* represents the amount of water for which an appropriation application has been submitted to the State Engineer for consideration and that the State Engineer has classified as a pending annual duty value within a hydrographic area in accordance with applicable state statutes. Unless otherwise noted, the source of data for pending annual duties in the hydrographic areas crossed by the alignment is the Water Rights Data Update (DIRS 182288-NDWR 2007, all). These data were acquired on May 30, 2007.

Perennial yield is the amount of useable water from a groundwater aquifer that can be economically withdrawn and consumed each year for an indefinite period. It cannot exceed the natural recharge to that aquifer and ultimately is limited to the maximum amount of discharge that can be utilized for beneficial use.

The State of Nevada may identify a hydrographic area as a **designated groundwater basin** where permitted groundwater rights approach or exceed the estimated average annual recharge and the water resources are being depleted or require additional administration, including a state declaration of preferred uses (for example, municipal and industrial, domestic supply) (DIRS 103406-Nevada Division of Water Planning 1992, p. 18). Designated groundwater basins are also referred to as administered groundwater basins.

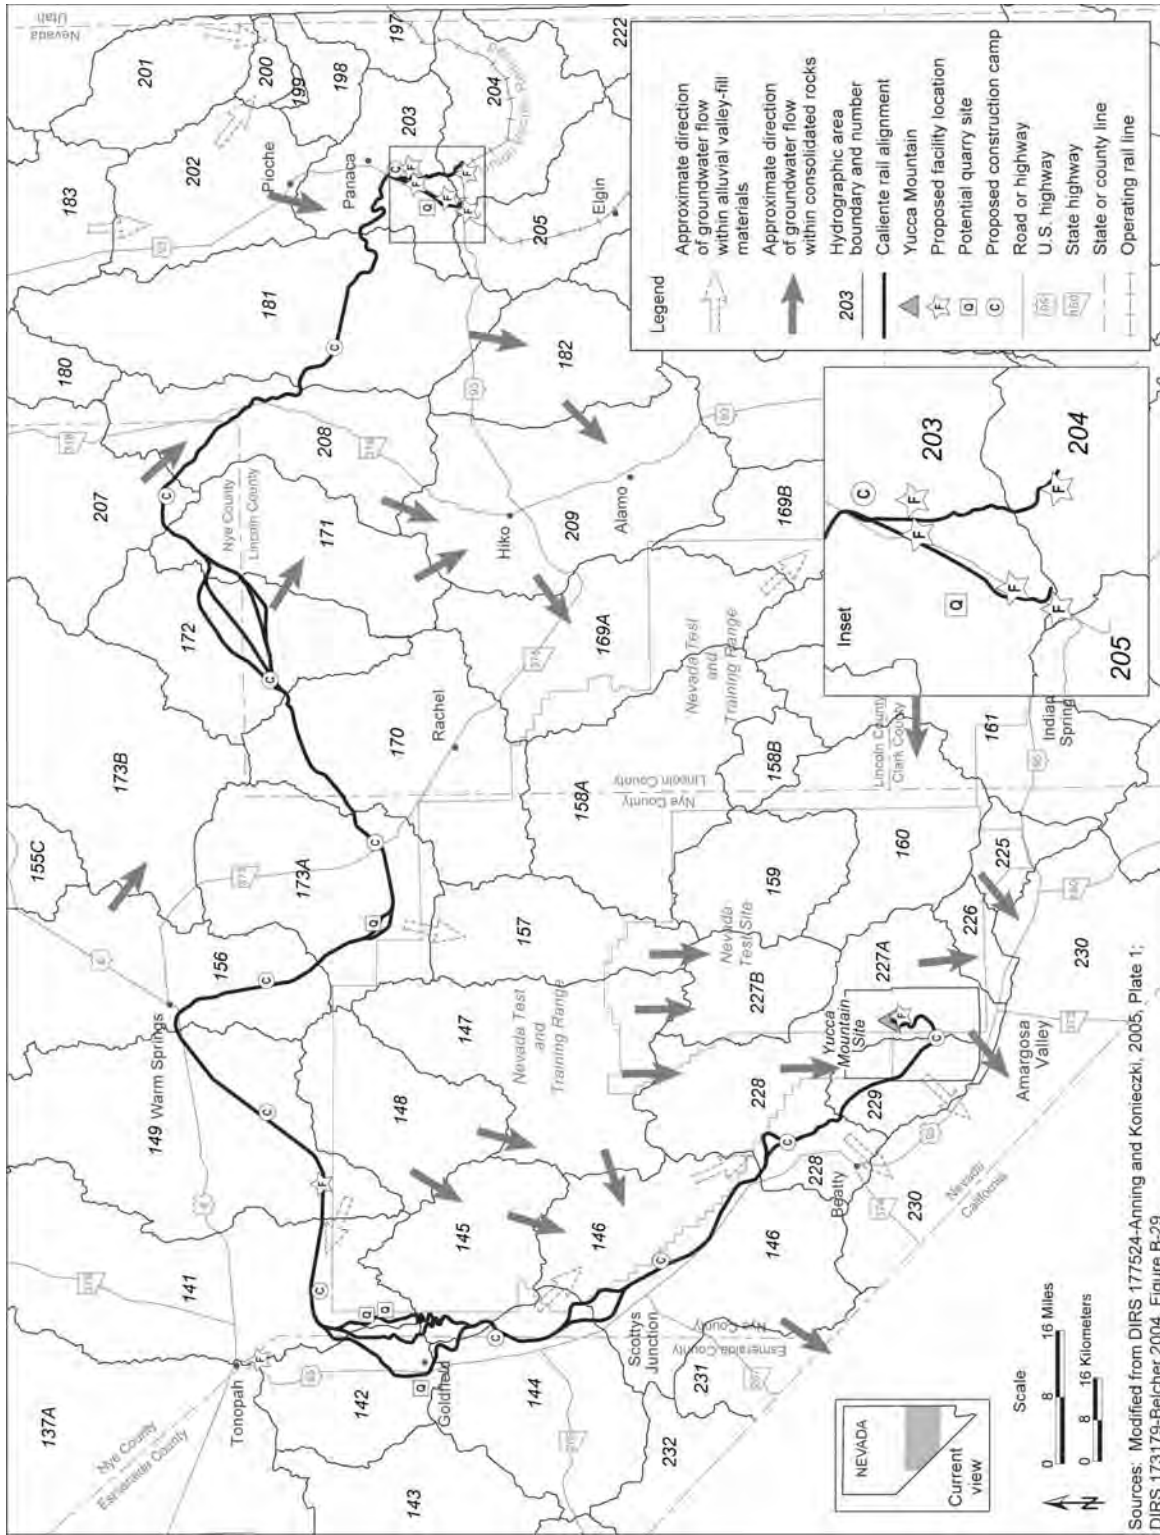


Figure 3-73. Generalized groundwater flow direction through alluvial valley-fill and consolidated rock aquifers in the vicinity of the Caliente rail alignment.

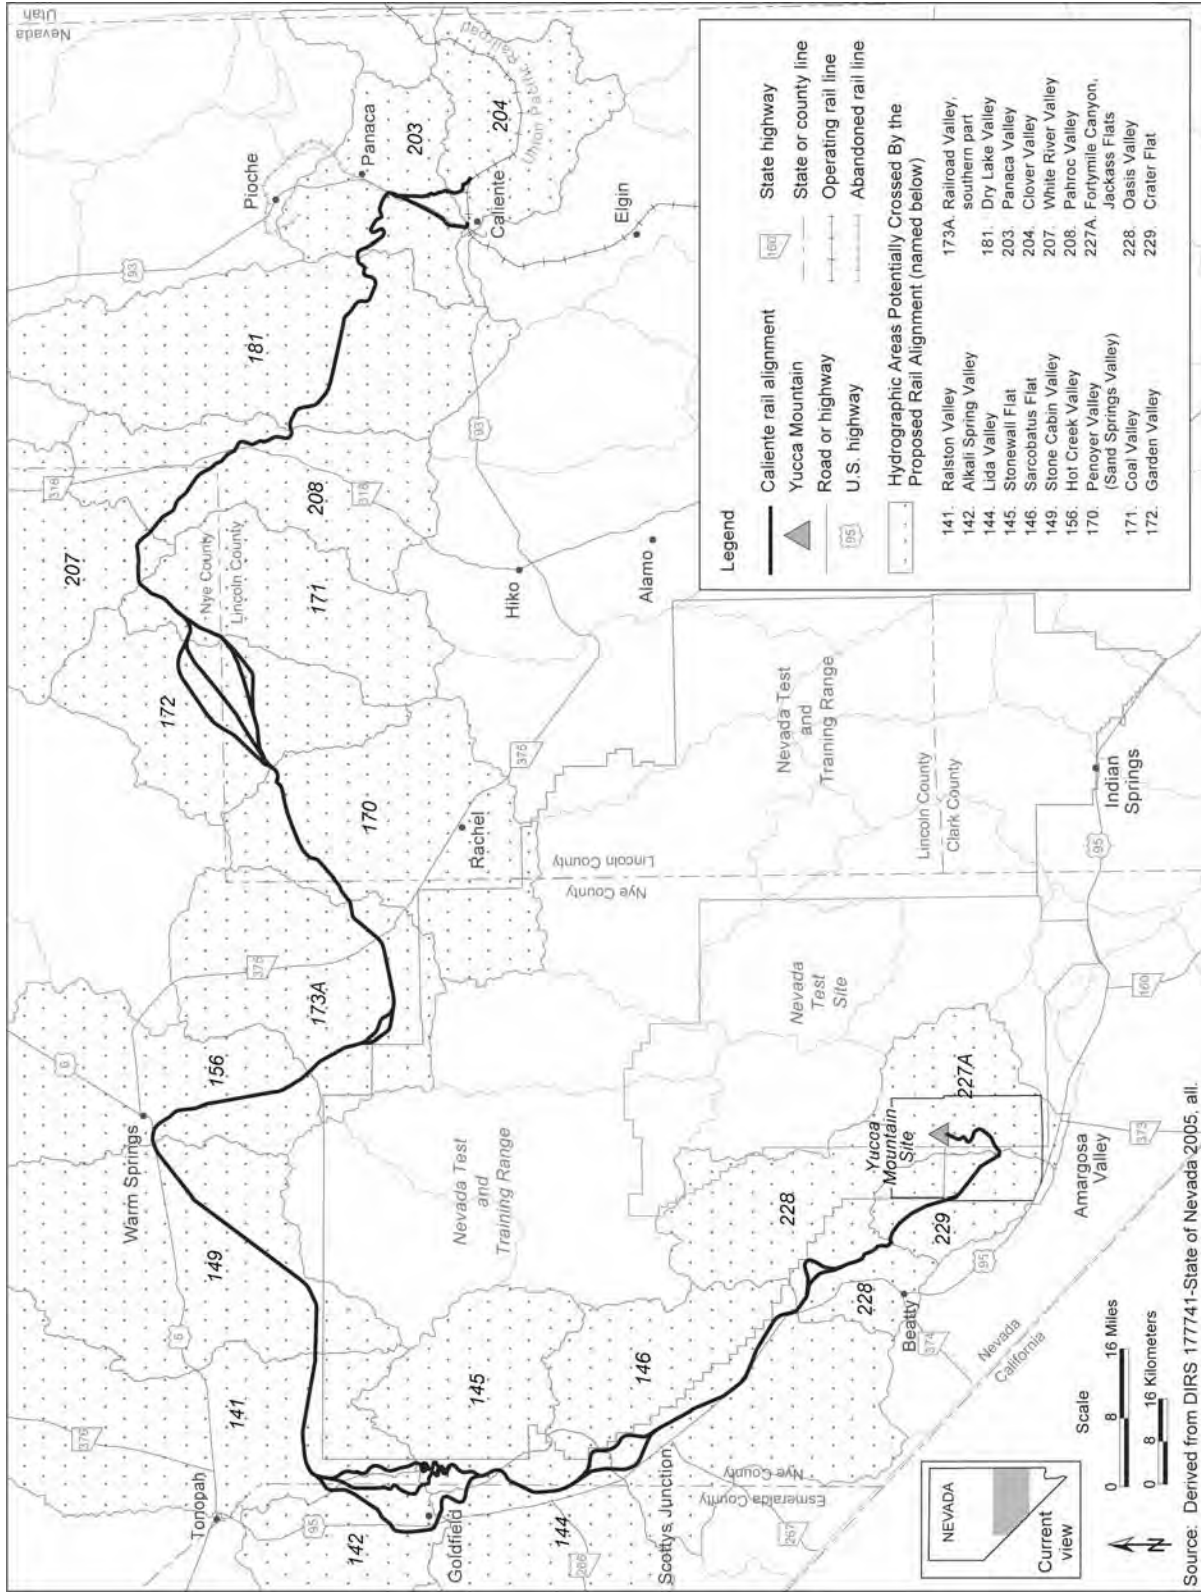


Figure 3-74. Hydrographic areas the Caliente rail alignment would cross.

Table 3-35. Perennial yield and annual committed groundwater resources of hydrographic areas the Caliente rail alignment would cross (page 1 of 2).

Rail line segment	Hydrographic area ^a number	Hydrographic area name	Perennial yield (acre-feet) ^{b,c}	Annual committed groundwater resources/pending annual groundwater duties (acre-feet) ^d	Designated groundwater basin ^{e,f}
Caliente alternative segment, Eccles alternative segment	204	Clover Valley	1,000	3,787/0	No
Caliente alternative segment, Eccles alternative segment, Caliente common segment 1	203	Panaca Valley	9,000	31,367/0	Yes
Caliente common segment 1	181	Dry Lake Valley	2,500	57/21,824	No
Caliente common segment 1	208	Pahroc Valley	21,000	30/0	No
Caliente common segment 1	207	White River Valley	37,000	31,819/42,512	No
Caliente common segment 1; Garden Valley alternative segments 1, 2, 3, and 8	171	Coal Valley	6,000	38/33,071	No
Garden Valley alternative segments 1, 2, 3, and 8; Caliente common segment 2	172	Garden Valley	6,000	559/12,224	No
Caliente common segment 2	170	Penoyer Valley (Sand Spring Valley)	4,000	14,461/11,888	Yes
Caliente common segment 2; South Reveille alternative segments 2 and 3; Caliente common segment 3	173A	Railroad Valley, Southern Part	2,800	3,867/0	No
Caliente common segment 3	156	Hot Creek Valley	5,500	4,231/0	No
Caliente common segment 3	149	Stone Cabin Valley	2,000	11,532/6,400	Yes
Caliente common segment 3; Goldfield alternative segments 1, 3, and 4	141	Ralston Valley	6,000	4,330/1	Yes
Goldfield alternative segments 1 and 4	142	Alkali Spring Valley	3,000	2,596/0	No
Goldfield alternative segments 1 and 3	145	Stonewall Flat	100	12/0	No

Table 3-35. Perennial yield and annual committed groundwater resources of hydrographic areas the Caliente rail alignment would cross (page 2 of 2).

Rail line segment	Hydrographic area ^a number	Hydrographic name	Perennial yield (acre-feet) ^{b,c}	Annual committed groundwater resources/pending annual groundwater duties (acre-feet) ^d	Designated groundwater basin ^{e,f}
Goldfield alternative segments 1, 3, and 4; Caliente common segment 4; Bonnie Claire alternative segments 2 and 3	144	Lida Valley	350	72/0	No
Bonnie Claire alternative segments 2, 3, and 5	146	Sarcobatus Flat	3,000	3,591/0	Yes
Common segment 5; Oasis Valley alternative segments 1 and 3; common segment 6	228	Oasis Valley	1,000	1,299/0	Yes
Common segment 6	229	Crater Flat	220	1,147/82	No
Common segment 6	227A	Fortymile Canyon, Jackass Flats	880 ^g	58 ^g /5	No

a. Source: DIRS 106094-Harrill, Gates, and Thomas 1988, Summary, Figure 3, with the proposed rail alignment map overlay.
 b. Source: DIRS 103406-Nevada Division of Water Planning 1992, Regions 10, 13, and 14, except hydrographic areas 227A, 228, and 229, for which the source is DIRS 147766-Thiel 1999, pp. 6 to 12. The perennial yield value shown for area 228 is the lowest value in range of estimated values (1,000 to 2,000 acre-feet per year) presented by Thiel Engineering Consultants 1999.
 c. To convert acre-feet to cubic meters, multiply by 1,233.49. To convert acre-feet to gallons, multiply by 3,259 x 10⁵.
 d. Data for committed groundwater resources are current as of May 30, 2007 (DIRS 182288-NDWR 2007, all). Data for pending groundwater resources include underground duties but do not include duties for streams or springs. All values have been rounded to the nearest acre-foot.
 e. Sources: DIRS 176488-State of Nevada 2006, Regions 10, 13, and 14; DIRS 177741-State of Nevada 2005, all.
 f. Based on a 1979 Designation Order by the State Engineer; there are no committed resources in area 227A. However, water-rights information from the Nevada Department of Water Resources indicates there are 58 acre-feet in committed resources for this area. The discrepancy appears to be related to the location of the boundary between areas 227A and 230 (Amargosa Desert) (DIRS 176600-Converse Consultants 2005, p. 29 and Table 4-45). The perennial-yield value shown for area 227A is the lowest estimated value presented in *Data Assessment & Water Rights/Resource Analysis of: Hydrographic Region #14 Death Valley Basin* (DIRS 147766-Thiel 1999, p. 8) for the western two-thirds of hydrographic area 227A. The perennial yield estimate for area 227A is broken down into 300 acre-feet for the eastern third of the area and 580 acre-feet for the western two-thirds of the area.

As part of an effort to assess water resources in the vicinity of the Caliente rail alignment, DOE performed studies to identify groundwater conditions, the locations of springs, and the locations, use, and water rights status of groundwater-supply wells within 32 kilometers (20 miles) of either side of the centerline of the rail alignment. Information on groundwater characteristics in hydrographic areas the rail alignment would cross and identified groundwater uses and use types within the 62-kilometer (39-mile) search area are compiled in the *Water Resources Assessment Report, Caliente Rail Corridor, Yucca Mountain Project, Nevada, Task 3.4, Rev. 0* (the Water Resources Assessment Report, Caliente Rail Corridor) (DIRS 176600-Converse Consultants 2005, all). DOE reviewed several other published reports and maps providing information regarding hydrogeologic and groundwater characteristics in hydrographic areas the rail alignment would cross to obtain information to support the groundwater resources impacts assessment.

DOE reviewed several well and spring databases, including Nevada Division of Water Resources (NDWR) and U.S. Geological Survey National Water Information System (USGS NWIS) databases to identify existing wells and springs located within the potential region of influence of proposed new groundwater withdrawal wells. Unless noted otherwise, the sources for the spring and well data in this section are as follows: DIRS 176325-USGS 2006, all; DIRS 177712- MO0607NHDPOINT.000, all; DIRS 177710-MO0607NHDWBDYD.000, all; DIRS 182898-NDWR 2007,all; DIRS 177293-MO0607PWMAR06D.000, all; DIRS 177294-MO0607USGSWNVD.000; DIRS 176600-Converse Consultants 2005, all; and DIRS 176979- MO0605GISGNISN.000, all. An initial screening process identified existing wells within 1.6 kilometers (1 mile) of the centerlines of the respective alternative segments, or within 1.6 kilometers of DOE-proposed new wells. As described later in this section, before analyzing potential impacts to groundwater resources, DOE extended the search radius for identifying existing beneficial-use wells and springs up to 2.4 kilometers (1.5 miles) away from a proposed new well if the initial search for such wells or springs within 1.6 kilometers did not reveal the presence of any such wells or springs. Additionally, on a case-by-case basis (see Section 4.2.6 and Appendix G), for a selected set of new groundwater withdrawal wells specifically targeted for installation within a fault zone or an extensive fracture zone, DOE identified the locations of existing wells and springs up to 10 kilometers (6 miles) away from each such proposed well (to address the possibility of fault zones or extensive fracture zones acting as conduits for groundwater flow). The Department derived information for completing this compilation through a review of well-log data and water-rights information obtained from the NDWR. NDWR well-log database entries include a general and legal description of the location of existing wells, along with *borehole* and well completion information and well testing data (if available). The NDWR water-rights database includes data on the locations, manner of use, and appropriations status of wells having appropriated water rights in Nevada. The USGS website generally includes site information (for example, well location coordinates, elevation, depth) and water-level data. DOE eliminated from consideration in the impacts analysis wells in the NDWR well-log database and the NDWR water-rights database that did not have an appropriated water right or were not domestic wells (such as abandoned or plugged wells, monitoring wells, thermal gradient test wells, oil or gas exploration or groundwater investigation wells). DOE considered all USGS-identified wells.

The compiled well locations had varying levels of accuracy. For example, well locations recorded in the NDWR water-rights database are generally considered to be at the center of each 0.16-square-kilometer (40-acre) parcel representing each quarter-quarter section. Additionally, the well driller might have mapped the well incorrectly, or a well might have been inadvertently recorded in the NDWR water-rights database in the wrong hydrographic area (for example, for wells very near a hydrographic area boundary). Figures 3-75 through 3-82 identify well locations within 1.6 kilometers (1 mile) of the centerline of the Caliente rail alignment or proposed wells. As a result of the characteristics of the well location specifications, there might be more than one existing well at some locations on these figures. Table 3-36 lists hydrographic areas the Caliente rail alignment would cross and the corresponding number of

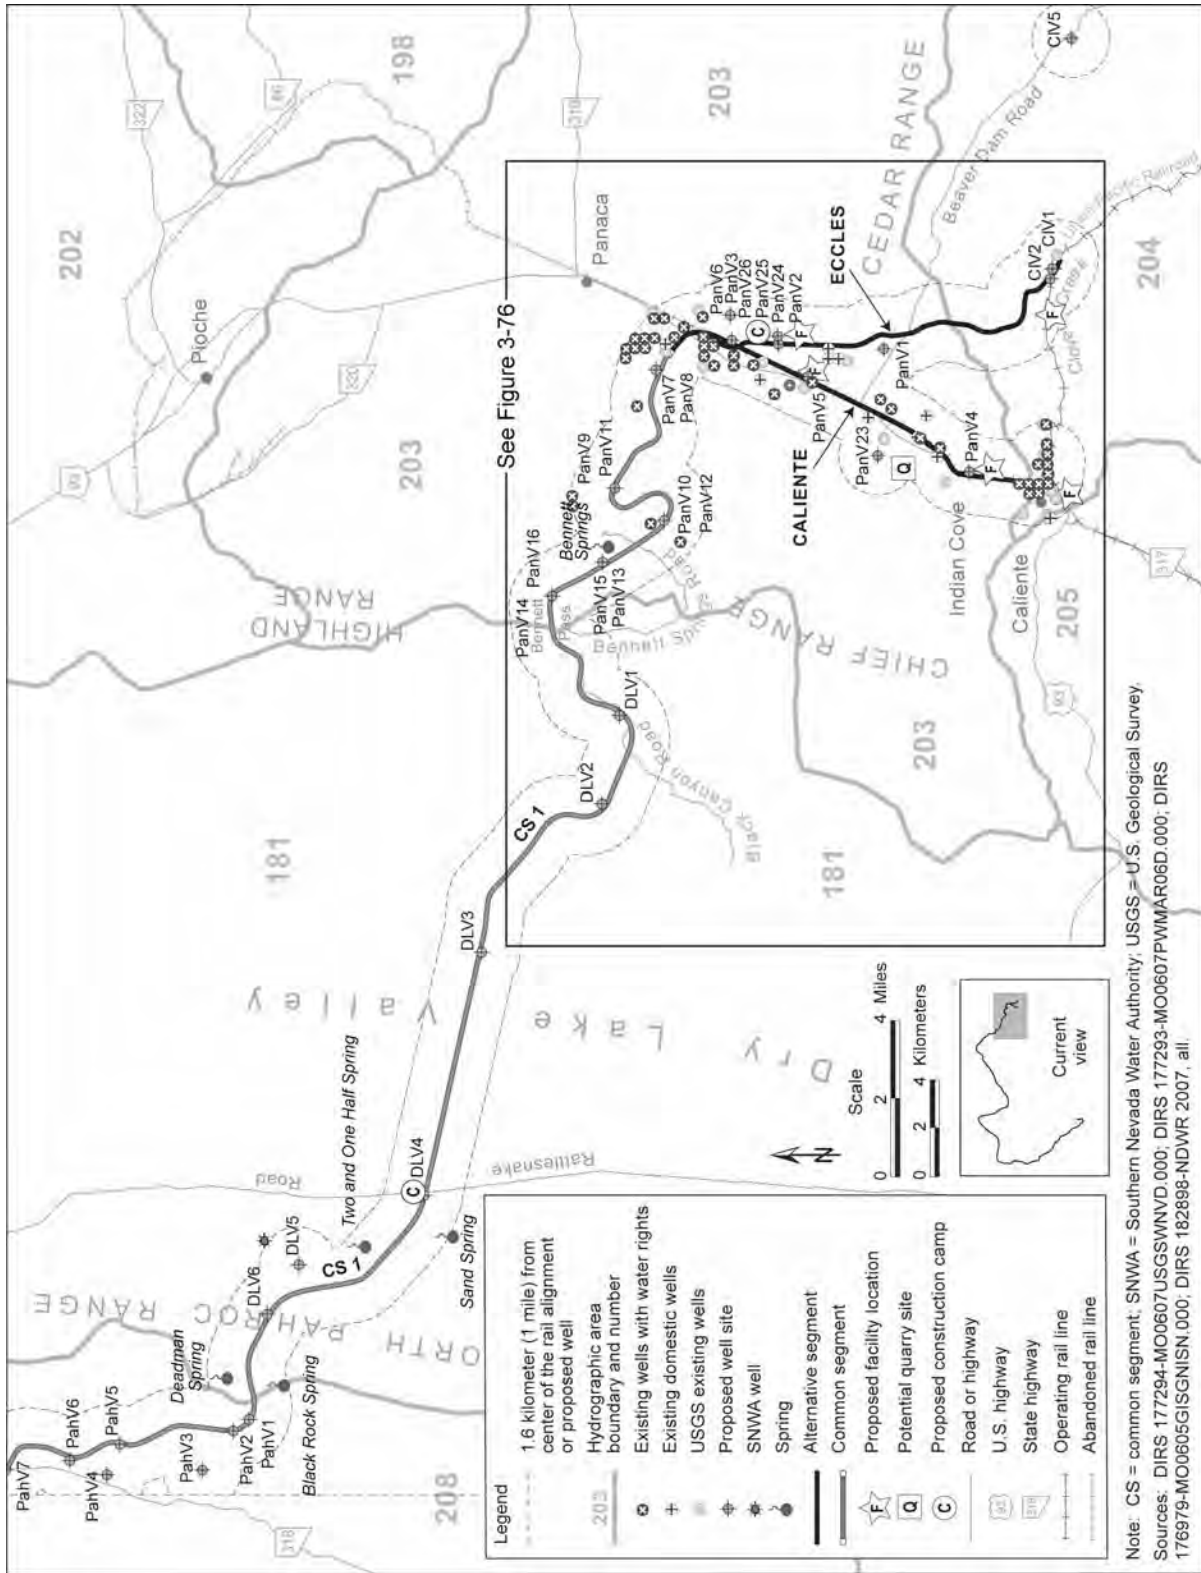


Figure 3-75. Proposed wells and existing USGS and NDWR wells and springs within map area 1.

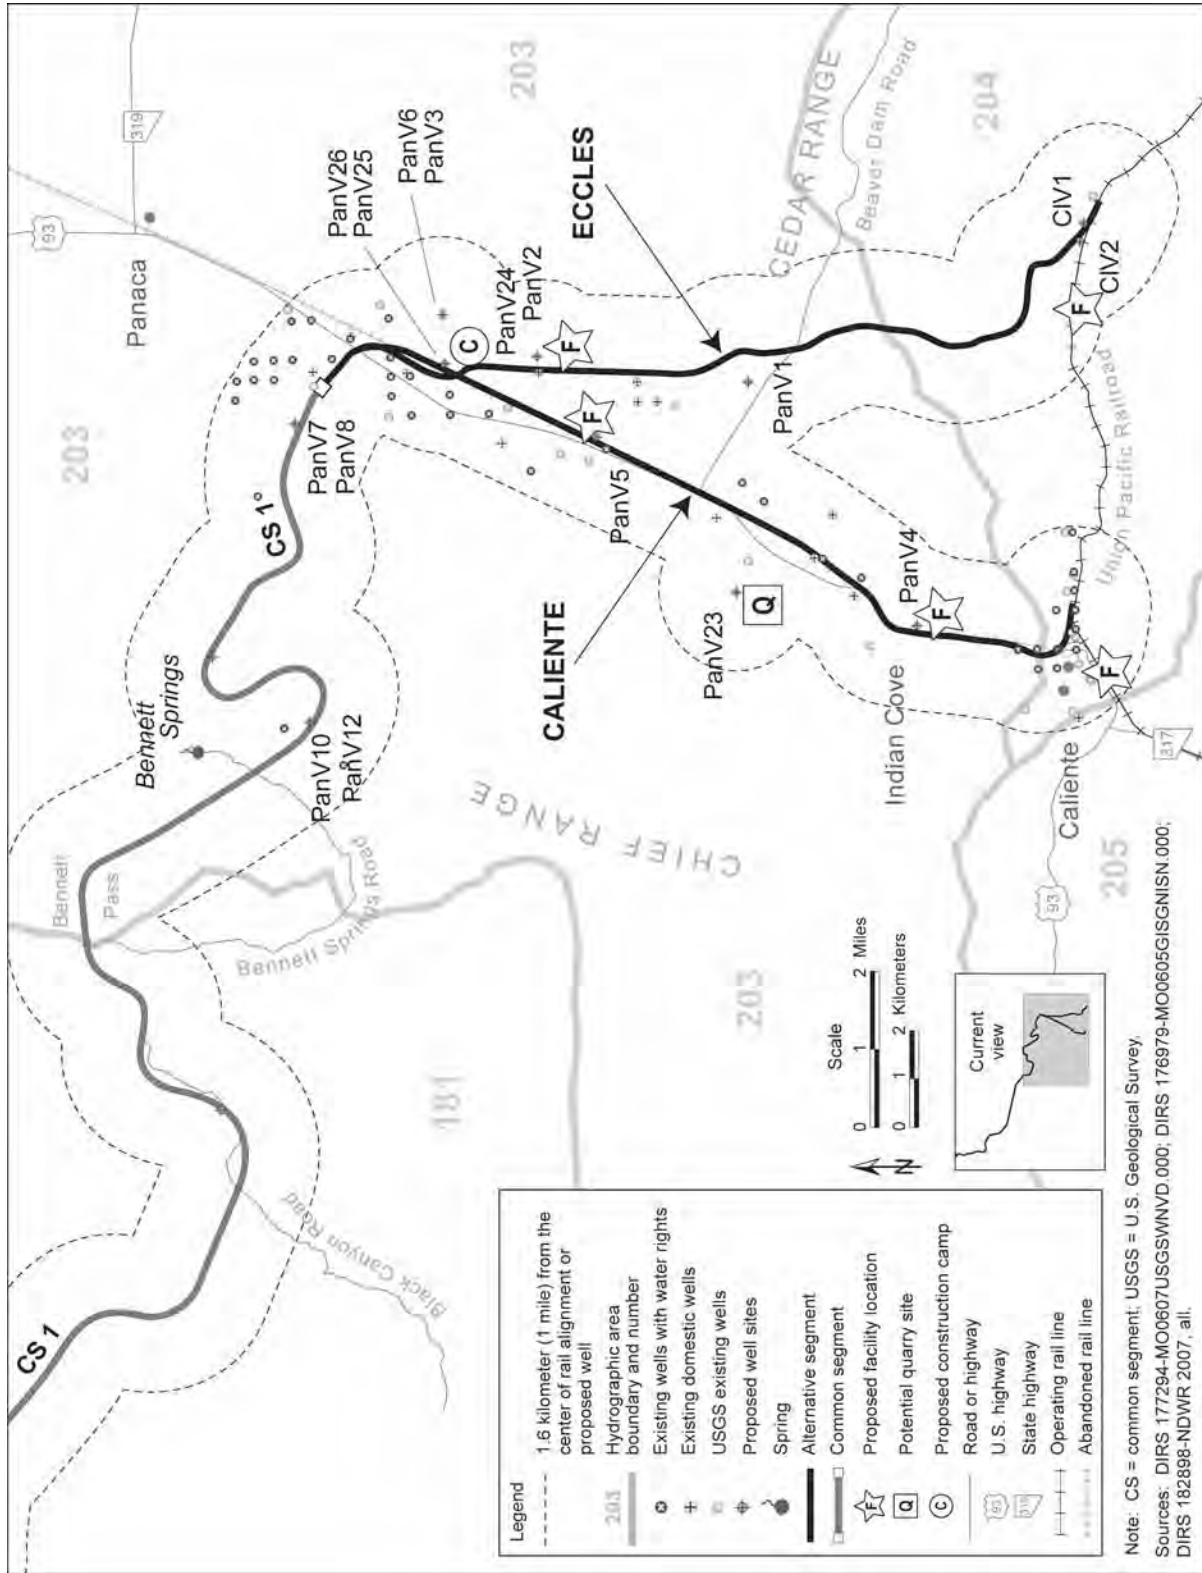


Figure 3-76. Proposed wells and existing USGS and NDWR wells and springs within map area 1 - INSET.

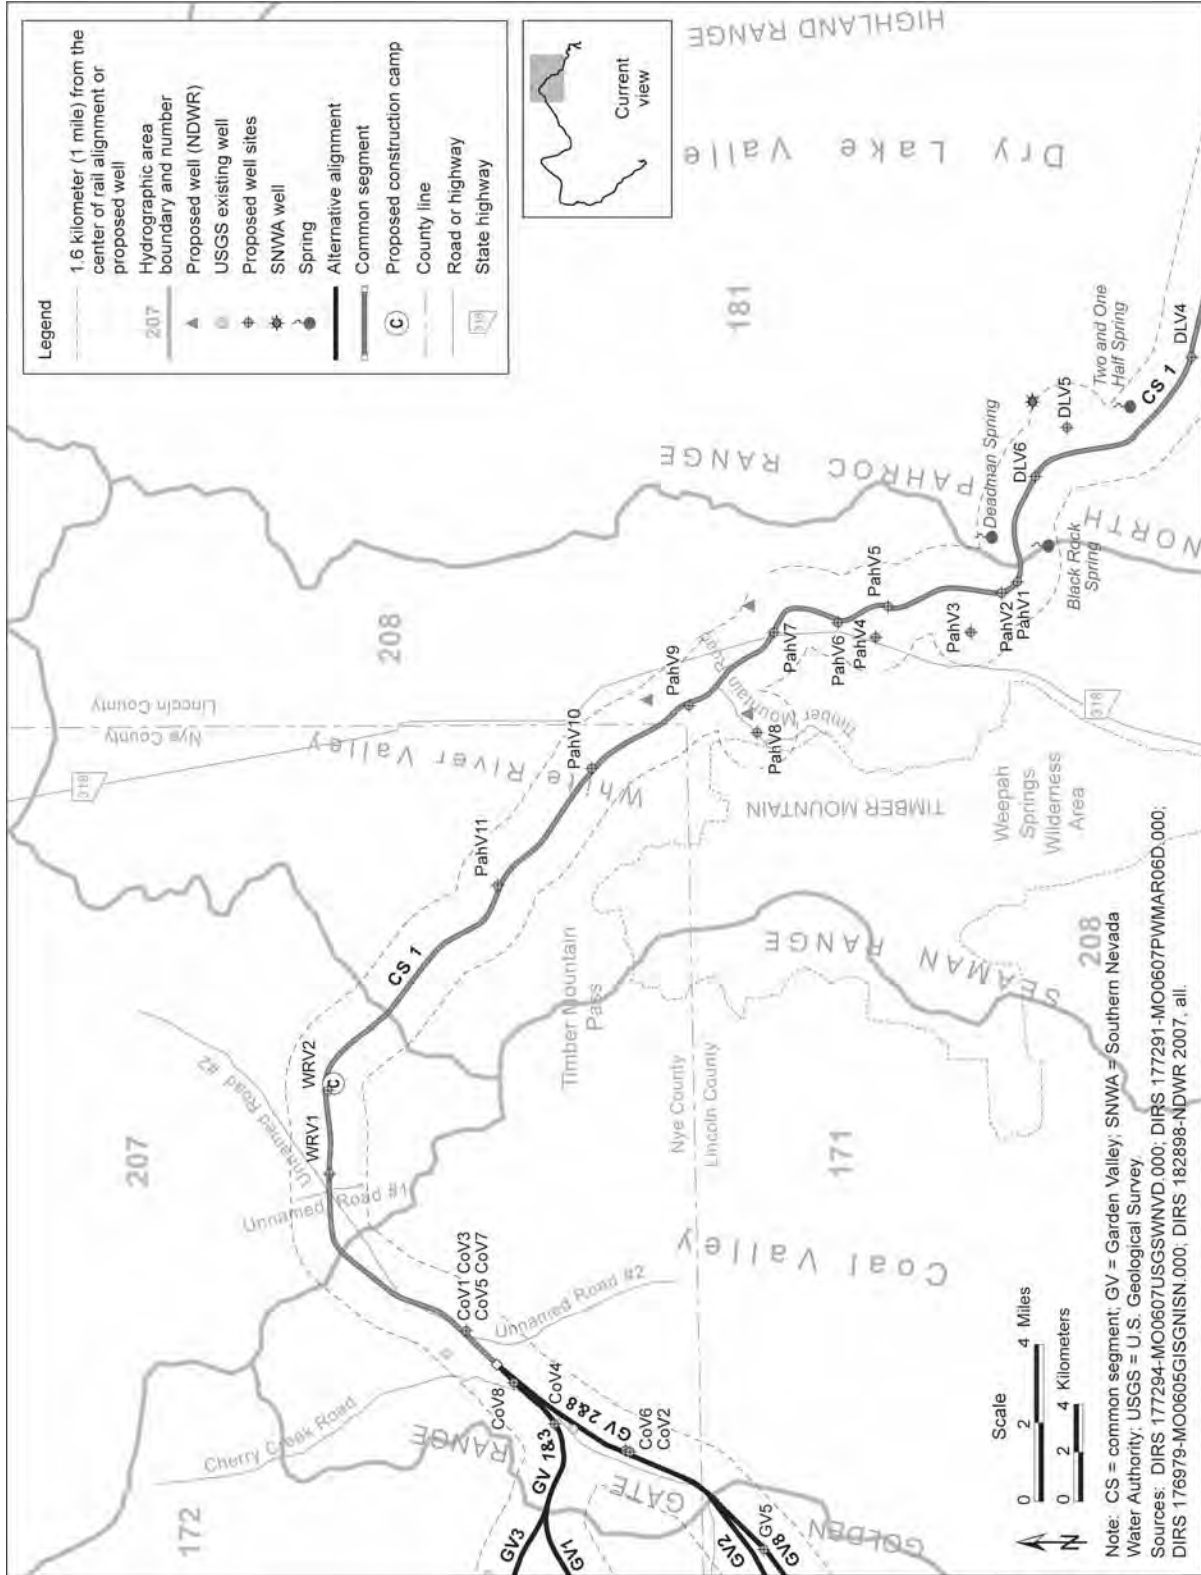


Figure 3-77. Proposed wells and existing USGS and NDWR wells and springs within map area 2.

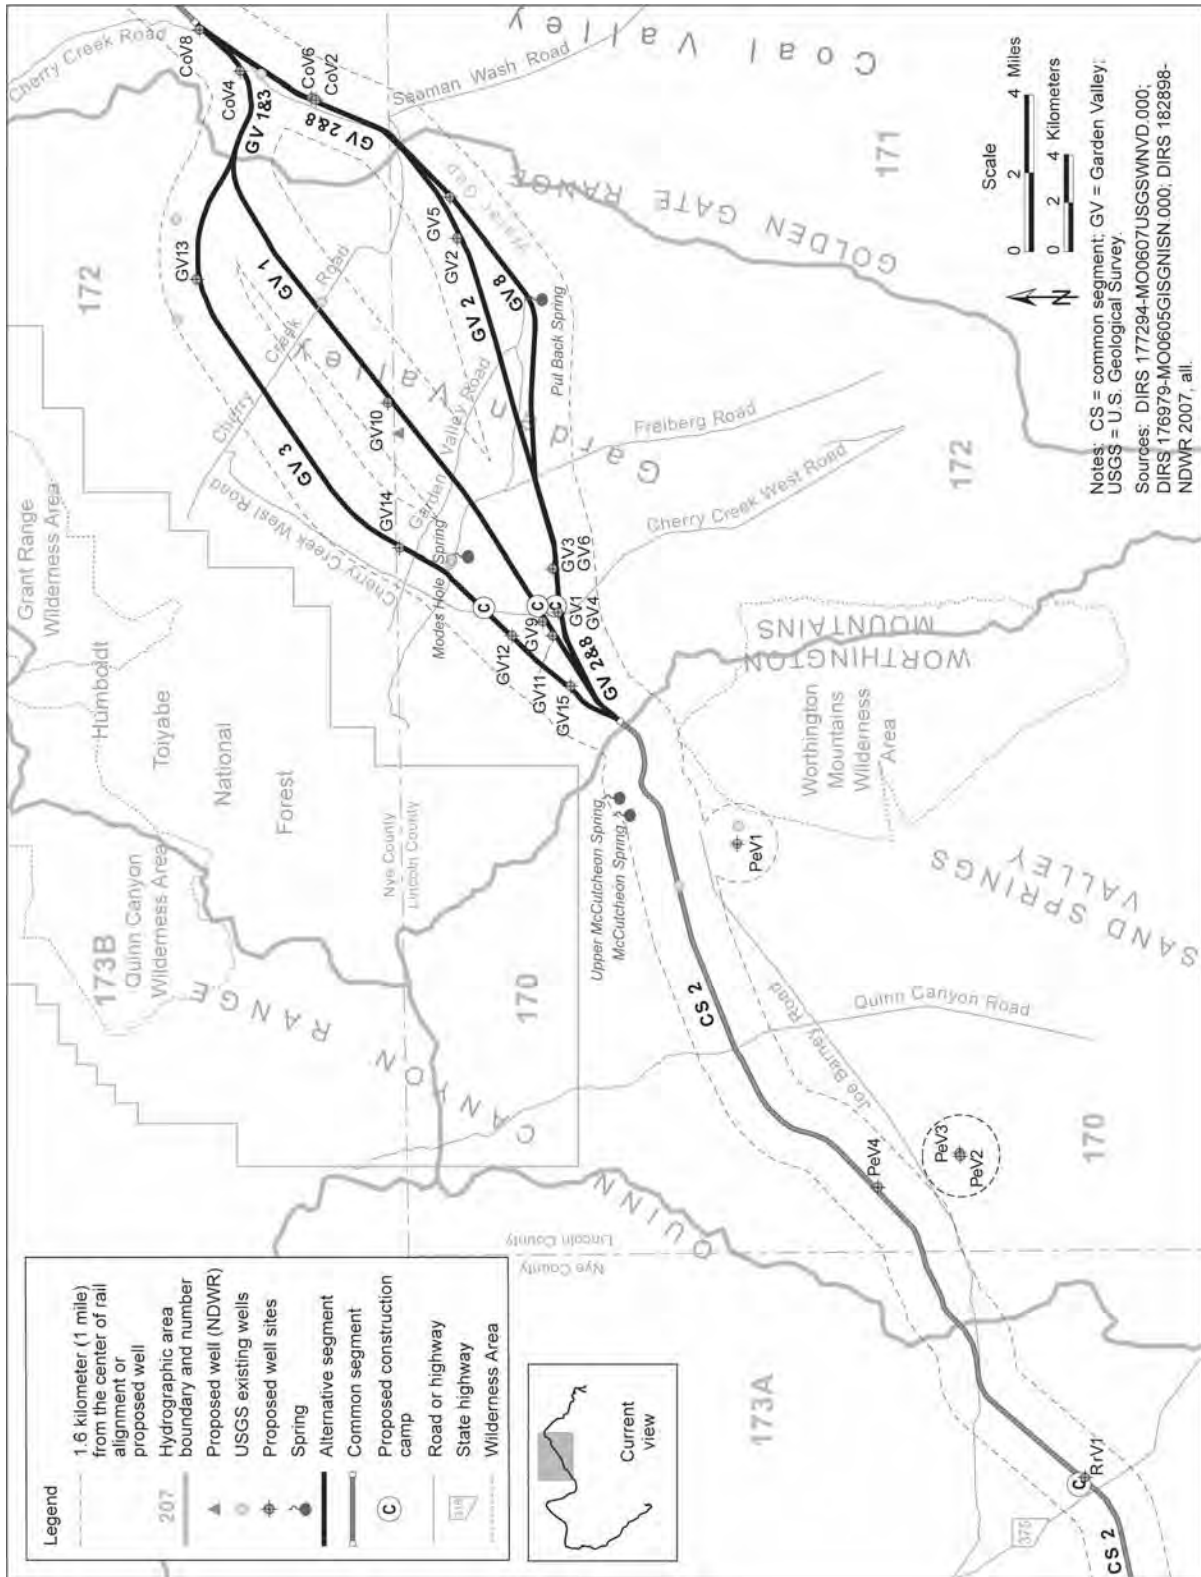


Figure 3-78. Proposed wells and existing USGS and NDWR wells and springs within map area 3.

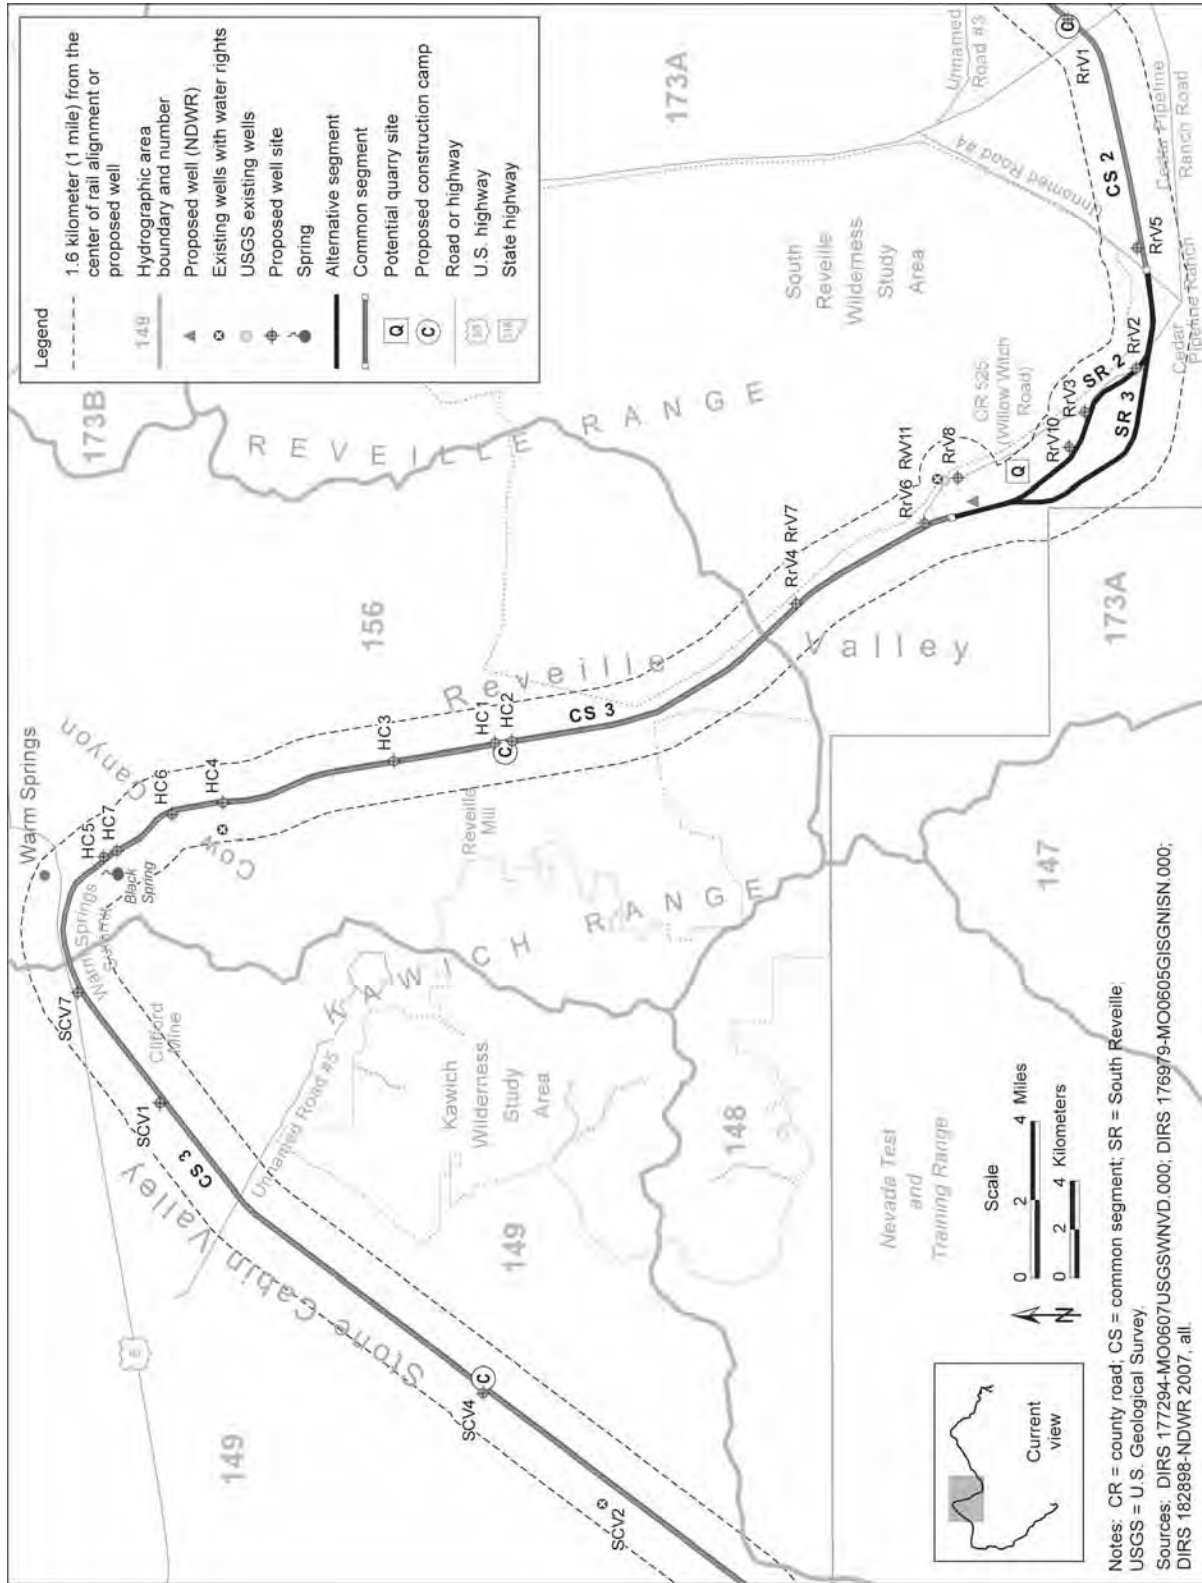


Figure 3-79. Proposed wells and existing USGS and NDWR wells and springs within map area 4.

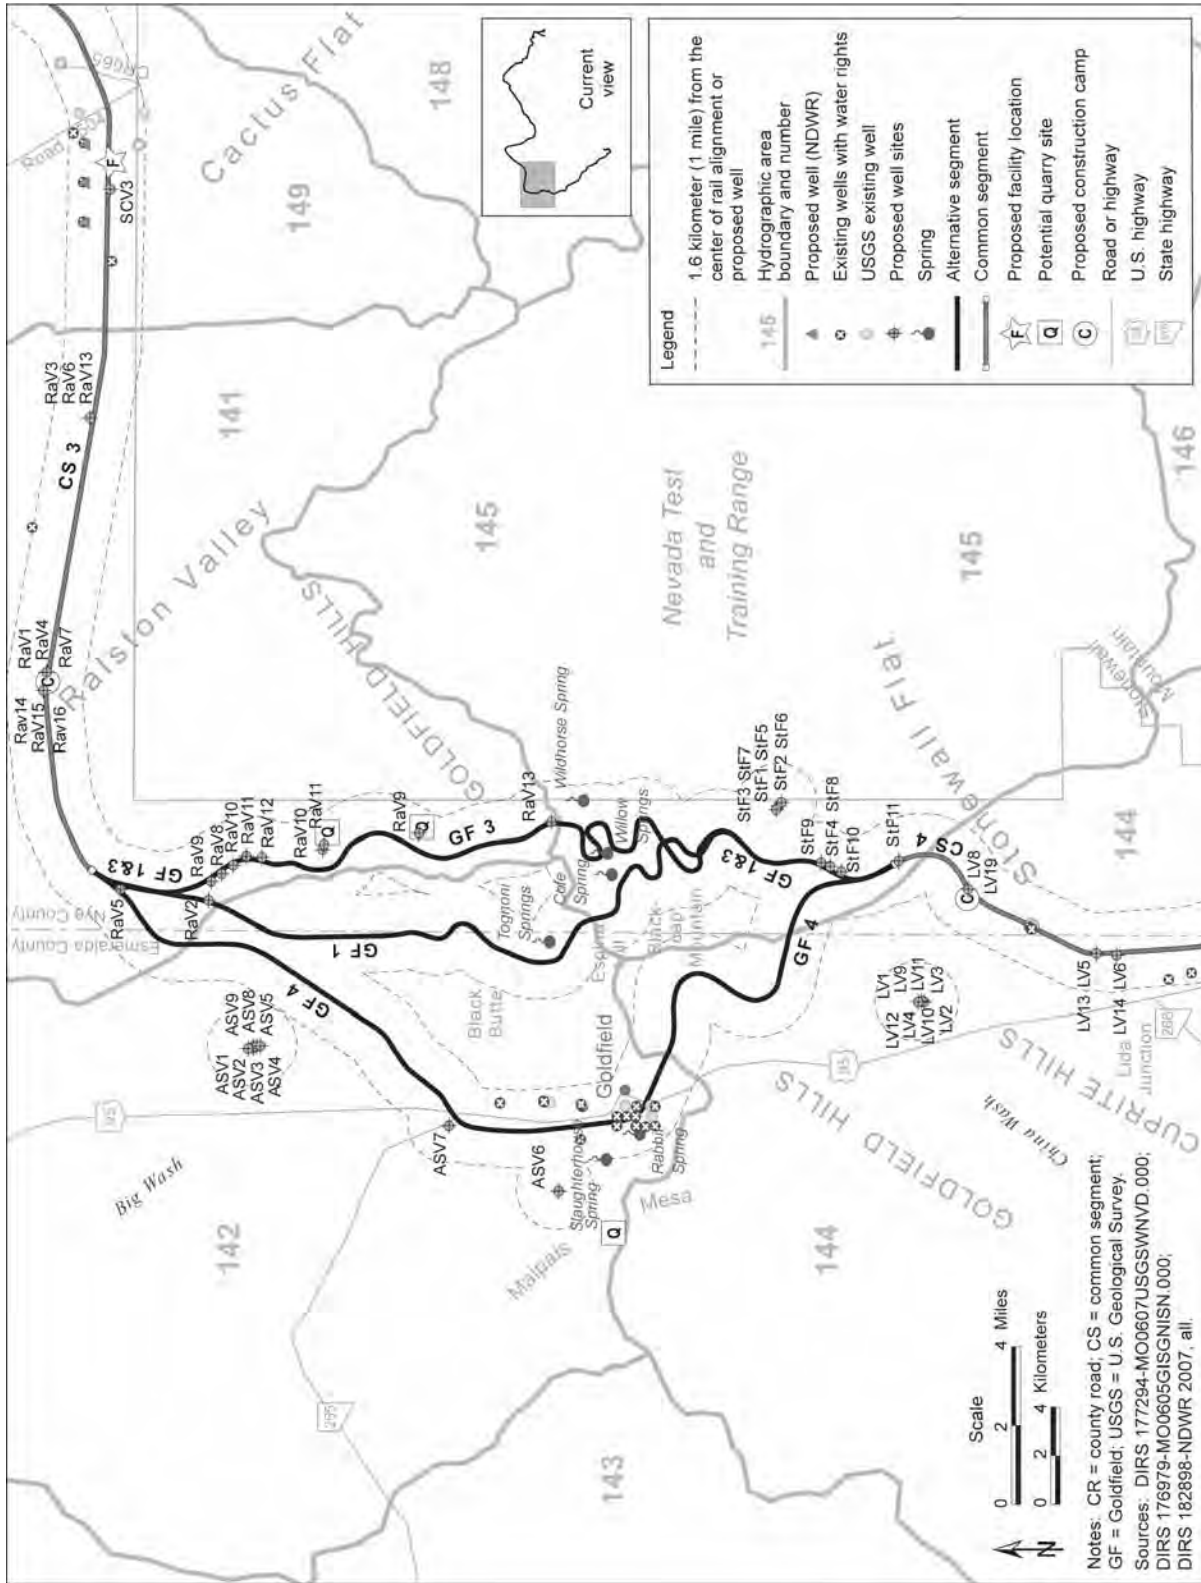


Figure 3-80. Proposed wells and existing USGS and NDWR wells and springs within map area 5.

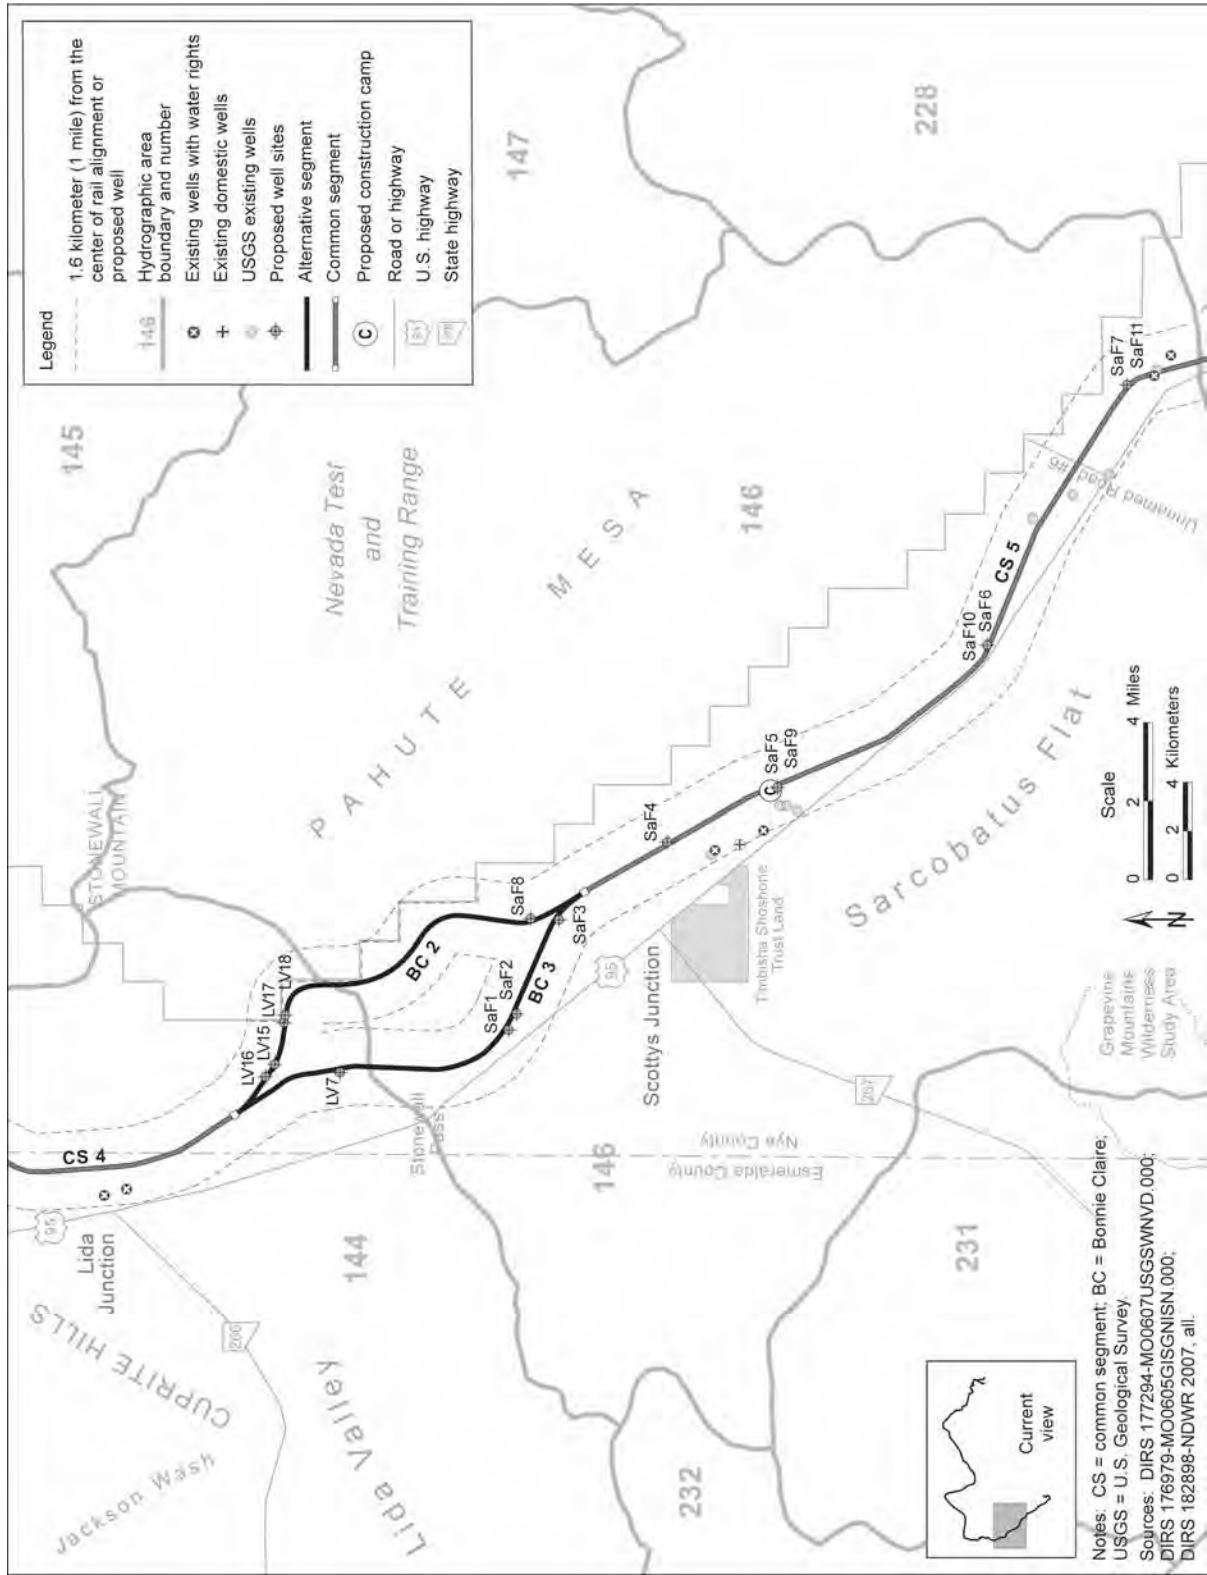


Figure 3-81. Proposed wells and existing USGS and NDWR wells and springs within map area 6.

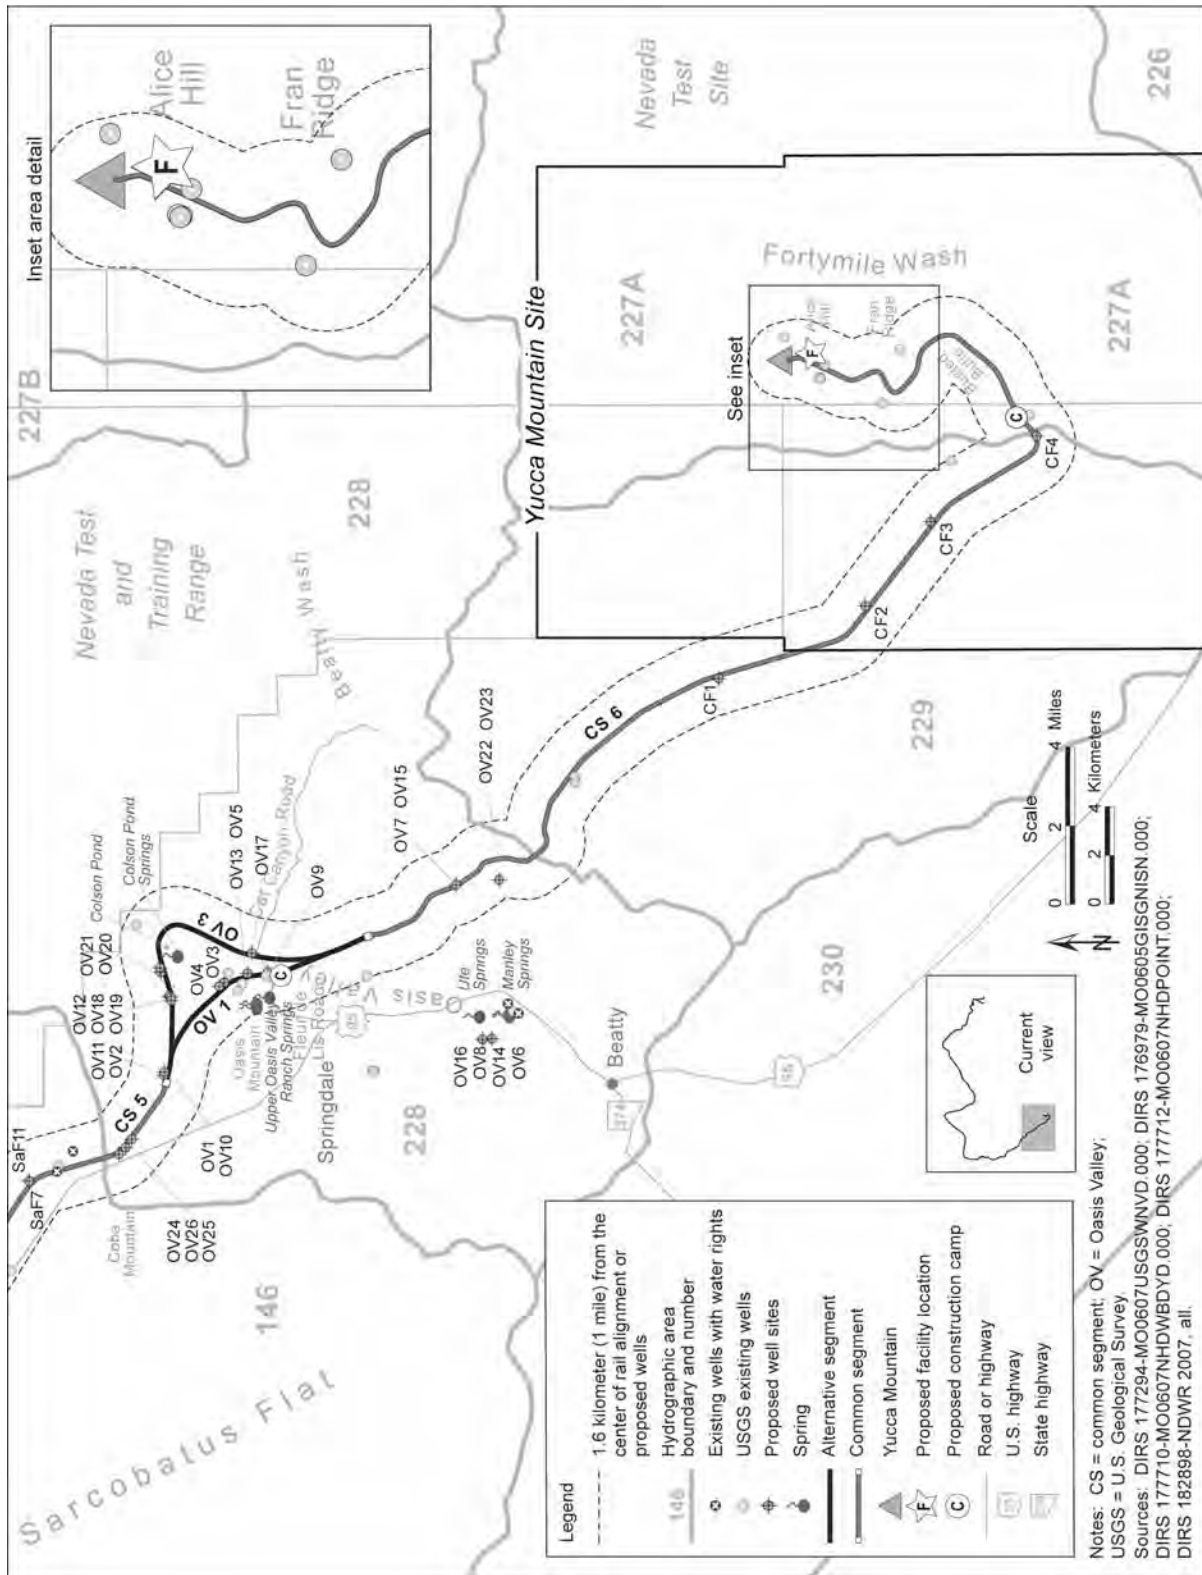


Figure 3-82. Proposed wells and existing USGS and NDWR wells and springs within map area 7.

Table 3-36. Existing wells and proposed new wells within 1.6 kilometers^a of the centerline of the Caliente rail alignment by hydrographic area and/or within 1.6 kilometers of proposed new wells outside the rail line construction right-of-way (page 1 of 2).^b

Hydrographic area		Total number of wells and number of NDWR ^c wells with water rights by proposed-use category ^{d,e}												
Name	Area number	Number of wells ^{f,g}	C	G	H	I	K	N	P	S	X	Z		
Lower Meadow Valley Wash	205	1	0	0	1	0	0	0	0	0	0	0		
Clover Valley	204	29	1	0	1	6	0	0	1	1	0	6		
Panaca Valley	203	71	4	0	11	35	0	0	5	1	0	5		
Dry Lake Valley	181	1	0	0	0	0	0	0	0	0	0	0		
Pahroc Valley	208	0	0	0	0	0	0	0	0	0	0	0		
White River Valley	207	0	0	0	0	0	0	0	0	0	0	0		
Coal Valley	171	2	0	0	0	0	0	0	0	0	0	0		
Garden Valley	172	6	0	0	0	0	0	0	0	0	0	0		
Penoyer (Sand Spring) Valley	170	2	0	0	0	0	0	0	0	0	0	0		
Railroad Valley, Southern Part	173A	1	0	0	0	0	0	0	0	0	0	0		
Hot Creek Valley	156	2	0	0	0	0	0	0	0	2	0	0		
Stone Cabin Valley	149	11	0	0	0	2	0	0	0	3	0	0		
Ralston Valley	141	0	0	0	0	0	0	0	0	0	0	0		
Alkali Spring Valley	142	5	0	0	0	0	0	0	1	0	0	0		
Stonewall Flat	145	0	0	0	0	0	0	0	0	0	0	0		
Lida Valley	144	3	0	0	0	0	0	0	0	0	0	0		
Sarcobatus Flat	146	17	0	0	1	4	0	0	2	2	0	0		
Oasis Valley	228	12	1	0	0	0	1	0	0	0	0	0		
Crater Flat	229	3	0	0	0	0	0	0	0	0	0	0		
Fortymile Canyon, Jackass Flats	227A	14	0	0	0	0	0	0	0	0	0	0		
Totals		180	6	0	14	47	2	0	9	9	0	11		

a. To convert kilometers to miles, multiply by 0.62137.

b. Source: DIRS 177293-DTN MO0607PWWMAR06D.000.

c. NDWR=Nevada Division of Water Resources.

d. C = commercial; G = monitoring wells; H = domestic; I = irrigation; K = mining and milling; N = industrial (includes those designated in the database as N for “industrial” and as J for “industrial-cooling”); P = municipal or quasi-municipal; S = stock; X = test wells; Z = other (includes those designated in the database as Z for “other,” R for “recreation,” and U for “unused”).

e. Proposed use categories are tabulated only for wells (98 of the 180 wells) listed as NDWR wells with water rights or NDWR domestic wells.

f. Includes total number of NDWR-documented existing wells with water rights, plus NDWR domestic wells, plus U.S. Geological Survey National Water Information System-listed wells within 1.6 kilometers from the centerline of the rail alignment or within 1.6 kilometers of any DOE-proposed new well. The number of NDWR wells listed by proposed use category applies only to NDWR wells with water rights and NDWR wells. U.S. Geological Survey wells are not included in the well counts; the Geological Survey database does not provide information regarding well use category.

g. Well locations have not been field-verified. Therefore, some of the identified wells might be farther than 1.6 kilometers from the centerline of the rail alignment or proposed new wells.

wells within 1.6 kilometers of the centerline of the rail alignment, as recorded by the NDWR and the USGS NWIS. Table 3-36 identifies the associated proposed use category of the NDWR-catalogued wells (as defined in the State of Nevada well-log database). The USGS NWIS database does not categorize wells according to their use.

The distance of 1.6 kilometers (1 mile) reflects the first two of three aspects considered in establishing the groundwater region of influence, as described in Section 3.2.6.1. Most of the wells shown in Figures 3-75 through 3-80 are along the easternmost extent of the Caliente rail alignment; a smaller number of wells are clustered in several groups along the western portion. Few existing wells are present elsewhere along the rail alignment. The wells identified in these figures were compiled from information in *Water Resources Assessment Report, Caliente Corridor* (DIRS 176600-Converse Consultants 2005, all) and databases administered by the NDWR and the USGS NWIS. DOE would field-verify the locations of wells that could be affected during rail line construction before starting construction activities.

DOE-compiled well data include data on well locations and uses as documented in the *Water Resources Assessment Report, Caliente Corridor*, and include well records coded as “new” or “replacement” wells in the Nevada well-log database. Because each entry in the well-log database represents an event at a well site (for example, installation, re-drilling, abandonment), there is a possibility that there is more than one record to represent a particular well. To preclude duplication, DOE summarized only records that identified wells as new or replacement.

As shown in Table 3-36, there are a total of 180 NDWR wells with water rights, NDWR domestic wells, and USGS NWIS wells within 1.6 kilometers (1 mile) of the centerline of the Caliente rail alignment or within 1.6 kilometers of proposed new wells. Most of these wells are in areas 203 and 204. Table 3-36 lists irrigation (41 of the 77 NDWR-listed wells with water rights and domestic wells in areas 203 and 204) as the predominant use category for those NDWR-listed wells that are within 1.6 kilometers of the centerline of the Caliente rail alignment or within 1.6 kilometers of any proposed new well.

3.2.6.2.2 Groundwater-Quality Characteristics

Water quality in aquifers in Nevada varies with location (DIRS 106094-Harrill, Gates, and Thomas 1988, all). In the Basin and Range, total dissolved solids concentrations can range from less than 500 to more than 10,000 milligrams per liter (DIRS 172905-USGS 1995, all). In general, at hydrographic area margins and on the slopes of alluvial fans, groundwater quality is good. In discharge areas (such as playas) and other selected areas, groundwater quality can be brackish. However, groundwater in deeper alluvial valley-fill units underlying some playa areas can be of better quality (DIRS 172905-USGS 1995, all). Groundwater quality in the carbonate aquifers in southern and central Nevada, including total dissolved solids concentrations, is generally more uniform in character and with depth within the aquifer (DIRS 101167-Winograd and Thordarson, 1975, p. C103). Total dissolved solids concentrations in alluvial valley fill underlying the Caliente rail alignment generally range from less than 500 to 1,000 milligrams per liter, or approximately 500 to 1,000 parts per million, but a few locations might be in the 1,000 to 3,000 milligrams per liter (approximately 1,000 to 3,000 parts per million) range (DIRS 172905-USGS 1995, Figure 7, with overlay of hydrographic area boundaries). The U.S. Environmental Protection Agency has set an aesthetic standard of 500 milligrams per liter of total dissolved solids for drinking water (40 CFR Part 143). Water with a total dissolved solids concentration of 500 milligrams per liter or less is regarded as acceptable and pleasing for general consumption. A secondary preferred drinking water standard for total dissolved solids concentrations of 500 milligrams per liter for public water supplies has been adopted for Nevada. If water supplies that meet the preferred standard are not available, the Maximum Contaminant Level of 1,000 milligrams per liter is enforceable by the State of Nevada. At higher concentrations, general consumption issues (pertaining to hardness, deposits, color, staining, and salty taste) could develop, but the water could be

used for other purposes (for example, agriculture or earthwork compaction as part of embankment construction). Another parameter of interest for gauging the quality of groundwater in Nevada is arsenic. A revised drinking water standard for arsenic (for water systems meeting certain specified criteria) of 0.010 milligrams per liter became enforceable in January of 2006 (40 CFR 141.23).

3.2.6.3 Hydrogeologic Setting and Characteristics along Alternative Segments and Common Segments

3.2.6.3.1 Interface with the Union Pacific Railroad Mainline

The Caliente alternative segment and the Eccles alternative segment would both overlie a small portion of Clover Valley (hydrographic area 204) and would cross Panaca Valley (hydrographic area 203) (see Figure 3-75). The Caliente and Eccles alternative segments would predominately overlie alluvial valley fill (Table 3-37).

Groundwater quality underlying the areas of the Caliente and Eccles alternative segments varies according to location within the hydrographic areas the segments would cross. Table 3-37 summarizes the general groundwater-quality and aquifer characteristics of this area.

Table 3-37. General groundwater-quality and aquifer characteristics – Interface with the Union Pacific Railroad Mainline, Caliente and Eccles alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
204 Clover Valley	Quaternary-age alluvial valley fill and volcanic rocks ^e	6 to 20	Upper 30 meters: 650,000 ^e	Total dissolved solids: 30 to 350 mg/L ^f
203 Panaca Valley	Alluvial valley fill, carbonate and clastic rocks, volcanic rocks and other crystalline rocks, with some terraced areas comprised of fine-grained lakebed deposits ^e	12 to 30	Upper 30 meters: 1.4 million ^f	Total dissolved solids: 230 to 770 mg/L ^e

a. Source: DIRS 176600-Converse Consultants 2005, Plates 4-13a and 4-15. The listed depth ranges generally apply to areas underlying the alternative segments; groundwater is deeper in the southern part of area 204 beneath the Clover Mountains (DIRS 176600-Converse Consultants 2005, p. 93) and in some other parts of area 203 (DIRS 176600-Converse Consultants 2005, p. 88).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Source: DIRS 176600-Converse Consultants 2005, pp. 86, 87, 92, and 93, and Plates 4-13a and 4-13b.

f. Source: DIRS 180754-Rush et al. 1971, all.

Hydrographic area 204, Clover Valley, is not a designated groundwater basin (see Table 3-35). Committed groundwater resources exceed estimated perennial yield of 1.2 million cubic meters (1,000 acre-feet). However, as noted previously, all committed resources within a hydrographic area might not be in use at the same time. Groundwater depth throughout Clover Valley varies from less than 1 meter to 60 meters (2.5 to 200 feet). The depth at which groundwater occurs varies from 6 meters (20 feet) to 20 meters (60 feet) below ground along the short segments of the Caliente and Eccles alternative segments that would lie within area 204 (see Table 3-37). Groundwater is primarily produced from the alluvial valley fill. Geologic units encountered in boreholes drilled in the Clover Valley area include alluvial valley fill and volcanic rocks.

DOE determined that there are a total of 29 combined existing NDWR wells with water rights, NDWR domestic wells, and USGS NWIS wells in hydrographic area 204 within 1.6 kilometers (1 mile) of the centerlines of the Caliente and Eccles alternative segments. Figures 3-75 and 3-76 show the locations of these wells. The locations of existing wells are based on data on well locations as available in NDWR and USGS NWIS databases. Not all existing wells in area 204 that lie within 1.6 kilometers of the centerlines of the Caliente and Eccles alternative segments may be depicted on Figures 3-75 and 3-76 because some wells are at very nearly the same locations and cannot be shown at the scale used in these figures. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 204.

Hydrographic area 203, Panaca Valley, is a designated groundwater basin. Committed groundwater resources exceed the estimated annual perennial yield of 11.1 million cubic meters (9,000 acre-feet) (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. The depth at which groundwater occurs ranges from above the ground surface to about 60 meters (200 feet) below ground, although in most areas, it is generally less than approximately 20 meters (60 feet) below ground. Along the Caliente alternative segment, the shallowest depth to groundwater in this basin is in its central portion, along U.S. Highway 93, where depth to groundwater is generally approximately 12 to 30 meters (40 to 100 feet) (see Table 3-37) (DIRS 176600-Converse Consultants 2005, Plate 4-13a). Groundwater is primarily produced from the alluvial valley fill, although some low-yielding wells have produced groundwater from thin sand beds in lakebed deposits of the Panaca Formation. Groundwater also occurs in fractured volcanic rocks and carbonate rocks (DIRS 176600-Converse Consultants 2005, pp. 86 and 87).

There are 60 wells (total number of NDWR wells with water rights, NDWR domestic wells, and USGS NWIS wells) in hydrographic area 203 within 1.6 kilometers (1 mile) of the centerlines of the Caliente and Eccles alternative segments. Figures 3-75 and 3-76 show the locations of these wells. As described above for the case of hydrographic area 204, not all existing wells in area 203 that lie within 1.6 kilometers of the centerlines of the proposed Caliente and Eccles alternative segments may be depicted on Figures 3-75 and 3-76 because some wells are at very nearly the same locations and cannot be shown at the scale used in these figures.

The predominant use categories for the NDWR wells with water rights within 1.6 kilometers (1 mile) of the centerlines of the Caliente and Eccles alternative segments in area 203 are irrigation, domestic municipal, or quasi-municipal, or other. Based on the information in Table 3-36, groundwater use associated with about 53 percent of NDWR wells with water rights or NDWR domestic wells in hydrographic areas 203 and 204 within 1.6 kilometers of the centerlines of those two alternative segments is categorized as irrigation; about 16 percent of those wells are listed as domestic wells; about 14 percent are listed as having other uses; about 8 percent are listed as municipal or quasi-municipal water-supply wells; about 6 percent are listed as commercial-use wells. Listed individual water-use types from other wells each represent 5 percent or less of the total well use.

The Panaca Valley area is underlain by alluvial valley fill, volcanic rocks and other crystalline rocks, and older carbonate and clastic rocks, with some terraced areas comprised of fine-grained lakebed deposits (DIRS 176519-Rowley and Shroba 1991, all; DIRS 176600-Converse Consultants 2005, pp. 86 and 87). Geologic materials present in the vicinity of the potential quarry site northwest of Caliente (west of proposed new well location PanV23) include lava flows; mudflow breccias; ash-flow tuffs; alluvium and alluvial fan materials; limestone and dolomite; and sandstone, mudstone, and conglomeratic rocks (DIRS 176947-Rowley et al. 1994, all; DIRS 176519-Rowley and Shroba 1991, all).

There is groundwater under both confined and unconfined conditions in the Meadow Valley Wash area (DIRS 176502-Rush 1964, p. 18), which generally includes the area between Caliente and Panaca. Groundwater storage values for the alluvial aquifers within the uppermost 30 meters (100 feet) of

saturated material in Panaca Valley and Clover Creek Valley were previously estimated at 1.75 billion cubic meters (1.4 million acre-feet) and 802 million cubic meters (650,000 acre-feet), respectively (Table 3-37). Because most wells are no deeper than approximately 46 meters (150 feet), the total thickness of the alluvial aquifer groundwater reservoir is not known in many parts of the Meadow Valley Wash area (DIRS 176502-Rush 1964, p. 18). In this area, well-pumping rates on the order of 40 to 190 liters per minute (10 to 50 gallons per minute) to more than 4,000 liters per minute (1,000 gallons per minute) have been reported (DIRS 176502-Rush 1964, Table 15). NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 203.

Figures 3-75 and 3-76 show DOE-proposed wells for supplying water to support construction of the Caliente or Eccles alternative segment. In addition to construction within the nominal width of the rail line construction right-of-way, a potential quarry in this area would also require up to two new wells. Quarry wells proposed for the Caliente and Eccles alternative segments would be outside the nominal width of the construction right-of-way of either alignment. Although the potential quarry location and its associated new well(s) would be outside the construction right-of-way, they are described in this Rail Alignment EIS in the context of the rail alignment segment(s) with which they are most closely associated, because each quarry would be accessed in a generally perpendicular direction from the rail line. A well proposed to provide water to potential quarry CA-8B (PanV23 on Figures 3-75 and 3-76) is approximately 1.6 kilometers (1 mile) northwest of the proposed Caliente alternative segment, respectively, and would overlie hydrographic area 203.

3.2.6.3.2 Caliente Common Segment 1 (Dry Lake Valley Area)

Crossing from east to west, Caliente common segment 1 would overlie hydrographic areas Panaca Valley (203), Dry Lake Valley (181), Pahroc Valley (208), White River Valley (207), and Coal Valley (171) (see Figure 3-74). Caliente common segment 1 would predominantly overlie alluvial valley fill (DIRS 176600-Converse Consultants 2005, Plates 4-13a and 4-13b). The depth to groundwater underlying common segment 1 varies according to locale. Groundwater quality underlying common segment 1 varies according to location within the hydrographic areas the rail line would cross. Table 3-38 summarizes the groundwater-quality and aquifer characteristics in the hydrographic areas common segment 1 would cross.

Section 3.2.6.3.1 discusses hydrographic area 203, Panaca Valley, in detail. Two existing wells in areas 203, one NDWR well with a water right and one USGS NWIS well, are within 1.6 kilometers (1 mile) of the centerline of the rail alignment in area 203. One existing spring (Bennett Springs) is within 1.6 kilometers of the centerline of common segment 1. Figure 3-75 shows the locations of these wells and the spring.

Hydrographic area 181, Dry Lake Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 3.08 million cubic meters (2,500 acre-feet) (see Table 3-35).

The depth to groundwater depth in most parts of Dry Lake Valley generally exceeds 60 meters (200 feet), and in many places exceeds 240 meters (800 feet). Depth to groundwater underlying the common segment varies from 50 to 160 meters (160 to 520 feet) (Table 3-38). Groundwater is generally calcium–sodium–sulfate type (DIRS 101811-DOE 1996, Section 4.6.5.2). The primary source of groundwater in Dry Lake Valley is mountain front recharge. Geologic units in the Dry Lake Valley area include alluvial valley-fill deposits, volcanic rocks, clastic rocks, and older carbonate rocks.

Table 3-38. General groundwater-quality and aquifer characteristics – Caliente common segment 1.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
203 Panaca Valley	Alluvial valley fill, carbonate and clastic rocks, volcanic rocks and other crystalline rocks, with some terraced areas comprised of fine-grained lakebed deposits ^e	Less than 60	Upper 30 meters: 1.4 million ^f	Total dissolved solids: 230 to 8,770 mg/L
181 Dry Lake Valley	Alluvial valley fill deposits, volcanic rocks, and older carbonate rocks ^e	50 to 160	Upper 30 meters: for both aquifer types – <i>Alluvial valley fill</i> : 2.8 million ^f <i>Carbonate rock aquifer</i> : 800,000 ^f	Total dissolved solids: 377 mg/L ^e Sulfate: 30 mg/L ^e Fluoride: Less than 1 mg/L ^e
208 Pahroc Valley	Alluvial sediments, carbonate rocks, quartzite, volcanics, and a clastic aquitard ^e	50 to 180	Upper 30 meters: for both aquifer types – <i>Alluvial valley fill</i> : 1.3 million ^f <i>Carbonate rock aquifer</i> : 325,000 ^f	Total dissolved solids: 475 mg/L ^e Sulfate: Less than 30 mg/L ^e
207 White River Valley	Alluvial valley-fill and older carbonate rocks ^e	30 to 50	<i>Alluvial valley fill</i> : 4.9 million ^f	Total dissolved solids: 257 to 470 mg/L ^e
171 Coal Valley	Alluvial valley fill, volcanic rocks, clastic rocks, and older carbonate rocks ^e	50 to 90	Upper 30 meters: for both aquifer types – <i>Alluvial valley fill</i> : 1.5 million ^f <i>Carbonate rock aquifer</i> : 600,000 ^f	Total dissolved solids: 200 to 300 mg/L ^e

- a. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 176600-Converse Consultants 2005, Plates 4-10 through 4-13a); groundwater can vary over a wide range of depth depending on location in each hydrographic area (DIRS 176600-Converse Consultants 2005, pp.76, 78, 79, 83, and 88).
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.
- d. mg/L = milligrams per liter.
- e. Source: DIRS 176600-Converse Consultants 2005, pp. 75 to 90.
- f. Sources: DIRS 180754-Rush et al. 1971, all; DIRS 176883-Brothers, Katzer, and Johnson 1996, pp. 27 and 28; DIRS 176851-Brothers, Bugo, and Tracy 1993, pp. 17 to 30; DIRS 176852-Drici, Garey, and Bugo 1993, p. 36.

Unconsolidated alluvial materials and older carbonate rock comprise the best aquifers in area 181 (DIRS 176600-Converse Consultants 2005, p. 83). Beneath Dry Lake Valley, the thickness of the alluvial materials varies from a few meters to more than 300 meters (1,000 feet) (DIRS 176883-Brothers, Katzer, and Johnson 1996, p. 15). There is an estimated 3.5 billion cubic meters (2.8 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer material within this basin, and there might be an additional 990 million cubic meters (800,000 acre-feet) of recoverable groundwater in the carbonate aquifer underlying the basin. There is one existing well (181M-1) and four springs in

hydrographic area 181 within 1.6 kilometers (1 mile) of the centerline of common segment 1. Figures 3-75 and 3-77 identify the locations of this well and the springs. Well 181M-1 is shown on Figures 3-75 and 3-77 as the “SNWA well.” This well is an exploration well drilled by the Southern Nevada Water Authority.

In addition to existing groundwater wells in hydrographic area 181 that have water-rights appropriations, NDWR data indicate that there are approximately 26.9 million cubic meters (22,000 acre-feet) of documented pending annual duties (see Table 3-35) in area 181. These total pending annual duties include 14.3 million cubic meters (12,000 acre-feet) for water-rights applications originally filed by the Las Vegas Valley Water District in 1989 to appropriate water at some future time from a series of proposed new wells in Dry Lake Valley (DIRS 177516-SNWA 2006, p. 3). Ownership of these water-rights applications was subsequently transferred to the Southern Nevada Water Authority. Caliente rail alignment common segment 1 would cross one of five different proposed groundwater exploration areas the Water Authority identified in area 181 (DIRS 176469-SNWA [n.d.], all) from which groundwater might be developed. The additional water-rights applications comprise pending annual duties of 12.6 million cubic meters (10,000 acre-feet) and were filed with the Nevada State Engineer by the Lincoln County Water District to appropriate water at some future time from a series of proposed new wells in Dry Lake Valley. Until the outcomes of agency and public scoping and the water-rights application process are known and the Nevada State Engineer makes permitting decisions, details about the specific future groundwater development in this valley pursuant to these applications (including final locations of any proposed new wells, or the precise timing of such development) are not known. However, according to the NDWR Water Rights Database, an application has been filed for a future irrigation well that would be within approximately 1.7 kilometers (1.1 miles) of a proposed new well location (DLV3) in Dry Lake Valley. The proposed production rate for the municipal well would be up to 17,000 liters (4,448 gallons) per minute and the well would operate year round. This water rights application is under protest. The potential for impacts associated with this well application, if it were to be approved and the well installed and used at the same time as proposed well location DLV3, is evaluated in Section 5.2.2.6. Chapter 5, Cumulative Impacts, includes additional information about these water-rights applications.

Hydrographic area 208, Pahroc Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 25.9 million cubic meters (21,000 acre-feet) (see Table 3-35). In addition to existing wells with water rights in area 208, Lincoln County and two other entities have filed water-rights applications with the Nevada State Engineer to possibly appropriate water at some future time from a series of proposed new wells in Pahroc Valley (DIRS 175909-Hafen et al. 2003, pp. 1 and 2, and Exhibit B). Pending the outcome of agency and public scoping and water rights permitted by the Nevada State Engineer, details pertaining to the specific future groundwater development in this valley pursuant to these applications (including final locations of any proposed new wells, or the precise timing of such development) are not known. However, according to the NDWR Water Rights Database, there are NDWR water-rights applications with “Ready for Action” (RFA) or “Ready for Protest” (RFP) status on file, and the most recent amended application applies to a proposed well location in Pahroc Valley that would be within approximately 1.7 kilometers (1.1 miles) of a proposed location (PahV9) for installation of up to two new withdrawal wells. This application has an RFA status, the proposed production rate for this municipal well would be up to 10,200 liters (2,690 gallons) per minute, and the well would operate year round. Water-rights applications have also been submitted for a proposed municipal well that would be approximately 1.5 kilometers (0.9 mile) northeast of the proposed PahV7 well location and a proposed municipal well that would be approximately 1 kilometer (0.6 mile) northeast of the proposed PahV8 well location. The potential for impacts associated with these well applications is evaluated in Section 5.2.2.6. Chapter 5, Cumulative Impacts, includes additional information pertaining to proposed future groundwater development projects in eastern Nevada.

The depth to groundwater beneath the Pahroc Valley hydrographic area generally exceeds 61 meters (200 feet) (see Table 3-38). Depth to groundwater underlying the rail alignment in Pahroc Valley ranges from 50 to 180 meters (160 to 600 feet). Available data regarding characteristics of the aquifers underlying area 208 indicate that approximately 1.6 billion cubic meters (1.3 million acre-feet) of recoverable groundwater might exist within the upper 30 meters (100 feet) of saturated aquifer material within this basin. It is also estimated that there could be an additional 400 million cubic meters (320,000 acre-feet) of recoverable groundwater in the carbonate aquifer underlying this area (Table 3-38). NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 208.

Geologic units underlying the Pahroc Valley hydrographic area include alluvial sediments, carbonate rocks, quartzite, volcanics, and an older clastic rock (rock formed from fragments of pre-existing rock) aquitard. Mountain front precipitation and inflow from adjacent valleys (primarily White River Valley to the north) provide most of the flow to Pahroc Valley.

There are no NDWR wells with water rights, no NDWR domestic wells, no USGS NWIS wells, and no springs in hydrographic area 208 within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 1 (see Table 3-36).

Hydrographic area 207, White River Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 45.6 million cubic meters (37,000 acre-feet) (see Table 3-35). In addition to existing groundwater wells in hydrographic area 207 with water-rights appropriations, preliminary NDWR data indicate that there are approximately 52.4 million cubic meters (42,500 acre-feet) of pending annual duties in area 207. None of the pending water-rights locations are within 1.6 kilometers (1 mile) of the centerline of the Caliente common segment 1.

Groundwater depth throughout White River Valley varies from above surface to 120 meters (–1 to 400 feet). In the portion of hydrographic area 207 the rail line would cross, groundwater is approximately 20 meters (60 feet) below ground surface (Table 3-38). Available data regarding characteristics of the aquifer underlying area 207 indicate that approximately 6.04 billion cubic meters (4.9 million acre-feet) of recoverable groundwater might exist within the upper 30 meters (100 feet) of saturated aquifer material within this basin. Groundwater is a calcium-bicarbonate type. Groundwater is primarily obtained from alluvial valley fill, but water does occur in carbonate rocks. The primary geologic units comprising White River Valley include alluvial valley fill and older carbonate rocks. There are no NDWR wells with water rights, USGS NWIS wells, or springs in hydrographic area 207 within 1.6 kilometers (1 mile) of the centerline of common segment 1 (see Table 3-36 and Figure 3-77).

Hydrographic area 171, Coal Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 7.4 million cubic meters (6,000 acre-feet) (see Table 3-35). Groundwater is primarily obtained from alluvial valley fill, but water does occur in fractured volcanic rocks and carbonate rocks. An oil exploration well in north-central Coal Valley penetrated 820 meters (2,700 feet) of alluvium. Depth to groundwater throughout Coal Valley varies from 30 meters to more than 240 meters (100 to more than 800 feet). Depth to groundwater along the rail alignment beneath area 171 varies from 50 to 90 meters (160 to 280 feet) (Table 3-38). It is estimated that there could be approximately 1.9 billion cubic meters (1.5 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer material within area 171. It is estimated that there could be an additional 740 million cubic meters (600,000 acre-feet) of recoverable groundwater in the carbonate aquifer underlying these two areas combined (DIRS 176851-Brothers, Bugo, and Tracy 1993, p. 29). NDWR data indicate that there are approximately 40.8 million cubic meters (33,100 acre-feet) of pending annual duties (see Table 3-35) in area 171.

There is one USGS NWIS well and no springs in hydrographic area 171 within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 1. Figure 3-77 shows the location of the well. Table 3-36

lists two existing wells within 1.6 kilometers of the centerline of the rail alignment within hydrographic area 171. One of these wells are within 1.6 kilometers of the centerline of common segment 1; the other is within 1.6 kilometers of the centerline of the Garden Valley 2 alternative segment (Figure 3-77).

The predominant proposed use category for the existing NDWR wells with water rights that are within approximately 1.6 kilometers (1 mile) of the centerline of Caliente common segment 1 is irrigation. Table 3-36 (columns 4 through 13) summarizes the proposed use categories of these wells. Figures 3-75, 3-77, and 3-78 show DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of common segment 1. In addition to a series of new wells proposed for installation within the rail line construction right-of-way, DOE might install a series of additional wells at selected locations outside the construction right-of-way, either as alternative water wells or as alternative wells used in combination with other water wells installed within the construction right-of-way. These wells would be drilled in areas where groundwater resources within the construction right-of-way were not adequate to meet railroad construction or operations needs. No potential quarry sites have been identified along Caliente common segment 1. Proposed new wells that might be required outside the nominal width of the rail line construction right-of-way not related to water-supply requirements for potential quarries include:

- Location DLV5 (Figures 3-75 and 3-77) in the western part of Dry Lake Valley 1.1 kilometers (0.7 mile) northeast of the centerline of the rail alignment
- Locations PahV3, PahV4, and PahV8 (Figure 3-77) in southern, central, and western Pahroc Valley approximately 1.3 to 2.7 kilometers (0.8 to 1.7 miles) west to southwest of the centerline of the rail alignment

There are no known existing wells within 1.6 kilometers (1 mile) of proposed well site DLV5, and the closest existing springs are Deadman Spring and Black Rock Spring, about 2.4 kilometers (1.5 miles) northwest or west of this location (DIRS 176189-Converse Consultants 2006, Appendixes A and B). There are no known existing wells or springs within 1.6 kilometers of the proposed well locations at PahV3, PahV4, and PahV8.

3.2.6.3.3 Garden Valley Alternative Segments

Crossing from east to west, alternative segments Garden Valley 1, Garden Valley 2, Garden Valley 3, and Garden Valley 8 would overlie hydrographic areas 171 (Coal Valley) and 172 (Garden Valley) (see Figure 3-78). Areas 171 and 172 each have a perennial yield of 7.40 million cubic meters (6,000 acre-feet), and are not designated groundwater basins (see Table 3-35). Committed groundwater resources in these areas do not exceed estimated perennial yields. In addition to existing groundwater wells in hydrographic area 172 that have water-rights appropriations, NDWR data indicate that there are approximately 15 million cubic meters (12,200 acre-feet) in pending underground annual duties (see Table 3-35) in area 172. These pending annual duties applications correspond to water-rights applications filed with the Nevada State Engineer by the Las Vegas Valley Water District and Lincoln County to appropriate water at some future time from a series of proposed new wells within hydrographic area 172 (DIRS 175909-Hafen et al. 2003, all). According to the NDWR Water Rights Database, an application for a future municipal well has been filed by the Lincoln County Water District and by a private entity to appropriate groundwater from a location approximately 1.2 kilometers (0.8 mile) southwest of a proposed location (GV10) for up to two new withdrawal wells in Garden Valley. The potential for impacts associated with this well application is evaluated in Section 5.2.2.6.

Groundwater quality underlying the areas of the Garden Valley alternative segments varies according to location within the hydrographic areas the rail line would cross. Table 3-39 summarizes general groundwater-quality and aquifer characteristics in the two hydrographic areas underlying the Garden Valley alternative segments.

Along the Caliente rail alignment, depth to groundwater in Garden Valley varies from approximately 40 to 120 meters (120 to 400 feet) below ground (Table 3-39). Groundwater quality underlying the Garden Valley alternative segments varies according to location. Data from four wells in Garden Valley indicate the groundwater is a calcium-bicarbonate type. Table 3-39 summarizes generalized groundwater-quality characteristics in this area.

Table 3-39. General groundwater-quality and aquifer characteristics – Garden Valley alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
171 Coal Valley	Alluvial valley fill, volcanic rocks, clastic rocks, and carbonate rocks ^e	50 to 80	<i>Alluvial valley fill:</i> 1.5 million ^f <i>Carbonate rock aquifer:</i> 600,000 (total for hydrographic areas 171 and 172) ^f	Total dissolved solids: 200 to 300 mg/L ^e
172 Garden Valley	Alluvial valley fill, with surrounding mountain ranges comprised of older carbonate and clastic rocks, and younger volcanic rock units ^e	40 to 120	<i>Alluvial valley fill:</i> 1.5 million ^f <i>Carbonate rock aquifer:</i> 600,000 (total for hydrographic areas 171 and 172) ^f	Total dissolved solids: 200 to 300 mg/L ^e

a. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 176600-Converse Consultants 2005, Plate 4-10); groundwater can vary over a wide range of depth depending on location in the hydrographic area (DIRS 176600-Converse Consultants 2005, pp. 74 and 76).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Source: DIRS 176600-Converse Consultants 2005, pp. 73 to 77.

f. Sources: DIRS 180754-Rush et al. 1971, all; DIRS 176851-Brothers, Bugo, and Tracy 1993, pp. 29 and 30.

Geologic units in the Garden Valley area include primarily alluvial valley fill, with surrounding mountain ranges comprised mostly of carbonate rocks, rock units, and clastic rocks (Table 3-39). The Garden Valley alternative segments would predominantly overlie alluvial valley fill. It is estimated that there could be approximately 1.85 billion cubic meters (1.50 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer material within area 172. It is estimated that there could be an additional 740 million cubic meters (600,000 acre-feet) of recoverable groundwater (DIRS 176851-Brothers, Bugo, and Tracy 1993, p. 30) in the carbonate aquifer underlying these two areas combined (Table 3-39). Review of available data for existing wells and springs indicates the following (Figure 3-78):

- There is one existing USGS NWIS well and no springs in hydrographic area 171 within 1.6 kilometers (1 mile) of the Garden Valley 2 alternative segment.
- In hydrographic area 172, there are no NDWR wells with water rights, no NDWR domestic wells, six USGS NWIS wells, and one spring within approximately 1.6 kilometers of the centerline of Garden Valley alternative segment 3; no NDWR well with water rights or NDWR domestic wells,

one USGS NWIS well, and one spring within 1.6 kilometers of the centerline of Garden Valley alternative segment 1; no NDWR wells with water rights or NDWR domestic wells, no USGS NWIS wells, and no springs within 1.6 kilometers of Garden Valley alternative segment 2; and no NDWR wells with water rights or NDWR domestic wells, no USGS NWIS wells, and one spring within approximately 1.6 kilometers of the centerline of Garden Valley alternative segment 8.

Figure 3-78 identifies NDWR wells with water rights and USGS NWIS wells within approximately 1.6 kilometers (1 mile) of the centerlines of the Garden Valley alternative segments. As described above for the cases of hydrographic areas 203 and 204, all existing wells in areas 171 and 172 that lie within 1.6 kilometers of the centerlines of the proposed Garden Valley alternative segments may not be depicted on Figure 3-78 because some wells are at very nearly the same locations and cannot be shown at the scale used in the figure.

Figure 3-78 shows DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of the Garden Valley alternative segments. All proposed water wells would be within the construction right-of-way of the selected alignment alternative. There are no potential quarry sites along the Garden Valley alternative segments.

3.2.6.3.4 Caliente Common Segment 2 (Quinn Canyon Range Area)

Crossing from east to west, Caliente common segment 2 would overlie hydrographic areas 172 (Garden Valley), 170 (Penoyer Valley), and 173A (Railroad Valley) (Figures 3-78 and 3-79). Section 3.2.6.3.3 describes the hydrogeologic characteristics of area 172. Committed groundwater resources in areas 170 and 173A exceed estimated perennial yields, but not in area 172 (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. Caliente common segment 2 would cross over a small portion of hydrographic area 172. Groundwater depth underlying the rail alignment in hydrographic area 172 varies from 50 to 90 meters (180 to 280 feet) (Table 3-40).

Groundwater quality underlying Caliente common segment 2 varies according to location within the hydrographic areas (172, 170, and 173A) the rail alignment would cross (Figures 3-78 and 3-79). Area 173A typically exhibits low dissolved-solids concentrations, with either bicarbonate with sodium or calcium as primary constituents. Table 3-40 summarizes general groundwater-quality and aquifer characteristics in this area.

Hydrographic area 170, Penoyer Valley, is a designated groundwater basin. Committed groundwater resources exceed the estimated perennial yield of 4.93 million cubic meters (4,000 acre-feet). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. In addition to existing groundwater wells in hydrographic area 170 that have water-rights appropriations, preliminary NDWR data indicate that there are approximately 14.7 million cubic meters (11,900 acre-feet) of pending annual duties (see Table 3-35) in area 170. This pending water-right location is not within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 2.

Groundwater in area 170 is produced primarily from valley fill, although consolidated rocks (including volcanic rocks) underlying and surrounding Railroad Valley and Penoyer Valley transmit water through fractures associated with faulting (DIRS 176848-Van Denburgh and Rush 1974, p. 11). Depth to groundwater throughout Penoyer Valley varies from approximately 5 to 100 meters (10 to 330 feet) (DIRS 176600-Converse Consultants 2006, p. 71). Depth to groundwater varies from 50 to 60 meters (160 to 200 feet) along common segment 2 (Table 3-40). It is estimated that there could be approximately 2.71 billion cubic meters (2.2 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer material within area 170. Figures 3-78 and 3-79 show wells within approximately 1.6 kilometers (1 mile) of common segment 2. There are no NDWR wells with water

rights, no NDWR domestic wells, two USGS NWIS wells (classified as monitoring wells), and two springs in area 170 within 1.6 kilometers of the centerline of common segment 2 or within 1.6 kilometers of any DOE-proposed new well.

Hydrographic area 173A is not a designated groundwater basin. Committed groundwater resources exceed the estimated perennial yields of 3.45 million cubic meters (2,800 acre-feet) (see Table 3.2.6-1). Groundwater in area 173A is produced primarily from valley fill, although consolidated rocks (including volcanic rocks) underlying and surrounding Railroad Valley and Penoyer Valley transmit water through fractures associated with faulting (DIRS 176848-Van Denburgh and Rush 1974, p. 11). Depth to groundwater throughout hydrographic area 173A varies from 5 to 120 meters (17 to 400 feet). Depth to groundwater varies from 50 to 55 meters (160 to 180 feet) along common segment 2 (Table 3-40). It is estimated that there could be approximately 2.59 billion cubic meters (2.1 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer material within area 173A.

Table 3-40. General groundwater-quality and aquifer characteristics – Caliente common segment 2.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
172 Garden Valley	Alluvial valley fill, with surrounding mountain ranges comprised of older carbonate and clastic rocks, and younger volcanic rock units ^e	50 to 90	<i>Alluvial valley fill:</i> 1.5 million ^f <i>Carbonate rock aquifer:</i> 600,000 (total for hydrographic areas 171 and 172) ^f	Total dissolved solids: 200 to 300 mg/L ^e
170 Penoyer Valley	Alluvial valley fill, volcanic rocks, and older carbonate rocks ^e	50 to 60	2.2 million ^f	Total dissolved solids: 300 to 700 mg/L ^e
173A Railroad Valley (Southern Part)	Alluvial valley fill, volcanic rocks, and older carbonate rocks ^e	50 to 55	2.1 million ^f	Total dissolved solids: 253 to 409 mg/L; 2,790 mg/L in one well ^e Fluoride: more than 4 mg/L ^e

a. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 176600-Converse Consultants 2005, Plates 4-8 and 4-10); groundwater can vary over a wide range of depths depending on location in the hydrographic area (DIRS 176600-Converse Consultants 2005, pp. 64 and 71).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Source: DIRS 176600-Converse Consultants 2005, pp. 63 to 75.

f. Sources: DIRS 180754-Rush et al. 1971, all; DIRS 176851-Brothers, Bugo, and Tracy 1993, pp. 29 and 30.

There are no NDWR wells with water rights, no USGS NWIS wells, and no springs in area 173A within 1.6 kilometers (1 mile) of the centerline of common segment 2. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 173A.

Geologic units in the Penoyer Valley (area 170) and the Railroad Valley South (area 173A) areas include alluvial valley fill, volcanic rocks, and older carbonate rocks (Table 3-40). Carbonate rocks make up part of the Reveille Range and a portion of the southern Quinn Canyon Range where common segment 2

would cross the east and west perimeters of Railroad Valley. Caliente common segment 2 would predominantly overlie alluvial valley fills.

Figures 3-78 and 3-79 show proposed well locations (see Section 4.2.6) for supplying water to support construction of Caliente common segment 2. New wells are proposed within and outside the rail line construction right-of-way. These wells would be drilled in areas where groundwater resources within the construction right-of-way would not be adequate to meet construction or operations needs. Up to two locations in the north-central portion of Penoyer Valley approximately 2.9 to 3.5 kilometers (1.8 to 2.2 miles) south of the rail alignment (locations PeV1, PeV2, and PeV3 on Figure 3-78) represent potential alternative new well locations. These two alternative well sites are within alluvial valley fill, and are proposed as alternative wells if needed, to allow for wells to be completed a greater distance from a geologic contact between alluvium and bedrock materials. There are no potential quarry sites along Caliente common segment 2.

3.2.6.3.5 South Reveille Alternative Segments

South Reveille alternative segments 2 and 3 would overlie the Railroad Valley Southern Part, hydrographic area 173A (Figure 3-79). Section 3.2.6.3.4 describes area 173A in detail. Table 3-40 summarizes generalized groundwater quality and aquifer characteristics in this area. Committed groundwater resources in this (designated) area exceed the estimated perennial yield (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There is one NDWR well with water rights, no NDWR domestic wells, and no USGS NWIS wells, and no springs in area 173A within 1.6 kilometers (1 mile) of the centerlines of the South Reveille alternative segments.

Geologic units in the general area of South Reveille alternative segments 2 and 3 include alluvial valley fill, with volcanic rocks primarily comprising the Kawich Range and older carbonate rocks and volcanic rocks comprising the Reveille Range adjacent to the alternative segments. About half of the total length of the South Reveille alternative segments would overlie alluvial valley fill. Groundwater is produced primarily from alluvial valley fill, although water does occur in fractured volcanic rocks. Based on data from six wells in the southern part of Railroad Valley, depth to groundwater ranges from approximately 5 to 120 meters (17 to 400 feet) (DIRS 176600-Converse Consultants 2006, p. 64). Near Caliente common segment 2 and the South Reveille alternative segments in the southern part of area 173A, the depth to groundwater could be more than 91 meters (300 feet) in some areas based on data from only two wells. Section 3.2.6.3.4 contains additional information on groundwater characteristics and groundwater availability in area 173A.

3.2.6.3.6 Caliente Common Segment 3 (Stone Cabin Valley Area)

Crossing from east to west, Caliente common segment 3 would overlie hydrographic areas 173A (Railroad Valley South), 156 (Hot Creek Valley), 149 (Stone Cabin Valley), and 141 (Ralston Valley) (Figures 3-79 and 3-80). Caliente common segment 3 would predominantly overlie alluvial valley fill. Depth to groundwater varies from approximately 24 to more than 90 meters (80 to more than 300 feet) along Caliente common segment 3 (Table 3-41). This range includes projected values in those areas where there are few or no wells.

Groundwater quality underlying Caliente common segment 3 varies according to location within the hydrographic areas the rail line would cross. Table 3-41 summarizes general groundwater-quality and aquifer characteristics in the three hydrographic areas underlying Caliente common segment 3.

Section 3.2.6.3.4 describes the hydrogeologic characteristics of area 173A. There is one USGS NWIS well in area 173A within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 3 (Figure 3-79).

Area 156, Hot Creek Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed the perennial yield of 6.8 million cubic meters (5,500 acre-feet). Geologic units in hydrographic area 156 (Hot Creek) include alluvial valley fill, volcanic rocks in the Kawich Range adjacent to Caliente common segment 3, and volcanic and older carbonate rocks comprising part of the Hot Creek Range, north of Warm Springs (see Figure 3-79). Groundwater is produced primarily from alluvial valley fill, although there is water in fractured volcanic rocks and in carbonate rocks in the Hot Creek Range. There is groundwater under both confined and unconfined conditions in area 156 (DIRS 176950-Rush and Everett 1966, p. 16). The thickness of underlying alluvium is not known; however, three wells in the area penetrated between 47 and 97 meters (150 and 320 feet) of alluvial materials (DIRS 176950-Rush and Everett 1966, p. 35). There could be approximately 2.8 billion cubic meters (2.3 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 156.

Table 3-41. General groundwater-quality and aquifer characteristics – Caliente common segment 3 and South Reveille alternative segments 2 and 3.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
173A Railroad Valley, Southern Part	Alluvial valley fill, volcanic rocks, and older carbonate rocks ^e	20 to 50	2.1 million ^f	Total dissolved solids: 253 to 409 mg/L; 2,790 mg/L in one well ^e Fluoride: more than 4 mg/L ^e
156 Hot Creek Valley	Alluvial valley fill, volcanic rocks in the Hot Creek and Kawich Ranges adjacent to common segment 3, and older carbonate rocks comprising part of the Hot Creek Range ^d	Less than 60	2.3 million ^f	Total dissolved solids: 176 to 2,500 mg/L ^e Fluoride: 5 to 30 mg/L ^e
149 Stone Cabin Valley	Alluvial valley fill, volcanic rocks, and carbonate rocks ^{e,g}	20 to 40	2.2 million ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^h
141 Ralston Valley	Alluvial valley fill, volcanic rocks, and older carbonate and clastic rocks ^{e,g}	50 to 70	2.7 million ^f	Total dissolved solids: 290 mg/L (in one well 3.2 kilometers [2 miles] northwest of Tonopah airport) ^e

a. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 176600-Converse Consultants 2005, Plates 4-6 to 4-8); groundwater can vary over a wide range of depths depending on location in the hydrographic area (DIRS 176600-Converse Consultants 2005, pp. 53 and 57).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Source: DIRS 176600-Converse Consultants 2005, pp. 52 through 66.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Sources: DIRS 176600-Converse Consultants 2005, p. 55; DIRS 173179-Belcher 2004, Figure B-1.

h. Sources: DIRS 172905-USGS 1995, Figure 70; DIRS 177741-State of Nevada 2005, all, with overlay of hydrographic area boundaries.

Groundwater is reported to be a sodium-bicarbonate type. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 156.

There is one NDWR well with water rights, no NDWR domestic wells, and no USGS NWIS wells in area 156 within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 3. One spring (Black Spring) in area 156 (Figure 3-79) is within 1.6 kilometers of the centerline of Caliente common segment 3.

Area 149, Stone Cabin Valley, is a designated groundwater basin with perennial yields of 2.5 million cubic meters (2,000 acre-feet). Committed groundwater resources in area 149 exceed the estimated perennial yield (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. In addition to existing groundwater wells in hydrographic area 149 with water-rights appropriations, NDWR data indicate that there are approximately 7.9 million cubic meters (6,400 acre-feet) of pending annual duties (see Table 3-35) in area 149.

Groundwater in area 149 is produced primarily from alluvial valley fill, although there is water in fractured volcanic rocks and in carbonate rocks in the Hot Creek Range, north of Warm Springs (see Table 3-41). There could be approximately 2.71 billion cubic meters (2.2 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 149. Table 3-41 summarizes groundwater-quality characteristics in this area. Depth to groundwater throughout hydrographic area 149 varies from 5 to 120 meters (18 to 390 feet). Depth to groundwater underlying the rail alignment in this area ranges from 20 to 40 meters (80 to 120 feet) (Table 3-41). There are five NDWR wells with water rights, no NDWR domestic wells, six USGS NWIS wells, and no springs in area 149 within approximately 1.6 kilometers (1 mile) of the centerline of Caliente common segment 3 (Figures 3-79 and 3-80). The proposed use categories for the wells include irrigation and public supply–municipal. Figure 3-80 does not depict all existing wells in area 149 that lie within 1.6 kilometers of the centerline of Caliente common segment 3 because some wells are at very nearly the same locations and cannot be shown at the scale used in the figure.

Area 141, Ralston Valley, is a designated groundwater basin with perennial yields of 7.40 million cubic meters (6,000 acre-feet) (see Table 3-35). Committed groundwater resources do not exceed the estimated perennial yield. The thicknesses of underlying alluvium is not known; however, well logs for wells drilled in the area indicate alluvial materials up to at least 120 meters (380 feet) thick. Geologic units include alluvial valley fill, volcanic rocks in the central and southern parts of the basin, and older carbonate or clastic rocks in the northern part of the basin. Groundwater in area 141 is produced primarily from alluvial valley fill, with limited production from volcanic rocks where they are fractured and minor production from carbonate rocks in the northern part of the valley. Groundwater depths throughout hydrographic area 141 vary from less than 3 meters to 150 meters (less than 10 to 500 feet). Groundwater depth underlying the common segment 3 alignment in this area varies from 50 to 70 meters (Table 3-41). There could be approximately 3.33 billion cubic meters (2.7 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 141. Table 3-41 summarizes groundwater-quality characteristics in this area. There are no NDWR wells with water rights, no NDWR domestic wells, no USGS NWIS wells, and no springs in area 141 within 1.6 kilometers (1 mile) of the centerline of Caliente common segment 3 (see Figure 3-80). NDWR data indicate that there are approximately 1,230 cubic meters (1 *acre-foot*) of documented pending annual duties (see Table 3-35) in area 141.

Figures 3-79 and 3-80 show DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of Caliente common segment 3. The potential quarry site east of Caliente common segment 3 in South Reveille Valley (see Figure 3-79) would overlies hydrographic area 173A. Host rock units in the vicinity of this potential quarry include basalt and lava flow rocks (DIRS 173842-Shannon &

Wilson 2005, Plate 2). Depth to groundwater in the area could be between 90 and 150 meters (300 and 500 feet) (DIRS 176189-Converse Consultants 2006, Appendix A).

3.2.6.3.7 Goldfield Alternative Segments

Crossing from north to south, Goldfield alternative segment 1 would overlie hydrographic areas 141 (Ralston Valley), 142 (Alkali Spring Valley), and 145 (Stonewall Flat); Goldfield alternative segment 3 would overlie areas 141 and 145; and Goldfield alternative segment 4 would overlie areas 141, 142, 144 (Lida Valley), and 145 (Figure 3-80).

Section 3.2.6.3.6 describes hydrographic area 141. There are no existing NDWR wells with water rights, USGS NWIS wells, or springs in area 141 within 1.6 kilometers (1 mile) of the centerlines of the proposed Goldfield alternative segments.

Depth to groundwater varies along the Goldfield alternative segments. However, based on projections from nearby areas, depth to groundwater could generally vary between approximately 15 and 90 meters (50 to 300 feet) (Table 3-42), but can locally be shallower, such as in areas where springs occur.

Groundwater quality underlying the Goldfield alternative segments varies according to location within the hydrographic areas the rail line would cross. Table 3-42 summarizes general groundwater-quality and aquifer characteristics in the three hydrographic areas underlying the Goldfield alternative segments.

Area 142, Alkali Spring Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed the perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-35). Groundwater depth throughout area 142 varies from 15 to 40 meters (50 to 120 feet). There could be approximately 1.6 billion cubic meters (1.3 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 142. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 142.

Near the western edge of Goldfield, along Goldfield alternative segment 4, the depth to groundwater is approximately 15 to 40 meters (50 to 120 feet) (Table 3-42). Water quality varies in area 142 according to location. Water in Alkali Spring, in the southern portion of area 142 approximately 13 kilometers (8 miles) northwest of Goldfield is reported to be a sodium sulfate type that exhibits elevated total dissolved solids concentrations (DIRS 176849-Rush 1968, Plate 1). Analyses have shown that the quality of water from various groundwater wells in the basin is good (Table 3-42).

In area 142 (see Table 3-36), there is one NDWR well with water rights (municipal use), no NDWR domestic wells, four USGS NWIS wells, and two springs within approximately 1.6 kilometers (1 mile) of the centerline of Goldfield alternative segment 4, and one spring within approximately 1.6 kilometers of the centerline of Goldfield alternative segment 1. In area 141, there are no existing NDWR wells with water rights, no NDWR domestic wells, no USGS NWIS wells, and no springs within 1.6 kilometers of the centerline of Goldfield alternative segment 3.

Area 144, Lida Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed the perennial yield of 430,000 cubic meters (350 acre-feet) (see Table 3-35). There could be approximately 1.85 billion cubic meters (1.5 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 142. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 144.

Depth to groundwater is uncertain along the Goldfield 4 alternative segment where it would cross area 144. However, based on projections from nearby areas, depth to groundwater could range from 50 to 90 meters (160 to 290 feet) (DIRS 176600-Converse Consultants 2005, pp. 46 and 47). There is one

existing NDWR well with water rights, no NDWR domestic wells, no existing USGS NWIS wells, and no springs in area 144 within 1.6 kilometers (1 mile) of the centerline of Goldfield alternative segment 4.

Area 145, Stonewall Flat, is not a designated groundwater basin. Committed groundwater resources do not exceed the perennial yield of 124,000 cubic meters (100 acre-feet) (see Table 3-35). There could be approximately 1.01 billion cubic meters (820,000 acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 145. Depth to groundwater is uncertain along Goldfield alternative segment 3 where it would cross area 145. However, based on projections from nearby areas, depth to groundwater could be approximately 37 to 60 meters (120 to 200 feet) (Table 3-42). There are no existing NDWR wells with water rights and no NDWR domestic wells, no existing USGS NWIS wells, and one spring in area 145 within 1.6 kilometers (1 mile) of the centerline of Goldfield alternative segment 1, and no existing NDWR wells with water rights and no NDWR domestic wells, no existing USGS NWIS wells, and three springs in area 145 within 1.6 kilometers of Goldfield alternative segment 3. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 145.

There are two potential quarry sites (NS-3A and NS-3B) east of Goldfield alternative segment 3 (Figure 3-80). These potential quarry sites would overlie hydrographic area 141. Host rock units include

Table 3-42. General groundwater-quality and aquifer characteristics – Goldfield alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
141 Ralston Valley	Alluvial valley fill, volcanic rocks, and older carbonate or clastic rocks ^e	43 to 67	2.7 million ^f	Total dissolved solids: 290 mg/L (in one well 3.2 kilometers [2 miles] northwest of Tonopah airport) ^g
142 Alkali Spring Valley	Alluvial valley fill deposits, volcanic rocks, and older sedimentary rocks ^h	15 to 40	1.3 million ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ⁱ
144 Lida Valley	Alluvial valley fill, rhyolite, volcanic sediments (including tuffs of the Stonewall Flat and tuffs of the Thirsty Canyon Group), and older rock units including claystone, siltstone, and limestone ^d	50 to 85	1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g
145 Stonewall Flat	Alluvial valley fill deposits, volcanic rocks, and older sedimentary rocks ^h	37 to 60	820,000 ^f	Total dissolved solids: Less than 300 mg/L ^g

a. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 176600-Converse Consultants 2005, Plates 4-5 and 4-6); groundwater can vary over a wide range of depths depending on location in the hydrographic area (DIRS 176600-Converse Consultants 2005 pp. 41, 45 through 47, 49, and 51).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Source: DIRS 176600-Converse Consultants 2005, p. 52.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 176600-Converse Consultants 2005, pp. 42, 47, 49, and 54.

h. Sources: DIRS 173842-Shannon & Wilson 2005, pp. 23 and 24, 29, 30, 33 to 35, and Plate 2; DIRS 173179-Belcher 2004, Figure B-1.

i. Sources: DIRS 172905-USGS 1995, Figure 70; DIRS 177741-State of Nevada 2005, all, with overlay of hydrographic area boundaries.

alluvial fan deposits, and the targeted water production zones for wells at these potential quarry sites, if required, are an alluvial fan or the underlying fractured volcanic rocks. The estimated total depths of these new wells (RaV9/10/11) would be between 120 and 150 meters (400 and 500 feet), and the target aquifer would be an alluvial unit (DIRS 176189-Converse Consultants 2006, Appendixes A and B). A potential alternative groundwater-supply well location west of Goldfield alternative segment 4 (AsV6) would be installed if necessary to obtain adequate water to support operation of a quarry (ES-7) west of Goldfield alternative segment 4 and southwest of this proposed well (Figure 3-80). This potential quarry site would overlie the southern portion of hydrographic area 142. Up to two wells that might be installed at this location would have total depths of between about 30 and 60 meters (100 and 200 feet), with the target aquifer being a fractured volcanic rock unit (DIRS 176189-Converse Consultants 2006, Appendixes A and B). Host rock units for this potential quarry site include basalt (DIRS 175986-Shannon & Wilson 2005, Plate 2 and Figure 3, Sheet 21 of 94; DIRS 173842-Shannon & Wilson 2005, Plate 2).

Geologic units underlying hydrographic areas 142, 144, and 145 include alluvial valley-fill deposits, volcanic rocks, and older sedimentary rocks (DIRS 173179-Belcher 2004, p. 28). Goldfield alternative segments 1 and 3 would cross alluvial deposits, basalt flows, rhyodacite lava flow deposits, and ash-flow tuff deposits (DIRS 175986-Shannon & Wilson 2005, Figures 2 and 3, Sheets 23 to 26). Goldfield alternative segment 3 would cross near a small cinder cone west of Mud Lake Playa (DIRS 175986-Shannon & Wilson 2005, Plate 2 and Sheets 23 and 26). Portions of the three Goldfield alternative segments would overlie alluvial valley fill (DIRS 176189-Converse Consultants 2006, Maps 11a and 11b). About two-thirds of the total length of Goldfield alternative segment 4 would overlie alluvial valley fill, compared to approximately one-third for Goldfield alternative segments 1 and 3. Goldfield alternative segment 1 and, to a considerably lesser extent, Goldfield alternative segment 3, would pass close to mine shafts at one or more locations (for example, along a section of Goldfield alternative segment 1 near Black Butte in the immediate vicinity of the City of Goldfield) (DIRS 175986-Shannon & Wilson 2005, Figure 3, Sheets 24 and 25).

Within area 142 (Alkali Spring Valley), which portions of Goldfield alternative segments 1 and 4 would cross, groundwater production is generally derived from valley-fill alluvium. Groundwater production in area 144 is limited to a few domestic wells, a municipal well at Lida, and stockwater wells. There are a few small stockwater wells near the general area of the rail alignment in area 144. These wells produce from valley fill materials; however, no aquifer test data are available for these wells (DIRS 176189-Converse Consultants 2006, Appendix B).

Figure 3-80 shows DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of the Goldfield alternative segments. In addition to a series of new wells proposed for installation within the rail line construction right-of-way of the selected alternative segment, DOE might install a series of additional wells outside the nominal width of the rail line construction right-of-way, either as alternative water wells or as alternative wells used in combination with other water wells installed within the rail line construction right-of-way. These wells would be drilled in areas where groundwater resources within the construction right-of-way would not be adequate to meet construction or operations needs. Possible locations for wells in this category (Figure 3-80) include the following (locations used would depend on the alternative segment):

- Locations ASV1/2/3/4/5/8/9 in hydrographic area 142, approximately 3.5 kilometers (2.2 miles) west of the centerline of Goldfield alternative segment 4. Wells installed at this location would be expected to intercept alluvial valley fill deposits (alluvial fan), and could encounter groundwater at a depth of approximately 60 to 90 meters (200 to 300 feet) (DIRS 176189-Converse Consultants 2006, Appendixes A and B).
- Locations StF1/2/3/5/6/7 in hydrographic area 145, approximately 1.9 to 2.3 kilometers (1.2 to 1.4 miles) east of the centerline of Goldfield alternative segment 3. Wells installed at this location would be

expected to intercept alluvial valley fill deposits, and would have total depths of approximately 180 to 210 meters (600 to 700 feet) (DIRS 176189-Converse Consultants 2006, Appendixes A and B and Maps 12a and 12b).

- Locations LV1/2/3/4/9/10/11/12 in hydrographic area 144, approximately 4.6 to 5.0 kilometers (2.9 to 3.1 miles) west of the centerline of Goldfield alternative segment 4. Wells installed at this location would be expected to intercept alluvial valley fill deposits, and would have total depths of approximately 120 to 150 meters (400 to 500 feet) (DIRS 176189-Converse Consultants 2006, Appendixes A and B and Maps 12e and 12f).

3.2.6.3.8 Caliente Common Segment 4 (Stonewall Flat Area)

Caliente common segment 4 would overlie hydrographic area 144 (Figures 3-80 and 3-81). Section 3.2.6.3.7 describes the hydrogeologic characteristics of area 144. Committed groundwater resources in this area do not exceed the estimated perennial yield (see Table 3-35). As shown on Figures 3-80 and 3-81, there is one NDWR well with water rights, no NDWR domestic wells, two USGS NWIS wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of Caliente common segment 4.

Geologic units that common segment 4 would cross include primarily alluvial valley fill deposits and some volcanic rocks (DIRS 173179-Belcher 2004, p. 28). Specific volcanic units the segment would cross include Stonewall Flat and tuffs of the Thirsty Canyon Group. The estimated depth to groundwater throughout hydrographic area 144 can vary from 8 to 110 meters (26 to 360 feet) depending on location (DIRS 176600-Converse Consultants 2005, p. 45). The depth to groundwater underlying the alignment varies from 50 to 85 meters (160 to 280 feet) (Table 3-43) (DIRS 176600-Converse Consultants 2005, Plate 4-5). Section 3.2.6.3.7 and Table 3-42 summarize general groundwater quality and aquifer characteristics in area 144.

Figures 3-80 and 3-81 show DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of Caliente common segment 4. All proposed water wells would be within the rail alignment construction right-of-way. There are no potential quarry sites along Caliente common segment 4.

3.2.6.3.9 Bonnie Claire Alternative Segments

From north to south, Bonnie Claire alternative segments 2 and 3 would cross hydrographic areas 144 (Lida Valley) and 146 (Sarcobatus Flat) (Figure 3-81). Section 3.2.6.3.7 describes hydrographic area 144. There are no existing NDWR wells with water rights, no NDWR domestic wells, no existing USGS NWIS wells, and no existing springs in area 144 within 1.6 kilometers (1 mile) of the centerlines of the proposed Bonnie Claire alternative segments. There are four NDWR wells with water rights, no NDWR domestic wells, no USGS NWIS wells, and no existing springs in area 144 within 1.6 kilometers of the centerlines of the proposed Bonnie Claire alternative segments.

The Bonnie Claire alternative segments would predominantly overlie alluvial valley fill deposits and some volcanic rocks (DIRS 173842-Shannon & Wilson 2005, p. 28). The primary volcanic unit encountered along Bonnie Claire alternative segments 2 and 3 is tuff of the Timber Mountain Group (DIRS 173842-Shannon & Wilson 2005, p. 30 and Plate 2).

Area 146, Sarcobatus Flat, is a designated groundwater basin, and has a perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-35). Committed groundwater resources in area 146 exceed the estimated perennial yield, but as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 3 billion cubic meters (2.4 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 146. While the basin is primarily comprised of alluvial valley fill deposits, volcanic rocks

make up the hills surrounding Sarcobatus Flat (Table 3-43). There are no existing water-supply wells or springs in area 146 within 1.6 kilometers (1 mile) of the centerlines of the Bonnie Claire alternative segments. Section 3.2.6.3.7 and Table 3-42 summarize general groundwater characteristics in area 144. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 146.

Groundwater in hydrographic area 146 contains elevated levels of sodium bicarbonate. Table 3-43 summarizes general groundwater-quality and aquifer characteristics in areas 144 and 146.

Most of the existing groundwater wells in area 146 are *screened* (installed with the well casing screened interval) in the alluvial valley fill; a few wells in the western portion of the basin are screened in volcanic rocks. The total volume of alluvial valley fill comprising the primary aquifer reservoir in area 146 is not known because of variations in the thickness of valley fill that result in variations in the surface of the underlying bedrock. However, Malmberg and Eakin (DIRS 106695-Malmberg and Eakin 1962, pp. 13 and 19) suggested the maximum thickness of valley fill in area 146 could be as much as thousands of

Table 3-43. General groundwater-quality and aquifer characteristics – Caliente common segment 4 and Bonnie Claire alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
144 Lida Valley	Alluvial valley fill, rhyolite, volcanic sediments (including tuffs of the Stonewall Flat and tuffs of the Thirsty Canyon Group), and older rock units including claystone, siltstone, and limestone ^e	50 to 85	1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g
146 Sarcobatus Flat	Alluvial valley fill deposits and some volcanic rocks ^f (Volcanic units are tuff of the Timber Mountain Group) ^h	24 to 40	2.4 million ^f	Total dissolved solids: 540 mg/L ^g

a. The listed range of groundwater depths applies to the area underlying the proposed rail alignment (DIRS 176600-Converse Consultants 2005, Plates 4-4 and 4-5). The depth to groundwater can vary over a wide range of depths depending on location in a hydrographic area DIRS 176600-Converse Consultants 2005, pp. 41 and 45 through 47.

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Sources: DIRS 173842-Shannon & Wilson 2005, pp. 23 and 24, 29 and 30, 33 to 35, and Plate 2; DIRS 173179-Belcher 2004, Figure B-1.

f. Source: DIRS 176600-Converse Consultants 2005, pp. 42 and 47.

g. Source: DIRS 176600-Converse Consultants 2005, pp. 40 to 42, and Plates 4-4 and 4-5.

h. Source: DIRS 180754-Rush et al. 1971, all.

meters (several thousand feet). Figure 3-81 shows DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of the Bonnie Claire alternative segments. All proposed water wells would be within the nominal width of the construction right-of-way of the selected alternative segment. There are no potential quarry sites along Bonnie Claire alternative segments.

3.2.6.3.10 Common Segment 5 (Sarcobatus Flat Area)

Crossing from north to south, common segment 5 would overlie hydrographic area 146 (Sarcobatus Flat) and a small portion of hydrographic area 228 (Oasis Valley) (Figures 3-81 and 3-82). Section 3.2.6.3.9 describes the groundwater-quality and aquifer characteristics of area 146, which are summarized in Table 3-43. There are four NDWR wells with water rights, one NDWR domestic well, eight USGS NWIS

wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 5 within area 146. The use categories for the NDWR wells with water rights are irrigation, quasi-municipal and stock-watering (see Table 3-36). Most wells in area 146 are screened in alluvial valley fill; a few wells are screened in volcanic rocks on the west side of the basin.

Section 3.2.6.3.11 describes the hydrogeologic characteristics of area 228, including groundwater-quality and aquifer characteristics; Table 3-44 summarizes those characteristics. Committed groundwater resources in these areas exceed estimated perennial yields (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There are no NDWR wells with water rights, no USGS NWIS wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 5, as shown in Figure 3-81.

Common segment 5 would predominantly overlie alluvial valley fill, with depth to groundwater generally approximately 3 to 55 meters (10 to 180 feet) in those portions of areas 146 and 228 the rail line would cross. Volcanic rocks are the predominant rock type comprising the hills surrounding the basin.

Figures 3-81 and 3-82 show DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of common segment 5. All proposed water wells would be within the rail line construction right-of-way. There are no potential quarry sites along common segment 5.

Table 3-44. General groundwater-quality characteristics – Oasis Valley alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
228 Oasis Valley	Volcanic rocks clastic rocks, older carbonate rocks, and alluvial valley fill ^e	10 to 30	400,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g Fluoride: 1 to more than 4 mg/L ^h

- a. The listed depth to groundwater range applies to the area underlying the proposed Oasis Valley alternative rail alignments (DIRS 176600-Converse Consultants 2005, Plate 4-3). Depth to groundwater is much greater in the central and northern parts of area 228 (DIRS 176600-Converse Consultants 2005, p. 38).
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.
- d. mg/L = milligrams per liter.
- e. Sources: DIRS 176600-Converse Consultants 2005, p. 36; DIRS 181909-Fridrich [n.d.] 2007, all; DIRS 181909-Fridrich et al. 2007, all.
- f. Source: DIRS 180754-Rush et al. 1971, all.
- g. Sources: DIRS 172905-USGS 1995, Figure 70; DIRS 177741-State of Nevada 2005, all, with overlay of hydrographic area boundaries.
- h. Source: DIRS 176600-Converse Consultants 2005, p. 38.

3.2.6.3.11 Oasis Valley Alternative Segments

Oasis Valley alternative segments 1 and 3 would cross hydrographic area 228 (Oasis Valley) (Figure 3-82). This area is a designated groundwater basin with an estimated perennial yield in the range of 1.2 to 2.5 million cubic meters (1,000 to 2,000 acre-feet) (DIRS 147766-Thiel 1999, pp. 6 to 12 and Table 3-35). Committed groundwater resources in area 228 total 1.6 million cubic meters (1,300 acre-feet) per year (see Table 3-35). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 490 million cubic meters (400,000 acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 228. NDWR data indicate that there are no documented pending annual duties (see Table 3-35) in area 228.

Geologic units Oasis Valley alternative segments 1 and 3 would cross include sedimentary rocks, small areas underlain by volcanic rocks, and some alluvial valley fill (Table 3-44). Depth to groundwater throughout Oasis Valley is generally 3 to 46 meters (10 to 150 feet), with the shallowest groundwater occurring along Oasis Valley alternative segment 1, northeast of Springdale. Depth to groundwater underlying the Oasis Valley alternative segments ranges from 10 to 30 meters (40 to 100 feet).

Oasis Valley has several springs and seeps. The locations of these springs and seeps are dictated by structurally controlled changes in rock unit lithology and thickness and conduits. The springs, seeps, and shallow groundwater in the valley are maintained primarily by groundwater flow moving into the area through a regional volcanic rock aquifer system (DIRS 169384-Reiner et al. 2002, p. 8). Most groundwater flowing south-southeastward into Oasis Valley through the *welded tuff* aquifer is diverted upward along faults where it either forms springs or flows laterally out of Oasis Valley as underflow, indicating a regional groundwater inflow component to the flow at the springs. Springs and seeps occur where upward diversion coincides with areas where the potentiometric surface is above the ground surface (DIRS 169384-Reiner et al. 2002, pp. 9 and 10). Most historical groundwater resource development in this area was from springs.

Available information indicates a non-welded confining volcanic tuff unit separates the alluvial aquifer from a regional welded tuff volcanic rock aquifer throughout much of Oasis Valley. This regional welded tuff aquifer has moderate fracture *permeability* (DIRS 169384-Reiner et al. 2002, p. 9).

Based on a review of the NDWR and USGS NWIS databases and other published information, Figure 3-82 identifies seven USGS NWIS wells, four springs, and one surface-water body within approximately 1.6 kilometers (1 mile) of the centerlines of the Oasis Valley alternative segments. As shown on the figure, there is a series of three springs (Upper Oasis Valley Ranch Springs) southwest of Oasis Valley alternative segment 1. Colson Pond and Colson Pond Spring are also near Oasis Valley alternative segment 3 (Figure 3-82).

There are no existing NDWR wells with water rights within 1.6 kilometers (1 mile) of the centerline of the Oasis Valley alternative segments. There is one cluster of three USGS-installed wells within approximately 0.64 kilometer (0.40 mile) of the centerline of Oasis Valley alternative segment 3 (wells ER-OV-01, ER-OV-06a, and ER-OV-06a2), and one USGS-installed well (ER-OV-02) within approximately 0.40 kilometer (0.25 mile) of Oasis Valley alternative segment 1 (DIRS 176600-Converse Consultants 2005, Plate 4-3 and Appendix A; DIRS 176325-USGS 2006, all; DIRS 177294-MO0607USGSWNVD.000; DIRS 169384-Reiner et al. 2002, Plate 2). The use category for these wells is monitoring. There are three additional shallow USGS-installed wells (the OVU-Dune Well, OVU-Middle ET Well, and the OVU-Lower ET Well), used for monitoring groundwater levels, within approximately 0.32 to 0.48 kilometer (0.20 to 0.30 mile) of Oasis Valley alternative segment 1 (DIRS 176600-Converse Consultants 2005, Plate 4-3 and Appendix A; DIRS 169384-Reiner et al. 2002, Plate 2). Figure 3-82 does not show all existing wells in area 228 that lie within 1.6 kilometers of the centerlines of Oasis Valley alternative segments because some wells are at very nearly the same locations and cannot be shown at the scale used in the figure.

Groundwater in much of Oasis Valley exhibits elevated levels of fluoride, in excess of the 4 milligrams per liter (approximately 4 parts per million) Nevada drinking water standard level (Table 3-44). Dissolved-solids concentrations in the alluvial valley fill are expected to be less than 500 milligrams per liter (approximately 500 parts per million) in the vicinity of the Oasis Valley alternative segments.

Figure 3-82 shows DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of the Oasis Valley alternative segments. In addition to a series of new wells proposed for installation within the construction right-of-way, DOE might install wells at other locations outside the construction right-of-way, and use them either as principal water wells or in combination with other water wells installed within the construction right-of-way. These wells would be drilled in cases where either groundwater resources

within the construction right-of-way would not be adequate for meeting construction or operations needs, or groundwater withdrawals would need to be distributed to reduce potential impacts on existing groundwater resources (see Section 4.2.6). Possible locations for wells in this category that could be used to obtain water for constructing the Oasis Valley alternative segments include the following (Figure 3-82):

- Up to two locations in the Oasis Valley groundwater basin, approximately 5.6 to 5.8 kilometers (3.5 to 3.6 miles) southwest of the centerline of common segment 6 (locations OV6 and OV8, or OV14 and OV16, depending on alternative segment). The target water source at this location would be alluvial valley fill (DIRS 176189-Converse Consultants 2006, Appendixes A and B and Maps 14a and 14b).
- Locations in the southeastern part of Oasis Valley, approximately 0.8 kilometer (0.5 mile) west of common segment 6 (well location OV22 or OV23, depending on alternative segment). The target water source at this location would be a possibly water-bearing fault system (DIRS 176189-Converse Consultants 2006, Appendixes A and B and Maps 14a and 14b).

Review of NDWR and USGS database data and other published information (DIRS 169384-Reiner et al. 2002, Plate 2; DIRS 181909-Fridrich et al. 2007, all) on existing wells and springs indicates the following:

- There two existing NDWR wells with water rights, no NDWR domestic wells, and no USGS NWIS wells within 1.6 kilometers (1 mile) of locations OV6 and OV8, or OV14 and OV16. Two springs (Ute Springs and Manley Springs) lie within approximately 1.3 to 1.4 kilometers (0.8 to 0.9 mile) east of locations OV6 and OV8, or OV14 and OV16.
- There are no known existing wells or springs within 1.6 kilometers of the proposed alternative well location at OV22/OV23.

3.2.6.3.12 Common Segment 6 (Yucca Mountain Approach)

From north to south, common segment 6 would cross a portion of hydrographic area 228 (Oasis Valley), all of hydrographic area 229 (Crater Flat), and a portion of area 227A (Jackass Flats), as shown in Figure 3-82. Section 3.2.6.3.11 describes, and Table 3-44 summarizes groundwater-quality and aquifer characteristics of hydrographic area 228.

There are 14 USGS NWIS wells, no NDWR wells with water rights, no NDWR domestic wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 6, as shown on Figure 3-82. The figure does not show all existing wells in area 227A that lie within 1.6 kilometers of the centerline of common segment 6 because some wells, particularly in area 227A, are at very nearly the same locations and cannot be shown at the scale used in this figure.

Geologic units that common segment 6 would cross include volcanic rocks and basin-fill alluvium (DIRS 173179-Belcher 2004, p. 28; DIRS 176600-Converse Consultants 2005, Plate 4-3). Specific volcanic rock units the segment would cross include volcanic rocks of the Crater Flat and Paintbrush Groups (DIRS 173842-Shannon & Wilson 2005, Plate 2).

Hydrographic area 228, Oasis Valley, is a designated groundwater basin and is described in Section 3.2.6.3.11.

Hydrographic area 229, Crater Flat, is not a designated groundwater basin. Committed groundwater resources exceed the estimated perennial yield of about 271,000 cubic meters (220 acre-feet) (see Table 3-35). As previously noted, all committed resources within a hydrographic area might not be in use at the same time. In addition to existing groundwater wells in hydrographic area 229 that have water-rights appropriations, preliminary NDWR data indicate that approximately 101,000 cubic meters (82 acre-feet) of pending annual duties (see Table 3-35) exist in area 229. The pending water right

locations are not within 1.6 kilometers (1 mile) of the centerline of common segment 6. There could be approximately 430 million cubic meters (350,000 acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 229.

Table 3-45 summarizes groundwater-quality and aquifer characteristics of hydrographic area 229. Groundwater is typically very deep in area 229 beneath the rail alignment, generally 180 to 370 meters (600 to 1,200 feet) below ground. In the northwestern portion of area 229 and west of the rail alignment, groundwater occurs within two aquifers and the estimated depth to groundwater varies from 55 to 200 meters (180 to 650 feet). There are three USGS NWIS wells, one NDWR well with a water right, and no springs in area 229 within approximately 1.6 kilometers (1 mile) of the centerline of common segment 6, as shown on Figure 3-82.

Hydrographic area 227A, Jackass Flats, is not a designated groundwater basin. Committed groundwater resources do not exceed the total perennial yield value of 1.1 million cubic meters (880 acre-feet) per year estimated for the entire hydrographic area (see Table 3-35). For evaluation purposes, the perennial yield estimate for hydrographic area 227A is assumed to be approximately 720,000 cubic meters (580 acre-feet) per year, representing the western two-thirds of the area. The perennial yield estimate for the eastern one-third of this hydrographic area has been estimated at approximately 370,000 cubic meters (300 acre-feet) per year. The value of 720,000 cubic meters (580 acre-feet) per year is used as a basis for evaluating the potential impacts of groundwater withdrawals (Section 4.2.6) because the western two-thirds of the hydrographic area is most representative of the potential source area from which groundwater required to support the project might be obtained. There could be approximately 910 million cubic meters (740,000 acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 227A. NDWR data indicate that there are approximately 6,170 cubic meters (5 acre-feet) of documented pending annual duties (see Table 3-35) in area 227A.

Table 3-45 summarizes groundwater-quality and aquifer characteristics of hydrographic area 227A. In hydrographic area 227A, groundwater occurs in alluvial valley-fill deposits in the southern portion of the area and deeper in volcanic rocks in the central part of the basin. The depths to groundwater in wells throughout area 227A vary from approximately 12 to 650 meters (38 to 2,150 feet) (DIRS 176600-Conserve Consultants 2006, p. 31). Most groundwater storage in area 227A occurs toward the southern end of the basin, south of the rail alignment. Groundwater is typically very deep near the rail alignment, generally 180 to 370 meters (600 to 1,200 feet) below ground.

Most wells penetrating the volcanic rocks are monitoring wells used for monitoring groundwater conditions southwest, southeast, and south of the Yucca Mountain Site. Twelve of 15 NDWR existing new or replacement wells cataloged within all of hydrographic area 227A are groundwater monitoring wells; the others are listed as production wells. The volcanic rocks in this area generally have low porosity, and are not considered suitable for groundwater production except in major fractured areas.

Figure 3-82 shows DOE-proposed wells (see Section 4.2.6) for supplying water to support construction of common segment 6. All proposed water wells would be within the rail alignment construction right-of-way. There are no potential quarry sites along common segment 6.

Table 3-45. General groundwater-quality characteristics – common segment 6.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
228 Oasis Valley	Volcanic rocks clastic rocks, older carbonate rocks, and alluvial valley fill ^e	10 to 30	400,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g Fluoride: 1 to more than 4 mg/L ^h
229 Crater Flat	Volcanic rocks and alluvial valley fill ^e	180 to 370	350,000 ^f	Total dissolved solids: 270 mg/L ^h
227A Fortymile Canyon, Jackass Flats	Volcanic rocks and alluvial valley fill ^e	210 to 370	740,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g

- a. The listed depth range for depth to groundwater generally applies to the area underlying the rail alignment (DIRS 176600-Converse Consultants 2005, Plates 4-1, 4-2, and 4-3). Depth to groundwater in each hydrographic area can vary over a greater range of depths depending on location (refer to text).
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.
- d. mg/L = milligrams per liter.
- e. Source: DIRS 176600-Converse Consultants 2005, pp. 29, 30, 34, 35, and 36.
- f. Source: DIRS 180754- Rush et al. 1971, all.
- g. Sources: DIRS 172905-USGS 1995, Figure 70; DIRS 177741-State of Nevada 2005, all, with overlay of hydrographic area boundaries.
- h. Source: DIRS 176600-Converse Consultants 2005, pp. 35 and 38.

3.2.7 BIOLOGICAL RESOURCES

This section describes the biological resources that could be affected by construction and operation of the proposed railroad along the Caliente rail alignment.

Biological resources include vegetation, wildlife, special status species, game species, and wild horses and burros within or near the construction right-of-way described in Section 3.2.7.1. This discussion of biological resources is based on the results of a review of available data from federal, State of Nevada, and local agencies, and data gathered during field investigations.

Section 3.2.7.2 provides a general overview of biological resources, including vegetation, wildlife, special status species, game species, and wild horses and burros along the Caliente rail alignment. Section 3.2.7.3 describes biological resources unique to each Caliente rail alignment alternative segment and common segment. Appendix H, Biological Resources, provides additional information regarding biological resources along the Caliente rail alignment.

3.2.7.1 Areas of Assessment

DOE used two areas of assessment to describe the affected environment for biological resources: the greater study area and the construction right-of-way.

Special Status Species

Endangered species are classified under the Endangered Species Act as being in danger of extinction throughout all or a significant part of their range.

Threatened species are classified under the Endangered Species Act as likely to become endangered species in the foreseeable future.

Proposed species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information on their biological status and threats and that are the subject of a Fish and Wildlife Service *Federal Register* rulemaking notice to list them as endangered or threatened.

Candidate species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information to support a proposal to list as endangered or threatened, but development of a listing regulation is precluded by other higher priority listing activities.

Endangered Species Act candidate species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information on their biological status and threats to propose them as endangered or threatened under the Endangered Species Act.

State protected plant and animal species. Wildlife species or subspecies are classified as protected under Nevada Administrative Code (NAC) Chapter 503 if one or more of the following criteria exists:

1. The wildlife is found only in the State of Nevada and its population, distribution, or habitat is limited.
2. The limited population or distribution within Nevada is likely to decline.
3. The population is threatened as a result of the deterioration or loss of its habitat.
4. The wildlife has ecological, scientific, educational, or other value that justifies its classification as protected.
5. The available data is not adequate to determine the exact status of the wildlife population, but does indicate a limited population, distribution, or habitat.
6. The wildlife is listed by the U.S. Fish and Wildlife Service as a candidate species, or it is classified as threatened or endangered in the federal Endangered Species Act.
7. Other evidence exists to justify classifying the wildlife as protected.

Under NAC Chapter 527, plants are classified as being in danger of extinction if their survival requires assistance because of overexploitation, disease, or other factors or because its habitat is threatened with destruction, drastic modification, or severe curtailment. There are no State of Nevada-listed endangered plants present in the areas of assessment.

BLM-designated sensitive species are species other than federally listed, proposed, or candidate species, and may include such native species as those that:

1. Could become endangered in or extirpated from a state or within a significant portion of their distribution in the foreseeable future;
2. Are undergoing a status review by the U.S. Fish and Wildlife Service to determine whether to list the species as a threatened or endangered species across all or a significant portion of its range under the Endangered Species Act;
3. Are undergoing significant current or predicted downward trends in habitat capability that would reduce their existing distribution;
4. Are undergoing significant current or predicted downward trends in population or density such that federally listed, proposed, candidate, or state listed status might become necessary;
5. Have typically small and widely dispersed populations;
6. Are inhabiting ecological refugia or specialized or unique habitats; or
7. Are state listed but might be better conserved through application of BLM sensitive species status. Such species should be managed to the level of protection required by State laws or under the BLM policy for candidate species, whichever would provide better opportunity for their conservation.

3.2.7.1.1 Construction Right-of-Way

The rail line construction right-of-way would be a nominal width of 300 meters (1,000 feet), which is 150 meters (500 feet) on either side of the rail alignment centerline. The footprint, which would be within the construction right-of-way, is the area that would involve clearing of vegetation, excavation, and filling for subgrade to support the rail line. This area would be directly affected, long term, by rail line construction activities. The footprint would fluctuate throughout the alignment due to topography, cut and fill requirements, and land use. The footprint could also vary based on land use and avoidance or minimization of impacts to other resources (for example, water or structures) but generally would be 300 meters or less. The area between the footprint and the outer edge of the construction right-of-way would be directly affected, short term, by construction-related activities such as construction staging, material laydown, and temporary access roads. DOE analyzed the area between the footprint and the outer edge of the construction right-of-way for short-term impacts even though the use of this area would be minimized and the area might not be disturbed. For purposes of this analysis, DOE has taken a conservative approach of potentially overstating the environmental impacts to biological resources. For facilities that would be outside the nominal width of the rail line construction right-of-way (such as quarries and other *infrastructure*), the area DOE assessed as the affected environment is the maximum area or the footprint of the proposed facility.

3.2.7.1.2 Study Area

DOE identified a study area (16-kilometers [10-miles] wide, extending 8 kilometers [5 miles] on either side of the centerline of the rail alignment) for use in database and literature searches to ensure the identification of sensitive habitat areas near the Caliente rail alignment and transient or migratory wildlife, particularly special status species, that could pass through or along the construction right-of-way. Using the larger study area identifies special status species and/or habitat that could be present near the rail alignment to better describe the habitat value and species use within the construction right-of-way.

3.2.7.2 General Environmental Setting and Characteristics

This section describes the affected environment for biological resources that could be present or have the potential to occur within the construction right-of-way or the study area. DOE used the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all), which the BLM currently uses in its conservation and management actions, to characterize the vegetation communities in the construction right-of-way and the study area.

As a starting point for classification, the 2004 Southwest Regional Gap Analysis Project divided the southwestern United States into general *ecoregions* (relatively discrete sets of ecosystems characterized by certain plant communities or assemblages) based on physical and biological similarities. Using satellite imagery and field data, the Project classified geographic areas or “mapping zones” within each ecoregion based on their land-cover types, and generated maps of these land-cover types. The project classified naturally vegetated types using the “ecological systems” and developed and described types based on dominant vegetation, physical characteristics of the land, hydrology, and climate in the area (DIRS 176369-Lowry et al. 2005, all; DIRS 173051-Comer et al. 2003, all). These mapping zones represent recurring groups of biological communities that are found in similar physical environments and are influenced by similar dynamic ecological processes, such as fire or flooding. As shown in Figure 3-83, the Caliente rail alignment would cross three mapping zones: the Pioche, the Mojave, and the Nellis. The land-cover types are grouped into land-cover classes. Eleven land-cover classes occur in this part of Nevada. To identify the land-cover types and classes within the construction right-of-way and the study area, digital maps of the land-cover types within the affected map zones were overlain (spatial analysis using the Geographic Information System) with the Caliente rail alignment construction right-of-way and operations support facilities.

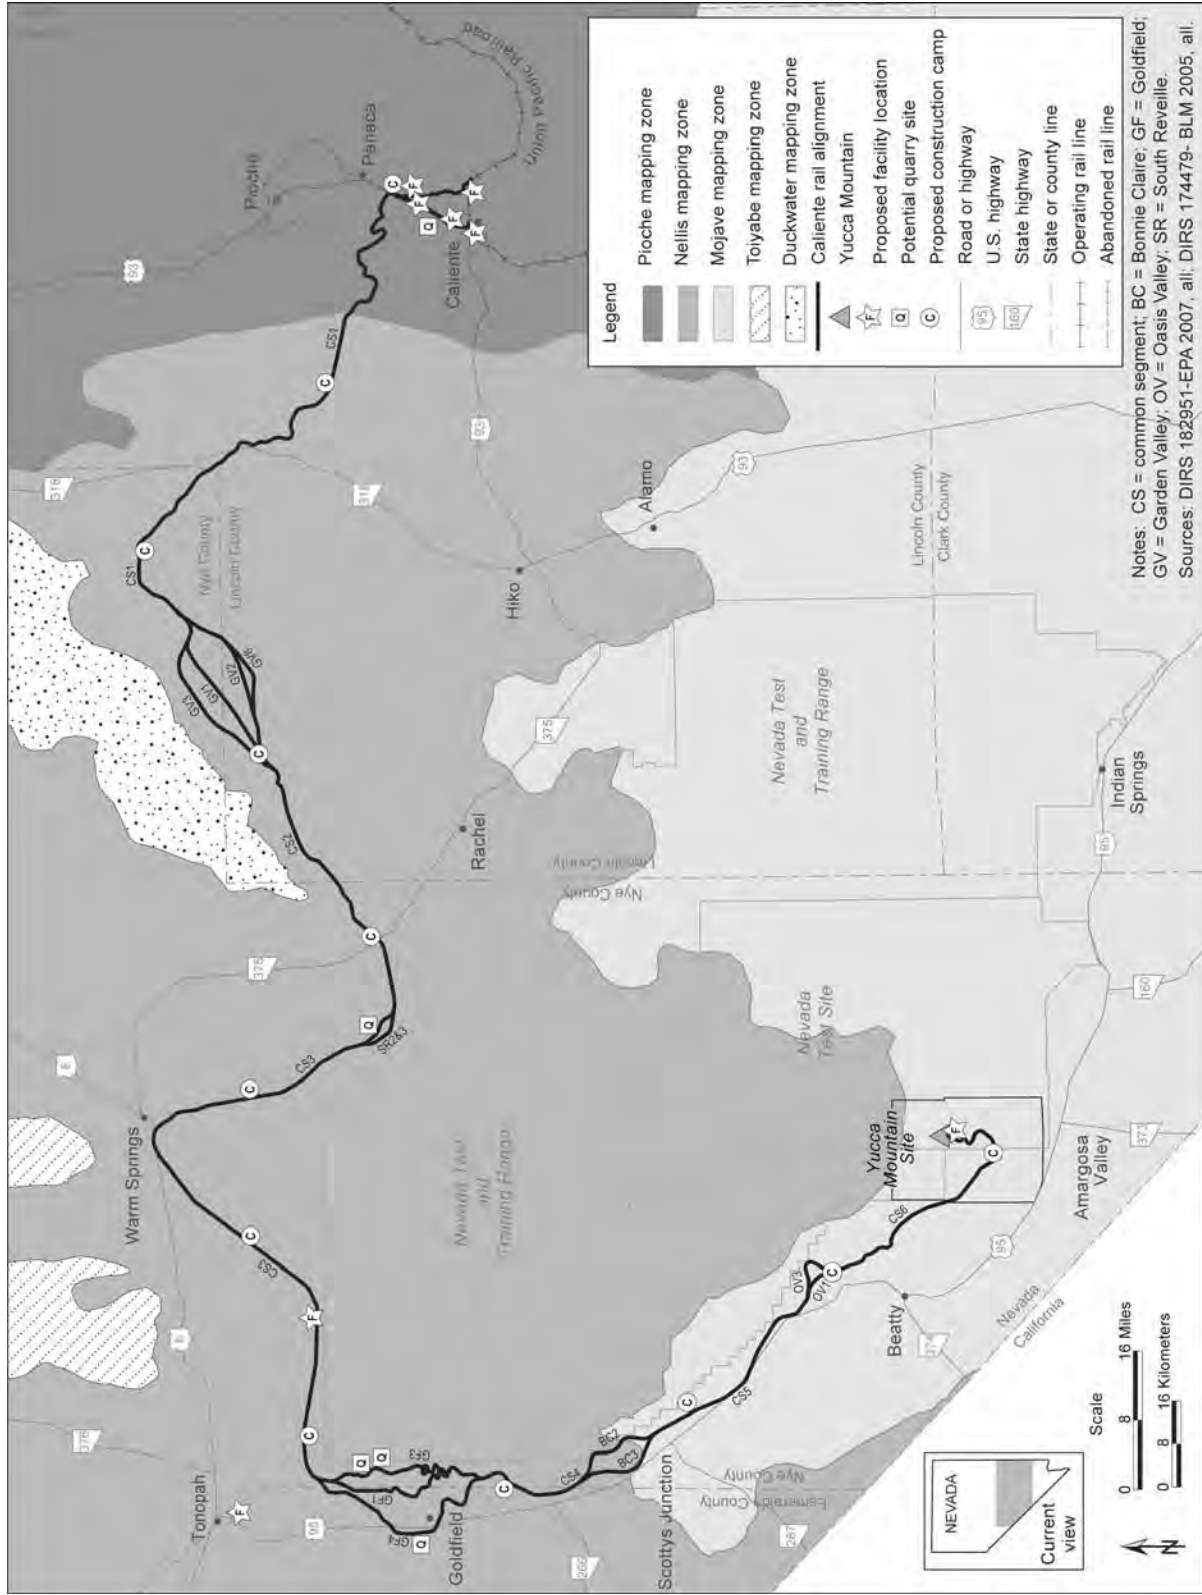


Figure 3-83. Mapping zones along the Caliente rail alignment.

The Caliente rail alignment construction right-of-way would cross nine of the eleven classes (DIRS 174324-NatureServe 2004). Table 3-46 lists classes and types and Figures 3-84 through 3-90 show the classes the rail alignment would cross.

To document additional site-specific information regarding vegetation and habitat, DOE performed literature and database searches, and consulted with land and resource management agencies and authorities, including the BLM, the U.S. Fish and Wildlife Service, the Nevada Natural Heritage Program, the Nevada Department of Wildlife, the University of Nevada–Reno, and the Nevada Division of Forestry.

In addition to the review of existing information, DOE conducted field surveys and gathered data to further characterize the mapping zones and associated vegetation communities, and to further characterize the habitats in the study area that might support special status species. DOE chose field survey locations to provide representative survey coverage of the different types of vegetation along the Caliente rail alignment, specifically in the construction right-of-way, but also in the larger study area. The field survey data DOE collected helped further characterize the types of habitats in the construction right-of-way and identified by the Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all). Appendix H describes the field survey methodology. The additional surveys and data searches are outlined in each specific resource area below.

3.2.7.2.1 Vegetation

The Caliente rail alignment is situated within two large deserts: the Great Basin and the Mojave. The Great Basin Desert is considered a cold desert and has been referred to as the Basin and Range region due to its parallel north-south trending ranges, or mountains, and intervening basins, or valleys. This region covers most of central and northern Nevada, with its southern extent ending roughly in southern Lincoln, Esmeralda, and Nye Counties. The Mojave Desert is considered a hot desert and covers most of southern Nevada and much of southeastern California (DIRS 174412-Ryser 1985). Just as the two deserts are distinguished from one another climatically, the predominant vegetation and vegetation communities also define each desert.

The Great Basin Desert is generally characterized by big sagebrush (*Artemisia tridentata*), which is mostly absent from the Mojave Desert except at moderate to high elevations in the mountains. Alternatively, the Mojave Desert is dominated by creosote bush (*Larrea tridentata*), which is mostly absent from the Great Basin Desert. There is a broad transitional zone where these two deserts meet, which exhibits characteristics of both regions.

Based on the spatial analysis described above, the Caliente rail alignment would intersect 25 land-cover types, which are listed in Table 3-46. The most common plant communities within the study area are the Inter-Mountain Basins Mixed Salt Desert Scrub and the Inter-Mountain Basins Big Sagebrush Shrubland. Appendix H, Table H-1, describes plant communities. The acreages in the table are representative of the total acreages in the mapping zones (the Pioche, the Mojave, and the Nellis) that intersect the Caliente rail alignment.

Undisturbed areas of winterfat, or whitesage (*Krascheninnikovia lanata*), are present, but uncommon, within the construction right-of-way. While they have no official protected status with any federal or state agency, the BLM has identified these vegetation communities as important and their conservation or protection should be considered during development of any projects.

Table 3-46. Land-cover classes and types in the mapping zones.

Class and type	Total amount of classes and land-cover types within the Pioche, the Mojave, and the Nellis mapping zones (square kilometers) ^a
<i>Barren Lands</i>	
Inter-Mountain Basins Playa	1,100
Inter-Mountain Basins Wash	1.6
Inter-Mountain Basins Cliff and Canyon	420
North American Warm Desert Playa	520
North American Warm Desert Bedrock Cliff and Outcrop	1,820
<i>Evergreen Forest</i>	
Great Basin Pinyon-Juniper Woodland	1,000
<i>Scrub/Shrub</i>	
Inter-Mountain Basins Mixed Salt Desert Scrub	26,000
Inter-Mountain Basins Big Sagebrush Shrubland	8,000
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	19,000
Great Basin Xeric Mixed Sagebrush Shrubland	7,600
Mojave Mid-Elevation Mixed Desert Scrub	11,000
Sonora-Mojave Mixed Salt Desert Scrub	1,500
<i>Grassland/Herbaceous</i>	
Inter-Mountain Basins Semi-Desert Shrub Steppe	4,900
Inter-Mountain Basins Semi-Desert Grassland	100
Inter-Mountain Basins Montane Sagebrush Steppe	530
<i>Woody Wetland</i>	
Inter-Mountain Basins Greasewood Flat	1,440
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	140
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	30.8
<i>Emergent Herbaceous Wetland</i>	
North American Arid West Emergent Marsh	47.2
<i>Altered or Disturbed</i>	
Invasive Annual Grassland	51
Invasive Annual and Biennial Forbland	29
<i>Developed and Agriculture</i>	
Developed, Open Space - Low Intensity	430
Agriculture	430
Developed, Medium - High Intensity	84
<i>Other</i>	
Barren Lands, Non-specific	30

a. To convert square kilometers to acres, multiply by 247.10.

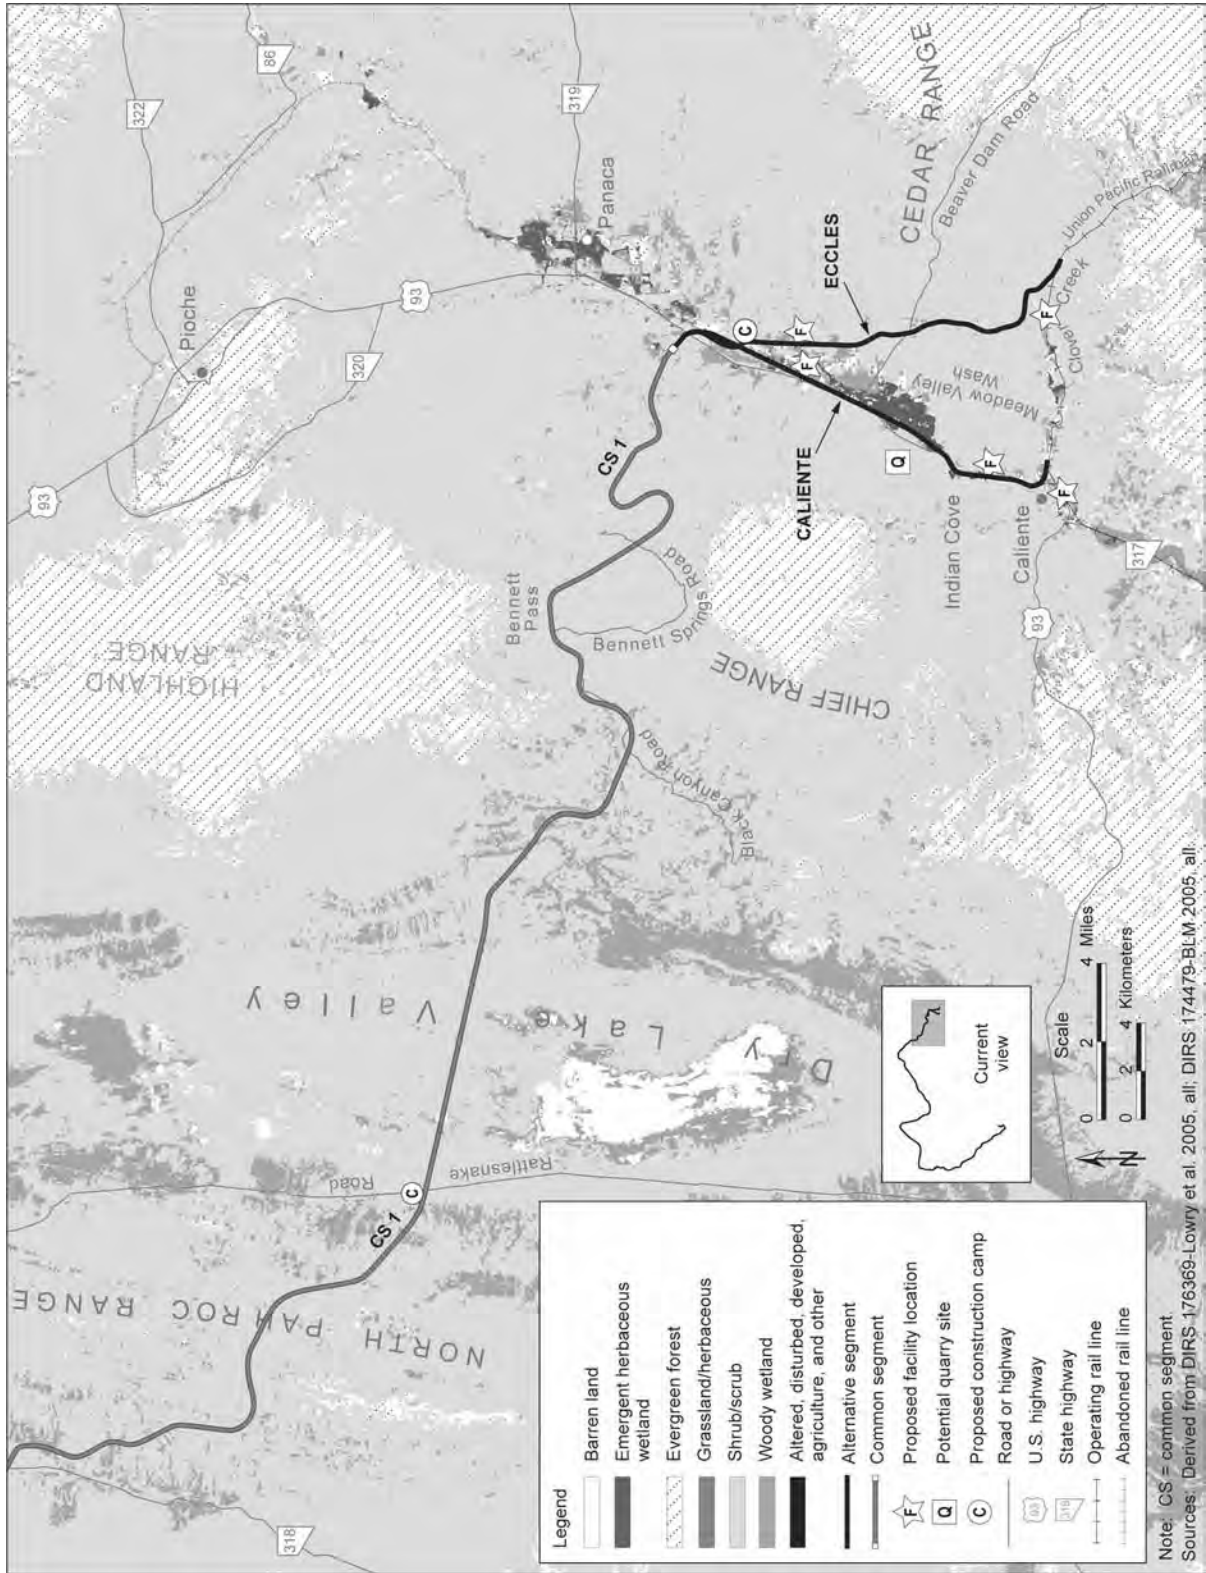


Figure 3-84. Land-cover classes the Caliente rail alignment would cross within map area 1.

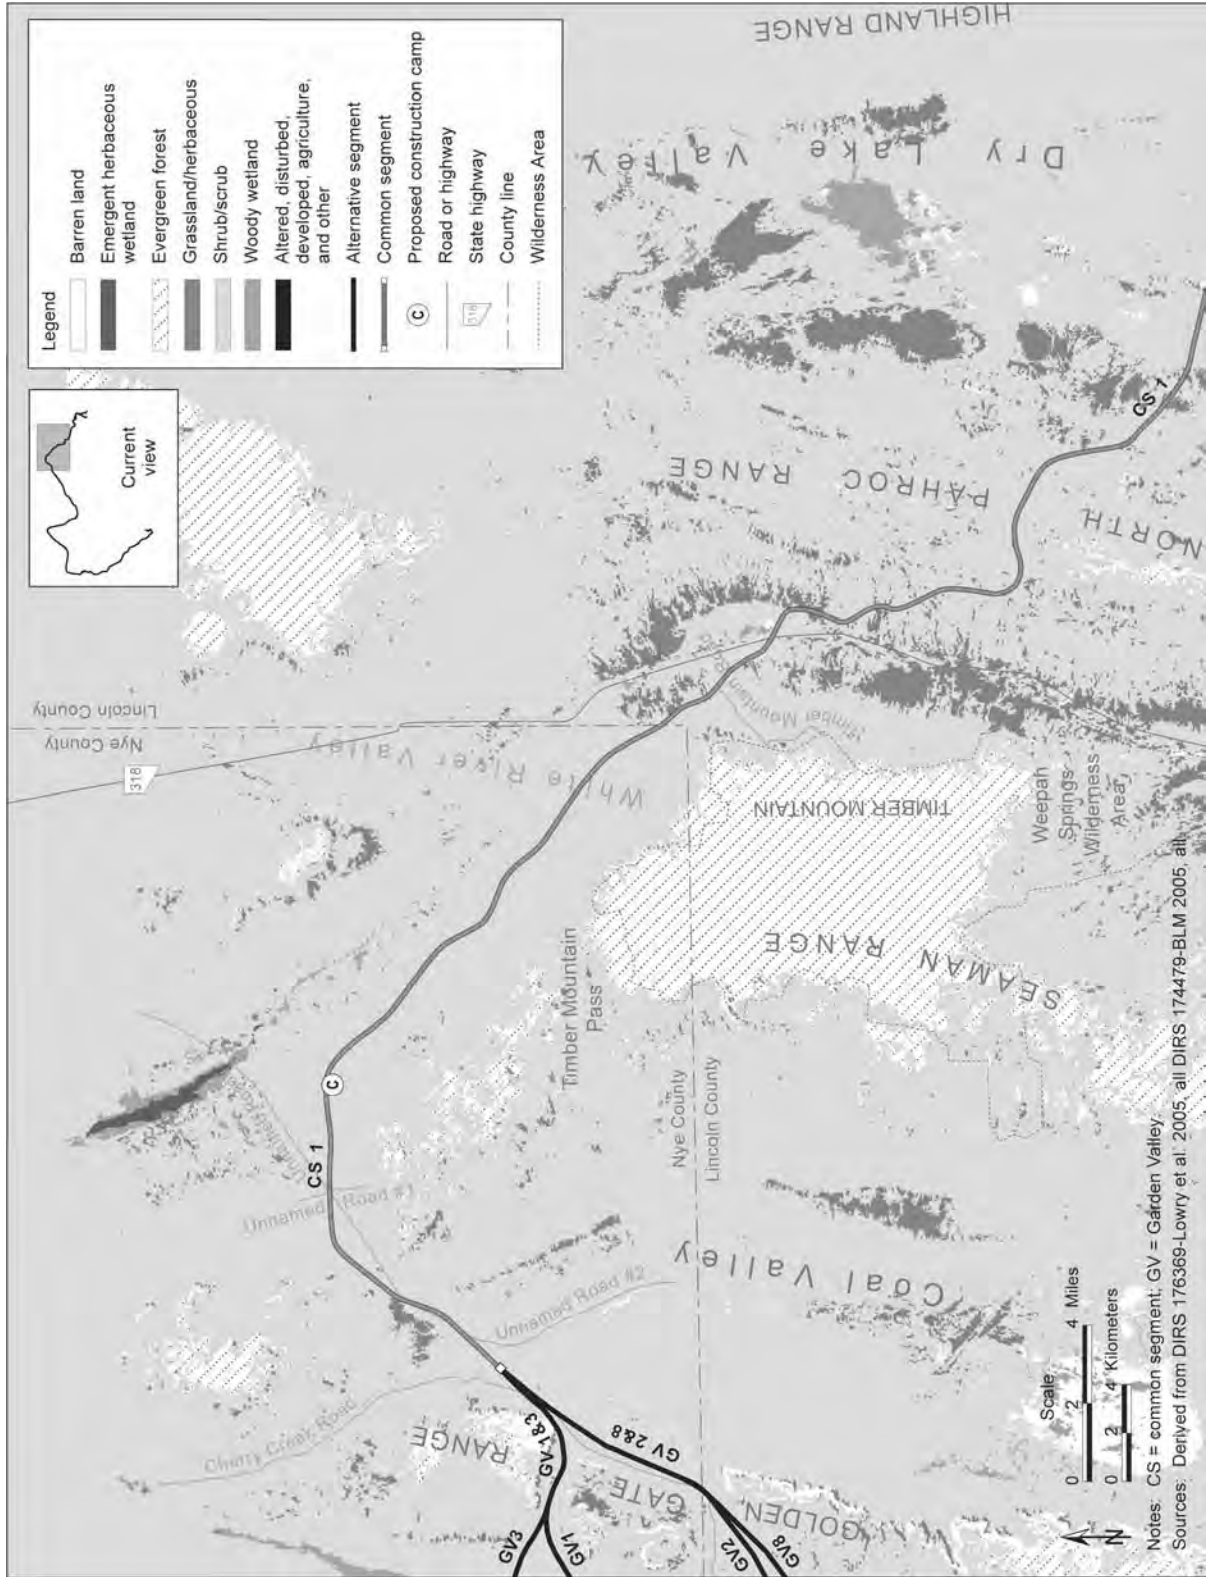


Figure 3-85. Land-cover classes the Caliente rail alignment would cross within map area 2.

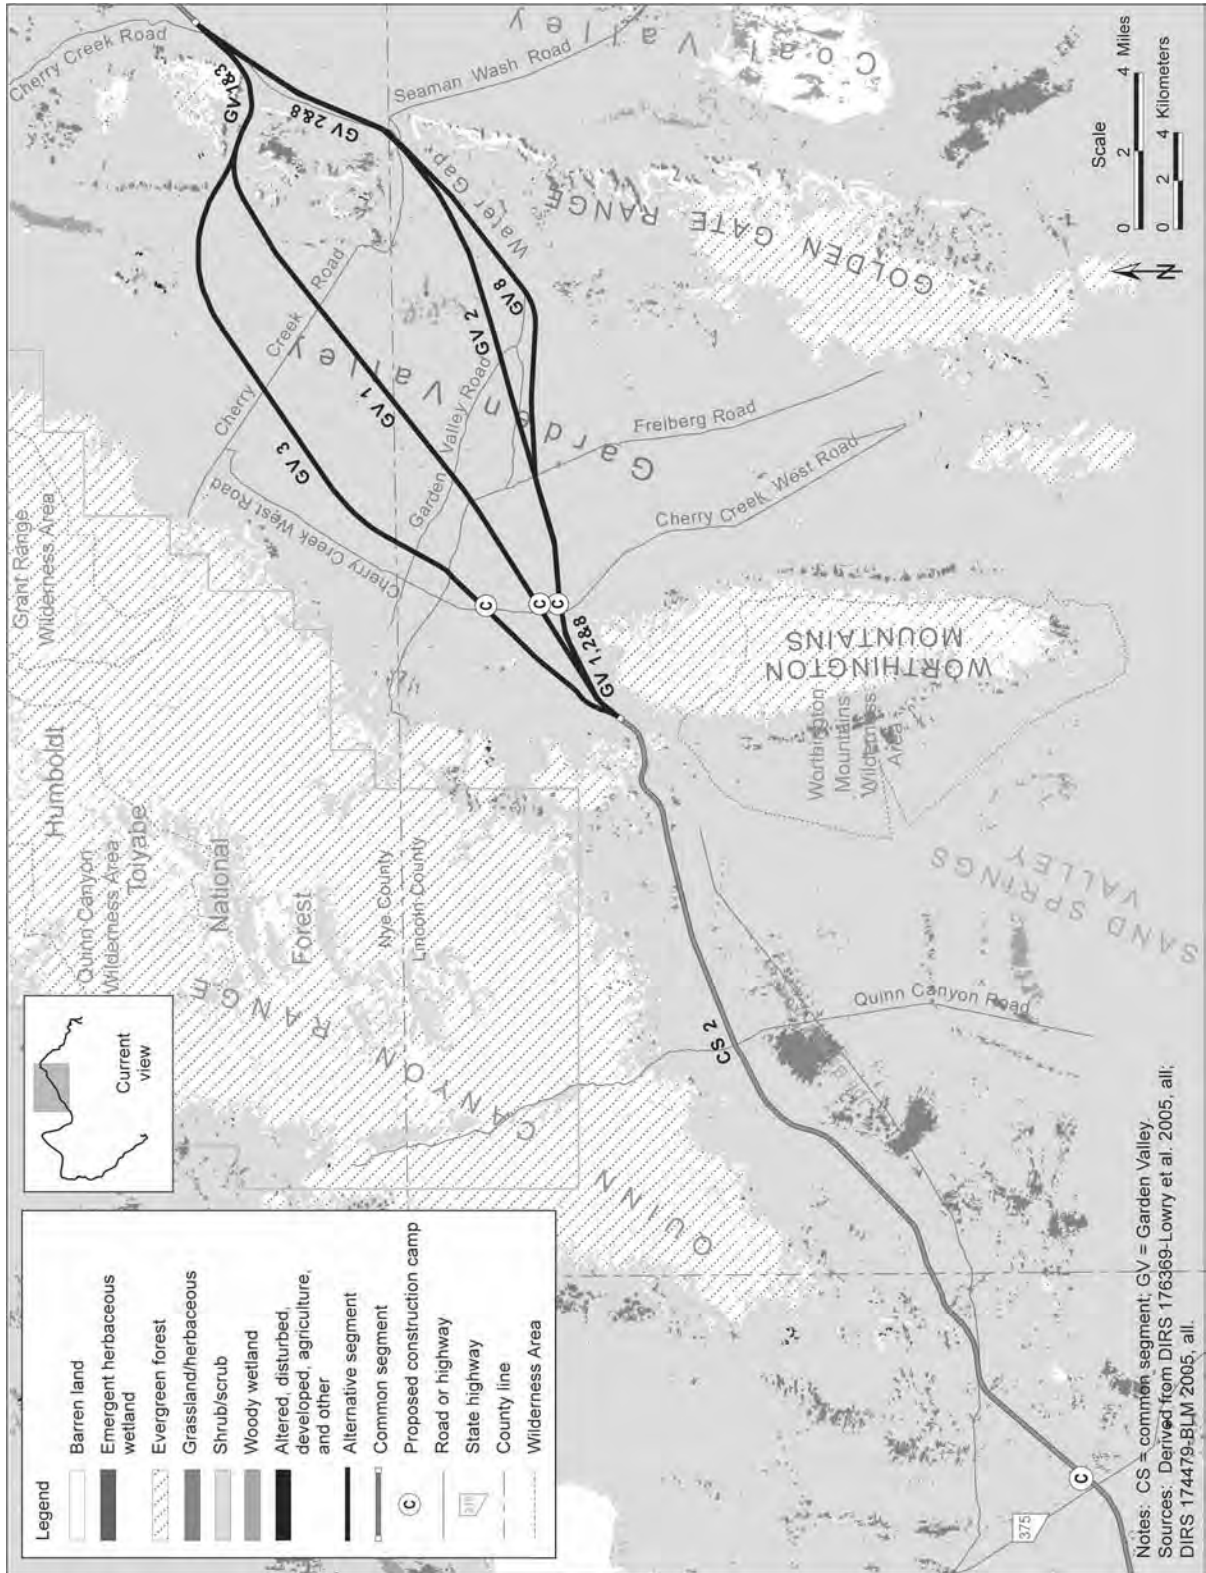


Figure 3-86. Land-cover classes the Caliente rail alignment would cross within map area 3.

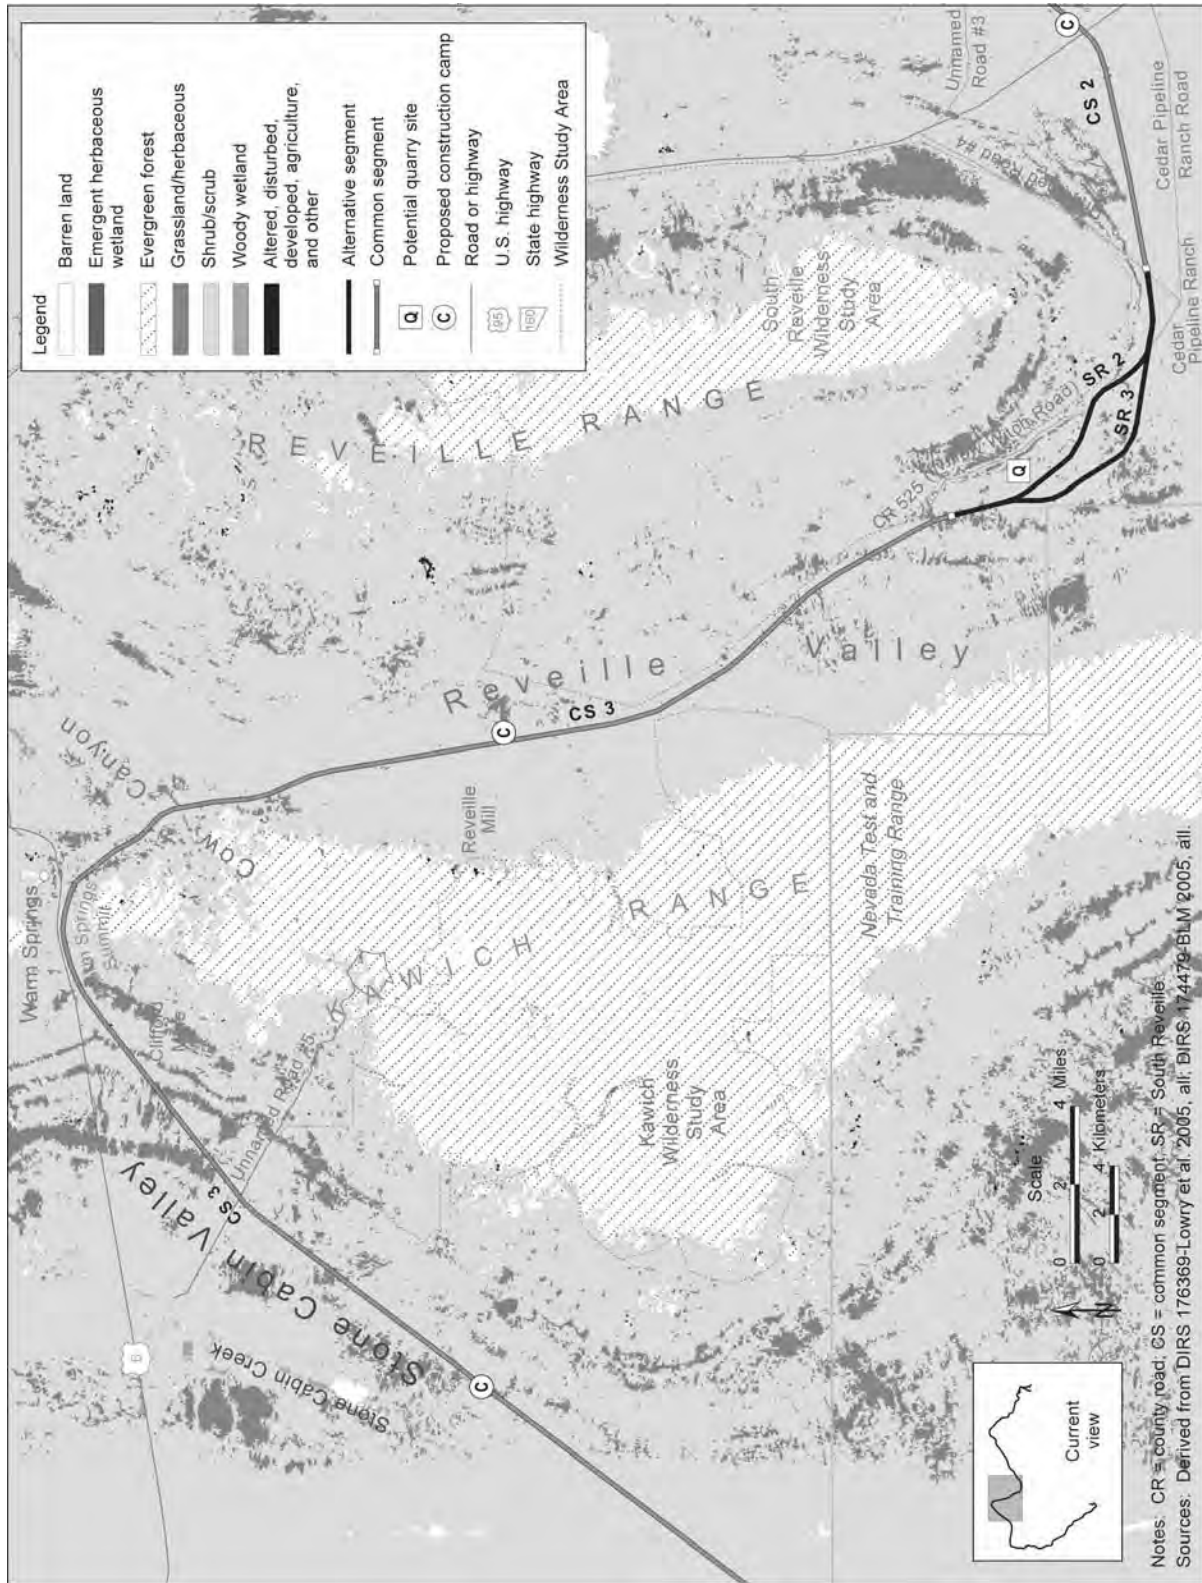


Figure 3-87. Land-cover classes the Caliente rail alignment would cross within map area 4.

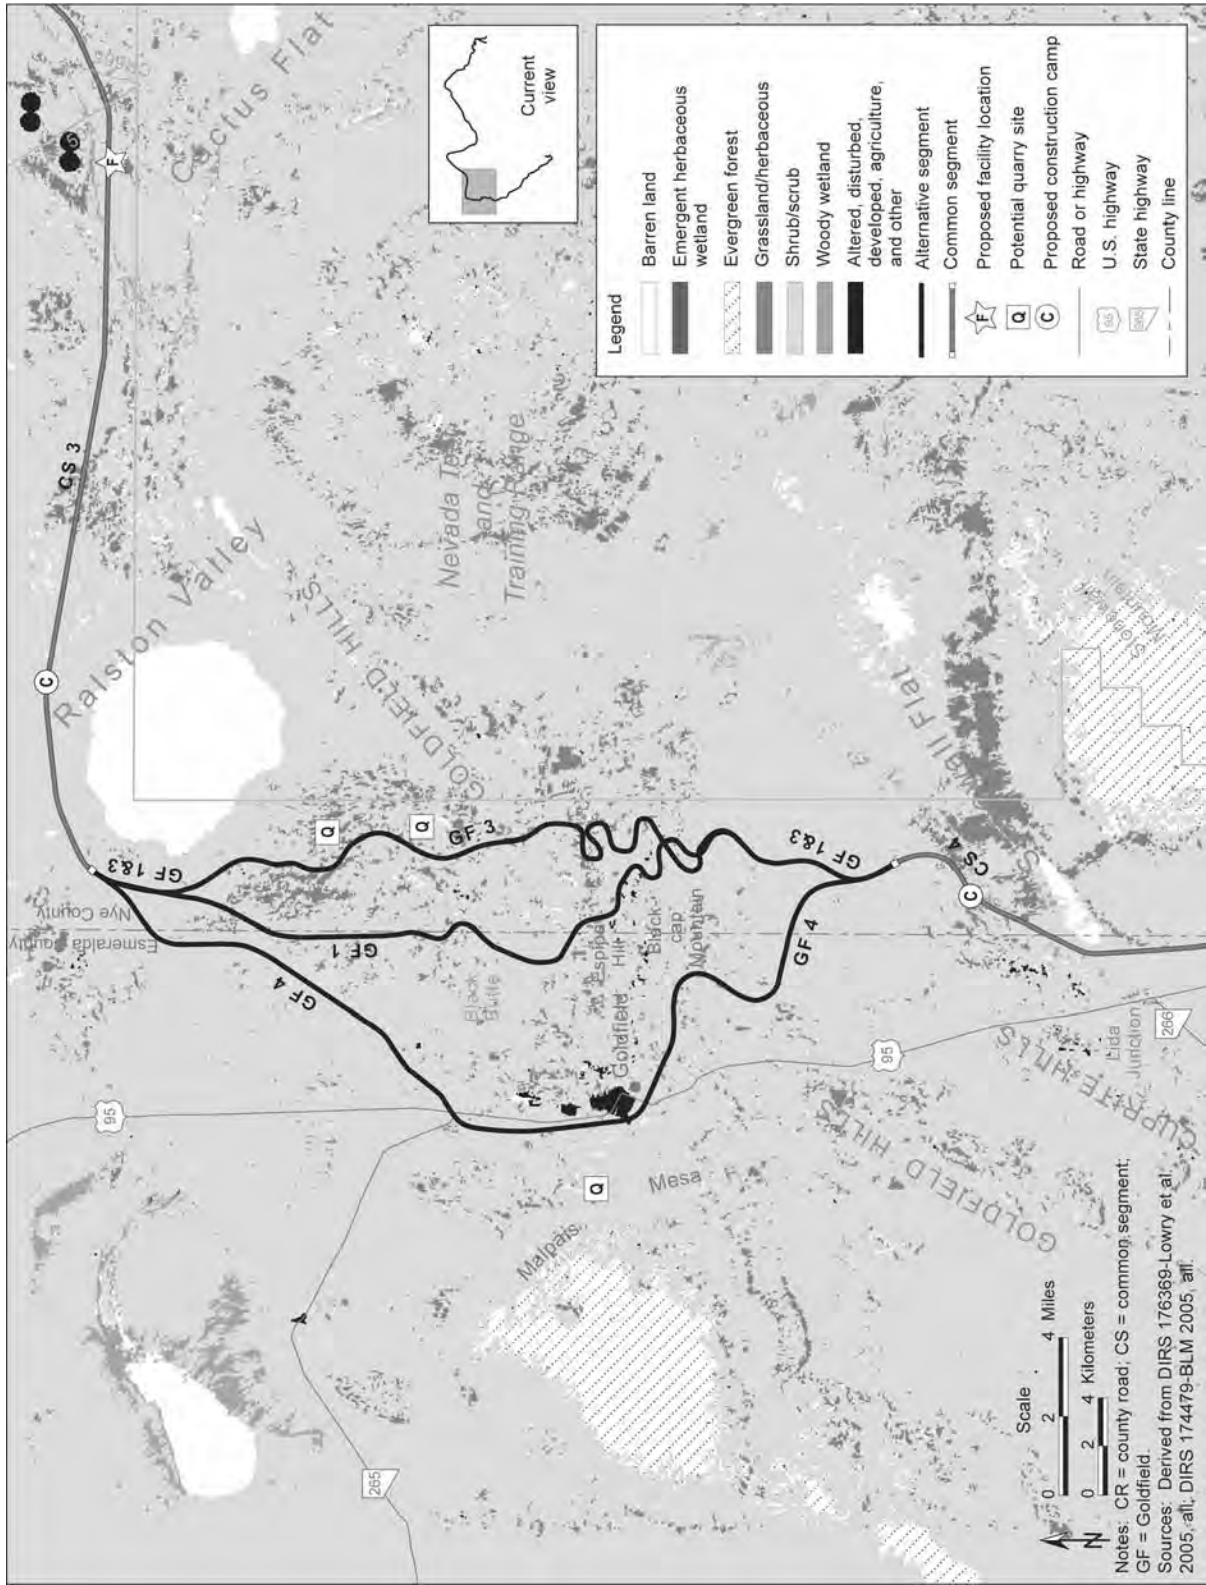


Figure 3-88. Land-cover classes the Caliente rail alignment would cross within map area 5.

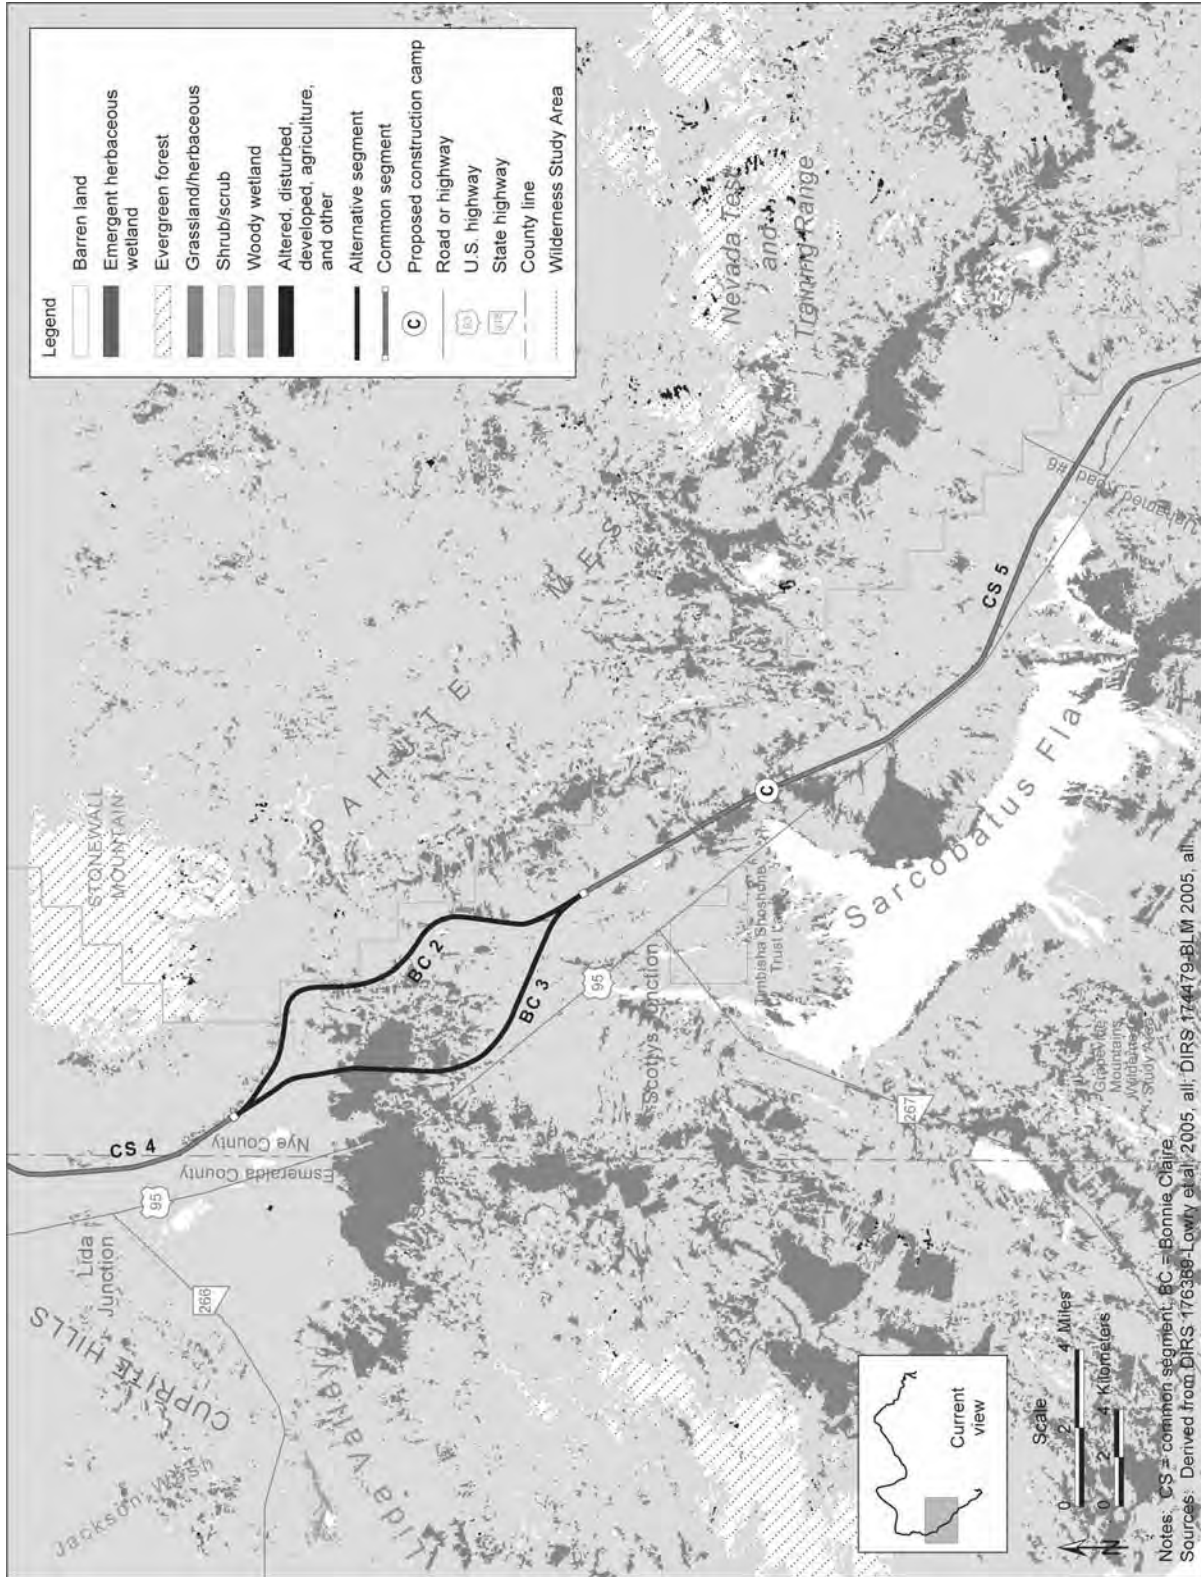


Figure 3-89. Land-cover classes the Caliente rail alignment would cross within map area 6.

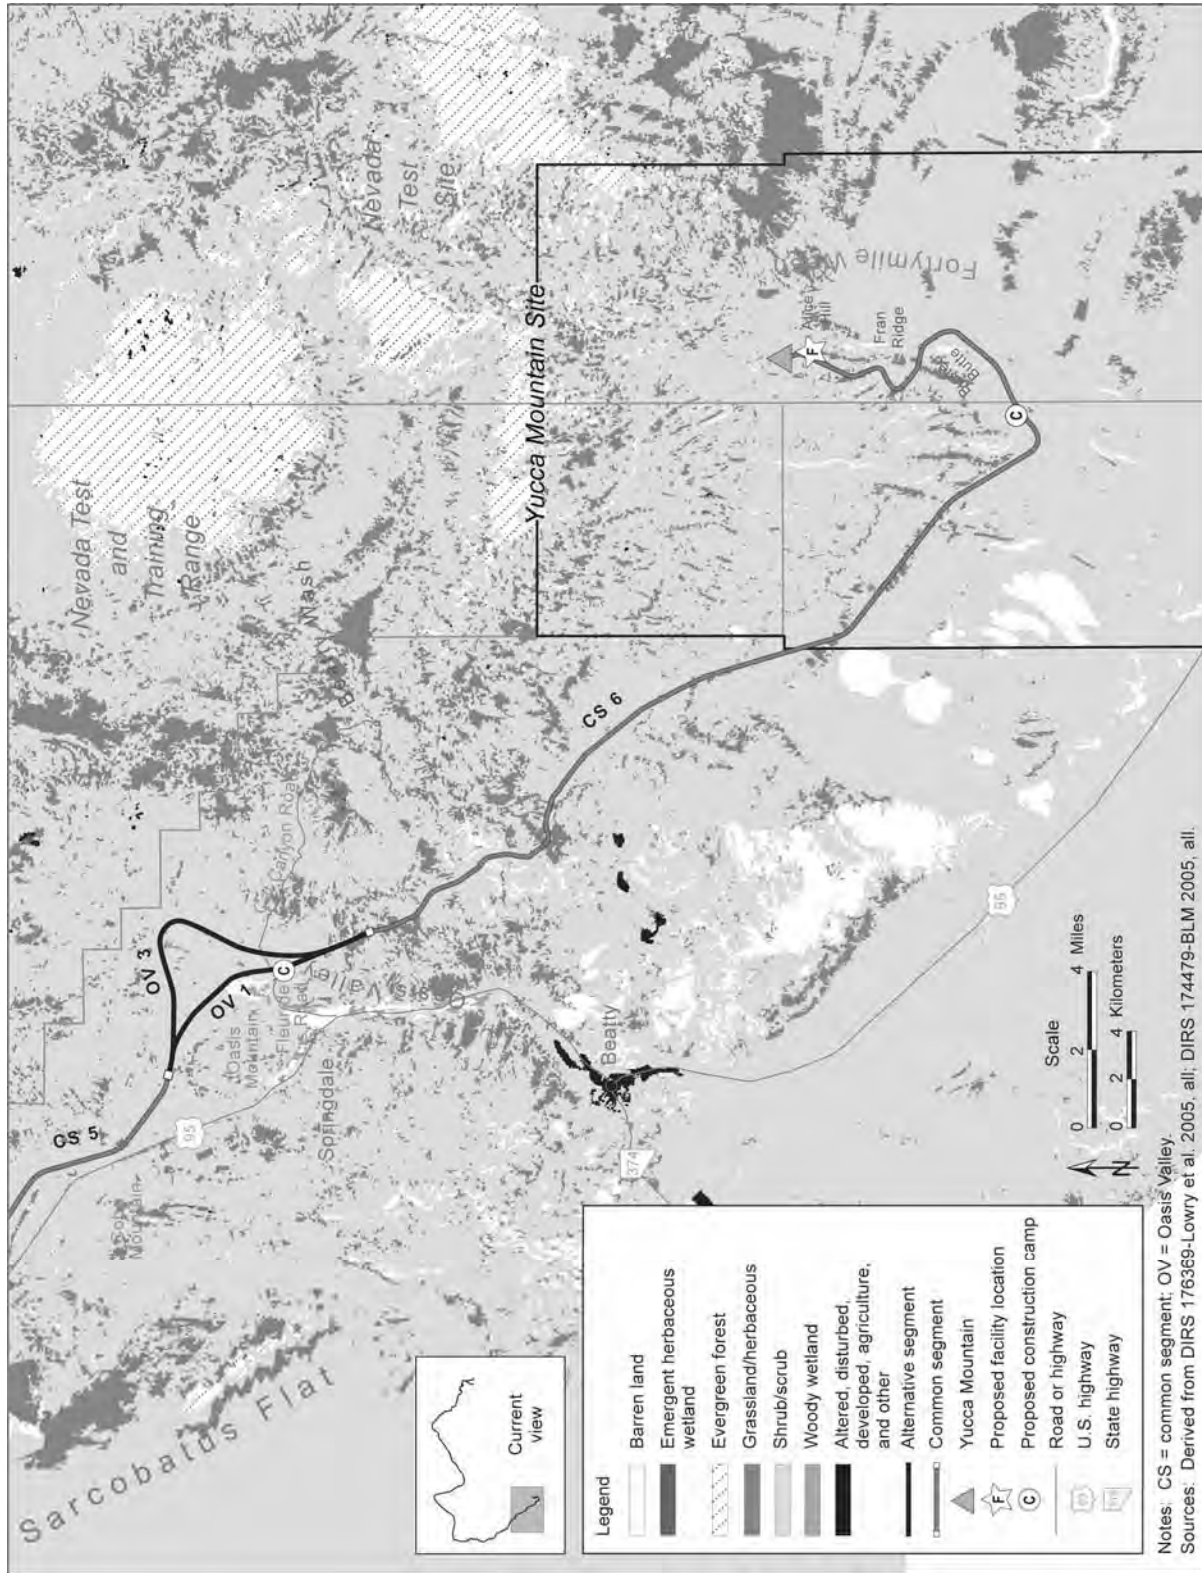


Figure 3-90. Land-cover classes the Caliente rail alignment would cross within map area 7.

In addition to shrubs and grasses, biological soil crusts are an important component to both the Mohave and Great Basin ecosystems. Biological crusts are comprised of multiple species of lichen, moss, cyanobacteria and algae which live on top of the soil surface, binding with soil particles and forming a cohesive mat or crust on the surface of arid landscapes (DIRS 181866-Belnap 2006, p. 1). Cyanobacteria is the dominant component of crusts in the Mojave Desert, while soil lichen and moss species tend to be limited. Biological crusts (if present) could play an important role in maintaining the health of some of the desert vegetation communities listed in Table 3-46, including but not limited to facilitating water infiltration, retaining soil moisture, and reducing soil loss from wind and water erosion (DIRS 181957-Kaltenecker and Wicklow-Howard 1994, p. 1-8). Crusts are highly sensitive to surface disturbance and are easily destroyed. Biological crusts likely occur within the region of influence in some areas where there has been no surface disturbance. Biological crusts are potentially present in areas where construction would occur, but because of insufficient data regarding the location and extent of biological crusts in the region of influence, Section 4.2.7 does not discuss impacts to biological crusts.

3.2.7.2.1.1 Noxious Weed and Invasive

Species. The Great Basin-Mojave Desert region is threatened by a number of nonnative, invasive plant species that have displaced *native plant species*. Invasive plant species, such as red brome (*Bromus rubens*), tamarisk (*Tamarix ramosissima*), and cheatgrass (*Bromus tectorum*), have the ability to out-compete individual species of native range plants, which results in extensive monocultures of the introduced species. *Invasive species* usually have little to no nutritional value for livestock and wildlife; some invasive species are toxic or physically injurious to animals, can increase the frequency of wildfires, and degrade wildlife habitat by reducing the diversity of native vegetation (DIRS 155925-Nevada Weed Action Committee 2000, p. 5).

Some plant species are considered *noxious weeds*, an official designation used by federal and state authorities to identify species with a high likelihood of being very destructive or difficult to control or eradicate. Chapter 555.010 of the Nevada Administrative Code lists species designated as noxious. Chapter 555 of the Nevada Revised Statutes directs that designated noxious weeds are to be controlled on both public and private land, and provides for enforcement measures should the landowner or occupier fail to take corrective action. While many noxious species are invasive, invasiveness is not required for a species to be designated noxious. Some species managed as noxious weeds are not considered truly invasive because they cannot effectively out-compete healthy communities of native vegetation.

3.2.7.2.1.2 Wetlands and Riparian Habitats. Riparian habitats are transition areas from wetland or stream habitat to upland habitat. Wetlands are areas that are saturated by water for a sufficient amount

Nonnative plant species: A species found in an area where it has not historically been found.

Native plant species: With respect to a particular ecosystem, a species that, other than as a result of an introduction, historically occurred or currently occurs in that ecosystem (Executive Order 13112, *Invasive Species*).

Invasive plant species: An alien species whose introduction does or is likely to cause economic or environmental harm or harm to human health (Executive Order 13112, *Invasive Species*).

Noxious weeds: The BLM defines a noxious weed as: "A plant that interferes with management objectives for a given area of land at a given point in time." (DIRS 177037-BLM 1996, p. 3) The State of Nevada defines noxious weeds as: "Any species of plant which is, or liable to be, detrimental or destructive and difficult to control or eradicate" (Nevada Revised Statute 555.005).

Weeds can be native or nonnative, invasive or non-invasive, and noxious or not noxious. Invasive species include not only noxious weeds, but also other nonnative plants. The BLM considers plants invasive if they have been introduced into an environment where they did not evolve. As a result, invasive species usually have no natural enemies to limit their spread and can produce significant detrimental changes.

of time to support vegetation that is adapted to saturated soil conditions. While wetland and riparian habitats in Nevada cover a very small percentage of the total area of the state, they support a comparatively high number and large diversity of species, many of which are locally *endemic*. Wetland and riparian habitats have been reduced in the region over the years due in part to water removal and the presence of invasive species, such as tamarisk (DIRS 174518-BLM 2005, p. 3.5-9). Appendix F contains information on wetlands within the project area and Sections 3.2.5 and 4.2.5 discuss impacts in relation to Section 404 of the Clean Water Act and wetland fill permitting. This section discusses wetlands and riparian habitats that support terrestrial and aquatic species.

To maintain consistency within this section, DOE assessed the amount and types of wetland and riparian habitats utilizing the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all). Section 3.2.5, Surface-Water Resources, utilizes National Wetlands Inventory maps (DIRS 176976-MO0605GISNWIDQ.000) and the results of the wetland delineations conducted during the field surveys in 2005 (DIRS 174040-PBS&J 2005, pp. 15 and 16) and 2006 (DIRS 180914-PBS&J 2006, pp. 11 and 12) to calculate the area of the wetlands. Therefore, the area totals differ between Sections 3.2.5 and 3.2.7 because Section 3.2.7 analyzes wetland and riparian habitat and Section 3.2.5 analyzes only the wetland areas.

According to the Southwest Regional Gap Analysis Project, there are three types of wetland or riparian habitats along the Caliente rail alignment and at locations of the proposed railroad construction and operations support facilities: North American Warm Desert Lower Montane Riparian Woodland and Shrubland; Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland; and North American Arid West Emergent Marsh (Figures 3-91 to 3-94 and Table 3-46).

The North American Warm Desert Lower Montane Riparian Woodland and Shrubland is found along perennial and seasonally intermittent streams. Generally located in middle to low elevations and found in canyons and valleys, vegetation in this land-cover type depends on seasonal flooding and removal of sediment that occurs during these flood events. The vegetation is a mix of tree and shrub species including Fremont cottonwood (*Populus fremontii*) and willows, including sandbar willow (*Salix exigua*) and seep willows (*Baccharis salicifolia*) (DIRS 174324-NatureServe 2004, pp. 140 to 142).

The Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland land cover occurs in the mountains of the Great Basin from middle to high elevations. This habitat requires flooding, and the scouring and subsequent deposition of soils that occurs during flood events, for maintenance and germination of vegetation. Vegetation typically associated with this type of riparian habitat includes Fremont cottonwood, willows, rushes (*Juncus* spp.), and sedges (*Carex* spp.) (DIRS 174324-NatureServe 2004, pp. 149 and 150).

The North American Arid West Emergent Marsh type occurs throughout the arid regions of the western United States. This land cover occurs along slow-moving streams, has soils that are able to accumulate organic material, and contains vegetation that is adapted to frequently or continually saturated soil conditions. Vegetation commonly found in marsh areas includes bulrushes (*Scirpus* spp.), cattails (*Typha* spp.), and rushes (DIRS 174324-NatureServe 2004, pp. 154 to 156).

3.2.7.2.2 Wildlife

As with the vegetation communities and wetland habitats, DOE gathered data on wildlife communities to identify existing information regarding the occurrence and distribution of wildlife, including mammals, birds, reptiles, and aquatic species, within the construction right-of-way.

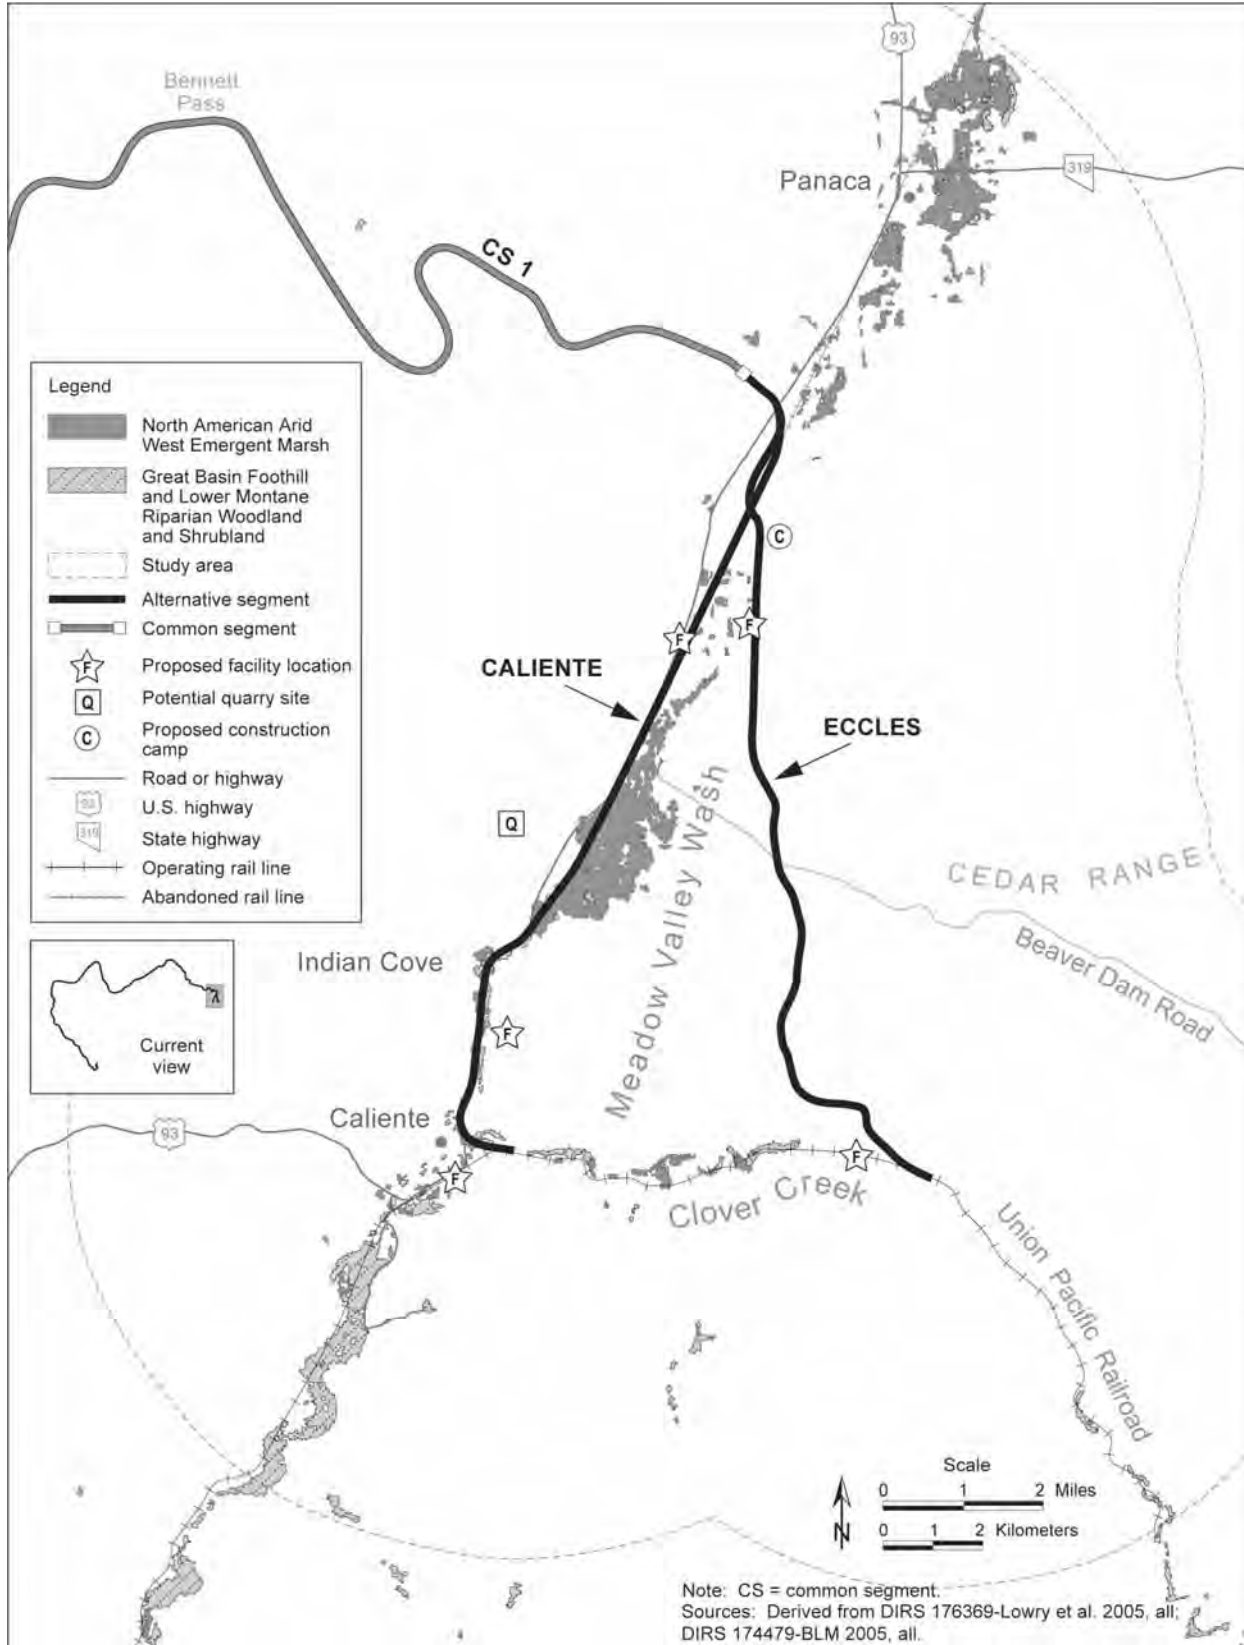
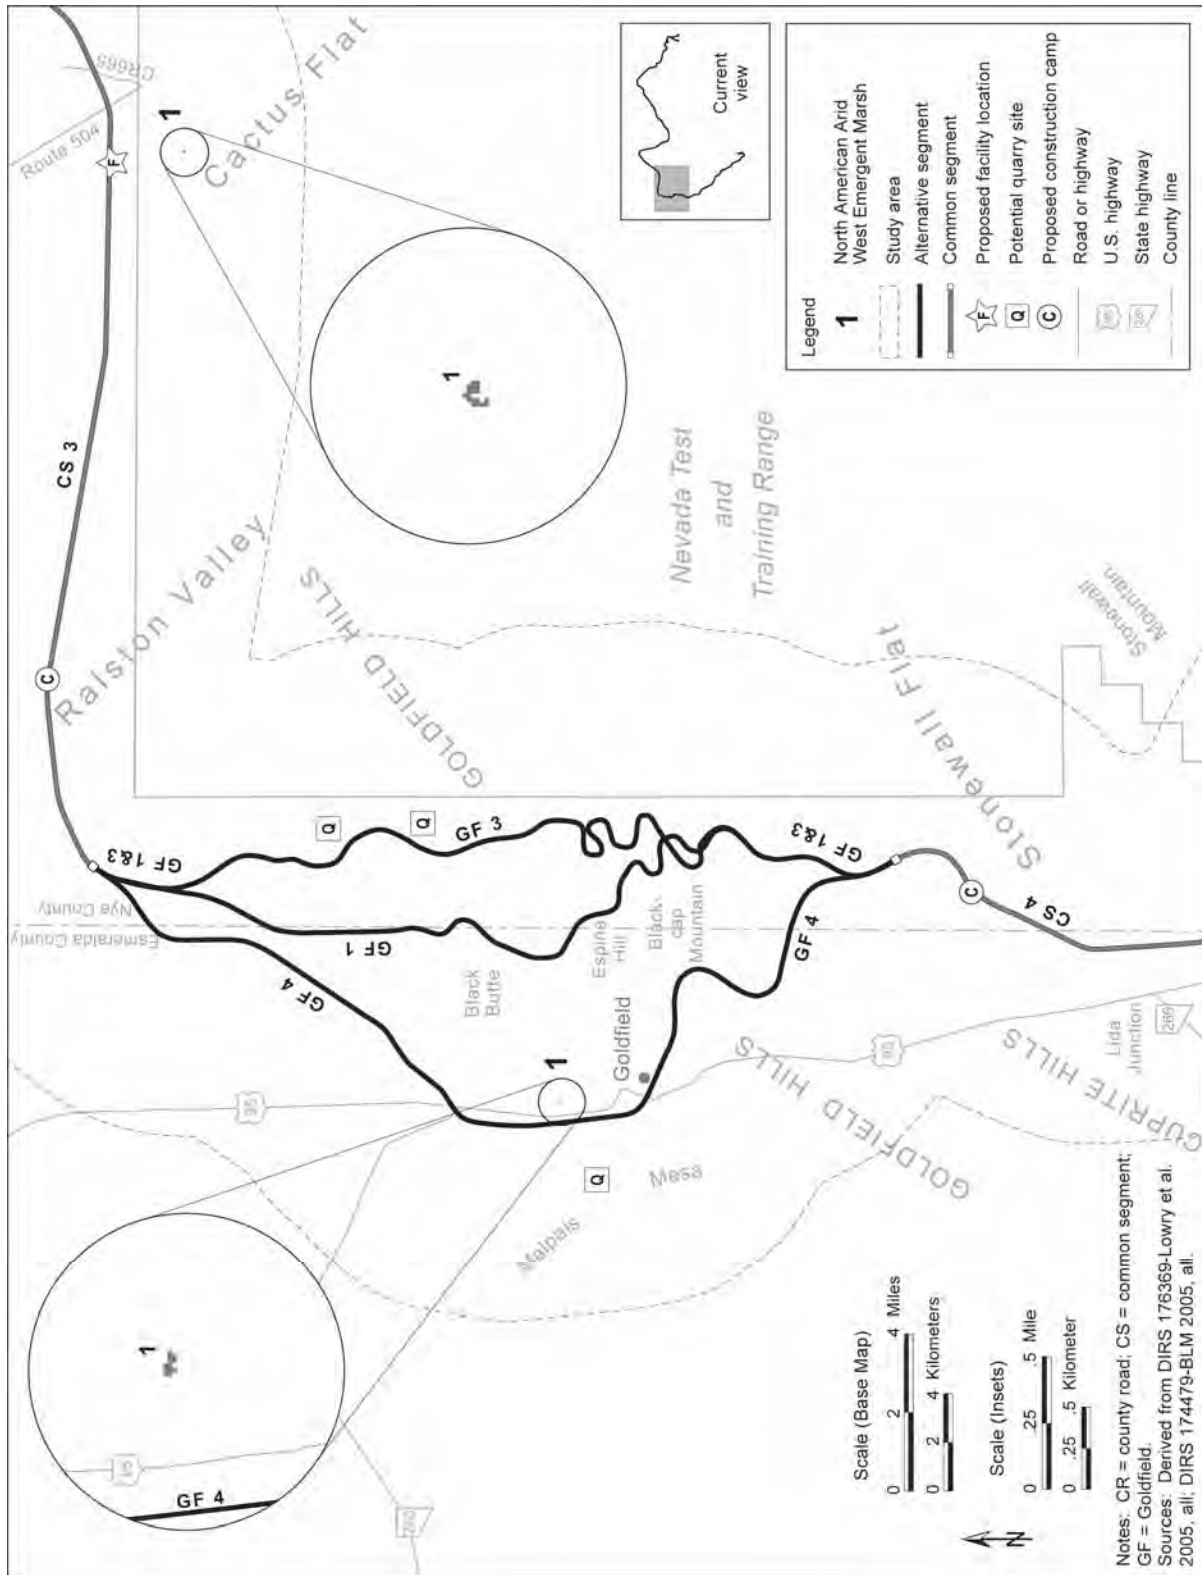
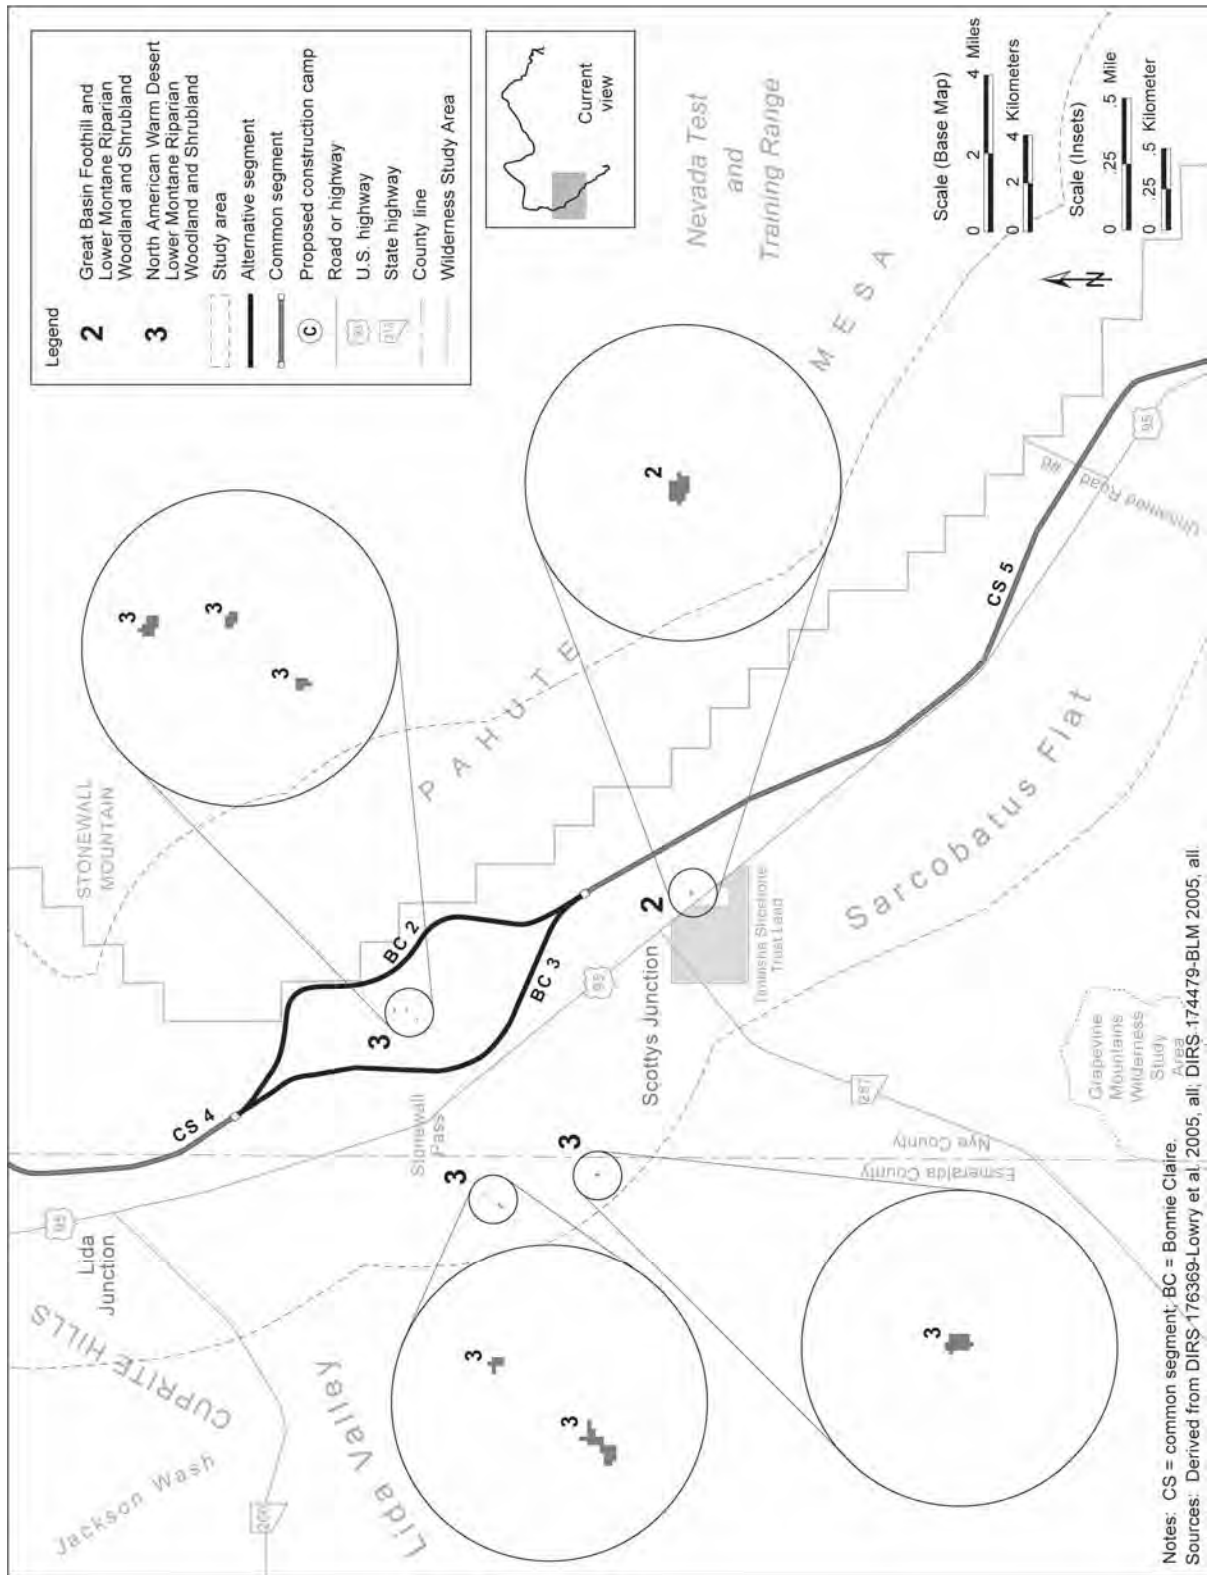


Figure 3-91. Wetland/riparian habitat within the study area near the Caliente and Eccles alternative segments.





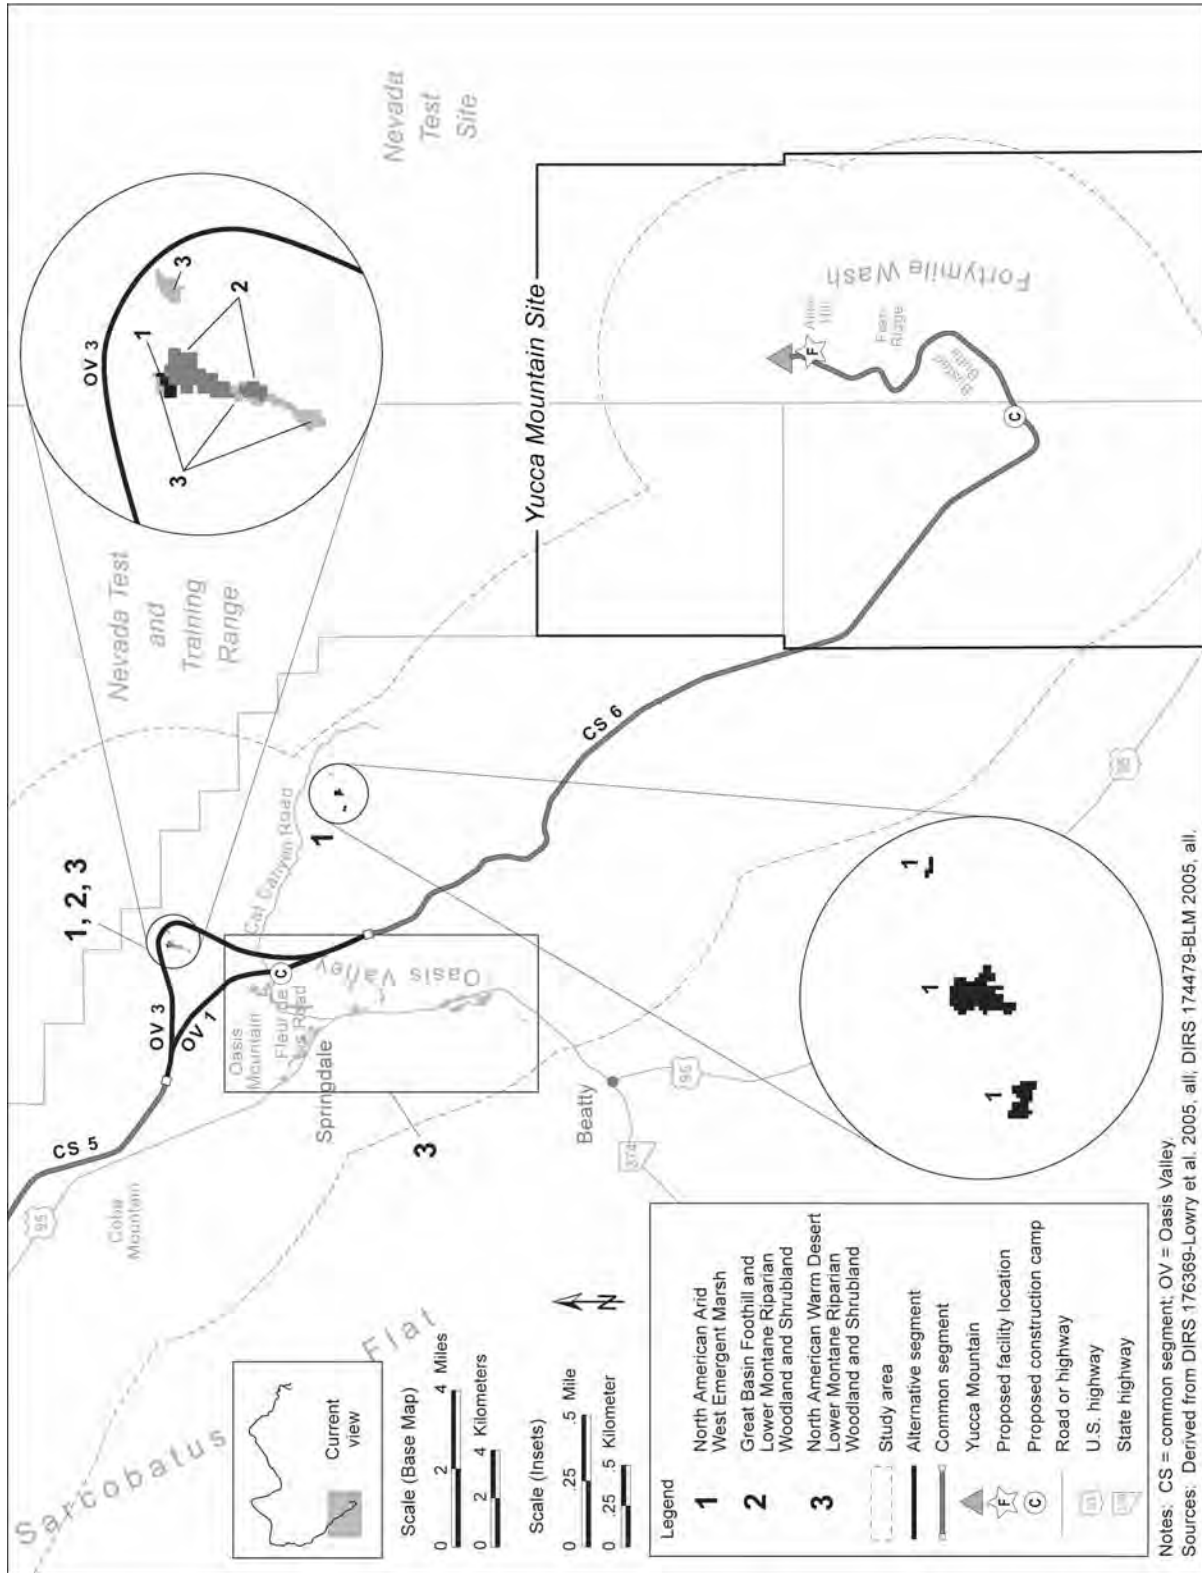


Figure 3-94. Wetland/riparian habitat within the study area near the Oasis Valley alternative segments.

These investigations incorporated literature and database searches and consultations with land and resource management agencies and authorities, including the BLM, the U.S. Fish and Wildlife Service, the Nevada Natural Heritage Program, and the Nevada Department of Wildlife. DOE also obtained information regarding Nevada game species from these agencies. Concurrent with other field surveys, the Department gathered information on field observations to identify the presence of wildlife within the construction right-of-way.

Wildlife abundance and diversity is related to habitat or land-cover types and quality. DOE mapped the wildlife and species synonymous with the habitat or land-cover types to the construction right-of-way. Appendix H contains a map detailing field survey locations.

3.2.7.2.3 Special Status Species

Special status species are plants, fish, and wildlife species that are afforded some level of protection or special management under federal or state laws or regulations. DOE contacted the U.S. Fish and Wildlife Service to obtain a list of species protected under the federal Endangered Species Act that are known to exist or could exist within the construction right-of-way or within the study area (DIRS 174439-Williams 2005, all). The Department assessed the potential for federally listed species to occur within the construction right-of-way by reviewing agency listings of known, or potentially occurring, listed species, and through a review of potential habitat for those species along the Caliente rail alignment. The Department also obtained location records for special status species from a statewide database managed by the Nevada Natural Heritage Program that contains records of incidental observations of rare or protected plants, fish, and wildlife species (DIRS 182061 2005, all). The special status species DOE selected for further consideration are one or a combination of the following:

- Special status species documented as occurring within the study area
- Special status species identified as potentially occurring in the study area by personnel affiliated with appropriate resource management agencies, including the BLM (DIRS 172900 BLM 2003, all), the U.S. Fish and Wildlife Service, the Nevada Department of Wildlife, or the Nevada Division of Forestry
- Special status species identified as potentially occurring in the study area because field personnel identified potentially suitable habitat during the field surveys

DOE used a Geographic Information System database to map the documented occurrences of special status plants and wildlife species within the study area in relation to the Southwest Regional Gap Analysis Project types. The Department then used these maps to identify and match areas of potential habitat and the presence of the documented special status species within those habitats. Through field surveys, the Department further evaluated areas that appeared to contain viable habitat for a special status species. Appendix H provides details on the survey methodology for special status species.

3.2.7.2.4 State of Nevada Game Species

Table 3-47 lists the game species identified in the Nevada Administrative Code Sections 503.020, 503.045, 503.060 that potentially occur in the study area. Game species identified in these sections of the Nevada Administrative Code that are absent from the study area are listed in Appendix H, Table H-5, and are not considered further in this Rail Alignment EIS. The greater sage-grouse (*Centerocercus urophasianus*) and pygmy rabbit (*Sylvilagus idahoensis*) are game species that are also BLM-listed sensitive and State of Nevada protected. The bighorn sheep is a BLM-listed sensitive species managed by the Nevada Department of Wildlife as a big game mammal.

Table 3-47. Nevada game species present or potentially present in the biological resources study area – Caliente rail alignment.^a

Common name	Scientific name	Occurrence within the study area
<i>Game mammals</i>		
Pronghorn antelope	<i>Antilocapra americana</i>	Present
Mule deer	<i>Odocoileus hemionus</i>	Present
Mountain lion	<i>Felis concolor</i>	Present
Cottontail rabbit	<i>Sylvilagus</i> spp.	Present
Pygmy rabbit	<i>Sylvilagus idahoensis</i>	Present
Black-tailed jackrabbit	<i>Lepus californicus</i>	Present
Bighorn sheep	<i>Ovis canadensis</i>	Present
Elk	<i>Cervus elaphus</i>	Present
<i>Upland and migratory game birds</i>		
Greater sage-grouse	<i>Centrocercus urophasianus</i>	Potentially present
Chukar	<i>Alectoris chukar</i>	Present
Ring-necked pheasant	<i>Phasianus colchicus</i>	Present
Gambel's quail	<i>Callipepla gambelii</i>	Present
Wild turkey	<i>Meleagris gallopavo</i>	Present
American crow	<i>Corvus brachyrhynchos</i>	Present
Ducks, geese, and swans	Family <i>Anatidae</i>	Present only in wetland/marsh areas
Wild doves and pigeons	Family <i>Columbidae</i>	Present
Cranes	Family <i>Gruidae</i>	Present only in wetland/marsh areas
Rails, coots, and gallinules	Family <i>Rallidae</i>	Present only in wetland/marsh areas
Woodcocks and snipes	Family <i>Scolopacidae</i>	Present only in wetland/marsh areas

a. Source: Nevada Administrative Code Sections 503.020, 503.045, and 503.060.

DOE conducted surveys along the Caliente rail alignment to further characterize the presence or absence of game species. Observations included identification of tracks and fecal pellets, and direct observation of animals within the rail alignment study area. Results do not imply population level or habitat quality, only the presence or absence of game species and their approximate level of use.

3.2.7.2.5 Wild Horses and Burros

The BLM has delineated herd management areas within the wild horse herd areas. Each herd management area has an appropriate management level determined by the BLM through a rangeland assessment and a public review process. The appropriate management level is the number of wild horses and burros that the herd management area is managed for, and it is established to avoid the ecological degradation of the herd management area. DOE reviewed the Tonopah Resource Management Plan (DIRS 173224-BLM 1997, all), the Draft Ely District Resource Management Plan (DIRS 174518-BLM 2005, all), and herd management plans for the Ely and Battle Mountain BLM Districts to obtain current information on herd management areas. The Department contacted the BLM to obtain Geographic Information System data on management areas and to obtain data regarding the use of the herd management areas by wild horses and burros.

Concurrent with other field investigations, DOE performed observations for wild horses and burros, or signs of their presence. Section 3.2.2, Land Use and Ownership, describes the grazing allotment planning process.

3.2.7.3 Affected Environment along Alternative Segments and Common Segments

This section describes biological resources in the Caliente rail alignment construction right-of-way and study area. To avoid unnecessary repetition, this section discusses biological resources by resource type (vegetation, wildlife, special status species, migratory birds, State of Nevada game species, and wild horses and burros) rather than by alternative segment or common segment.

3.2.7.3.1 Vegetation

There are 25 different land-cover types within the construction right-of-way and multiple options for the proposed Caliente railroad construction and operations support facilities. Tables 3-48 through 3-50 list land-cover types along the rail alignment and the areas of proposed operations support facilities. The percentages disclosed are the percent of land-cover types that could be affected and these percentages relate to the total acreages in the Pioche, the Mojave, and the Nellis mapping zones (see Table 3-46). The land-cover types listed and the percentages that could be affected are based on the nominal width of the rail line construction right-of-way for the alternative segments and common segments and the footprint of each proposed operations support facility. Table 3-51 lists the land-cover types present in the areas of the potential quarry sites.

3.2.7.3.1.1 Noxious Weeds and Invasive Species. Cheatgrass is found along most of the Caliente rail alignment where it fills open space between shrubs. Red brome is also common, although it is generally confined to areas along the rail alignment that would cross the Mojave Desert region. These observations were made during the 2005 field surveys.

The BLM and the Nevada Department of Agriculture maintain databases identifying the locations of documented occurrences of noxious weeds and invasive species (DIRS 174479-BLM 2003, all). The databases identify the following noxious weeds and invasive species in the Meadow Valley Wash near the Caliente alternative segment:

- Dalmatian toadflax (*Linaria dalmatica*)
- Hoary cress (*Cardaria draba*)
- Spotted knapweed (*Centaurea maculosa*)
- Tall whitetop (*Lepidium latifolium*)
- Russian knapweed (*Acroptilon repens*)

These databases also identify tall whitetop along the Eccles alternative segment and Caliente common segment 1, and Scotch thistle (*Onopordum acanthium*) along the Eccles alternative segment.

3.2.7.3.1.2 Wetlands and Riparian Habitat. Before conducting field surveys, DOE reviewed pertinent maps, the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all), and available state wetland and land-use inventories to identify the locations of possible wetland and riparian habitat within the rail line construction right-of-way and the study area.

Table 3-48. Land-cover types and percentages within the construction right-of-way by common segment.^a

Land-cover type	Area covered by common segment ^{b,c} (percent)					
	CS1	CS2	CS3	CS4	CS5	CS6
Barren Lands, Non-specific	0	0.04	0	0	0	0
Great Basin Pinyon-Juniper Woodland	<0.01	0.11	0	0	0.1	0
Great Basin Xeric Mixed Sagebrush Shrubland	13.25	0.60	0.75	0	0	0
Inter-Mountain Basins Big Sagebrush Shrubland	45.95	20.59	20.46	0.64	0.05	0
Inter-Mountain Basins Greasewood Flat	0.19	0.08	0.46	0.35	0	0
Inter-Mountain Basins Mixed Salt Desert Scrub	33.59	77.37	71.35	95.36	0	0
Inter-Mountain Basins Playa	0.28	0	0.33	0	0	0
Inter-Mountain Basins Semi-Desert Grassland	0.24	0.07	1.57	0	0	0
Inter-Mountain Basins Semi-Desert Shrub Steppe	4.3	1.14	5.05	3.65	7.55	13.59
Invasive Annual and Biennial Forbland	0	0	0.03	0	0	0
Mojave Mid-Elevation Mixed Desert Scrub	2.17	0	0	0	12.46	23.92
North American Warm Desert Bedrock Cliff and Outcrop	0	0	0	0	0	0.39
North American Warm Desert Playa	0	0	0	0	<0.01	0.13
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	<0.01	0	0	0	26.47	61.38
Sonora-Mojave Mixed Salt Desert Scrub	<0.01	0	0	0	53.37	0.59
Totals^d	100	100	100	100	100	100

a. Source: DIRS 174324-NatureServe 2004, all.

b. CS = common segment.

c. < = less than.

d. Totals might differ from sums of values due to rounding.

Table 3-49. Land-cover types and percentages within the construction right-of-way by alternative segment^a (page 1 of 2).

Land-cover type	Area covered by alternative segment (percent)															
	Interface with Union Pacific Mainline alternative segments		Garden Valley			South Reveille			Goldfield			Bonnie Claire		Oasis Valley		
	Caliente	Eccles	GV1	GV2	GV3	GV8	SR2	SR3	GF1	GF3	GF4	BC2	BC3	OV1	OV3	
Agriculture	1.84	1.21	0	0	0	0	0	0	0	0	0	0	0	0	0	
Barren Lands, Non-specific	0	0.38	0	0	0	0	0	0	0	0	0.03	0	0	0	0	
Developed, Medium-High Intensity	0	0	0	0	0	0	0	0	0	0	0.06	0	0	0	0	
Developed, Open Space - Low Intensity	0.85	0	0	0	0	0	0	0	0	0	0.21	0	0	0	0	
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	5.55	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Great Basin Pinyon-Juniper Woodland	15.57	1.14	0	0	0	0	0	0	0	0	0	0	0	0	0	
Great Basin Xeric Mixed Sagebrush Shrubland	16.4	35.04	0.08	0.01	0.04	0.33	2.88	1.25	0.99	6.33	1.35	0.11	0	0	0	
Inter-Mountain Basins Big Sagebrush Shrubland	22.99	35.56	29.5	20	60	19.1	18.44	17.4	10.3	15.44	9.57	5.04	0.8	0	0	
Inter-Mountain Basins Cliff and Canyon	0	0	0.02	0.06	0.02	0	0	0	0	0	0	0	0	0	0	
Inter-Mountain Basins Greasewood Flat	10.43	6.02	0.04	0.02	0.09	0.02	0	0	1.49	1.37	1.33	0	0	0	0	
Inter-Mountain Basins Mixed Salt Desert Scrub	6.01	19.82	70.19	79.9	40.8	80.45	68.92	71.49	83.9	69.91	85.63	33.59	30.27	0	0	
Inter-Mountain Basins Montane Sagebrush Steppe	6.53	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Table 3-49. Land-cover types and percentages within the construction right-of-way by alternative segment^a (page 2 of 2).

Land-cover type	Area covered by alternative segment (percent)																	
	Interface with Union Pacific Mainline alternative segments		Garden Valley				South Reveille				Goldfield				Bonnie Claire		Oasis Valley	
	Caliente	Eccles	GV1	GV2	GV3	GV8	SR2	SR3	GF1	GF3	GF4	BC2	BC3	OV1	OV3			
Inter-Mountain Basins Playa	0	0	0	0	0	0	0	0	0	0	0	0	0.51	0	0			
Inter-Mountain Basins Semi-Desert Grassland	0	0.16	0	0	0	0	0	0	0	0	0	0	0	0	0			
Inter-Mountain Basins Semi-Desert Shrub Steppe	0.13	0.67	0.17	0	0.13	0.1	9.56	9.86	3.12	6.95	1.81	10.66	16.53	4.88	3.13			
Inter-Mountain Basins Wash	2.87	0.01	0	0	0	0	0	0	0	0	0	0	0	0	0			
Invasive Annual Grassland	0	0	0	0	0	0	0	0	0.1	0	0	0	0	0	0			
Mojave Mid-Elevation Mixed Desert Scrub	0	0	0	0	0	0	0	0	0.09	0	0	31.44	23.43	3.61	0.45			
North American Arid West Emergent Marsh	10.82	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.43			
North American Warm Desert Playa	0	0	0	0	0	0	0	0	0	0	0	0	0	5.33	1.07			
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	0	0	0	0	0	0	0	0	0	0	0	13.88	27.01	77.56	72.68			
Sonora-Mojave Mixed Salt Desert Scrub	0	0	0	0	0	0	0	0	0	0	0	5.29	1.84	8.63	22.24			
Totals^b	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100			

a. Source: DIRS 174324-NatureServe 2004.

b. Totals might differ from sums of values due to rounding.

Table 3-50. Land-cover types and percentages within facility footprints by facility^a (page 1 of 2).

Land-cover type	Area covered by facility ^b (percent)									
	Interchange Yard			Staging Yard			Maintenance-of-Way		Maintenance-of-Way Headquarters	Rail Equipment Maintenance Yard
	Caliente	Eccles	Caliente-Upland	Caliente-Indian Cove	Eccles-North	Trackside Facility	Headquarters			
Developed, Open Space - Low Intensity	0.27	0	0	0	0	0	0	0	0	0
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	1.6	5.17	0	26.74	0	0	0	0	0	0
Great Basin Pinyon-Juniper Woodland	12	8.8	0.28	6.69	1.67	0	0	0	0	0
Great Basin Xeric Mixed Sagebrush Shrubland	29.87	19.37	1.82	29.61	8.24	0	0	7.27	0	0
Inter-Mountain Basins Big Sagebrush Shrubland	6.13	54.68	3.11	4.57	9.21	0	0	0	0	0
Inter-Mountain Basins Greasewood Flat	0	0	64.1	0	41.85	0	0	0	0	0
Inter-Mountain Basins Mixed Salt Desert Scrub	38.67	10.59	4.63	0	38.82	93.16	92.73	0	0	0
Inter-Mountain Basins Montane Sagebrush Steppe	0	1.39	0	0.06	0	0	0	0	0	0

Table 3-50. Land-cover types and percentages within facility footprints by facility^a (page 2 of 2).

Land-cover type	Area covered by facility ^b (percent)									
	Interchange Yard			Staging Yard			Maintenance-of-Way			Rail Equipment Maintenance Yard
	Caliente	Eccles	Caliente-Upland	Caliente-Indian Cove	Eccles-North	Maintenance-of-Way Trackside Facility	Maintenance-of-Way Headquarters			
Inter-Mountain Basins Playa	0	0	1.28	0	0	0	0	0	0	0
Inter-Mountain Basins Semi-Desert Grassland	0	0	0	6.69	0	0.5	0	0	0	0
Inter-Mountain Basins Semi-Desert Shrub Steppe	0	0	0	0	0	6.34	0	0	0	15.04
Inter-Mountain Basins Wash	0	0	20.99	15.62	0	0	0	0	0	0
Mojave Mid-Elevation Mixed Desert Scrub	0	0	0	0	0	0	0	0	0	8.04
North American Arid West Emergent Marsh	11.47	< 0.01	3.83	10.02	0.19	0	0	0	0	0
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	0	0	0	0	0	0	0	0	0	74.94
Sonora-Mojave Mixed Salt Desert Scrub	0	0	0	0	0	0	0	0	0	1.98
Totals^b	100	100	100	100	100	100	100	100	100	100

a. Source: DIRS 174324-NatureServe 2004.

b. < = less than.

c. Totals might differ from sums of values due to rounding.

Table 3-51. Types and percentages of land cover within the footprints of potential quarry sites^a
(page 1 of 2).

Land-cover type	Area covered (percent)
<i>Quarry CA-8B</i>	
Great Basin Foothill and Lower Montane Riparian Woodland & Shrubland	1.27
Barren Lands, Non-Specific	0.76
Great Basin Pinyon-Juniper Woodland	1.42
Great Basin Xeric Mixed Sagebrush Shrubland	67.35
Inter-Mountain Basins Mixed Salt Desert Scrub	0.09
Inter-Mountain Basins Montane Sagebrush Steppe	0.21
Inter-Mountain Basins Semi-Desert Shrub Steppe	2.12
Inter-Mountain Basins Big Sagebrush Shrubland	21.86
North American Arid West Emergent Marsh	4.91
Total^b	100
<i>Quarry NN-9A</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	8.07
Inter-Mountain Basins Big Sagebrush Shrubland	27.96
Inter-Mountain Basins Mixed Salt Desert Scrub	50.95
Inter-Mountain Basins Semi-Desert Shrub Steppe	13.02
Total	100
<i>Quarry NN-9B</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	22.62
Inter-Mountain Basins Big Sagebrush Shrubland	13.11
Inter-Mountain Basins Mixed Salt Desert Scrub	59.73
Inter-Mountain Basins Semi-Desert Shrub Steppe	4.54
Total	100
<i>Quarry NS-3A</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	14.35
Inter-Mountain Basins Big Sagebrush Shrubland	13.02
Inter-Mountain Basins Mixed Salt Desert Scrub	47.00
Inter-Mountain Basins Semi-Desert Shrub Steppe	25.66
Total	100
<i>Quarry ES-7</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	32.46
Inter-Mountain Basins Big Sagebrush Shrubland	47.50
Inter-Mountain Basins Mixed Salt Desert Scrub	18.86
Inter-Mountain Basins Semi-Desert Shrub Steppe	1.17
Total	100

Table 3-51. Types and percentages of land cover within the footprints of potential quarry sites^a (page 2 of 2).

Land-cover type	Area covered (percent)
<i>Quarry NS-3B</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	2.61
Inter-Mountain Basins Big Sagebrush Shrubland	26.68
Inter-Mountain Basins Mixed Salt Desert Scrub	60.81
Inter-Mountain Basins Semi-Desert Shrub Steppe	9.9
Total	100

a. Source: DIRS 174324-NatureServe 2004, all.
 b. Total might differ from sum of values due to rounding.

DOE identified wetland and riparian habitat along the following portions of the Caliente rail alignment using a combination of fieldwork and the 2004 Southwest Regional Gap Analysis Project (see Figures 3-91 through 3-94):

- Caliente alternative segment
- Eccles alternative segment
- Caliente common segment 1
- Goldfield alternative segments
- Bonnie Claire alternative segments
- Oasis Valley alternative segment

This section discusses only portions of the Caliente rail alignment in which there are wetland and/or riparian habitats. Section 3.2.5, Surface-Water Resources, provides information on springs and their locations and specific information for function and value of wetlands for Section 404 permitting. This section discusses wetlands and riparian areas in relation to the vegetation and habitat that is supplied for terrestrial and aquatic species. Table 3-52 details the identified wetland and riparian types found in the construction right-of-way and the study area, along alternative segments and common segments of the Caliente rail alignment.

Plant species that are considered indicators of wetland conditions that were found along the Caliente alternative segment include bulrushes, sedges, Fremont cottonwood, willows (including sandbar willow), broadleaf cattail (*Typha latifolia*), Baltic rush (*Juncus balticus*), common reed (*Phragmites australis*), tamarisk, and Russian olive (*Eleagnus angustifolia*) (DIRS 174040-PBS&J 2005, p. 17).

The wetlands along the Eccles alternative segment at the Meadow Valley Wash were classified as emergent, emergent/rock bottom, and scrub-shrub/rock bottom wetlands (DIRS 174040-PBS&J 2005, p. 16).

In the North Pahroc Range pass (between White River Valley to the west and Dry Lake Valley to the east), Caliente common segment 1 would pass near an approximately 0.01-square kilometer (3-acre) wetland. This wetland is adjacent to a single, developed unnamed spring, approximately 440 meters (1,450 feet) outside the rail line construction right-of-way near Black Rock Spring (DIRS 174040-PBS&J 2005, p. 18 and Figure 5). The unnamed spring was likely developed to provide a stock watering area. The wetland area is classified as emergent/rock bottom/unconsolidated bottom and emergent wetlands. The Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all) lists the riparian habitat in this area as Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland.

Table 3-52. Wetland and riparian land-cover types within the Caliente rail alignment construction right-of-way and study area.^a

Segment/land-cover type	Amount in construction right-of-way (square kilometers) ^b	Amount in study area (square kilometers)
<i>Caliente alternative segment</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0.07	4.5
North American Arid West Emergent Marsh	0.14	9.76
<i>Eccles alternative segment</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	2.04
North American Arid West Emergent Marsh	0.05	9.61
<i>Caliente common segment 1</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.57
North American Arid West Emergent Marsh	0	7.59
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0.01
<i>Goldfield alternative segment 4</i>		
North American Arid West Emergent Marsh	0	0.01
<i>Bonnie Claire alternative segment 2</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.03
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0.03
<i>Bonnie Claire alternative segment 3</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.02
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0.07
<i>Oasis Valley alternative segment 1</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.08
North American Arid West Emergent Marsh	0	0.13
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	2.02
<i>Oasis Valley alternative segment 3</i>		
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0.02	2.02
North American Arid West Emergent Marsh	0	0.23
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.08

a. Source: DIRS 174324-NatureServe 2004.

b. To convert square kilometers to acres, multiply by 247.10.

Oasis Valley alternative segment 3 contains a small (approximately 0.02 square kilometer [5 acres]) wetland area that would be within the construction right-of-way. This wetland area contains willow and inland saltgrass (*Distichlis spicata*) (DIRS 174040-PBS&J 2005, Figure 4T).

See Section 3.2.5, Surface-Water Resources, for more specific information on wetlands.

3.2.7.3.2 Wildlife

This section describes the wildlife and wildlife communities potentially present in the Caliente rail alignment construction right-of-way. Figure 3-95 details the manmade wildlife water sources, also called *wildlife guzzlers*, within the study area. There are three wildlife guzzlers within the study area: Scofield #3, and two guzzlers, both named Garden Valley (Figure 3-95 Scofield #3 is approximately 7.6 kilometers (4.7 miles) north of Garden Valley alternative segment 3. The first Garden Valley guzzler is approximately 1.8 kilometers (1.1 miles) south of Garden Valley alternative segment 8. The second Garden Valley guzzler is approximately 2 kilometers (1.2 miles) south of Garden Valley alternative segment 8. Section 3.2.5, Surface-Water Resources, provides information about and locations of other sources of water available to wildlife.

A **wildlife guzzler** is a water development for wildlife that relies on rainfall or snowmelt to recharge it, rather than springs or streams. Usually used where there are no other sources of water for wildlife.

The following sections describe the most common species of mammals, birds, reptiles, amphibians, and fish potentially found within the Caliente rail alignment greater study area and potentially within the construction right-of-way. Section 3.2.7.3.3 provides information on federally listed threatened and endangered species, and federally and state-listed sensitive or protected species. Section 3.2.7.3.4 discusses migratory birds, Section 3.2.7.3.5 discusses Nevada game species, and Section 3.2.7.3.6 discusses wild horses and burros.

3.2.7.3.2.1 Mammals. Mammals are known to exist within the study area along the entire length of the Caliente rail alignment. The types of mammals found within the study area would depend on the vegetation communities. Mammals that could occur within the greater study area and the construction right-of-way of the Caliente rail alignment include:

- Mountain lion (*Felis concolor*)
- Bighorn sheep (*Ovis Canadensis*)
- Kit fox (*Vulpes macrotis*)
- Coyote (*Canis latrans*)
- Bobcat (*Lynx rufus*)
- Badger (*Taxidea taxus*)
- Cottontail rabbit (*Sylvilagus* spp.)
- Various rodents
- Elk (*Cervus elaphus*)
- Pronghorn antelope (*Antilocapra americana*)
- Grey fox (*Urocyon cinereoargenteus*)
- Mule deer (*Odocoileus hemionus*)
- Black-tailed jackrabbit (*Lepus californicus*)
- Ringtail (*Bassariscus astutus*)
- Various bats
- Various ground squirrel species

Mule deer, elk, pronghorn antelope, and bighorn sheep are Nevada game species and are discussed in Section 3.2.7.3.5.

Twenty-three species of bats have been observed in Nevada (DIRS 174474-NDOW 2002, p. 7-8). Bats, including resident, migrant, and transient species, are found throughout Nevada and in every type of habitat. Bats occupy a variety of habitats within the construction right-of-way, including mine shafts, caves, talus slopes with cracks and crevices, cliff faces, man-made structures, and pinyon-juniper and Joshua tree (*Yucca brevifolia*) forests. Bats often use different day and night roosting habitats, different nursery and non-breeding habitats, and different winter and summer habitats. Appendix H includes a list of bat species potentially found within the project area. Many of the bats along the rail alignment are special status species and are discussed further in Section 3.2.7.3.3.

3.2.7.3.2.2 Birds. A variety of bird species are commonly observed in central and southern Nevada, including year-round residents, summer residents, migratory species breeding in southern Nevada, winter residents that breed to the north, and seasonal migrants passing through central and southern Nevada en route to breeding ranges to the north and winter ranges to the south. Several federal laws and state statutes protect various groups of birds. Chapter 6 of this Rail Alignment EIS details these protections.

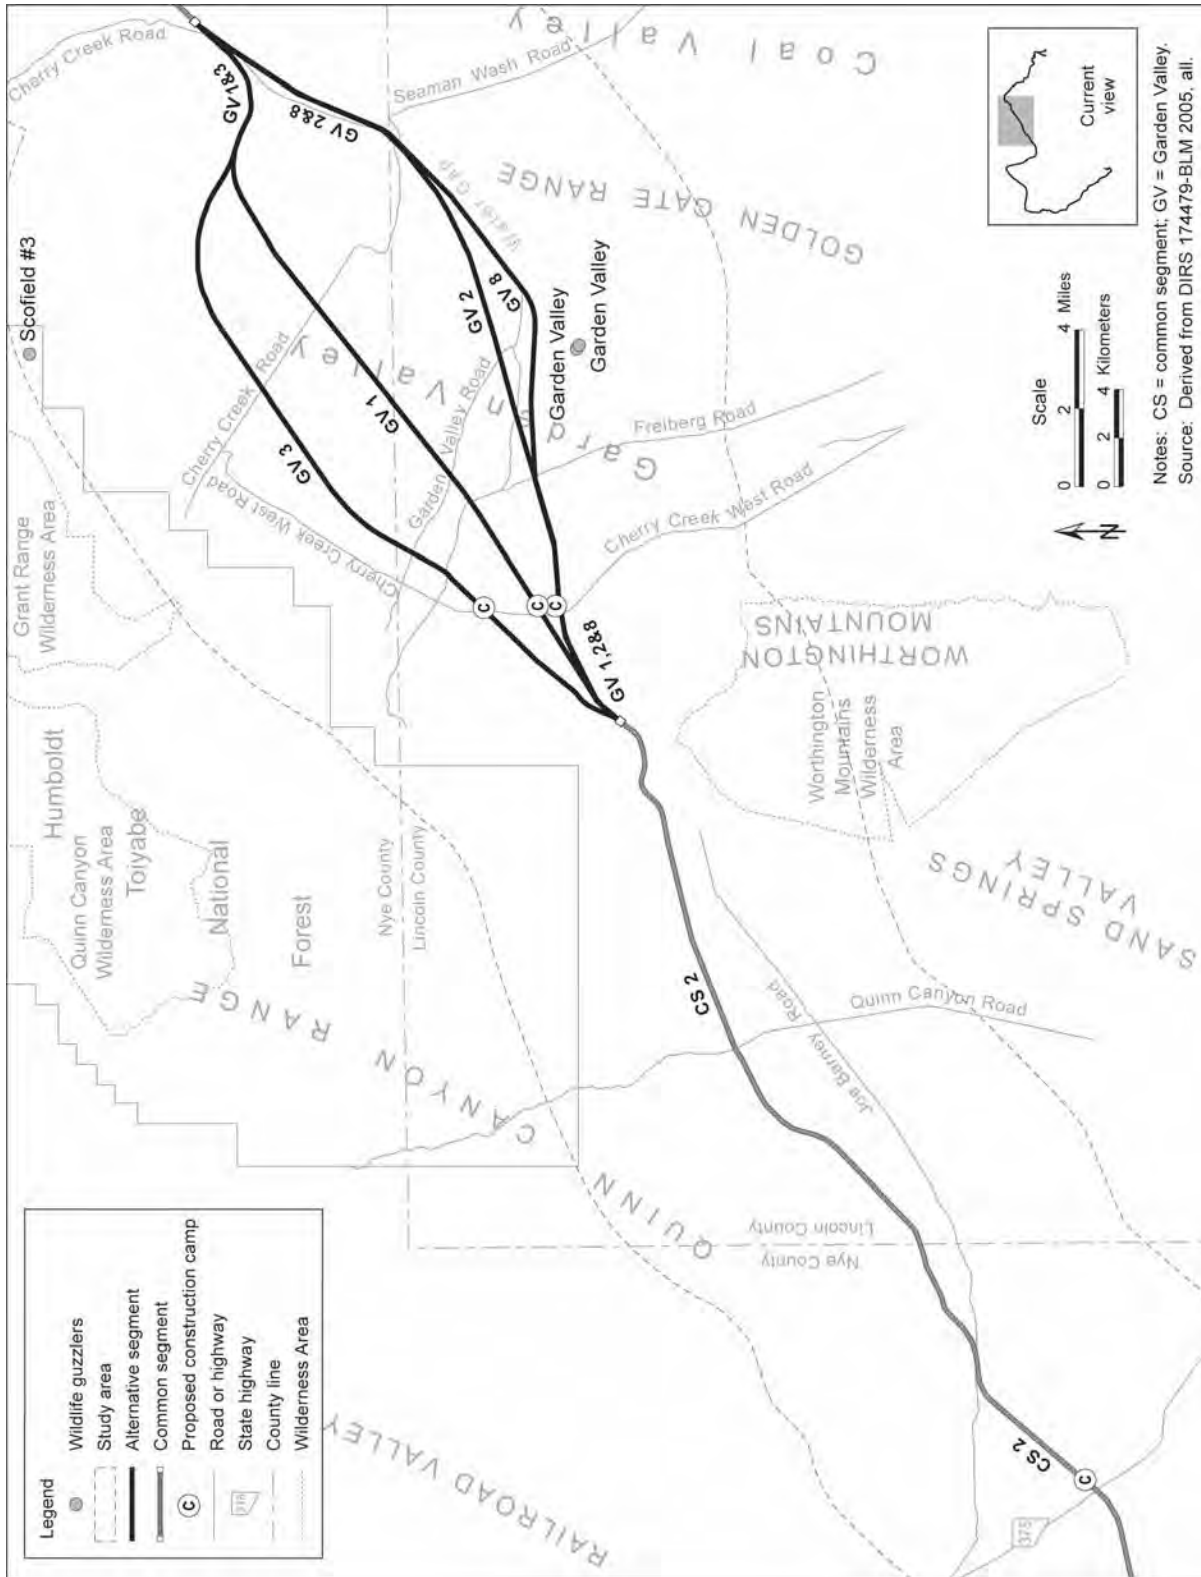


Figure 3-95. Wildlife guzzlers located along the Caliente rail alignment.

The Great Basin region of Nevada is an important migration route for waterfowl and other species of birds traveling between southern wintering areas and northern breeding territories; however, suitable habitat for waterfowl and shorebirds is extremely limited in the region and along the Caliente rail alignment. Portions of Meadow Valley Wash are considered to be waterfowl habitat (DIRS 101504-BLM 1979, pp. 2-35 and 2-36) and migrating birds might temporarily utilize any exposed surface-water areas. Waterfowl and shorebirds were observed during the 2005 field surveys in a few locations where there was standing surface water that supported aquatic vegetation.

Common species of resident and migrating birds observed along the Caliente rail alignment include:

- Common raven (*Corvus corax*)
- Horned lark (*Eremophila alpestris*)
- American pipit (*Anthus rubescens*)
- European starling (*Sturnus vulgaris*)
- American crow (*Corvus brachyrhynchos*)
- MacGillivray's warbler (*Oporonis tolmiei*)
- Loggerhead shrike (*Lanius ludovicianus*)
- Yellow warbler (*Dendroica petechia*)

Two upland game bird species are expected to occur within the Caliente rail alignment construction right-of-way: chukar (*Alectoris chukar*) and Gambel's quail (*Callipepla gambelii*). Two species of upland game birds, chukar and mourning dove, were observed during surveys conducted along the rail alignment. Chukars were recorded in cliff and talus habitat in the Beatty Wash area. Mourning doves are common and were observed at multiple locations along the rail alignment. The greater sage-grouse is an upland game bird that has historically occurred in low abundance near portions of the rail alignment and it could occupy suitable habitat along the northern sections of the rail alignment. The greater sage-grouse is a BLM-listed special status species and receives additional protection from the State of Nevada; it is discussed in more detail in Section 3.2.7.3.3.

Populations of raptors are typically low in numbers, and their occurrence in the rail line construction right-of-way would be very low due to the lack of roosting, nesting, and foraging potential along the alignment. Raptors observed during field surveys included prairie falcon (*Falco mexicanus*), red-tailed hawk (*Buteo jamaicensis*), rough-legged hawk (*Buteo lagopus*), northern harrier (*Circus cyaneus*), burrowing owl (*Athene cunicularia*), great-horned owl (*Bubo virginianus*), turkey vulture (*Cathartes aura*), and golden eagle (*Aquila chrysaetos*). In addition, ferruginous hawks (*Buteo regalis*) have been reported to occupy, and in some cases nest in, areas with trees close to the construction right-of-way (DIRS 174519-Bennet 2005, Plate 5).

Populations of bird species that rely on sagebrush habitat in Nevada are declining because cattle grazing and the proliferation of nonnative weeds have degraded the native sagebrush habitat (DIRS 174518-BLM 2005, pp. 222-223). Sagebrush-dependent species that might occupy habitat along the proposed rail alignment could include sage thrasher (*Oreoscoptes montanus*), sage sparrow (*Amphispiza belli*), Brewer's sparrow (*Spizella breweri*), and vesper sparrow (*Pooecetes gramineus*). The Caliente rail alignment would cross sagebrush habitat in Bennett Pass, Pahroc Pass, and the western and northern portions of Garden Valley, portions of western Sand Spring Valley, southeastern Railroad Valley, and Warm Springs Pass.

3.2.7.3.2.3 Reptiles. A variety of species of lizards and snakes are present throughout the southern Great Basin Desert and northern Mojave Desert and along the Caliente rail alignment. Appendix H, Table H-6, lists the reptiles that have the potential to occur along the Caliente alignment. The desert tortoise (*Gopherus agassizii*) is found within the proposed rail line construction right-of-way at its southern end, from the Beatty Wash area to Yucca Mountain.

This special status species is discussed in Section 3.2.7.3.3.1. The most common lizard species observed during the 2005 field surveys were:

- Western fence lizard (*Sceloporus occidentalis*)
- Western whiptail lizard (*Cnemidophorus tigris*)
- Long-nosed leopard lizard (*Gambelia wislizenii*)
- Side-blotched lizard (*Uta stansburiana*)
- Sagebrush lizard (*Sceloporus graciosus*)
- Desert horned lizard (*Phrynosoma platyrhinos*)

Other lizard species that were observed, but did not appear to be common, were:

- Zebra-tailed lizard (*Callisaurus draconoides*)
- Desert spiny lizard (*Sceloporus magister*)
- Desert iguana (*Dipsosaurus dorsalis*)

Great Basin collared lizards (*Crotaphytus bicinctores*) and desert night lizards (*Xantusia vigilis*) were not observed during field surveys, but probably occur in the study area and potentially in the construction right-of-way. Chuckwalla (*Sauromalus ater*) commonly occurs in land-cover types similar to those in the southern portion of common segment 6, although none were observed during field surveys. This species is found in rocky outcrops and is rarely seen above ground.

Two species of snakes were observed during field surveys performed in February, March, and May 2005: the coachwhip snake (*Masticophis flagellum*) and the gopher snake (*Pituophis catenifer*). Various other species of snakes are likely to occur in the study area and potentially in the construction right-of-way, but were not directly observed during field surveys.

3.2.7.3.2.4 Aquatic Species. Aquatic species are species that require wet environments for at least part of their life cycle. The only native fish species found within the Caliente rail alignment greater study area are special status species and include:

- Railroad Valley springfish (*Crenichthys nevadae*)
- Oasis Valley speckled dace (*Rhinichthys osculus* ssp. 6 [unnamed])
- Meadow Valley Wash speckled dace (*Rhinichthys osculus* ssp. 11 [unnamed])
- Meadow Valley Wash desert sucker (*Catostomus clarki* ssp. [unnamed])

Nine more species of amphibians can be found in the southern Great Basin Desert and northern Mojave Desert that are not present in the Caliente rail alignment study area or construction right-of-way and are listed in Appendix H. Potential amphibian habitat correlates with the riparian and wetland habitat found along the rail alignment. The only amphibian observed during field surveys was a possible Woodhouse's toad (*Bufo woodhousii*) at an unnamed spring approximately 760 meters (2,500 feet) downgradient of Caliente common segment 1 on Pahroc Pass, which would be outside of the construction right-of-way. A tadpole in the spring outflow and a brief vocalization are the only recorded evidence; there were no direct observations of adult individuals. The Amargosa toad (*Bufo nelsoni*) occurs only in Oasis Valley north of Beatty. The southwestern toad (*Bufo microscaphus*) has been reported to occur (DIRS 174048-Bennett and Thebeau 2005, all), and is assumed still to exist, at the confluence of Clover Creek and Meadow Valley Wash, although none were observed during field surveys. Nonnative bullfrogs (*Rana catesbeiana*) are also present in some waterways and water bodies in the Caliente rail alignment greater study area.

3.2.7.3.3 Special Status Species

Special status species are plants or wildlife species that are afforded some level of protection or special management under federal or state laws or regulations. The following sections describe two categories of

special status species, including threatened or endangered species and BLM special status (designated sensitive) and State of Nevada protected species. Table 3-53 lists special status species, their BLM, state, and federal status, and their likely occurrence in the greater study area and potentially within the construction right-of-way. Figures 3-96 through 3-98 show documented locations of special status species in the study area from the Nevada Natural Heritage Program database. Not all special status species listed in Table 3-53 appear on the figures because DOE obtained the additional information in the table from personnel affiliated with appropriate resource management agencies, including the BLM, the U.S. Fish and Wildlife Service, the Nevada Department of Wildlife, or the Nevada Division of Forestry, and obtained the specific locations of the special status species from a review of the Natural Heritage Program database (DIRS 182061-NNHP 2005, all). The review of the Nevada Natural Heritage Program database for the study area revealed 24 special status species that have been documented as occurring within the study area.

3.2.7.3.3.1 Threatened and Endangered Species. Table 3-53 identifies six federally listed plant and wildlife species, or candidates for listing, with the potential to occur along the Caliente rail alignment, including one plant, one fish, one reptile, and three bird species. However, in 2007 the U.S. Fish and Wildlife Service delisted the bald eagle and the golden eagle. These two species are protected under the Bald and Golden Eagle Protection Act, but are no longer federally listed (See Section 3.2.7.3.3.2). There are no federally listed mammal species along the Caliente rail alignment.

Plants The threatened Ute ladies'-tresses orchid has the potential to occur in the area of the Caliente alternative segment. However, the alternative segment is within the southernmost extent of potential Ute ladies'-tresses habitat. A petition to delist the Ute ladies'-tresses was filed with the U.S. Fish and Wildlife Service in 2004. In its 90-day finding on this petition, the U.S. Fish and Wildlife Service stated that the petition presented substantial new information on the orchid, and that the Service was initiating a 5-year status review to determine if delisting of this species is warranted (50 CFR 17). Until this review is completed and the Service issues the 12-month finding, the Ute ladies'-tresses orchid will continue to be addressed as a *threatened species*.

An historic observation of the Ute ladies'-tresses orchid was documented in 1936 approximately 8 kilometers (5 miles) north of the Caliente and Eccles alternative segments near Panaca Spring (Meadow Valley Wash watershed). Until recently, this species was believed to no longer exist in Nevada (*Endangered and Threatened Wildlife and Plants; Final Rule to List the Plant *Spiranthes Diluvialis* (Ute Ladies'-Tresses) as a Threatened Species* [57 FR 2048, January 17, 1992]). However, in July 2005, the population at Panaca Spring was rediscovered and included 80 to 100 individual plants (DIRS 176365-Fertig et al. 2005, p. 12). The Ute ladies'-tresses orchid is associated with moist soil conditions, which in the southwest can include perennial streams or washes, floodplains or spring-fed stream channels, or wetlands. There is no designated critical habitat for this species within the study area (DIRS 174439-Williams 2005). However, there is a potential for the Ute ladies'-tresses orchid to occur within Meadow Valley Wash between Panaca and Caliente, along the proposed Caliente alternative segment (DIRS 181606-Rautenstrauch 2007, all).

Fish The endangered Railroad Valley springfish was reportedly introduced into Warm Springs near the Warm Springs summit, north of U.S. Highway 6. The Nevada Natural Heritage Program documented the occurrence approximately 3.3 kilometers (2 miles) northeast of Caliente common segment 3 (see Figure 3-93). A survey of the springs in 1994 indicated that the springfish was no longer present in this area, and the Draft Ely District Resource Management Plan indicates that the introduction failed (DIRS 174518-BLM 2005, p. 3.7-5). This fish is typically found in warm spring pools, outflow streams, and adjacent marshes.

Table 3-53. Special status species potentially within the Caliente rail alignment greater study area^a (page 1 of 4).

Common name	Species name	Status			Portion of the Caliente rail alignment study area where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Plants</i>					
Eastwood milkweed	<i>Asclepias eastwoodiana</i>	N		xC2	Goldfield alternative segments 1, 3, and 4; Caliente common segment 4
Needle Mountains milkvetch	<i>Astragalus eurylobus</i>	N		xC2	Caliente and Eccles alternative segments; Caliente common segment 1
Black woollypod	<i>Astragalus funereus</i>	N		xC2	Common segment 6; Oasis Valley alternative segments 1 and 3
Long-calyx eggvetch	<i>Astragalus oophorus</i> <i>var. lonchocalyx</i>	N			Caliente common segment 1
White River catseye	<i>Cryptantha welshii</i>	N		xC2	Caliente and Eccles alternative segments; Caliente common segment 1; Garden Valley alternative segments 1, 2, 3, and 8
Rock purpusia	<i>Ivesia arizonica</i> <i>var. saxosa</i>	N			Common segment 6
Pioche blazingstar	<i>Mentzelia argillicola</i>	N			Caliente and Eccles alternative segments; Caliente common segment 1
Tiehm blazingstar	<i>Mentzelia tiehmii</i>	N			Caliente common segment 1
Nevada dune beardtongue	<i>Penstemon arenarius</i>	N		xC2	Caliente common segment 3; common segment 5
Bashful beardtongue	<i>Penstemon pudicus</i>	N			Caliente common segment 3; South Reveille alternative segments 2 and 3
Williams combleaf	<i>Ployctenium williamsiae</i>		CE		Caliente common segment 3
Tonopah fishhook cactus	<i>Sclerocactus nyensis</i>	N	CY		Caliente common segment 3
Schlesser pincusion	<i>Sclerocactus schlesseri</i>	N	CY	xC2	Caliente common segment 1
Ute ladies'-tresses	<i>Spiranthes diluvialis</i>		CE	LT	Caliente alternative segment
Wassuk beardtongue	<i>Penstemon rubicundus</i>				Goldfield alternative segments 1, 3, and 4; Oasis Valley alternative segments 1 and 3; common segments 5 and 6
Dune sunflower	<i>Helianthus deserticola</i>				Goldfield alternative segments 1, 3, and 4; common segments 5 and 6; Oasis Valley alternative segments 1 and 3

Table 3-53. Special status species potentially within the Caliente rail alignment greater study area^a (page 2 of 4).

Common name	Species name	Status			Portion of the Caliente rail alignment study area where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Invertebrates</i>					
Oasis Valley pyrg	<i>Pyrgulopsis micrococcus</i>	N		xC2	Common segments 5 and 6; Oasis Valley alternative segments 1 and 3
<i>Fish</i>					
Meadow Valley Wash desert sucker	<i>Catostomus clarki</i>	N	S	xC2	Caliente and Eccles alternative segments
Railroad Valley springfish	<i>Crenichthys nevadae</i>		T	LT	Caliente common segment 3
Meadow Valley speckled dace	<i>Rhinichthys osculus</i> ssp. 11 ^e	N	P		Caliente and Eccles alternative segments
Oasis Valley speckled dace	<i>Rhinichthys osculus</i> ssp. 6 ^e	N	P		Common segments 5 and 6; Oasis Valley alternative segments 1 and 3
<i>Amphibians and reptiles</i>					
Southwestern toad	<i>Bufo microscaphus</i>	N			Caliente and Eccles alternative segments; common segment 6
Amargosa toad	<i>Bufo nelsoni</i>	N	P		Common segments 5 and 6; Oasis Valley alternative segments 1 and 3
Desert tortoise (Mojave Desert pop.)	<i>Gopherus agassizii</i>	N	T	LT	Common segment 6
Chuckwalla	<i>Sauromalus ater</i>	N		xC2	Common segment 6
<i>Birds</i>					
Western burrowing owl	<i>Athenes cunicularia</i>	N		xC2	All
Greater sage-grouse	<i>Centrocercus urophasianus</i>	N	G		Caliente common segments 1, 2, and 3; Garden Valley alternative segments 1, 2, 3, and 8
Western yellow-billed cuckoo	<i>Coccyzus americanus</i>		S	C	Caliente alternative segment
Southwestern willow flycatcher	<i>Empidonax traillii extimus</i>		E	LE	Caliente alternative segment; Oasis Valley alternative segments 1 and 3
Ferruginous hawk	<i>Buteo regalis</i>	N		xC2	Caliente and Eccles alternative segments; Caliente common segments 1, 2, and 5
Swainson's hawk	<i>Buteo swainsoni</i>	N		--	Oasis Valley; common segment 6

Table 3-53. Special status species potentially within the Caliente rail alignment greater study area^a (page 3 of 4).

Common name	Species name	Status			Portion of the Caliente rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Birds (continued)</i>					
Peregrine falcon	<i>Falco peregrinus</i>	N	E	NL	Caliente alternative segment; Oasis Valley; common segment 6
Bald eagle	<i>Haliaeetus leucocephalus</i>		E	NL	Caliente alternative segment
Loggerhead shrike	<i>Lanius ludovicianus</i>	N	S	xC2	All
Sage thrasher	<i>Oreoscotes montanus</i>	N	S		Caliente common segments 1, 2, and 3; Garden Valley alternative segments 1, 2, 3, and 8; South Reveille alternative segments 2 and 3; Oasis Valley
Phainopepla	<i>Phainopepla nitens</i>	N		--	Oasis Valley; common segment 6
Brewer's sparrow	<i>Spizella breweri</i>	N	S		Caliente common segments 1, 2, and 3; Garden Valley alternative segments 1, 2, 3, and 8; South Reveille alternative segments 2 and 3; Oasis Valley; common segment 6
Western least bittern	<i>Ixobrychus exilis hesperis</i>	N	P	xC2	Common segment 5
White-faced ibis	<i>Plegasis chihi</i>	N	P	xC2	Oasis Valley; common segment 6
<i>Mammals</i>					
Pygmy rabbit	<i>Brachylagus idahoensis</i>	N	G	xC2	Caliente common segment 1; Garden Valley alternative segments 1, 2, 3, and 8
Pale kangaroo mouse	<i>Microdipodops pallidus</i>		P		Caliente common segments 1, 2, and 3; Garden Valley alternative segments 1, 2, 3, and 8; South Reveille alternative segments 2 and 3; Goldfield alternative segments 1, 3, and 4
Dark kangaroo mouse	<i>Microdipodops megacephalus albiventer</i>	N	P	xC2	Caliente common segments 1, 2, and 3; Garden Valley alternative segments 1, 2, 3, and 8; South Reveille alternative segments 2 and 3; Goldfield alternative segments 1, 3, and 4

Table 3-53. Special status species potentially within the Caliente rail alignment greater study area^a (page 4 of 4).

Common name	Species name	Status			Portion of the Caliente rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Mammals (continued)</i>					
Desert bighorn sheep	<i>Ovis canadensis</i>	N	G		Caliente common segment 1; Bonnie Claire alternative segment 2; common segment 5; common segment 6
Pallid bat	<i>Antrozous pallidus</i>		P		All segments
Townsend's big-eared bat	<i>Corynorhinus townsendii</i>	N	S		Goldfield alternative segment 4; Oasis Valley alternative segments 1 and 3; common segment 6
Big brown bat	<i>Eptesicus fuscus</i>	N			All segments
Greater western mastiff bat	<i>Eumops perotis</i>	N	S	xC2	All segments
Spotted bat	<i>Euderma maculatum</i>		T	xC2	Caliente and Eccles alternative segments; Caliente common segment 1; Goldfield alternative segment 4
Allen's lappet-browed bat	<i>Idionycteris phyllotis</i>	N	P	xC2	All segments
Western red bat	<i>Lasiurus blossomii</i>	N	S		All segments
Hoary bat	<i>Lasiurus cinereus</i>	N			All segments
Silver-haired bat	<i>Lasionycteris noctivagans</i>	N			All segments
California leaf-nosed bat	<i>Macrotus californicus</i>	N	S	xC2	All segments
California myotis	<i>Myotis californicus</i>	N			All segments
Small-footed myotis	<i>Myotis ciliolabrum</i>	N		xC2	All segments
Long-eared myotis	<i>Myotis evotis</i>	N			All segments
Little brown myotis	<i>Myotis lucifugus</i>	N			All segments
Fringed myotis	<i>Myotis thysanodes</i>	N	P	xC2	Common segment 6
Cave myotis	<i>Myotis velifer</i>	N		xC2	All segments
Long-legged myotis	<i>Myotis volans</i>	N			All segments
Yuma myotis	<i>Myotis yumanensis</i>	N			All segments
Western pipistrelle	<i>Pipistrellus hesperus</i>	N			All segments
Brazilian free-tailed bat	<i>Tadarida brasilliansis</i>	N	P		All segments

a. Source: DIRS 182061-NNHP 2005, all.

b. BLM = U.S. Bureau of Land Management. Status definitions: N = designated sensitive by the BLM state office.

c. State = State of Nevada Protected Species (under NAC 503). Status definitions: G = game; P = protected; T = threatened; E = endangered; S = sensitive; CE = critically endangered plant; CY = state-protected cactus and yucca.

d. FWS = U.S. Fish and Wildlife Service. Status definitions: LE = listed endangered; LT = listed threatened; C = candidate; xC2= former Category 2 Candidate, now "species of concern;" NL = not listed (removed from list).

e. Numbers refer to unnamed subspecies.

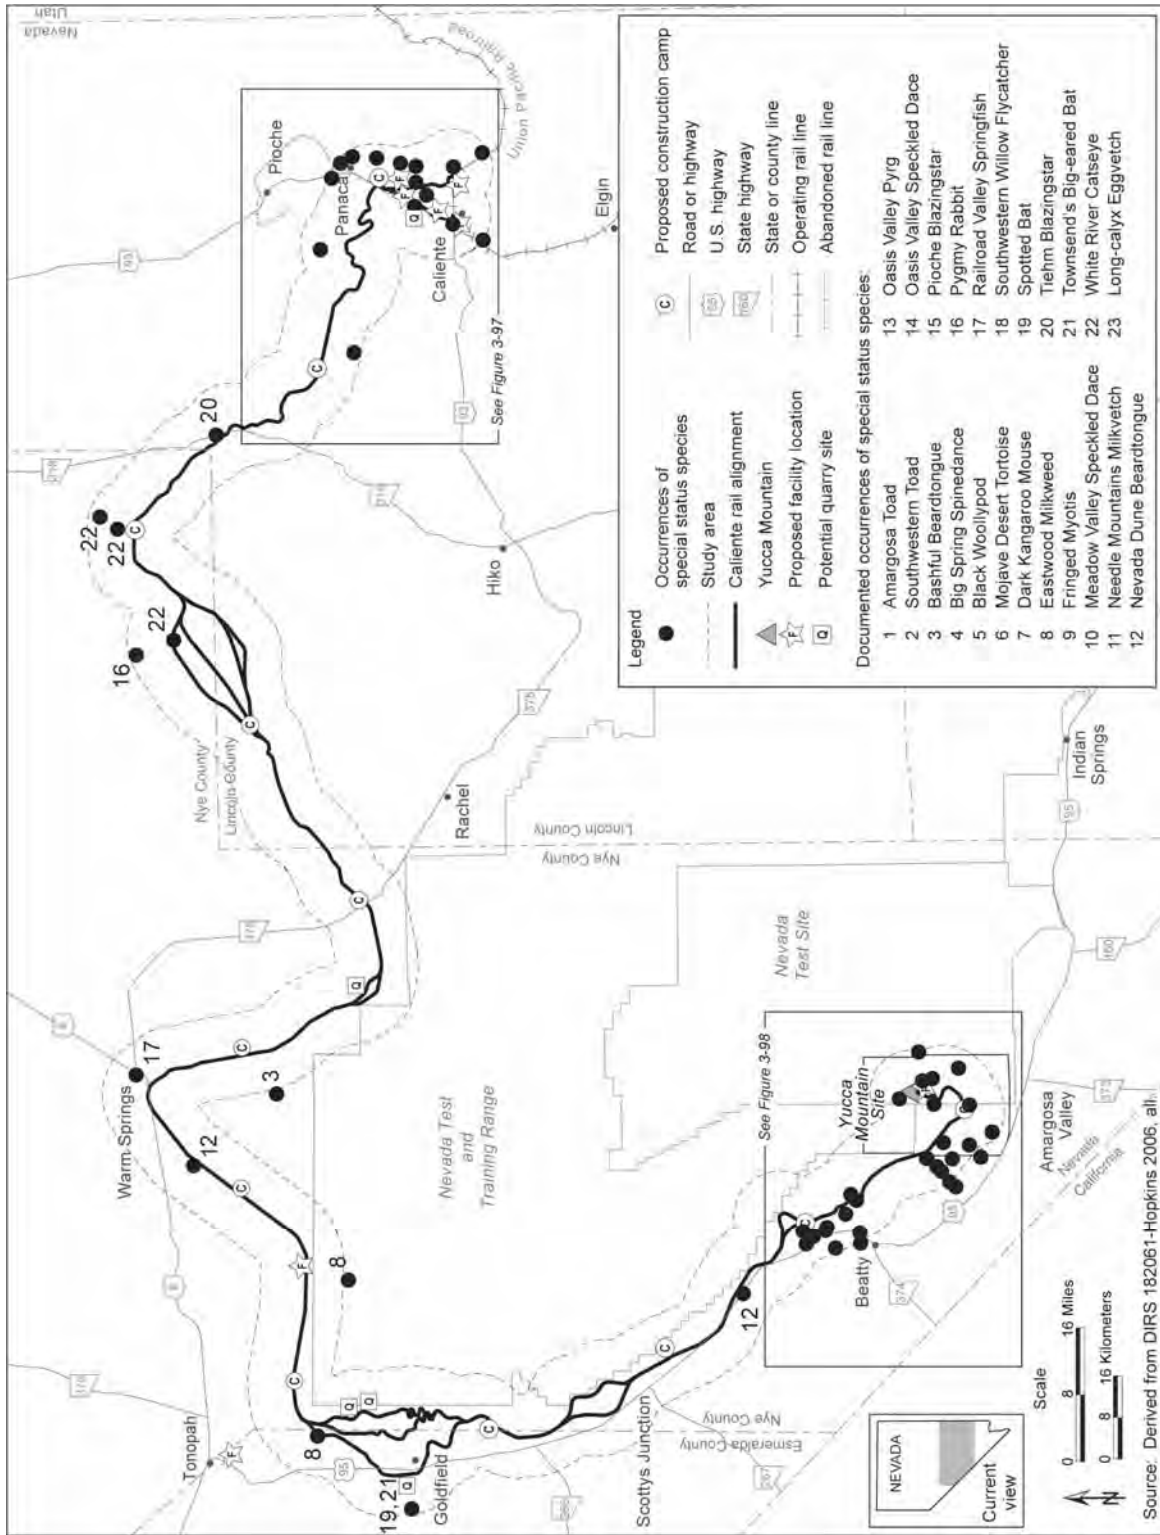


Figure 3-96. Occurrences of special status species documented in the Nevada Natural Heritage Program database along the Caliente rail alignment.

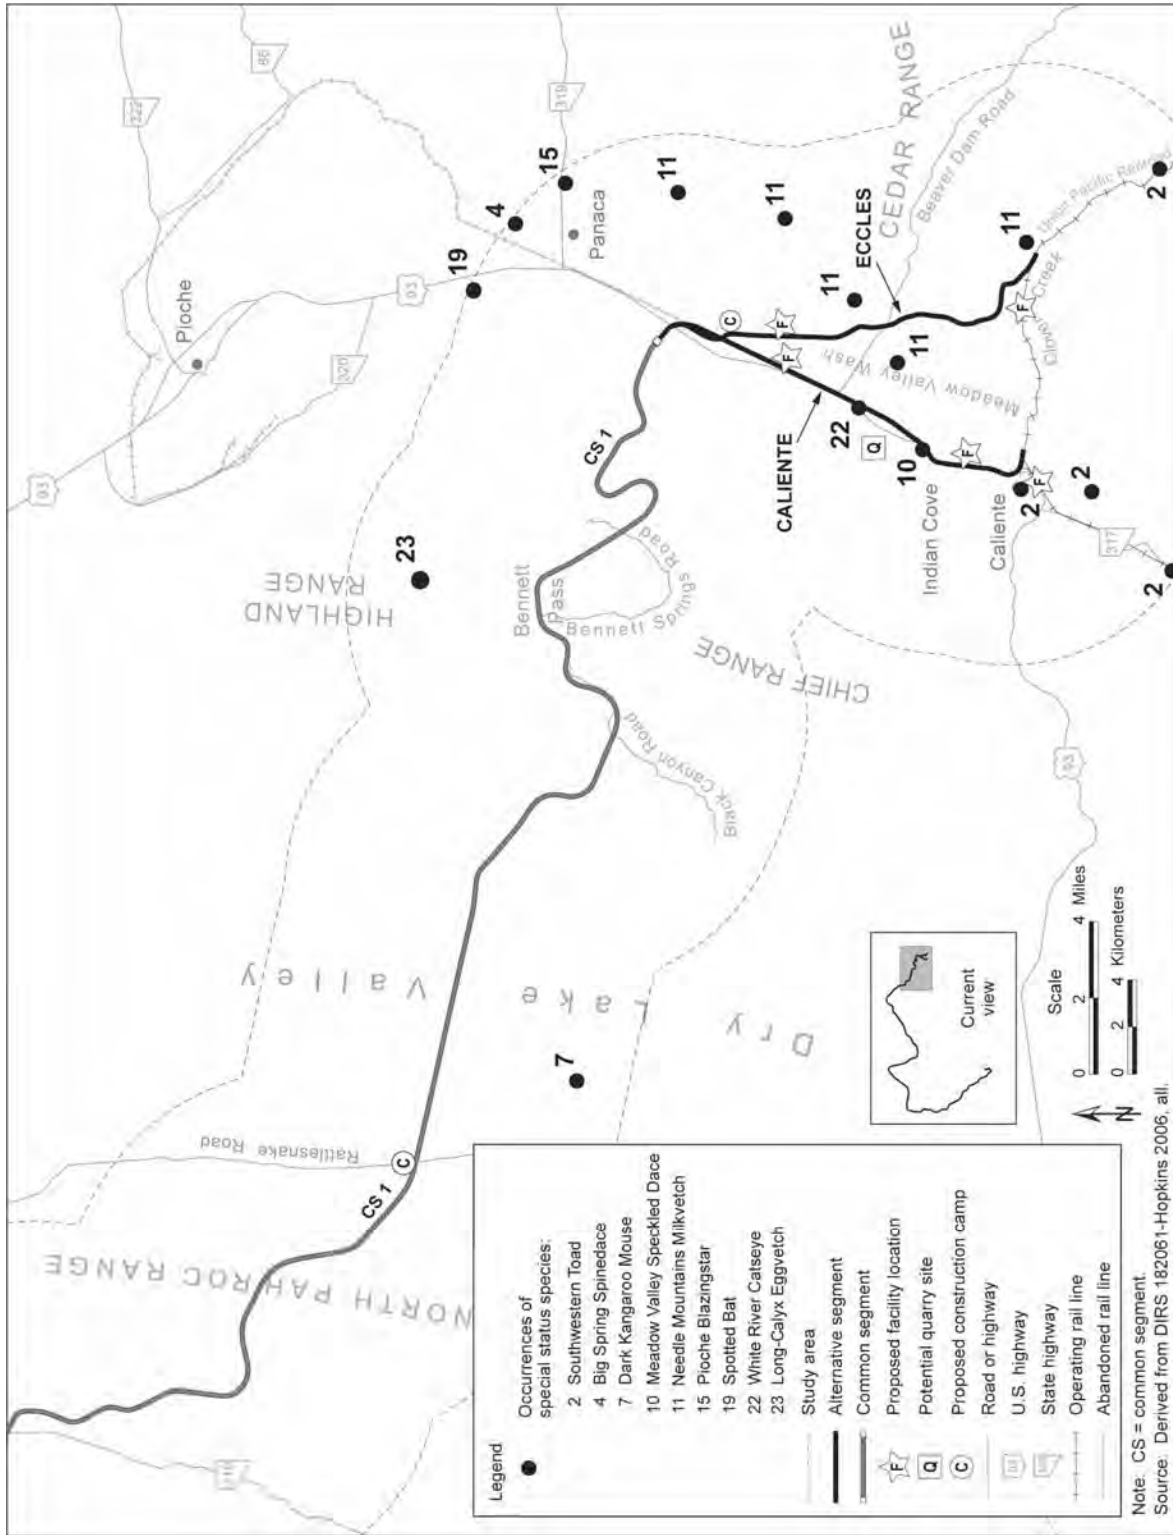


Figure 3-97. Occurrences of special status species documented in the Nevada Natural Heritage Program database adjacent to the Caliente and Eccles alternative segments.

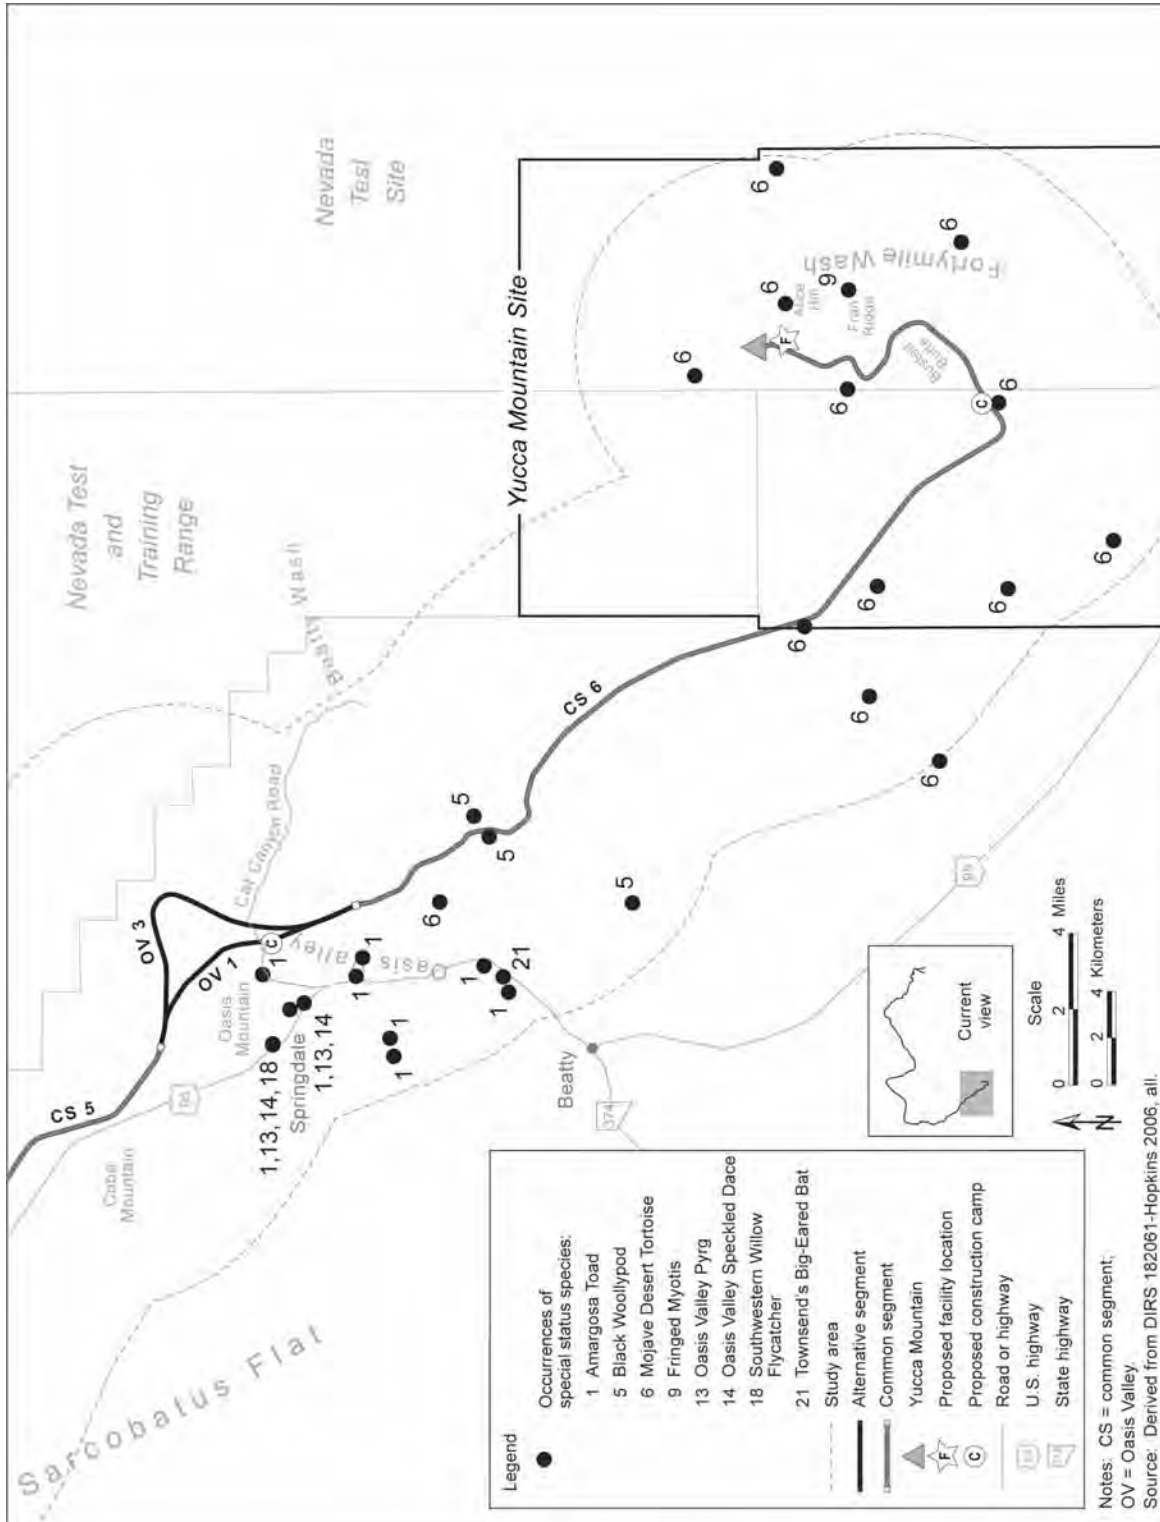


Figure 3-98. Occurrences of special status species documented in the Nevada Natural Heritage Program database adjacent to the Oasis Valley alternative segments and the Yucca Mountain Site.

Amphibians and Reptiles The desert tortoise, which is listed as threatened under the Endangered Species Act and by the State of Nevada (Mojave Desert population only), is found along the southern end of the Caliente rail alignment from approximately Beatty Wash to Yucca Mountain (DIRS 101830-Bury et al. 1994, pp. 57 to 72). The desert tortoise's range in this portion of Nevada extends approximately 16 kilometers (10 miles) north of Beatty near Springdale (DIRS 176649-FWS 2003, p. 7). About 48 kilometers (30 miles) of the rail alignment would be within potentially suitable desert tortoise habitat, including common segment 6 and the Rail Equipment Maintenance Yard (Figure 3-99). Mojave Desert tortoises are generally confined to warm, creosote bush and shadscale (*Atriplex confertifolia*) scrub habitats with well-drained sandy *loam* soils. These soils are composed of sand or sandy gravel that permit the tortoises to burrow and nest (DIRS 102475-Brussard et al. 1994, p. 15). The area through which common segment 6 would pass and the location of the Rail Equipment Maintenance Yard are not designated as critical habitat for the desert tortoise. This area is primarily considered low-density for the desert tortoise, with the population of tortoises at a low level in relation to other areas within the range of this species in Nevada.

Birds Until recently, the yellow-billed cuckoo, which is a federal *candidate species* under the Endangered Species Act, had been considered to no longer exist in Nevada; however, recent U.S. Fish and Wildlife Service survey data indicated that at least one nesting pair has been observed along the Meadow Valley Wash area in southeastern Nevada approximately 27 kilometers (17 miles) south of the City of Caliente (DIRS 173227-Micone and Tomlinson 2000; DIRS 173228-Gallagher et al. 2001, p. 10; DIRS 173229-Furtek et al. 2002, p. 13-21; DIRS 173230-Furtek et al. 2003, p. 18-23; DIRS 173231-Furtek and Tomlinson 2003, p. 16-22). Yellow-billed cuckoos nest in tall cottonwood trees and willow riparian woodlands in the West and require patches of an average of 0.17 square kilometers (42 acres) of dense riparian habitat with at least 0.03 square kilometers (7 acres) of it closed canopy (DIRS 175505-Laymon and Halterman 1987, pp. 19 to 25). There is no suitable breeding habitat for yellow-billed cuckoos within the Caliente rail alignment construction right-of-way (DIRS 182308-Rautenstrauch 2006, all). There is an area of marginally suitable migratory or non-nesting yellow-billed cuckoo habitat approximately 320 meters (1,050 feet) long on the northern border of the City of Caliente. This habitat is between U.S. Highway 95 and the Caliente rail alignment and outside the construction right-of-way. There is also a stand of riparian vegetation west of the Eccles Interchange Yard location along Clover Creek; although suitable for migratory or non-nesting yellow-billed cuckoos, this area is outside the Caliente rail alignment construction right-of-way. This area of riparian vegetation would not be disturbed during the construction of the Eccles Interchange Yard. The lack of confirmed records for this species throughout Nevada and the lack of sufficient breeding habitat within the Caliente rail alignment construction right-of-way suggest that it is highly unlikely that the yellow-billed cuckoo would occur within the project area.

The southwestern willow flycatcher, listed as endangered under the Endangered Species Act, is potentially present in Nevada from May through September and breeds in dense riparian habitat. This species' preferred habitat is typically dominated by willows, cottonwood, or invasive tamarisk. The southwestern willow flycatcher has been observed in dense stands of riparian vegetation in Meadow Valley Wash in Lincoln County. Potential habitat exists along Meadow Valley Wash; however, substantial flood events and recent construction efforts in the area have greatly reduced the amount of potential flycatcher habitat in this area. The closest recorded occurrence of this species within Meadow Valley Wash was approximately 12 kilometers (7.5 miles) from the beginning of the Caliente alternative segment, south of the City of Caliente (DIRS 182061-NNHP 2005, all). There is no suitable breeding habitat for southwestern willow flycatchers within the construction right-of-way (DIRS 182308-Rautenstrauch 2006, all). There is an area of marginally suitable migratory or non-nesting habitat for southwestern willow flycatchers approximately 320 meters (1,050 feet) long on the northern border of the City of Caliente to the confluence of Meadow Valley Wash and Antelope Canyon Wash.

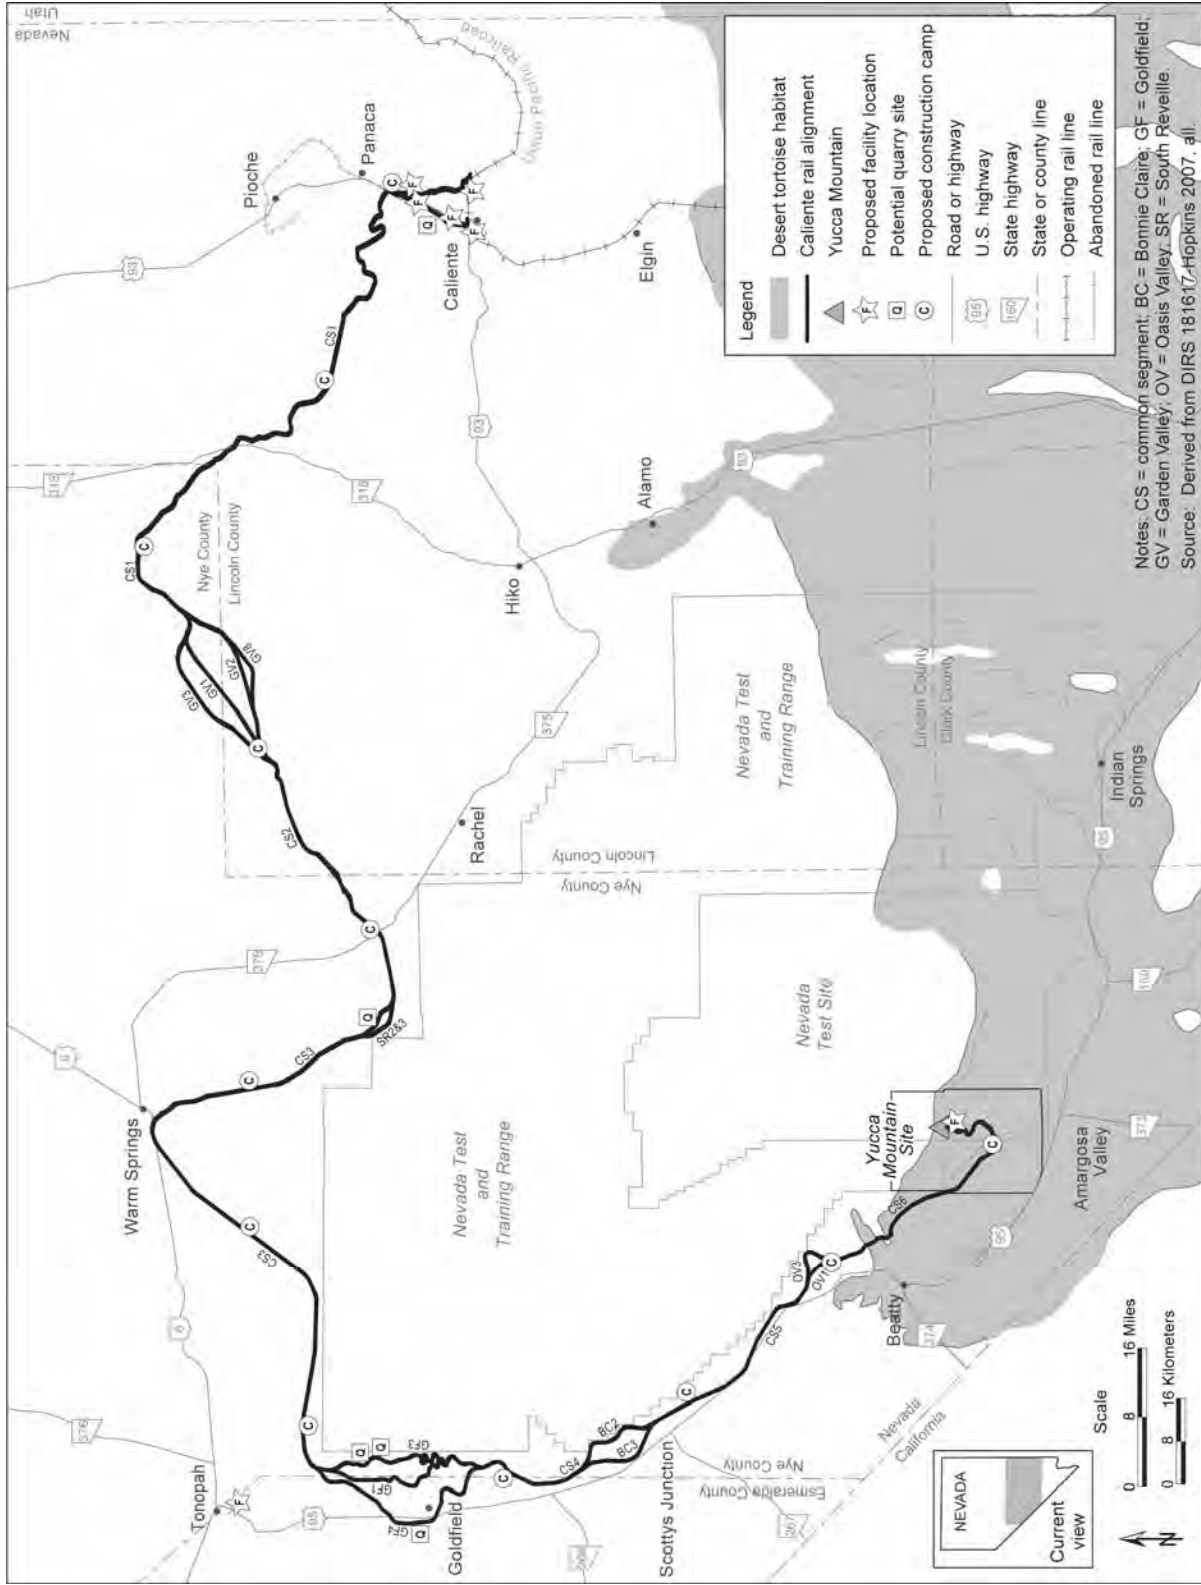


Figure 3-99. Estimated northern extent of potential desert tortoise habitat in relation to the Caliente rail alignment.

There are scattered occurrences of willows and cottonwoods within this stretch of riparian habitat and within the construction right-of-way but adjacent to the old rail roadbed where the new rail line would be constructed. There is a small amount, about 20 to 30 meters (66 to 98 feet), of riparian habitat to the north and west of the Antelope Canyon Wash bridge crossing. This area is between U.S. Highway 95 and the proposed construction right-of-way along the Caliente alternative segment. There is also a stand of riparian vegetation west of the proposed location of the Eccles Interchange Yard along Clover Creek, outside the construction right-of-way, which could be suitable for migrating and non-nesting southwestern willow flycatchers. This area of riparian vegetation would not be disturbed during construction of the Eccles Interchange Yard. Southwestern willow flycatchers have also been documented approximately 19 kilometers (12 miles) north of Beatty, near Oasis Valley (DIRS 182061-NNHP 2005, all). This recorded occurrence was approximately 4.4 kilometers (2.7 miles) southwest of Oasis Valley alternative segment 1 and well outside the Caliente rail alignment construction right-of-way.

3.2.7.3.3.2 BLM Special Status and State of Nevada Protected Species. The BLM State Office and the State of Nevada have identified a number of species as requiring conservation and protection. The BLM State Office designates species as sensitive and the State of Nevada designates species protected. Many of the species designated as sensitive by the BLM are also designated as protected by the State of Nevada. Additionally, a few BLM-designated sensitive species and State of Nevada-designated protected species are also listed as threatened, endangered, proposed, or candidate under the Endangered Species Act. Table 3-53 lists BLM-designated sensitive and State of Nevada-designated protected species and provides information on their status and known or potential locations along the Caliente rail alignment. These species are described below by plant and animal categories.

Plants DOE performed field surveys in May 2005 to confirm the presence of BLM-designated sensitive species and to identify potential habitat for such species along the Caliente rail alignment. Appendix H contains detailed survey information. In addition to location records for BLM-designated sensitive species obtained from the Nevada Natural Heritage Program (DIRS 182061-NNHP 2005, all), these species were passively observed during field surveys in other locations with habitat characteristics of the species. Because the field surveys did not cover the entire construction right-of-way, and there is both seasonality to the presence or absence of visible signs of plants and annual variability among plant species, the fact that a BLM-designated sensitive species was not documented at a specific location does not indicate a definitive absence of the species.

The Eastwood milkweed has been documented 140 meters (460 feet) west of Goldfield alternative segment 4, near Mud Lake. Surveys in May 2005 in this location documented an individual Eastwood milkweed plant within the construction right-of-way of Goldfield alternative segment 4. Typical habitat for this species consists of sandy soils in mixed desert shrub or salt desert scrub, including blackbrush (*Coleogyne ramosissima*) and sagebrush from 1,130 to 2,000 meters (3,700 to 6,500 feet) elevation (DIRS 176456-Welsh et al. 1993).

Needle Mountains milkvetch has been recorded in large populations within approximately 0.8 kilometer (0.5 mile) of the Eccles alternative segment (DIRS 182061-NNHP 2005, all). Field surveys identified this species in the gravelly, eroded sandstone badlands between the areas east of Bennett Pass to where the Caliente or Eccles alternative segment would join Caliente common segment 1, and continuing south along the Eccles alternative segment to the dirt road between U.S. Highway 93 and Beaver Dam State Park and outside the construction right-of-way. This species typically occurs in deep, sandy, gravelly, or clay soils and is frequently found in or along drainages. Although this species appears to be locally common, its distribution is patchy, and habitat outside this area is rare.

The black woollypod has been observed approximately 6 kilometers (4 miles) east of U.S. Highway 95 near Beatty Wash. Field surveys along common segment 6 in Beatty Wash confirmed the presence of this species in the study area but outside the construction right-of-way. This plant is common locally on very steep, gravelly slopes of light-colored volcanic tuff in the area where there is little competition from other species. Habitat for this species is characterized by open, talus, or gravelly slopes on alluvium soils composed of volcanic tuff around 975 to 2,340 meters (3,200 to 7,700 feet) elevation (DIRS 181872-NNHP 2001, all).

Long-calyx eggvetch has been recorded in the vicinity of the Highland Range, approximately 4.5 kilometers (2.8 miles) north of Bennett Pass, just west of Panaca within the study area but outside the construction right-of-way. There is very little information on the habitat of this species in Nevada. Typical habitat includes pinyon-juniper associations and other mixed-shrub communities (DIRS 176456-Welsh et al. 1993), which occur at elevations of 1,770 and 2,300 meters (5,800 and 7,550 feet) throughout the Great Basin.

White River catseye is known to occur in gravelly, eroded sandstone badlands between the areas east of Bennett Pass to where the Caliente or Eccles alternative segment would join Caliente common segment 1, and continuing south along the Eccles alternative segment to the dirt road between U.S. Highway 93 and Beaver Dam State Park. It has also been recorded in the Meadow Valley watershed near the Caliente alternative segment; however, the location description puts the species in a wet meadow, which is not typical habitat for the species. No White River catseye were observed in the construction right-of-way during field surveys; however, this species has been documented approximately 200 meters (660 feet) south of Garden Valley alternative segment 3.

Rock purpusia has been documented approximately 13 kilometers (8 miles) from common segment 6 within the study area but outside the construction right-of-way. No systematic surveys have been completed for this species; therefore, there is no habitat and range information. Studies at the Nevada Test Site show this species tends to occur in cliff crevices and boulders on volcanic and possibly carbonate rocks in the upper mixed-shrub, sagebrush, and pinyon-juniper zones (DIRS 180962-NatureServe Explorer 2007, all).

Pioche blazingstar is a newly described species that has been documented approximately 7.5 kilometers (4.7 miles) north of Bennett Pass, less than 1.6 kilometers (1 mile) east of Panaca. This species appears to be restricted to barren clay knolls and slopes between Panaca and the Patterson Wash area of southern Lake Valley and is known from only five reported occurrences in this area of Nevada (DIRS 181846-NatureServe 2007, all).

Tiehm blazingstar has been documented in the White River Valley, west of the White River approximately 1.6 kilometers (1 mile) from Caliente common segment 1. Field surveys conducted in May 2005 did not detect the presence of this species at the location described by the Nevada Natural Heritage Program (DIRS 182061-NNHP 2005, all). Additionally, no occurrences were documented along the Caliente rail alignment construction right-of-way in the White River Valley, although it is possible that the plant would not have matured enough to be identified. Other occurrences of this species were recorded approximately 40 kilometers (25 miles) to the north, near Sunnyside, in an area dotted with knolls of white, chalky soil, the type of habitat typically associated with this species. The area in White River Valley consists of a series of gravelly mesas separated by steep washes and lacks the white chalky soil found to the north.

A population of the Nevada dune beardtongue was documented during field surveys along the Caliente rail alignment within the Sarcobatus Flats area outside the construction right-of-way. This species is common locally in a sandy area along common segment 5 on both sides of a bisecting secondary road, but appears restricted to this area of deep, sandy soil. Typical habitat for this species consists of deep,

loose sandy soils of valley bottoms, often in alkaline areas, sometimes on road banks and other previously disturbed areas with associated vegetation including shadscale, four-winged saltbush (*Atriplex canescens*), and rabbitbrush (*Chrysothamnus nauseosus* spp.) (DIRS 180960-NatureServe Explorer 2007, all).

Bashful beardtongue, also known as the Kawich Range beardtongue, has been documented along the Caliente rail alignment where it would pass through the Kawich Range at Warm Springs Summit. This species has a narrow distribution and is known from only five sites within the Kawich Range. Typical habitat for this species includes coarse rocky slopes in pinyon-juniper or mountain mahogany woodlands and sagebrush communities around 2,300 to 2,700 meters (7,500 to 8,900 feet) elevation (DIRS 181882-NNHP 2001, all).

Williams combleaf has been found within the Kawich Range approximately 10 kilometers (6 miles) south of the study area along Caliente common segment 3 but outside the construction right-of-way. This species has a small range in Nevada and is found in relatively barren sandy to sandy-clay soils associated with high elevation non-alkaline seasonal lakes in sagebrush, pinyon-juniper zones around 1,700 to 2,700 meters (5,700 to 8,900 feet) (DIRS 181881-NNHP 2001, all).

The Tonopah fishhook cactus has been recorded near the Caliente rail alignment in Reveille Valley. Only general locations of this species are included in the Nevada Natural Heritage Program database (DIRS 182061-Hopkins 2005) because of the risk of illegal collection. Field surveys consisting of two 1.6-kilometer (1-mile) transects perpendicular to the rail alignment in Reveille Valley did not locate any Tonopah fishhook cacti within the construction right-of-way. This species is typically found in dry, rocky soils or outcrops, or under shrubs in the upper salt desert and lower sagebrush zones (DIRS 181880-NNHP 2001, all).

A population of the Schlessers' pincushion was recorded 640 meters (2,100 feet) north of the Caliente rail alignment near the city of Panaca. The habitat for this species is typified by open, gravelly or sandy-clay soils, with dense shrubs or grass canopies dominated by shadscale shrubs (DIRS 181879-NNHP 2001, all). Surveys along the rail alignment nearest the recorded occurrence, east of Bennett Pass to where the Caliente or Eccles alternative segment would join Caliente common segment 1, found no Schlessers' pincushion.

As defined in Section 3.2.7.3.3, special status species are species that are afforded some level of protection or special management under federal or state laws or regulations. As such, all cacti and yucca are considered special status because they are protected by the State of Nevada and the BLM. All cacti, yucca, and Christmas trees have special consideration under Nevada Revised Statutes Section 527.050 and are protected from unauthorized removal. Removal or possession of any cactus, yucca, or Christmas tree for commercial purposes on any state, county, or privately owned land is regulated by the State Forester Fire Warden. Removal of such species from private lands would require a permit requisition from the State Forester Fire Warden. DOE would salvage minimal amounts of cacti and yucca within the construction right-of-way in accordance with this law and the requirements of applicable land management agencies during the construction phase. Stipulations for salvage are outlined in BLM Manual 6840, *Special Status Species Management* (DIRS 172901-BLM 2001, all).

Invertebrates The Oasis Valley pyrg, a snail, is known to occur in the Amargosa River drainage in Oasis Valley. Specifically, this snail has been observed in an unnamed spring near Fleur de Lis Spring 12 kilometers (7.5 miles) north-northeast of Beatty (DIRS 104593-CRWMS M&O 1999, p. K-6) and potentially inhabits other springs in the Amargosa River drainage. This snail inhabits small springs and stream outflows where it is typically found on stone, travertine, watercress, and plant debris (DIRS 175029-NatureServe Explorer 2007, all). There is no recorded occurrence of this snail in the construction right-of-way.

Fish The Meadow Valley Wash desert sucker is also found in Meadow Valley Wash (DIRS 104593-CRWMS M&O 1999, pp. E-2 and E-4) and in the White River drainage. This subspecies is typically found in small- to moderate-sized streams, often with pools and riffles or shallow areas, with mainly gravel-rubble, sandy silt substrates (DIRS 180964-NatureServe Explorer 2007, all).

The Meadow Valley Wash speckled dace has been historically observed in Meadow Valley Wash approximately 60 meters (200 feet) northwest of the Caliente rail alignment (DIRS 182061-NNHP 2005, all; DIRS 104593-CRWMS M&O 1999, pp. 3-23, E-2, and E-4). This subspecies has a very limited range and is only known within this watershed. Specific distribution of this fish varies within Meadow Valley Wash due to water availability within the wash.

The Oasis Valley speckled dace occurs in the Amargosa River drainage and Fleur de Lis Spring near the towns of Springdale and Beatty, less than 1.6 kilometers (1 mile) from Oasis Valley alternative segment 1. This subspecies has a very limited range and is only known from the watershed in Oasis Valley. Specific distribution of this fish varies with available water (DIRS 181847- NatureServe 2007).

Amphibians and Reptiles The Amargosa toad is found in or near riparian habitats associated with the Amargosa River drainage (Oasis Valley) and at Fleur de Lis Spring, Crystal Spring, Indian Spring, and other springs and seeps near the towns of Springdale and Beatty (DIRS 174414-Stebbins 2003, pp. 209 and 210; DIRS 104593-CRWMS M&O 1999, p. 3-20). Vegetation bordering this toad's habitat includes cottonwood trees, cattails, and sedges. Adult toads hide and rest under bushes and in rodent burrows, and generally hibernate from November to March. In the late summer and fall, adult toads have been documented as traveling more than 183 meters (600 feet) from water sources. If moist soil is available, open water might not be necessary for the adult toad to survive (DIRS 176795-BLM [n.d.]).

The southwestern toad (also known as Arizona toad) has been documented in locations in Meadow Valley Wash near the City of Caliente, and also within Clover Creek (DIRS 174048-Bennett and Thebeau 2005). Specifically, this toad has been documented approximately 0.8 kilometer (0.5 mile) south of the Caliente alternative segment and approximately 4.8 kilometers (3 miles) south of the Eccles alternative segment in Clover Creek outside the construction right-of-way. This species can be found in cottonwood-willow associations, creeks, pools, irrigation ditches, flooded fields, and reservoirs. This toad normally breeds in low- to moderate-gradient streams and is not dependent on rainfall (DIRS 174414-Stebbins 2003, pp. 213 and 214; DIRS 175487-NatureServe Explorer 2007). There were no southwestern toads found within the Caliente rail alignment study area during the 2005 field surveys. However, the potential presence of this species cannot be discounted, because the survey of potentially suitable toad habitat was limited to areas that were accessible and along the construction right-of-way. Thus, the survey excluded large areas of potentially suitable habitat on private property to which DOE had no access.

Chuckwalla has been documented in the southeastern foothills of Yucca Mountain, adjacent to common segment 6 but outside the construction right-of-way. This area represents the chuckwalla's northern-most range in southern Nevada. This large lizard is typically found among talus slopes, large rocky outcrops and boulders, which provide cover and basking sites (DIRS 174414-Stebbins 2003, pp. 269 and 270).

Birds Western burrowing owls are known to occur throughout the Mojave and Great Basin Deserts (DIRS 176455-Dickinson ed. 1999, p. 256). DOE identified one burrowing owl burrow, which appeared to be active, within the Caliente rail alignment study area in the vicinity of Yucca Mountain. Typical burrowing owl habitat is characterized by well-drained, level-to-gently sloping areas in arid or semi-arid environments. This species has been known to overwinter throughout Nevada; however, they are predominantly encountered during their breeding season from mid-March through September (DIRS 176361-Klute et al. 2003, p. 1-12).

The greater sage-grouse is a BLM-designated sensitive bird species that is also listed as a game species by the State of Nevada. Greater sage-grouse are found exclusively in sagebrush habitat. Although sage-grouse are sagebrush obligate species, they require a variety of habitats within the landscape throughout the year, including various conditions and communities of sagebrush, meadow, and riparian habitats. The Caliente rail alignment would cross the extreme southern portion of the range of the greater sage-grouse. Big sagebrush and other sagebrush species provide nesting, brood, fall/winter cover, and forage throughout the year for the greater sage-grouse. Suitable winter habitat for the greater sage-grouse consists of big sagebrush stands comprised of 10 to 30 percent horizontal sagebrush cover and a diversity of sagebrush heights that are generally tall enough to emerge through any accumulated snow, and ridges or canyons where sagebrush is exposed. Nesting habitat is characterized by big sagebrush communities that have 15 to 38 percent canopy cover and 10 to 15 percent grass. Nesting habitat is usually close to leks (communal courtship and breeding sites in open areas surrounded by sagebrush cover). Nesting and early brood rearing in Nevada usually occurs during April through June in habitat with nearby sagebrush cover and an abundance of grass and forbs to provide nutrition for chicks. After about 6 weeks, hens move chicks to summer habitat for the remaining brood rearing. Summer habitat for this species is characterized by mixed sagebrush with wet meadows and riparian habitat (DIRS 173575-NDOW 2004, Appendix E, p. 2-3). The 2004 Conservation Assessment for *The Greater Sage-Grouse Management Plan for Nevada and Eastern California* shows the largest populations of sage-grouse to inhabit most of Elko county and portions of Washoe, White Pine, Humboldt, Lincoln, and Nye counties (of these, the proposed Caliente rail alignment would pass through Lincoln and Nye Counties). Documented lek sites in Nye County are concentrated in the north-central portion of the county, outside the study area. However, there is suitable winter, year-round, and nesting habitat along Caliente common segment 3 outside of the construction right-of-way. There is suitable winter habitat within the construction right-of-way of all Garden Valley alternative segments and within the northern portion of Caliente common segment 1 and a portion of the Caliente common segment 3 construction right-of-way (Figure 3-100). There are documented lek sites within the construction right-of-way of Garden Valley alternative segment 3 (DIRS 173575 NDOW 2004, p. 12). No greater sage-grouse or sage-grouse leks were observed in the construction right-of-way during the field surveys of the Caliente rail alignment in the spring of 2005. Appendix H provides additional information on the greater sage-grouse surveys.

Bald eagles almost exclusively occupy habitat associated with large bodies of water during the breeding season, but occasionally use upland areas for food and roost sites. They usually nest in tall trees and feed opportunistically on fish, waterfowl and seabirds, various mammals, and carrion. In the winter, bald eagles preferentially roost in large, shelter-providing trees (DIRS 180967-NatureServe Explorer [n.d.], all). There is no nesting habitat for the bald eagle within the Caliente rail alignment study area. The marsh habitat in Indian Cove and Meadow Valley Wash provides potential foraging habitat for migrating eagles. However, the waterbodies are small and not used by enough fish and waterfowl to support wintering eagles. Any use of the study area by bald eagles would be transitory.

Ferruginous hawks have been reported to occupy and, in some cases, nest in areas adjacent to the Caliente rail alignment (DIRS 174519-Bennett 2005). The ferruginous hawk is a relatively rare breeding species in the study area. This species prefers to nest in trees; however, in Nevada tall trees are scarce, so the species is often found in pinyon-juniper associations or occasionally on shrubs or rocks on the ground. No ferruginous hawks or nests were observed during the 2005 field surveys, although they have been previously reported in the area.

Peregrine falcons are found in a wide variety of habitats during the breeding season, from tundra, moorlands, steppe, and seacoasts to mountains, open-forested regions, and human population centers. They typically nest on rocky cliffs.

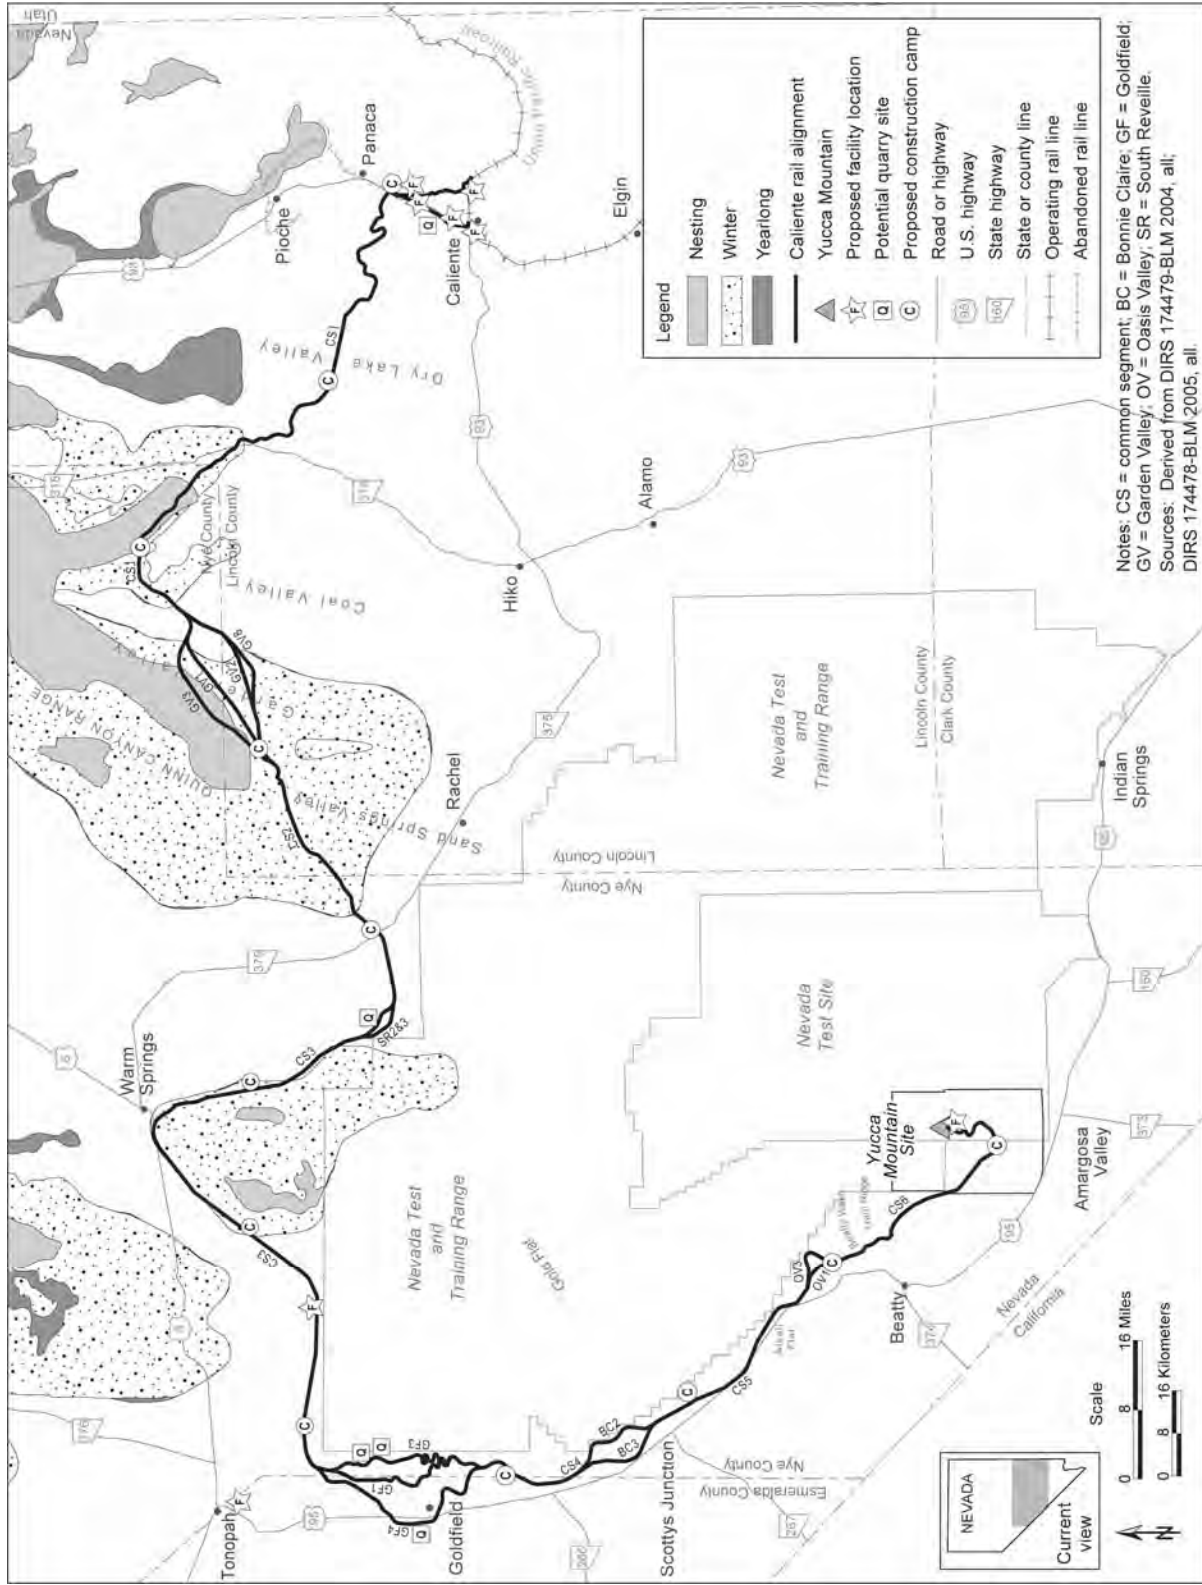


Figure 3-100. Potential greater sage-grouse habitat along the Caliente rail alignment.

Outside the breeding season, the falcons occur in areas where prey (primarily birds) concentrate, including farmlands, marshes, lakeshores, river mouths, tidal flats, dunes and beaches, broad river valleys, cities, and airports (DIRS 180966-NatureServe Explorer 2007, all). There is potential nesting habitat for peregrine falcons on cliffs within the Clover Creek area and near the City of Caliente.

Loggerhead shrikes have been documented along the Caliente rail alignment where suitable habitat is present. Habitat used by this species during the breeding season includes open country with scattered trees and shrubs, savanna, desert scrub (southwestern United States) and, occasionally, open woodlands (DIRS 180963-NatureServe Explorer 2007, all). They typically nest in thick brush, shrubs, or small trees in open areas. Potentially suitable habitat for loggerhead shrikes occurs along all segments of the Caliente alignment.

Sage thrashers are known to occur in sagebrush habitat within the Caliente rail alignment construction right-of-way. During field surveys in May 2005, an individual was sighted near Pahroc Pass within the common segment 1 study area in the Highland Range. Habitat for this bird species is associated with large stands of sagebrush habitat, which can be found in areas where the rail alignment would cross mountain ranges, including the Highland, Reville, and Kawich Ranges. There is potential sagebrush habitat near Bennett Pass, Pahroc Pass, the western and southern portions of Garden Valley, western Sand Spring Valley, southeastern Railroad Valley, and at Warm Springs Summit.

Brewer's sparrows are strongly associated with sagebrush over most of their range, in areas with scattered shrubs and short grass (DIRS 180959-NatureServe Explorer 2007, all). Sagebrush habitat can be found in areas where the rail alignment would cross mountain ranges, including the Highland, Reville, and Kawich Ranges. There is potential sagebrush habitat near Bennett Pass, Pahroc Pass, the western and southern portions of Garden Valley, western Sand Spring Valley, southeastern Railroad Valley, and at Warm Springs Summit. Brewer's sparrows are likely to occur in sagebrush habitat within the Caliente rail alignment construction right-of-way.

Mammals The State of Nevada classifies desert bighorn sheep as a game species. As further discussed in Section 3.2.7.3.5, the State of Nevada manages the desert bighorn sheep as a game species throughout the state.

The pygmy rabbit (*Brachylagus idahoensis*), a small sagebrush-dependent rabbit, has been documented 7.5 kilometers (4.6 miles) northwest of Garden Valley alternative segment 3 (DIRS 174519-Bennett 2005, Plate 3). This species is well-distributed throughout the Great Basin; however, overall the populations tend to be locally clustered in areas of high-density sagebrush, which they use for both cover and food. DOE field surveys did not indicate the presence of pygmy rabbit habitat within the Caliente rail alignment construction right-of-way.

The dark kangaroo mouse and the closely related pale kangaroo mouse are known to occur in appropriate habitat from the Dry Lake Valley to Goldfield (DIRS 174519-Bennett 2005). Habitat for these two mouse species is characterized by alkali (salt) sinks and desert scrub dominated by shadscale or big sagebrush. These rodents usually prefer soft sand accumulated at bases of shrubs for burrow sites (DIRS 176370-O'Farrell and Blaustein 1974, p. 1-2; DIRS 176372-O'Farrell and Blaustein 1974, p. 1).

There are 23 species of bats in Nevada. In general, bats are highly mobile; all of the 23 species could at some time of the year fly over or, if appropriate habitat exists, roost and forage near the Caliente rail alignment. Twenty-one of the 23 species of bats in Nevada are BLM-designated sensitive (DIRS 172900-BLM 2003, p. 2) and nine are State of Nevada protected.

Of these bat species, seven have a strong probability of utilizing habitat along the rail alignment (DIRS 181865 Bradley et al. 2006), as follows:

- Pallid bat
- Townsend's big-eared bat
- Big brown bat
- California myotis bat
- Small-footed myotis bat
- Western pipistrelle bat
- Brazilian free-tailed bat

All of these bat species are commonly found throughout the Mojave and southern Great Basin Deserts. These species are known to roost in cliff faces, caves, rocky outcrops, and man-made structures where available. Bats are also known to forage over natural or artificial water sources.

3.2.7.3.4 Migratory Birds

More than 300 species of birds are commonly observed in southern Nevada, including year-round residents, seasonal migrants that breed in southern Nevada, winter residents that breed in the north, and seasonal migrants that pass through southern Nevada while traveling in spring and fall between breeding ranges to the north and winter ranges to the south. All of the migratory birds found along the Caliente rail alignment are protected under the Migratory Bird Treaty Act (16 U.S.C. 703 *et seq.*) and Executive Order 13186.

3.2.7.3.5 State of Nevada Game Species

The Caliente rail alignment would cross several areas designated as game habitat (DIRS 173224-BLM 1997, Maps 9-13; DIRS 174518-BLM 2005, Maps 3.6-1 through 3.6-4). As shown in Table 3-53, three game species that occur, or have the potential to occur, within or near the construction right-of-way are cross-listed as BLM-designated sensitive, are state protected, or both. The game species that are also BLM-designated sensitive include greater sage-grouse, pygmy rabbit, and desert bighorn sheep. Section 3.2.7.3.3.2 provides information on the greater sage-grouse and pygmy rabbit. The Nevada Department of Wildlife actively manages the desert bighorn sheep as a big game animal. Its distribution is shown on Figure 3-98. Other game species that could be affected by the proposed railroad construction and operation include mule deer, pronghorn antelope, elk, and mountain lion. Figures 3-101 to 3-104 indicate the general habitat locations for desert bighorn sheep, mule deer, pronghorn antelope, and elk. Mountain lions occur throughout the State of Nevada in canyon, mountain, and forested areas; therefore, no distribution map is included for this species. Sections 3.2.7.3.5.1 through 3.2.7.3.5.5 summarize game species information.

3.2.7.3.5.1 Desert Bighorn Sheep. Desert bighorn sheep are found predominantly in lower foothills and grasslands of mountain ranges, often where terrain is rough, rocky and steep, and broken up by canyons and washes. Desert bighorn sheep require access to freestanding water, especially during the summer, and distribution of water holes significantly influences patterns of home-range movement (DIRS 176363-Shackleton 1985, p. 4). Any natural or artificial water sources within this species' range could be subject to desert bighorn sheep use. Caliente common segment 1 would cross year-round desert bighorn sheep habitat near the Pahroc Range, and common segment 6 would cross a *movement corridor*, or an area of high use at certain times of the year, in the Beatty Wash area (Figure 3-101). The Caliente rail alignment would not cross any crucial habitat for this species.

3.2.7.3.5.2 Mule Deer. Mule deer are fairly common in southern Nevada and throughout the western United States, and are found in a variety of habitats from coniferous forests at high elevations to desert shrub, chaparral, and grasslands at lower elevations (DIRS 176454-Whitaker 1992, p. 652). Mule deer are often associated with early transitional vegetation, especially near agricultural lands. Mule deer are found

throughout the area the Caliente rail alignment would cross, but would most likely be encountered in the segments from Warm Springs Summit (Kawich Range) eastward. The eastern portion of Caliente common segment 1 would pass through year-round mule deer habitat. The western portion of Caliente common segment 1, Garden Valley alternative segments, much of Caliente common segment 2, and Caliente common segment 3 at the Warm Springs summit would cross mule deer winter habitat. Figure 3-102 details habitat for mule deer. The rail alignment would not cross any mule deer crucial habitat.

3.2.7.3.5.3 Pronghorn Antelope. Most of the Caliente rail alignment would cross year-round pronghorn antelope habitat from Dry Lake Valley west to Goldfield (Figure 3-103). Pronghorn antelope are generally found at lower elevations in open desert grasslands, salt desert scrub, or bunchgrass-sagebrush vegetation in the valleys and foothills throughout the western United States. This species also occurs in dense sagebrush communities at higher elevations during the breeding season (DIRS 176454-Whitaker 1992, pp. 662 and 663). NDOW has not identified any areas along the Caliente rail alignment as pronghorn antelope augmentation areas.

3.2.7.3.5.4 Elk. Elk are known to have summer, winter, and year-round ranges along portions of the Caliente rail alignment from Garden Valley and the Quinn Canyon Mountain Range eastward. Elk habitat is usually composed of moderate- to low-density conifer woodlands and open mountain grasslands (Figure 3-104). This species is migratory, moving to lower elevations with dense wooded slopes during the winter (DIRS 176454-Whitaker 1992, pp. 647 to 650).

3.2.7.3.5.5 Mountain Lion. Mountain lions occur throughout the State of Nevada in low numbers in canyon, mountainous, and forested areas (DIRS 103439-Hall 1995, pp. 269 to 271). They are known to occur within the study area and might move along the Caliente rail alignment construction right-of-way. This species is shy, solitary, secretive, and active mostly at night (DIRS 103439-Hall 1995, pp. 269 to 271).

3.2.7.3.6 Wild Horses and Burros

Wild horses are generally presumed to descend from horses that were released by, or escaped from, settlers of western North America, possibly dating as far back as Spanish settlers in the 1600s. The size, color, and confirmation of the horses depend on the type of stock or breed from which the wild horses descended (DIRS 174518-BLM 2005, p. 3.8-1).

Generally, burros live in the lower elevations year-round, while wild horses reside in the higher elevations in summer and migrate to the lower elevations in winter. Both wild horses and burros will travel as far as 16 kilometers (10 miles) away from permanent water sources. Their diets vary—burros prefer shrubs, horses tend to prefer grasses (DIRS 103079-BLM 1998, p. 3-48).

Wild horse herd areas were originally identified by federal agencies in 1971, with passage of Public Law 92-195, the Wild Free-Roaming Horses and Burros Act. The BLM has delineated herd management areas within the wild horse herd areas. Each herd management area has an appropriate management level determined by the BLM through a rangeland assessment and a public review process. The appropriate management level is the number of wild horses and burros the BLM has determined the herd management area can support, and it is established to avoid the ecological degradation of the herd management area and any riparian areas within each herd management area (DIRS 176364-State of Nevada [n.d.], all).

The Caliente rail alignment would cross approximately 13 designated wild horse and burro herd management areas (Figure 3-105). Appendix H provides detailed information on the individual herd management areas. Table 3-54 identifies each Caliente rail alignment alternative segment and common segment that would cross or lie within herd management areas and describes the location, size, and management level of each herd management area.

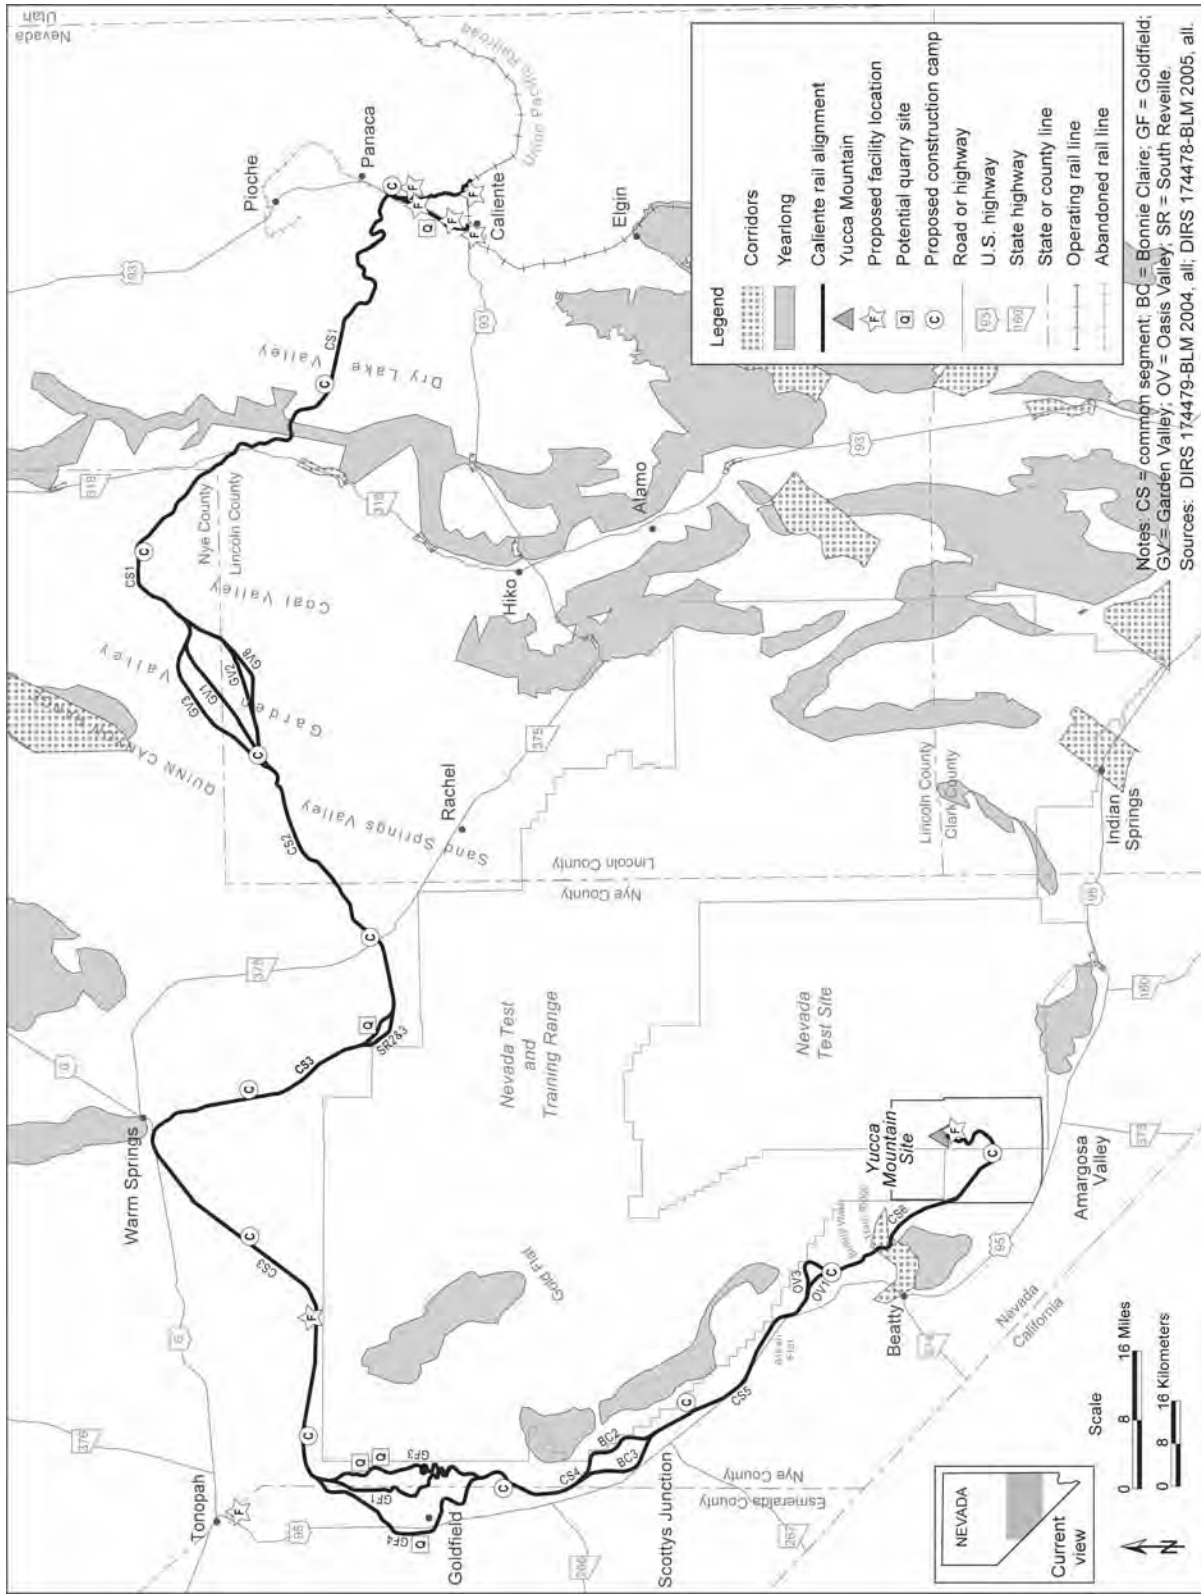


Figure 3-101. Desert bighorn sheep habitat along the Caliente rail alignment.

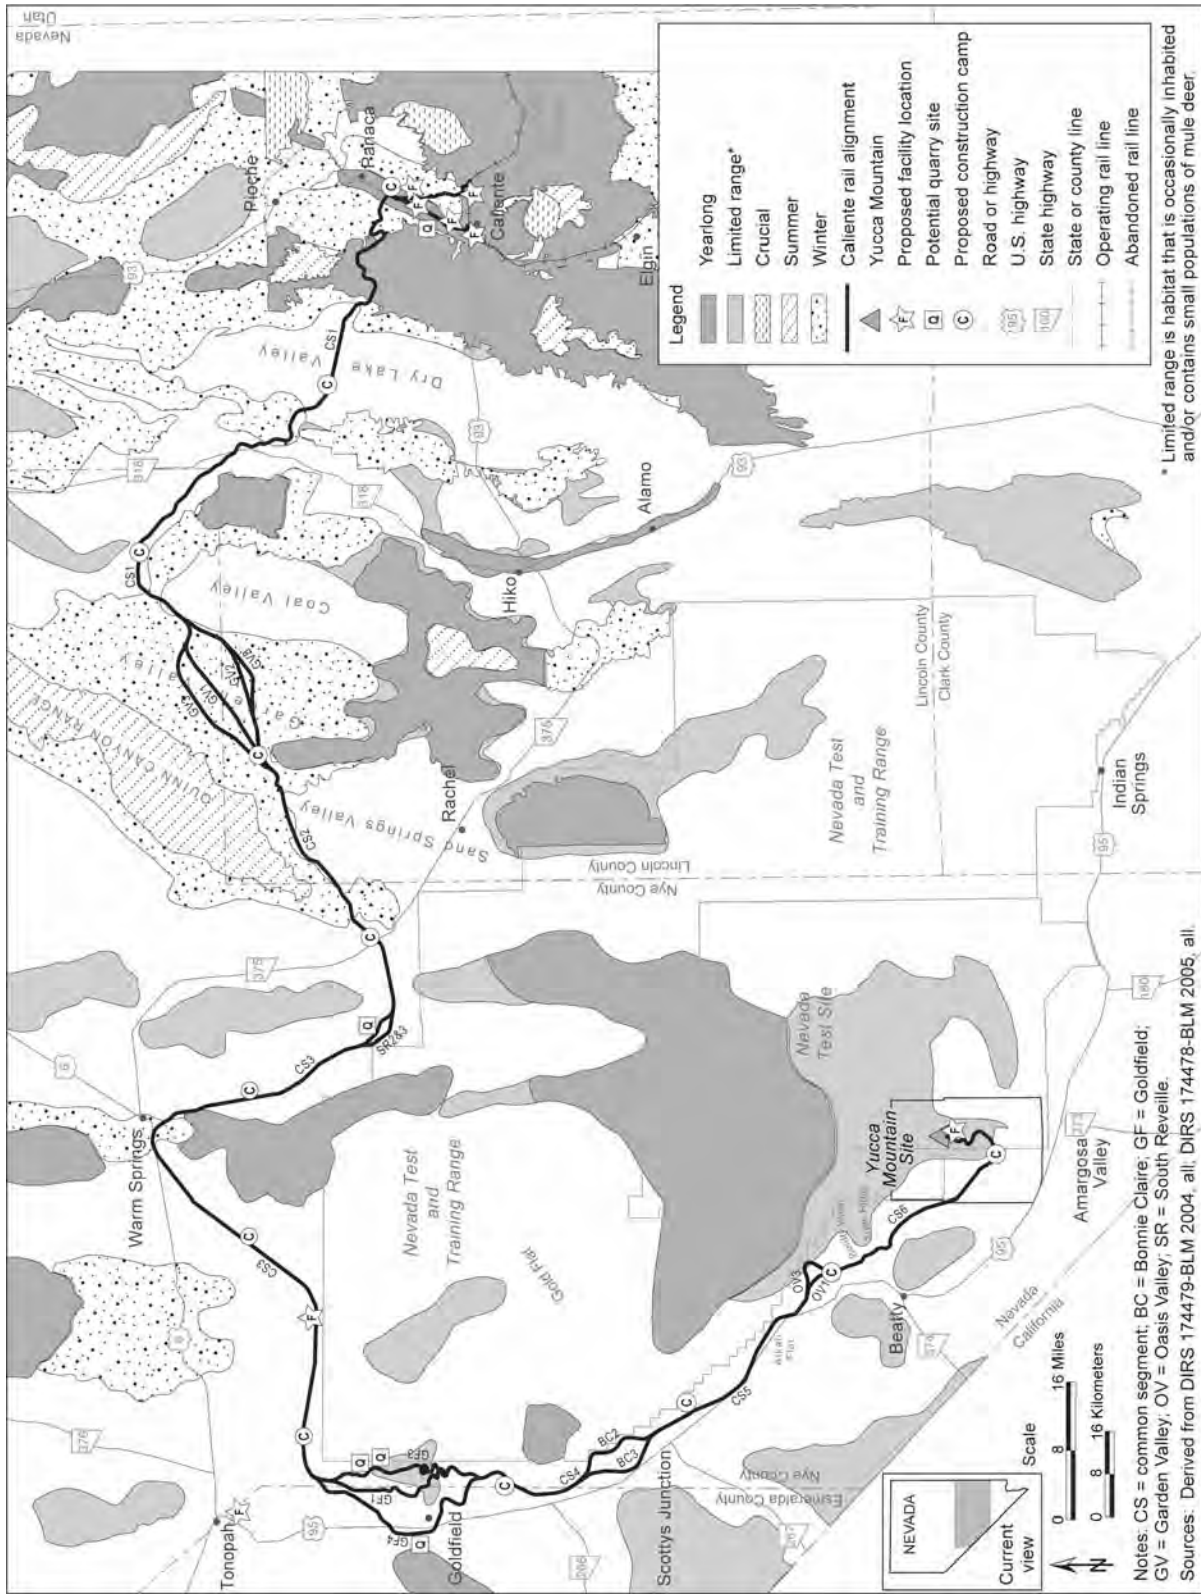


Figure 3-102. Mule deer habitat along the Caliente rail alignment.

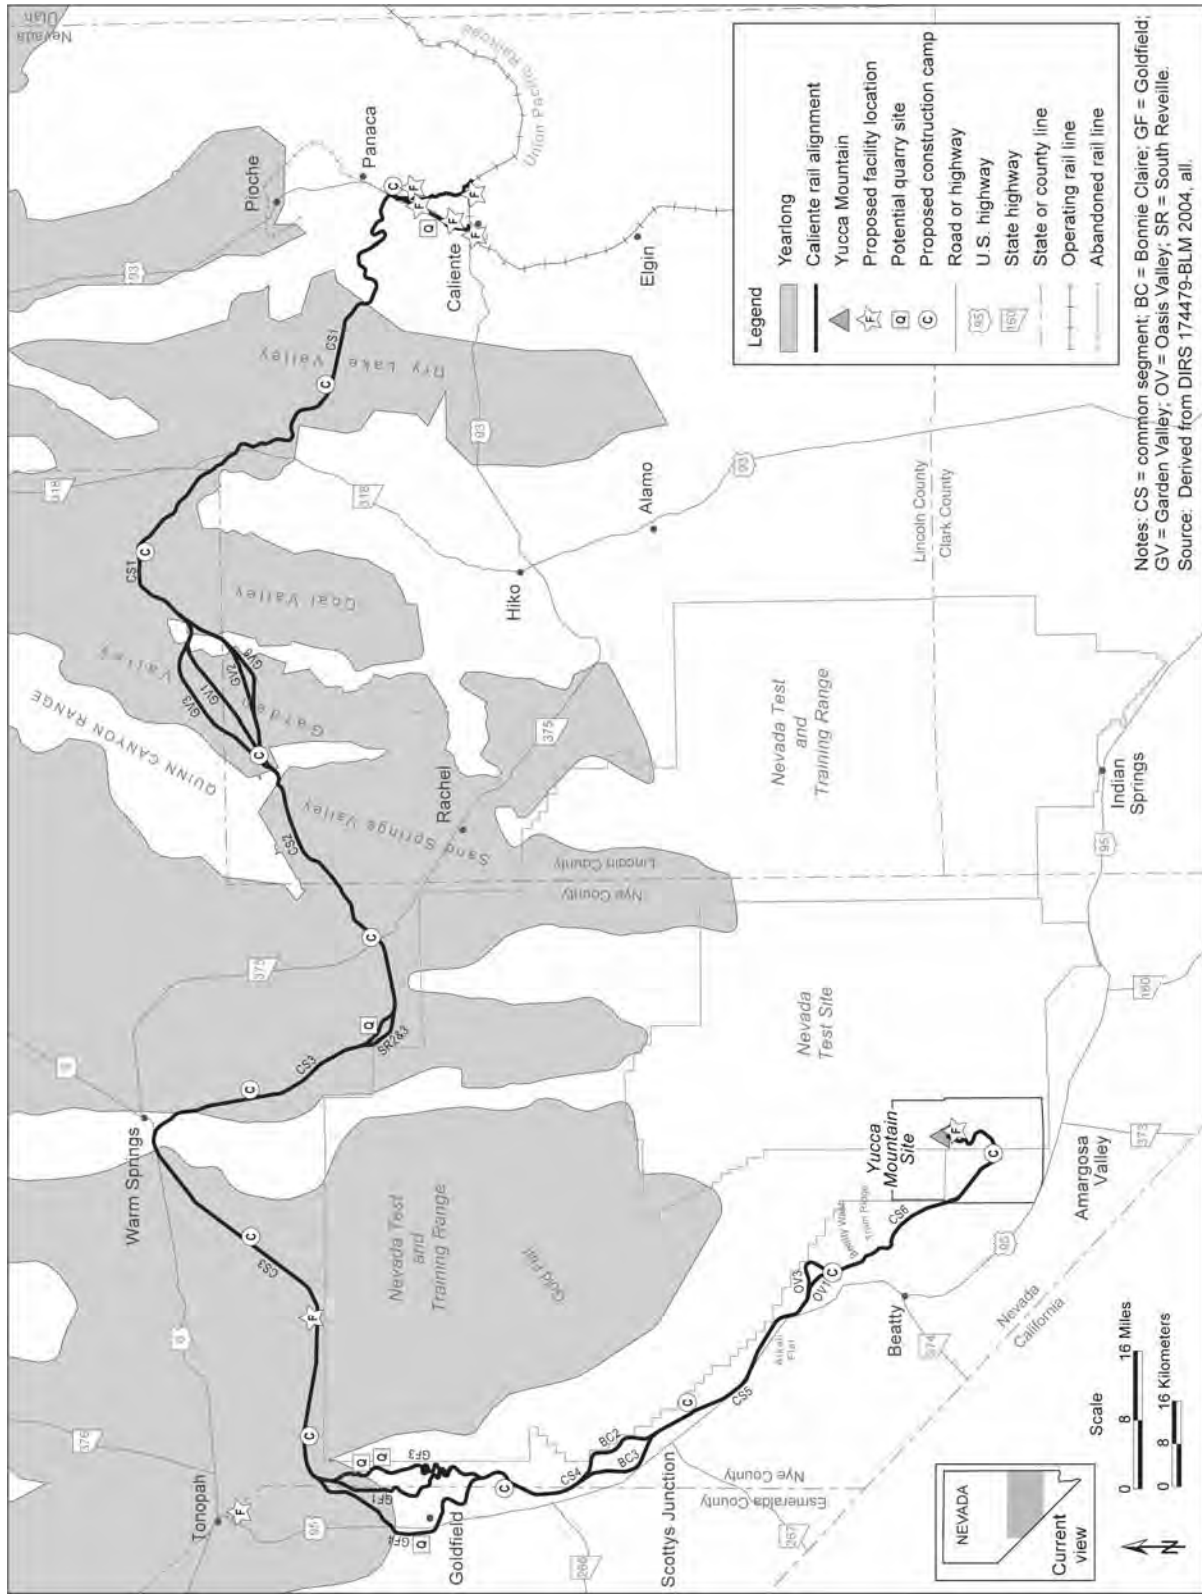


Figure 3.-103. Pronghorn antelope habitat along the Caliente rail alignment.

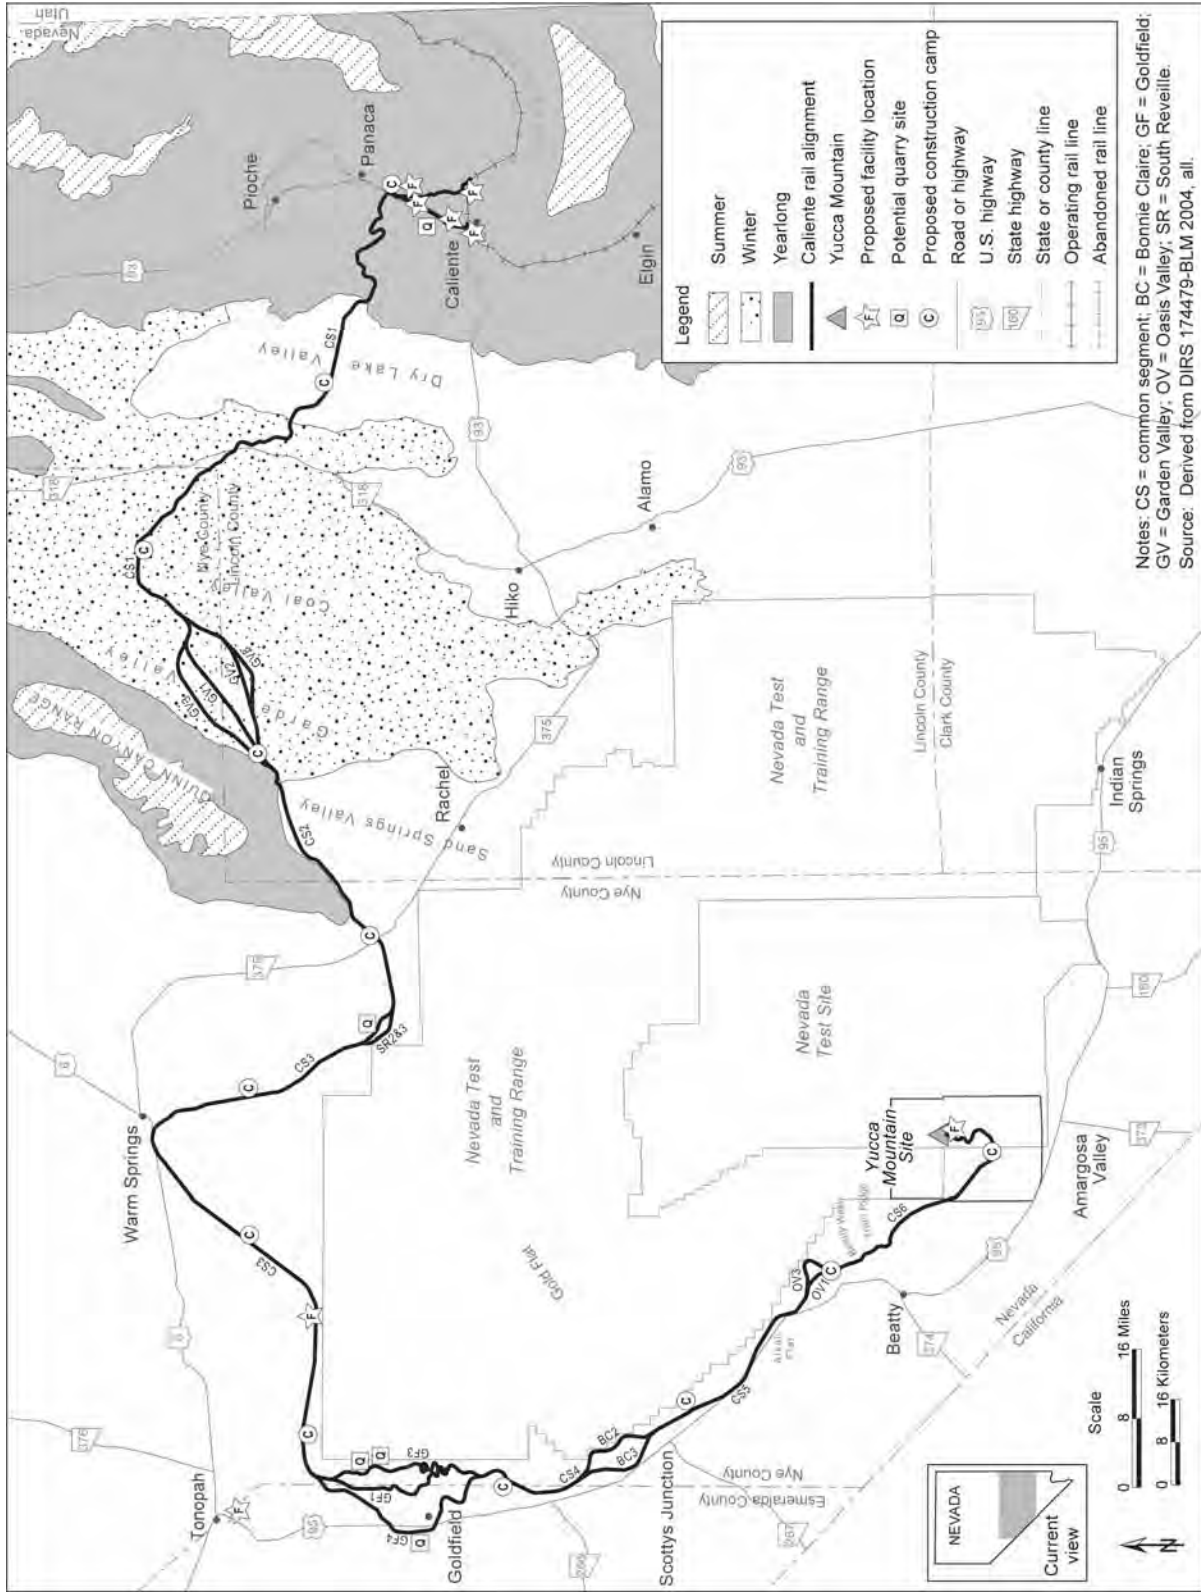


Figure 3-104. Elk habitat along the Caliente rail alignment.

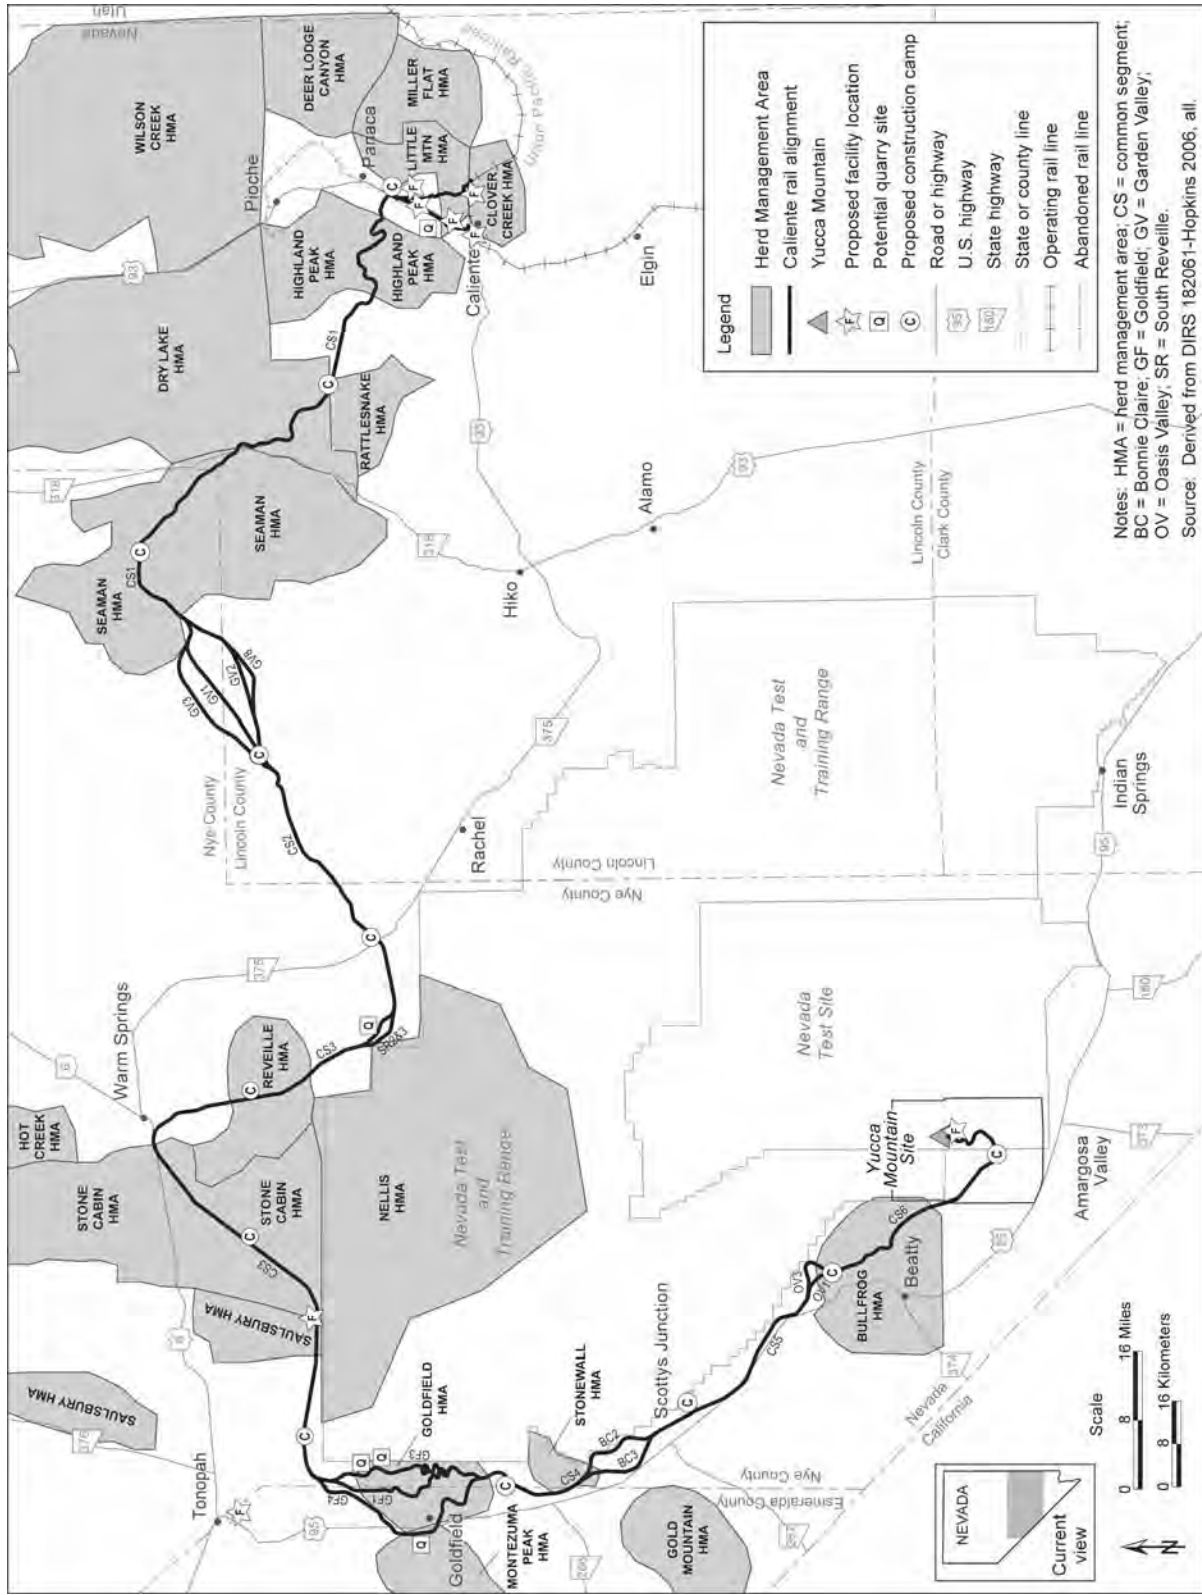


Figure 3-105. Herd management areas along the Caliente rail alignment.

Table 3-54. Herd management areas the Caliente rail alignment would cross.^a

Herd management area	Location ^b	Area (square kilometers) ^c	Appropriate management level	Alternative segment or common segment that would cross area
Miller Flat	Lincoln County, northeast of Caliente	360	9 to 15 horses	Caliente and Eccles alternative segments
Little Mountain	Lincoln County, northeast of Caliente	210	9 to 15 horses	Caliente and Eccles alternative segments
Highland Peak	West of Panaca	550	20 to 33 horses	Caliente common segment 1
Rattlesnake	27 kilometers west of Caliente	290	1 horse	Caliente common segment 1
Dry Lake	West of Pioche	2,000	94 horses	Caliente common segment 1
Seaman	56 kilometers south of Lund	1,500	159 horses	Caliente common segment 1; Garden Valley alternative segments 1, 2, and 3
Reveille	80 kilometers east of Tonopah and 19 kilometers south of Warm Springs	510	138 horses	Caliente common segment 3
Stone Cabin	45 kilometers east of Tonopah	1,600	364 horses	Caliente common segment 3
Saulsbury	26 kilometers east of Tonopah	570	40 horses	Caliente common segment 3
Goldfield	East of Goldfield	260	125 horses 50 burros	Goldfield alternative segments 1, 2, and 3
Montezuma Peak	West of Goldfield	310	146 horses 10 burros	Goldfield alternative segment 4
Stonewall	West of Lida Junction and south of Goldfield	100	50 horses 25 burros	Caliente common segment 4; Bonnie Claire alternative segments 2 and 3
Bullfrog	Surrounds Beatty	520	12 horses 185 burros	Oasis Valley alternative segments 1 and 3; common segment 6

a. Sources: DIRS 174047-Bennett 2005; DIRS 174046-Bennett 2005; DIRS 174479-BLM 2003; DIRS 174478-BLM 2005; DIRS 174329-BLM [n.d.]; DIRS 174333-BLM [n.d.]; DIRS 174332-BLM [n.d.]; DIRS 174330-BLM [n.d.]; DIRS 173064-BLM 2007; DIRS 173063-BLM [n.d.]; DIRS 173062-BLM [n.d.]; DIRS 173061-BLM [n.d.]; DIRS 173060-BLM [n.d.]; DIRS 173059-BLM [n.d.]; DIRS 173057-BLM 2005; DIRS 174518-BLM 2005.

b. To convert kilometers to miles, multiply by 0.62137.

c. To convert square kilometers to acres, multiply by 247.10.

3.2.8 NOISE AND VIBRATION

This section describes existing noise and vibration in the Caliente rail alignment region of influence. Section 3.2.8.1 describes the region of influence; Section 3.2.8.2 describes general regional characteristics for noise and vibration; and Section 3.2.8.3 describes the existing environment for noise and vibration in more detail for Caliente rail alignment alternative segments and common segments.

Noise is considered a source of pollution because it can be a human health hazard. Noise effects on people range from hearing impairment at very high noise levels to annoyance at moderate to high noise levels. Sound waves are characterized by frequency and measured in *hertz*; sound pressure is expressed as *decibels* (dB). Appendix I, Noise and Vibration Assessment Methodology, provides more information on the fundamentals of analyzing noise.

With the exception of prohibiting nuisance noise, neither the State of Nevada nor local governments have established numerical noise standards. Nevertheless, many federal agencies use the *day-night average noise level* (DNL) as a guideline for land-use compatibility and to assess the impacts of noise on humans.

For the operation of trains during proposed railroad construction and operations, DOE analyzed noise impacts under established STB criteria. The STB has environmental review regulations for noise analysis (49 CFR 1105.7e(6)), with the following criteria:

- An increase in noise exposure as measured by DNL of 3 *A-weighted decibels* (dBA) or more.
- An increase to a noise level of 65 DNL or greater.

If the estimated noise level increase at a location exceeds either of these criteria, the STB then estimates the number of affected noise-*sensitive receptors* (such as schools, libraries, residences, retirement communities, nursing homes). The two components (3 dBA increase, 65 DNL) of the STB criteria are implemented separately to determine an upper bound of the area of potential noise impact.

However, recent noise evaluations indicate that both criteria components must be met to cause an adverse impact from noise (DIRS 173225-STB 2003, p. 4-82). That is, noise levels would have to be greater than or equal to 65 DNL and increase by 3 dBA or more to cause an adverse impact.

Day-night average noise level (DNL):

The energy average of A-weighted decibels (dBA) sound level over 24 hours; includes an adjustment factor for noise between 10 p.m. and 7 a.m. to account for the greater sensitivity of most people to noise during the night. The effect of nighttime adjustment is that one nighttime event, such as a train passing by between 10 p.m. and 7 a.m., is equivalent to 10 similar events during the day.

A-weighted decibels (dBA): A measure of noise level used to compare noise from various sources. A-weighting approximates the frequency response of the human ear.

There are three potential ground-borne vibration (vibration propagating through the ground) impacts of general concern: annoyance to humans, damage to buildings, and interference with vibration-sensitive activities. To evaluate potential impacts of vibration from construction and operations activities, DOE used Federal Transit Administration building vibration damage and human annoyance criteria. Under these criteria, if vibration levels exceeded human annoyance criterion for infrequent events 80 VdB (vibration velocity in decibels) or if the vibration levels (measured as *peak particle velocity*) exceeded 0.20 inches per second for fragile buildings or 0.12 inches per second for extremely fragile historic buildings, then there could be an impact from vibration (DIRS 177297-Hanson, Towers, and Meister 2006, all). Appendix I provides more information on the vibration metrics used in this study.

3.2.8.1 Region of Influence for Noise and Vibration

The region of influence for noise and vibration for construction and operation of a railroad along the Caliente rail alignment includes the construction right-of-way and extends out to variable distances, depending on several analytical factors (ambient noise level, train speed, number of trains per day, and number of railcars). Similarly, the region of influence for the railroad construction and operations support facilities depends on the magnitude of noise that would be generated and ambient noise levels, which would affect how far away the noise might be heard. In areas with low ambient noise conditions along the proposed rail alignment, project-related noise might be heard farther away. Therefore, the region of influence varies along the rail alignment. In addition, DOE has reviewed recent aerial photographs along the entire rail alignment to identify the locations of receptors in the region of influence that might be affected by noise, vibration, or both.

Ambient noise: The sum of all noise (manmade and natural) at a specific location over a specific time is called ambient noise.

3.2.8.2 General Regional Characteristics for Noise and Vibration

The Caliente rail alignment is primarily in a quiet desert environment where natural phenomena such as wind, rain, and wildlife account for most of the ambient noise. Manmade noise in some areas of the region of influence is caused by vehicles traveling along public highways and an occasional low-flying military jet. At present, there is no train activity in the region of influence except in the City of Caliente. Historically, there was train activity in Goldfield, Nevada. Baseline sound conditions vary somewhat along the rail alignment and are site-specific. Most of the region of influence for the Caliente rail alignment is typical of other desert environments in which the DNL values range from 22 decibels on a calm day to 38 decibels on a windy day (DIRS 102224-Brattstrom and Bondello 1983, p. 170). Areas within the region of influence are sparsely populated and, in general, ambient noise levels are low. The noise level at a specific location depends on nearby and distant sources of noise. Noise levels in populated areas tend to be higher than in unpopulated areas because of human activity and higher levels of transportation noise (Figure 3-106).

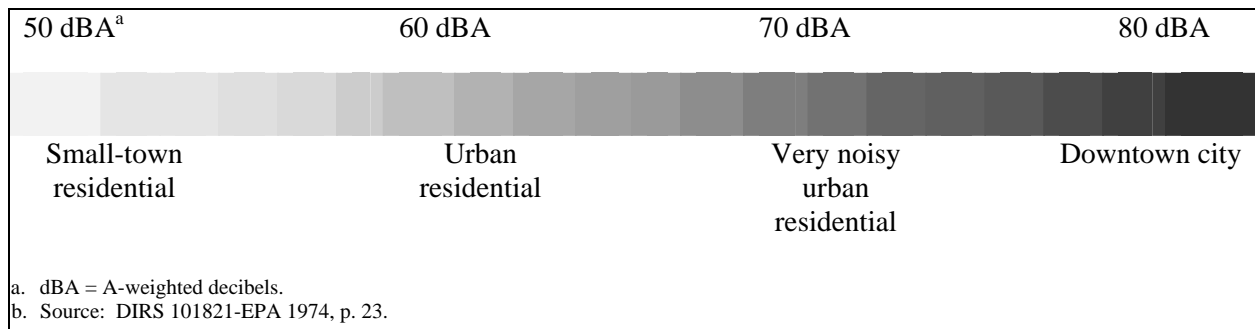


Figure 3-106. Typical DNLs for residential areas.^b

Ground-borne vibration occurs as a result of both natural phenomena (such as seismic activity) and manmade activities (such as construction and transportation activities). Human activities that can create perceptible levels of ground-borne vibration are important when sensitive sites, structures, or activities could be affected. Background vibration exists as a component of the overall effects of ground-borne vibration, higher in areas with more human activity, lower in areas more distant from human activities. Vibration levels in populated areas tend to be higher than in unpopulated areas because of human activity and higher levels of transportation vibration. Background levels of ground-borne vibration along the Caliente rail alignment are low.

3.2.8.3 Existing Environments for Noise and Vibration at Three Measurement Locations along the Caliente Rail Alignment

DOE evaluated existing noise and vibration conditions along the Caliente rail alignment and compiled the detected ranges of noise and vibration levels at different locations under different conditions. Most of the region of influence for the rail alignment is sparsely populated and, in general, ambient noise levels are low and there are no detectable vibrations. DOE measured ambient noise and vibration levels at three locations along the proposed rail alignment: in Caliente, in Garden Valley near *City* (a large complex of abstract sculptural and architectural forms made from earth, rock, and concrete), and in Goldfield. DOE selected these locations for ambient noise and vibration measurements because they are representative of the few populated areas or Special Recreational Management Areas within the region of influence. The ambient noise measurements at these representative locations along the rail alignment ranged from 47 to 62 DNL and ambient vibration levels ranged from 25 to 44 VdB. Table 3-55 summarizes the measured ambient noise levels in Caliente, Garden Valley, and Goldfield. Table 3-56 summarizes the measured ambient vibration levels in Caliente, Garden Valley, and Goldfield.

Table 3-55. Ambient noise measurements along the Caliente rail alignment.

Location	DNL dBA ^a
Caliente	53 ^b
Garden Valley	62 ^c
Goldfield	47 ^d

a. DNL dBA = day-night average noise level in A-weighted decibels.

b. DNL measurements were taken on January 11, 2005 (with a result of 54 DNL), and February 9, 2005 (with a result of 53 DNL). To be conservative, DOE selected the lowest value because the relative difference between project noise levels and ambient noise levels could influence the potential impact.

c. DNL measurements were taken in Garden Valley on February 9, 2005.

d. DNL measurements were taken in Goldfield on January 12, 2005.

Table 3-56. Ambient vibration measurements along the Caliente rail alignment.

Location	VdB ^a
Caliente	44 ^b
Garden Valley	29 ^c
Goldfield	25 ^d

a. VdB = vibration velocity in decibels with respect to 1 micro-inch per second.

b. Vibration measurements were taken in Caliente on January 11, 2005.

c. Vibration measurements were taken in Garden Valley on February 9, 2005.

d. Vibration measurements were taken in Goldfield on January 12, 2005.

3.2.8.3.1 Caliente

DOE took noise measurements for 24-hour periods in Caliente, Nevada, on January 11, 2005, and on February 9, 2005. The measurements were repeated on February 9 because there was a major flood in the area during the January 11 measurements, which could have affected measurement results. Train activity was halted during that period, and there was substantial helicopter activity associated with flood-relief efforts. However, the DNL did not vary much between the two sets of measurements. On January 11 the noise level was 54 DNL; on February 9 it was 53 DNL (see Table 3-55). Measured DNL noise levels at Caliente are consistent with the “small-town residential” category shown on Figure 3-106.

Hourly *equivalent sound levels* ranged from 32 to 62 dBA. Noise sources consisted of vehicular traffic on U.S. Highway 93, train horns, noise from nearby residential areas, and aircraft overflights. Figure 3-107 shows measured noise levels taken at the Agua Caliente Trailer Park over a 24-hour period. Figure 3-108 shows the location where DOE took the ambient noise measurements in Caliente.

Equivalent sound level (Leq): A single value of sound level for any desired duration (such as 1 hour), which includes all of the time-varying sound energy in the measurement period. Leq correlates reasonably well with the effects of noise on people, even for wide variations in environmental sound levels and time patterns. It is used when only the durations and levels of sound, and not their times of occurrence (day or night), are relevant.

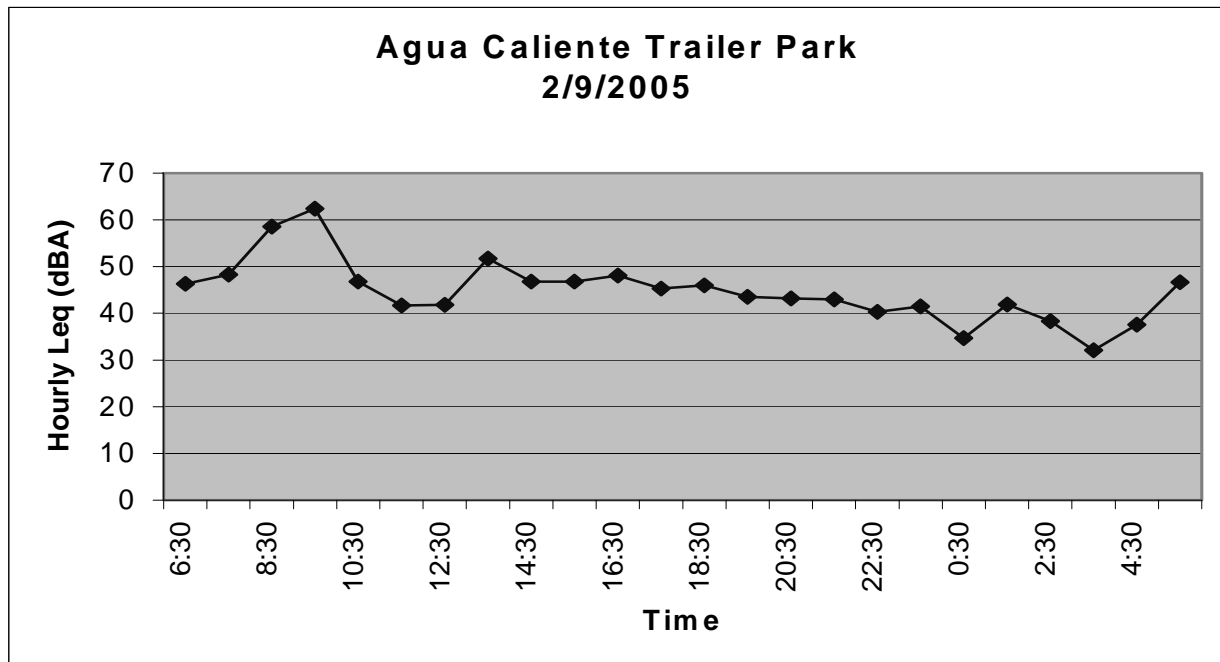


Figure 3-107. Measured noise levels over a 24-hour period in Caliente, Nevada.

Figure 3-109 shows modeled noise levels (65 DNL contour) for Union Pacific Railroad train activity in Caliente based on an average of 25 trains per day consisting of 2 locomotives and 60 railcars, and an operating speed of 64 kilometers (40 miles) per hour. The jagged shape and islands within the contour are caused by the shielding effects of buildings close to the grade crossing at South Spring Street.

DOE also took ambient ground-borne vibration measurements at the Agua Caliente Trailer Park on January 11, 2005. The vibration measurement was 44 VdB (see Table 3-56). Measured ambient vibration levels were low because of low population density and the resulting lack of vibration-producing activity. Ambient vibration levels of this magnitude are lower than human perception levels.

3.2.8.3.2 Garden Valley

DOE took noise measurements for 24 hours on February 9, 2005, near *City* in Garden Valley. Hourly equivalent sound level values ranged from 15 to 65 dBA, as shown on Figure 3-110. Figure 3-111 shows where DOE took the ambient noise measurements in Garden Valley. Two sonic booms from nearby U.S. Air Force jet activity or some other very loud-noise source occurred during the measurements,

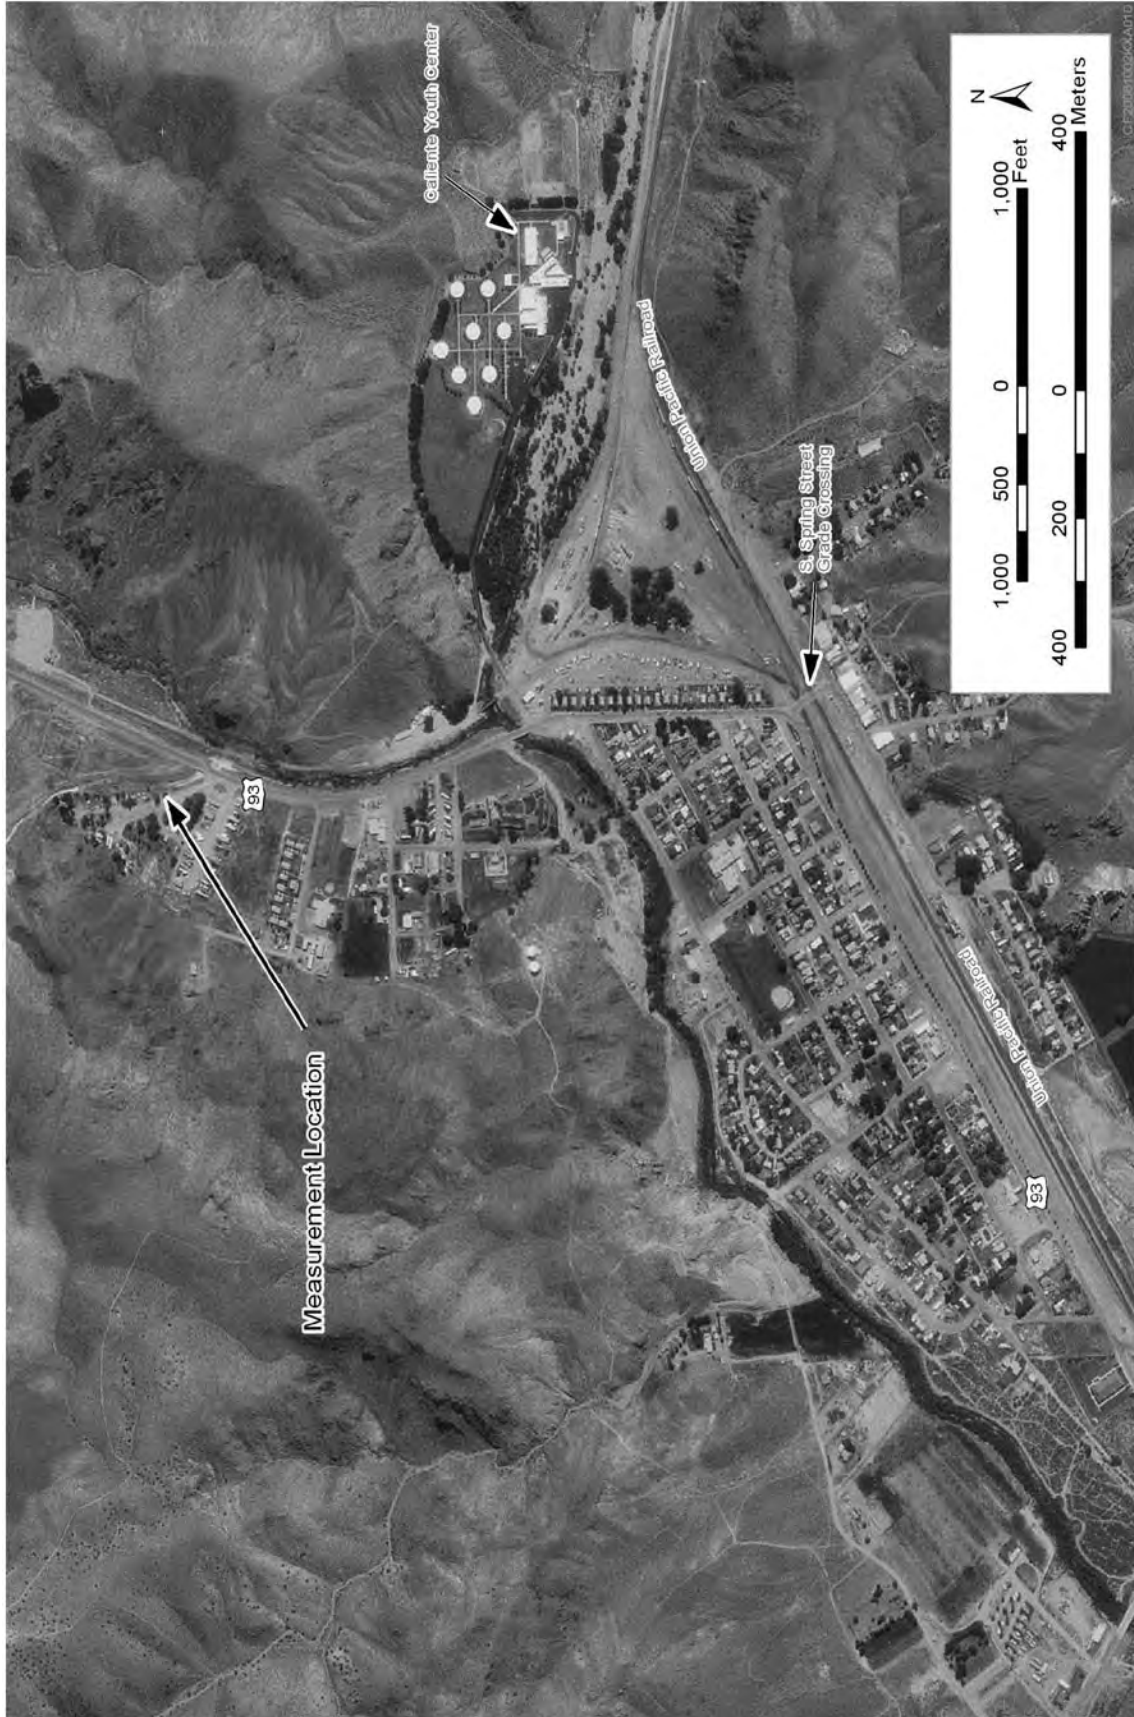


Figure 3-108. Ambient noise monitoring location at Agua Caliente Trailer Park, Caliente, Nevada.
(Source: Base map derived from DIRS 174497-Keck Library 2004, filename 37114E52.sid.)

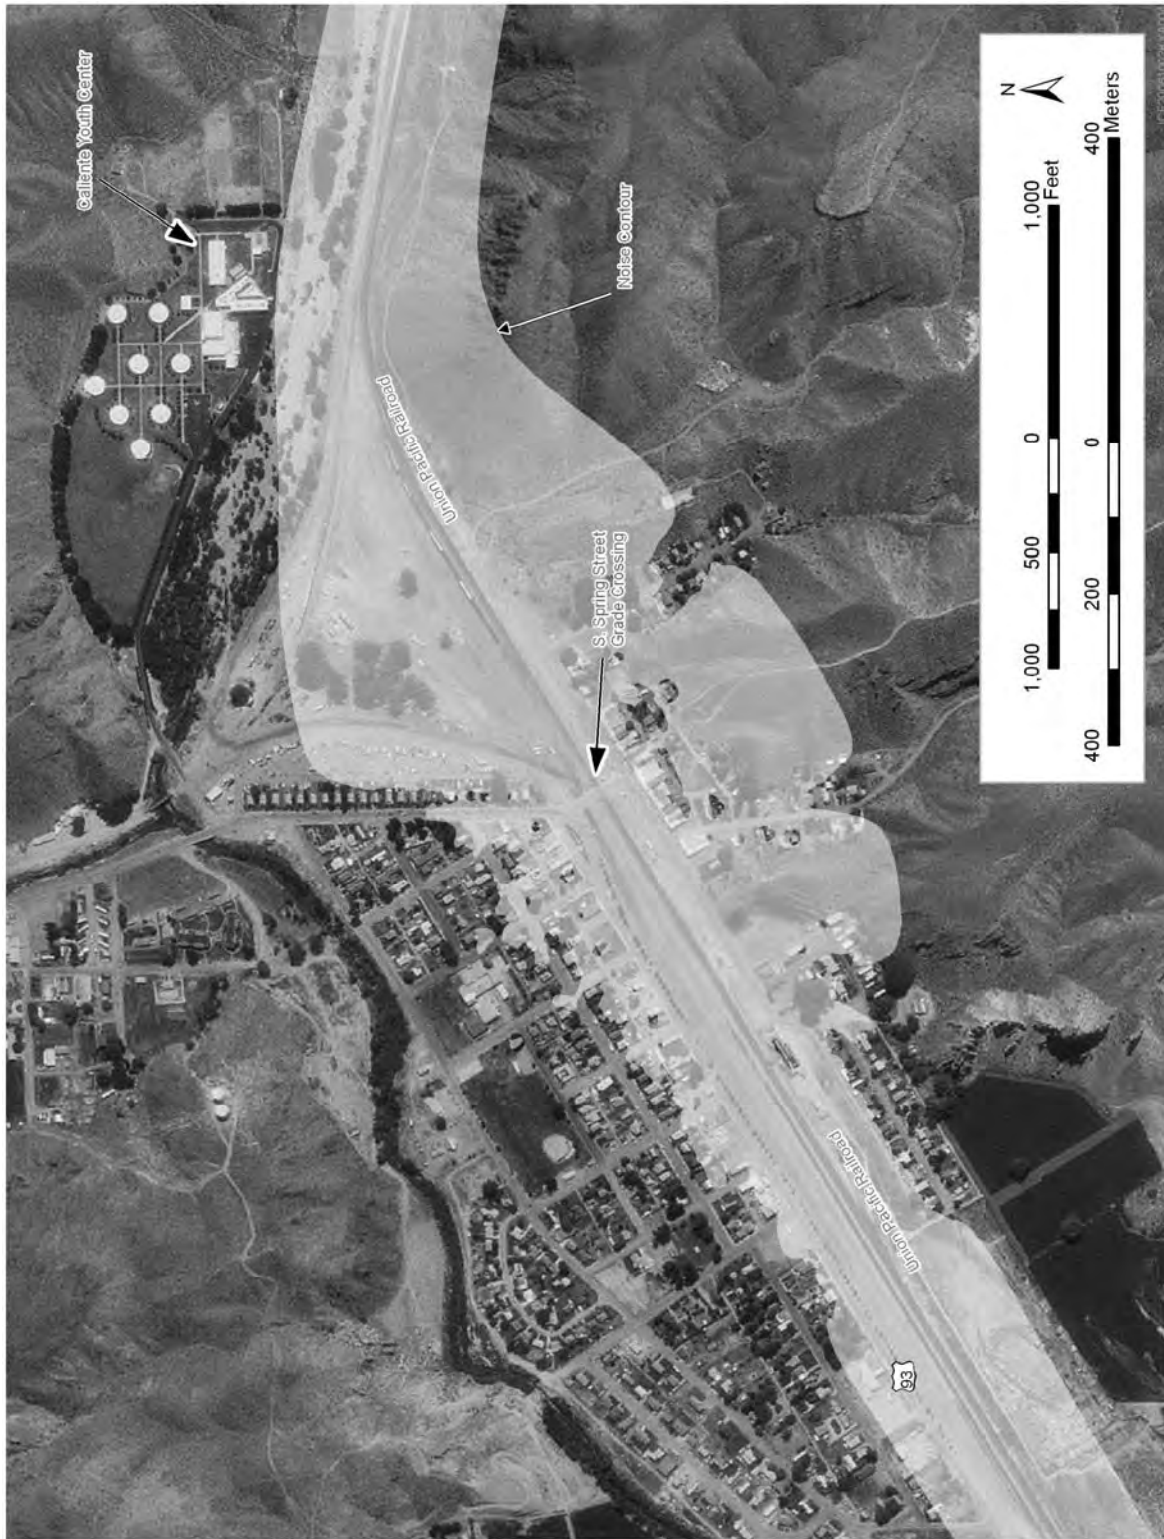


Figure 3-109. Union Pacific Railroad existing train activity in Caliente, Nevada, 65-decibel day-night average noise level contour.
(Source: Basemap derived from DIRS 174497-Keck Library 2004, filename 37114E52.sid.)

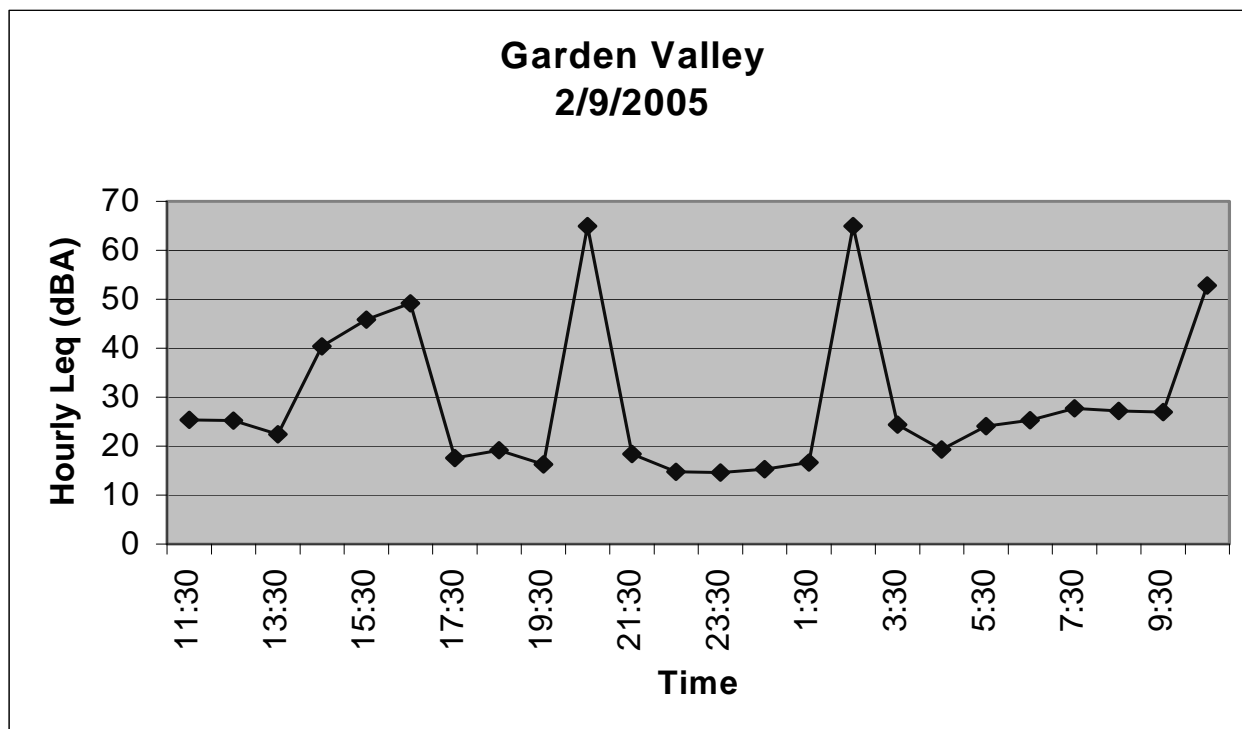


Figure 3-110. Measured noise levels over a 24-hour period in Garden Valley.

which resulted in two hourly equivalent noise level values of 65 dBA. Including these two loud noise events in the ambient noise results gives a noise level of 62 DNL (see Table 3-55). Excluding these two events, the noise level would have been 41 DNL. Measured noise levels at Garden Valley, excluding the two loud noise events, are consistent with the “small-town residential” category shown on Figure 3-106. Measured noise levels at Garden Valley, including the two loud noise events, are consistent with the “urban residential” category shown on Figure 3-106.

Noise levels varied dramatically at the Garden Valley location, from near the threshold of hearing to much higher levels. Military aircraft activity appears to be the cause of the high noise levels. While at this location, field personnel observed a substantial amount of military jet aircraft activity, some of which resulted in very high noise levels. U.S. Air Force noise data indicate that long-term noise levels associated with subsonic aircraft activity in this area range from 55 to 60 DNL (DIRS 174499-Frampton, Lucas, and Plotkin 1993, all). A separate U.S. Air Force report indicates that this Garden Valley location is within an area authorized for supersonic military training exercises to altitudes as low as 1,500 meters (5,000 feet) (DIRS 176798-Varnell et al. 1994, p. 2-5).

The measured DNL values confirm that ambient noise levels are high in this location. Noise sources consist of military aircraft and commercial aircraft. During the measurements, there were extended periods when there was no audible noise. Some construction equipment was operating at *City* during the measurements, but the noise monitor was sufficiently far away that the equipment had no effect on the measured noise level.

DOE also took ambient ground-borne vibration measurements at *City* on February 9, 2005. The vibration measurement was 29 VdB (see Table 3-56). Measured ambient vibration levels were low because of low population density and the resulting lack of activity that would produce vibration. Ambient vibration levels of this magnitude are lower than human perception levels.

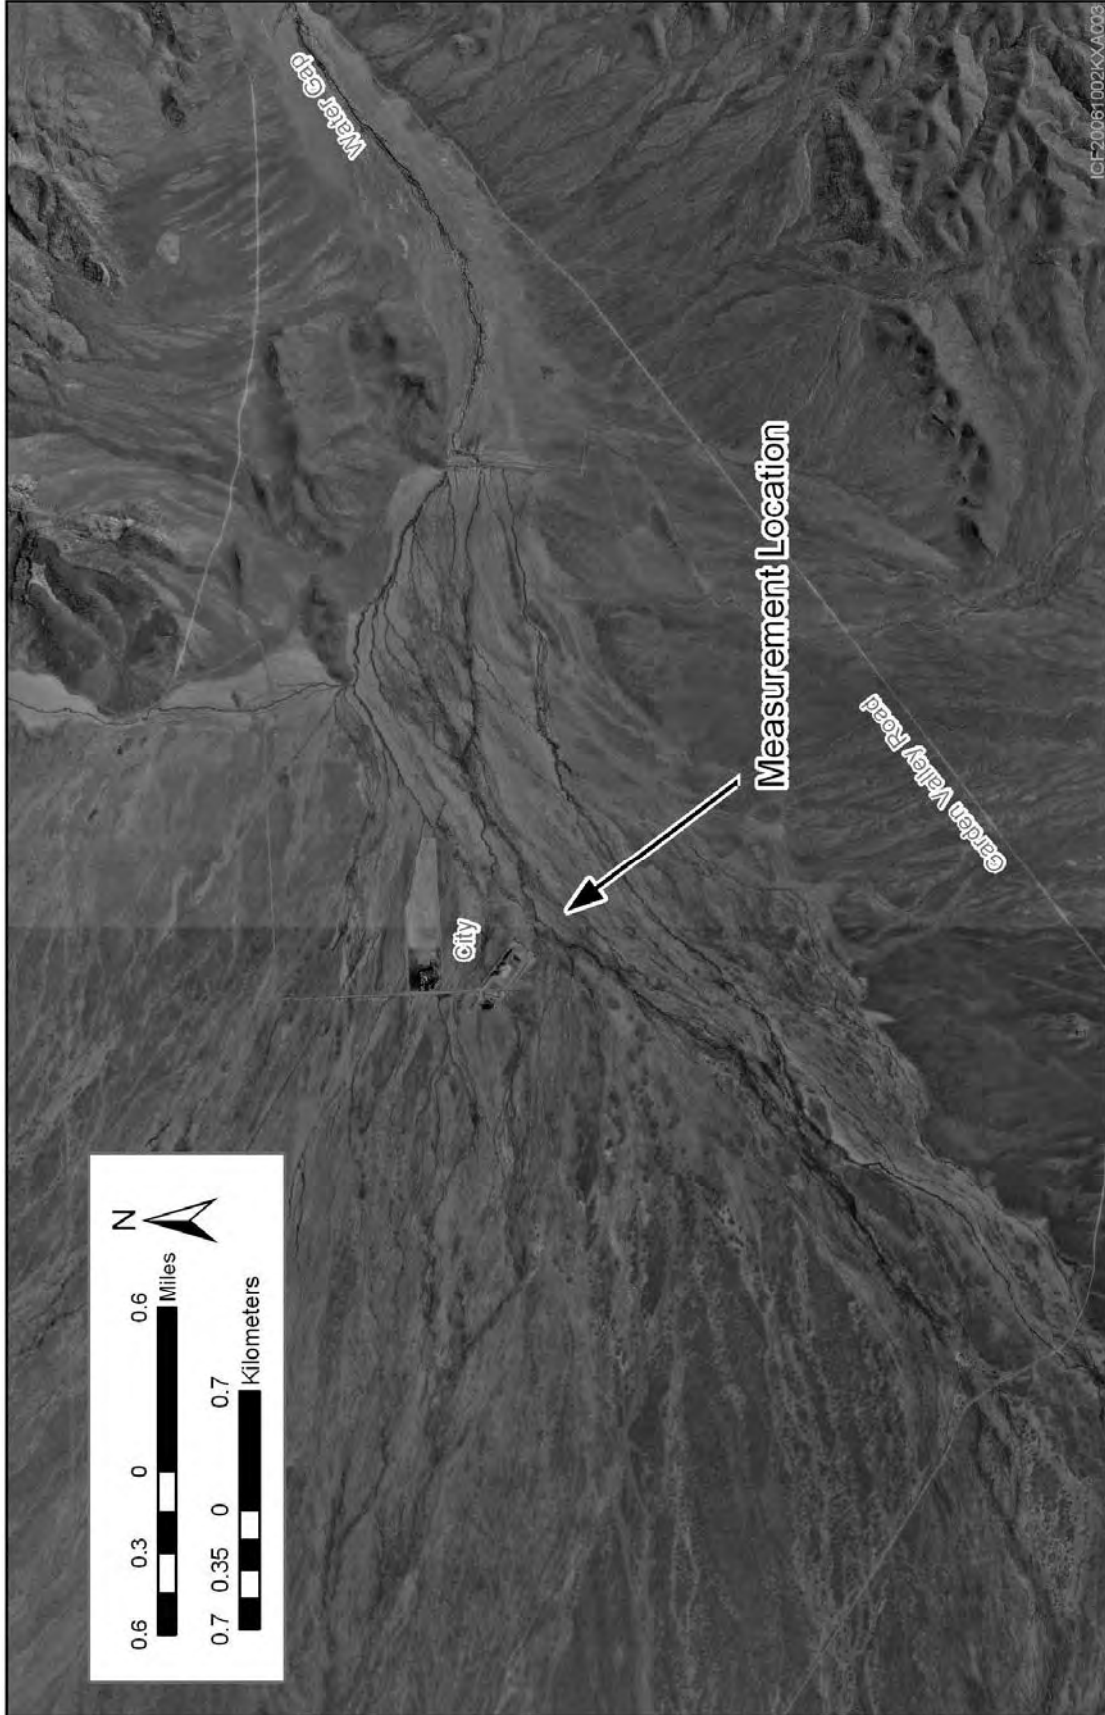


Figure 3-111. Ambient noise monitoring location in Garden Valley, Nevada.
(Source: Basemap derived from DIRS 174497-Keck Library 2004, filenames 381154A43.sid and 381154A44.sid.)

3.2.8.3.3 Goldfield

DOE conducted noise measurements for 24 hours in Goldfield on January 12, 2005. Hourly equivalent sound level values ranged from 30 to 44 dBA, as shown on Figure 3-112. The DNL at this location measured 47 dBA (see Table 3-55).

Noise sources included occasional vehicular traffic on U.S. Highway 95, barking dogs, wind, and occasional front-end-loader noise from the U.S. Department of Transportation maintenance station. Figure 3-113 shows where DOE took ambient noise measurements in the Goldfield area. Measured noise levels at Goldfield are lower than values associated with the “small-town residential” category, which is consistent with the low population density and desert environment (see Figure 3-104).

DOE also took ambient ground-borne vibration measurements at the Goldfield monitoring site on January 12, 2005. The vibration measurement was 25 VdB (see Table 3-56). Measured ambient vibration levels were low because of low population density and the resulting lack of *ground vibration*-producing activity. Ambient vibration levels of this magnitude are lower than human perception levels.

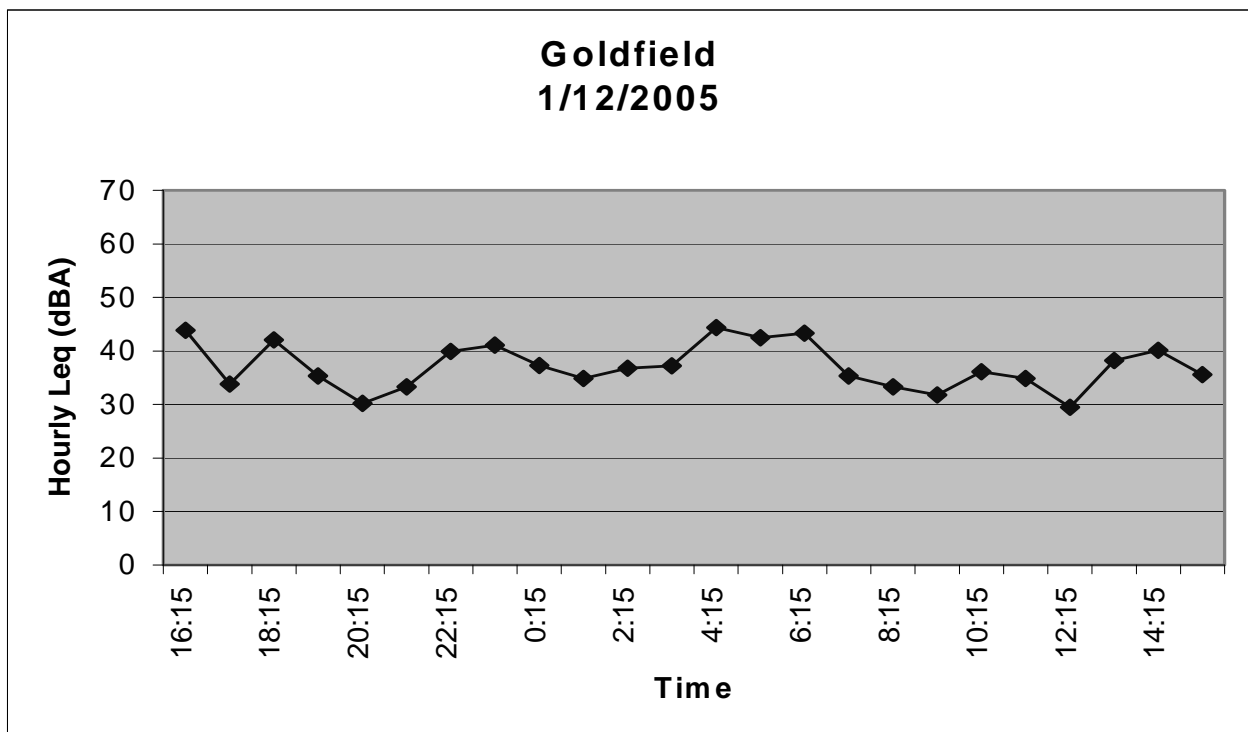


Figure 3-112. Measured noise levels over a 24-hour period in Goldfield, Nevada.

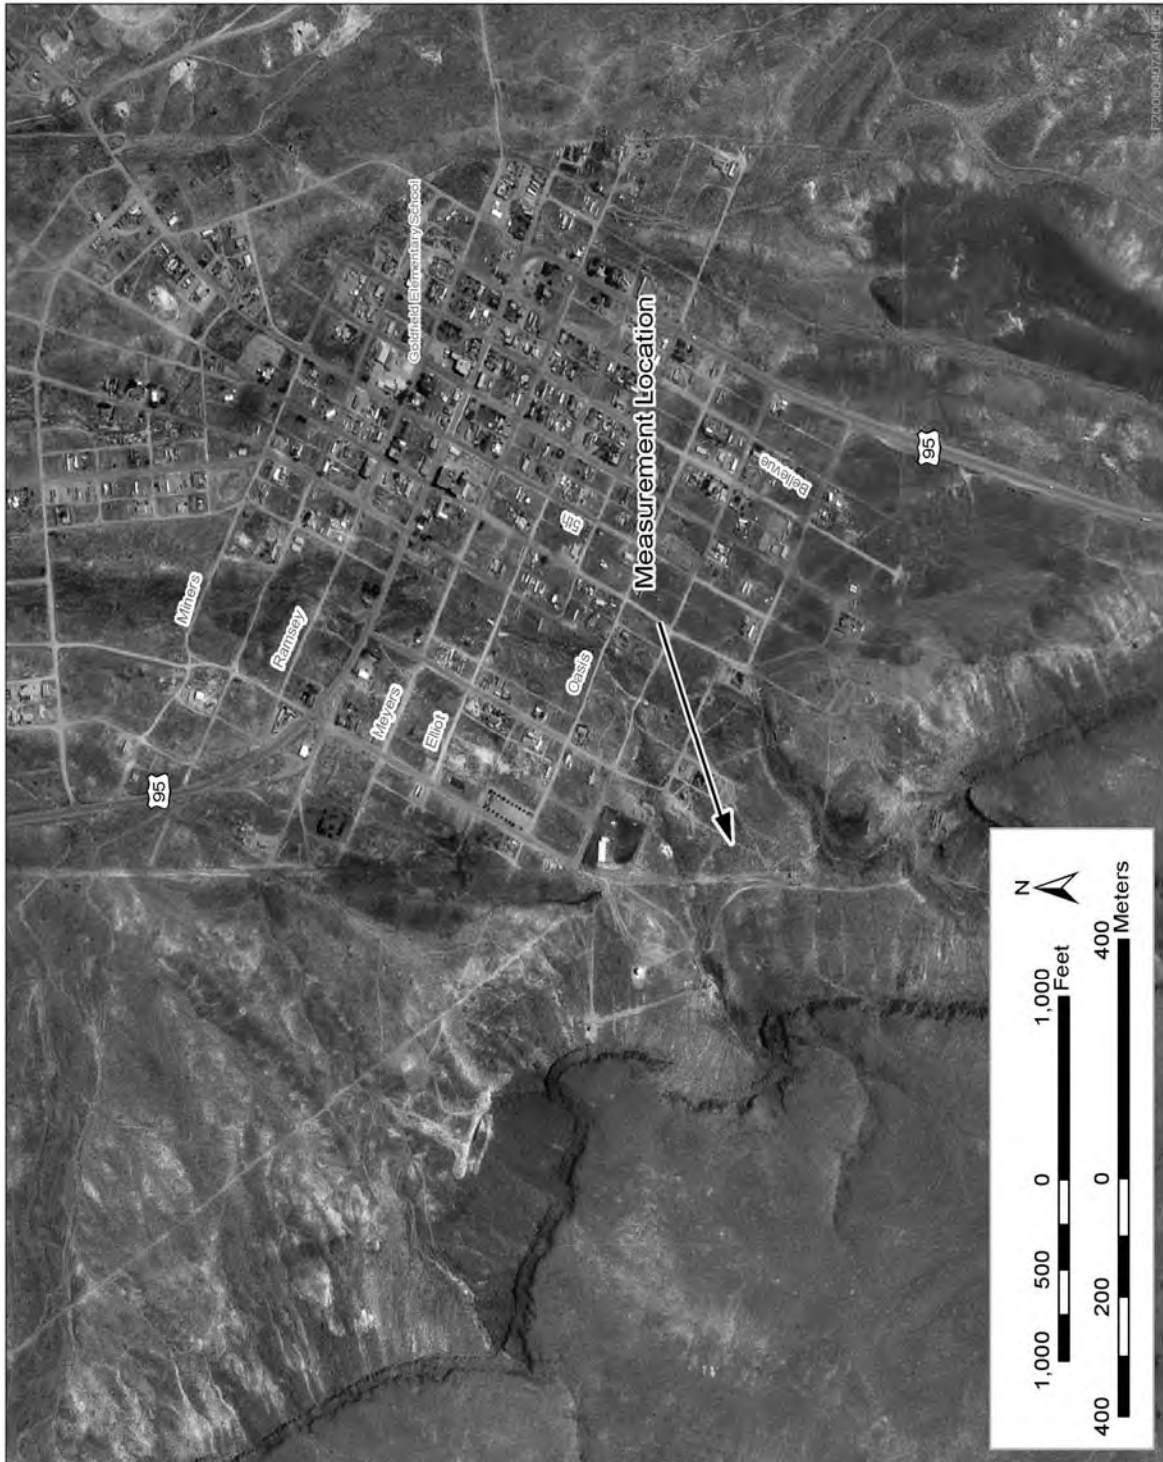


Figure 3-113. Ambient noise monitoring location on the southwestern edge of Goldfield, Nevada.
(Source: Basemap derived from DIRS 174497-Keck Library 2004, filename 37117F21.sid.)

3.2.9 SOCIOECONOMICS

This section describes the existing socioeconomic conditions (employment and income, population and housing, public services, and transportation) along the Caliente rail alignment. Section 3.2.9.1 describes the region of influence for socioeconomics; Section 3.2.9.2 summarizes the method DOE used to establish *baseline* socioeconomic conditions in the region of influence; and Section 3.2.9.3 describes general regional socioeconomic characteristics.

3.2.9.1 Region of Influence

The region of influence for the Caliente rail alignment socioeconomics analysis is Lincoln, Nye, Esmeralda, and Clark Counties and the Timbisha Shoshone Trust Lands. While the Timbisha Shoshone Trust Lands are included in the region of influence, they were not included in the socioeconomics analysis because no economic activity or growth is currently taking place or planned on these lands (Figure 3-114).

Construction and operation of a railroad along the Caliente rail alignment could affect social and economic activities and public services in these areas. This section examines baseline socioeconomic conditions for the counties and selected communities in the counties that would likely be affected during construction and operation of the proposed railroad. This analysis presents some socioeconomics detail for Clark County because, even though the rail line would not cross Clark County, construction workers for construction of the rail and associated facilities (except those in Nye County) are assumed to come from Clark County. This is because Clark is the only county with a sufficient workforce. Construction and operations workers for facilities located in Nye County are assumed to reside 80 percent in Clark County and 20 percent in Nye County, reflecting historical patterns. Operations workers for facilities outside Nye County are assumed to reside in the county of the facility. Furthermore, Clark County medical facilities could receive medical cases from the construction camps and construction sites. The region of influence does not extend beyond these counties in Nevada because there is no indication of a regional or national socioeconomic effect from goods and services purchased outside the region of influence, and demand for goods and services would not be likely to adversely affect regional or national supplies of required goods and services. The Yucca Mountain FEIS examined the possibility that socioeconomic effects from purchasing construction materials could be felt beyond this four-county region and concluded that there would be little or no impact (DIRS 155970-DOE 2002, p. 4-77).

The region of influence for the analysis of transportation resources includes public roadways near the Caliente rail alignment, and the rail alignment itself.

During rail line construction, new access roads to construction camps, quarries, and water wells would originate from nearby intersections with existing public roadways. Most of the rail alignment would be within Nevada Department of Transportation District 1, crossing Lincoln, Nye, and Esmeralda Counties, with a small portion in District 3 near the State Route 318 crossing (along Caliente rail alignment common segment 1). There are no operating railroads along the Caliente rail alignment.

3.2.9.2 Methodology for Determining Existing Socioeconomic Conditions

DOE characterized socioeconomic activities and resources in the region of influence with a particular emphasis on community-level resources, as appropriate.

For this analysis, DOE used the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Chapter 3) as a basic source of data, and supplemented that data where possible with current community-level data for Lincoln, Nye, and Esmeralda Counties.

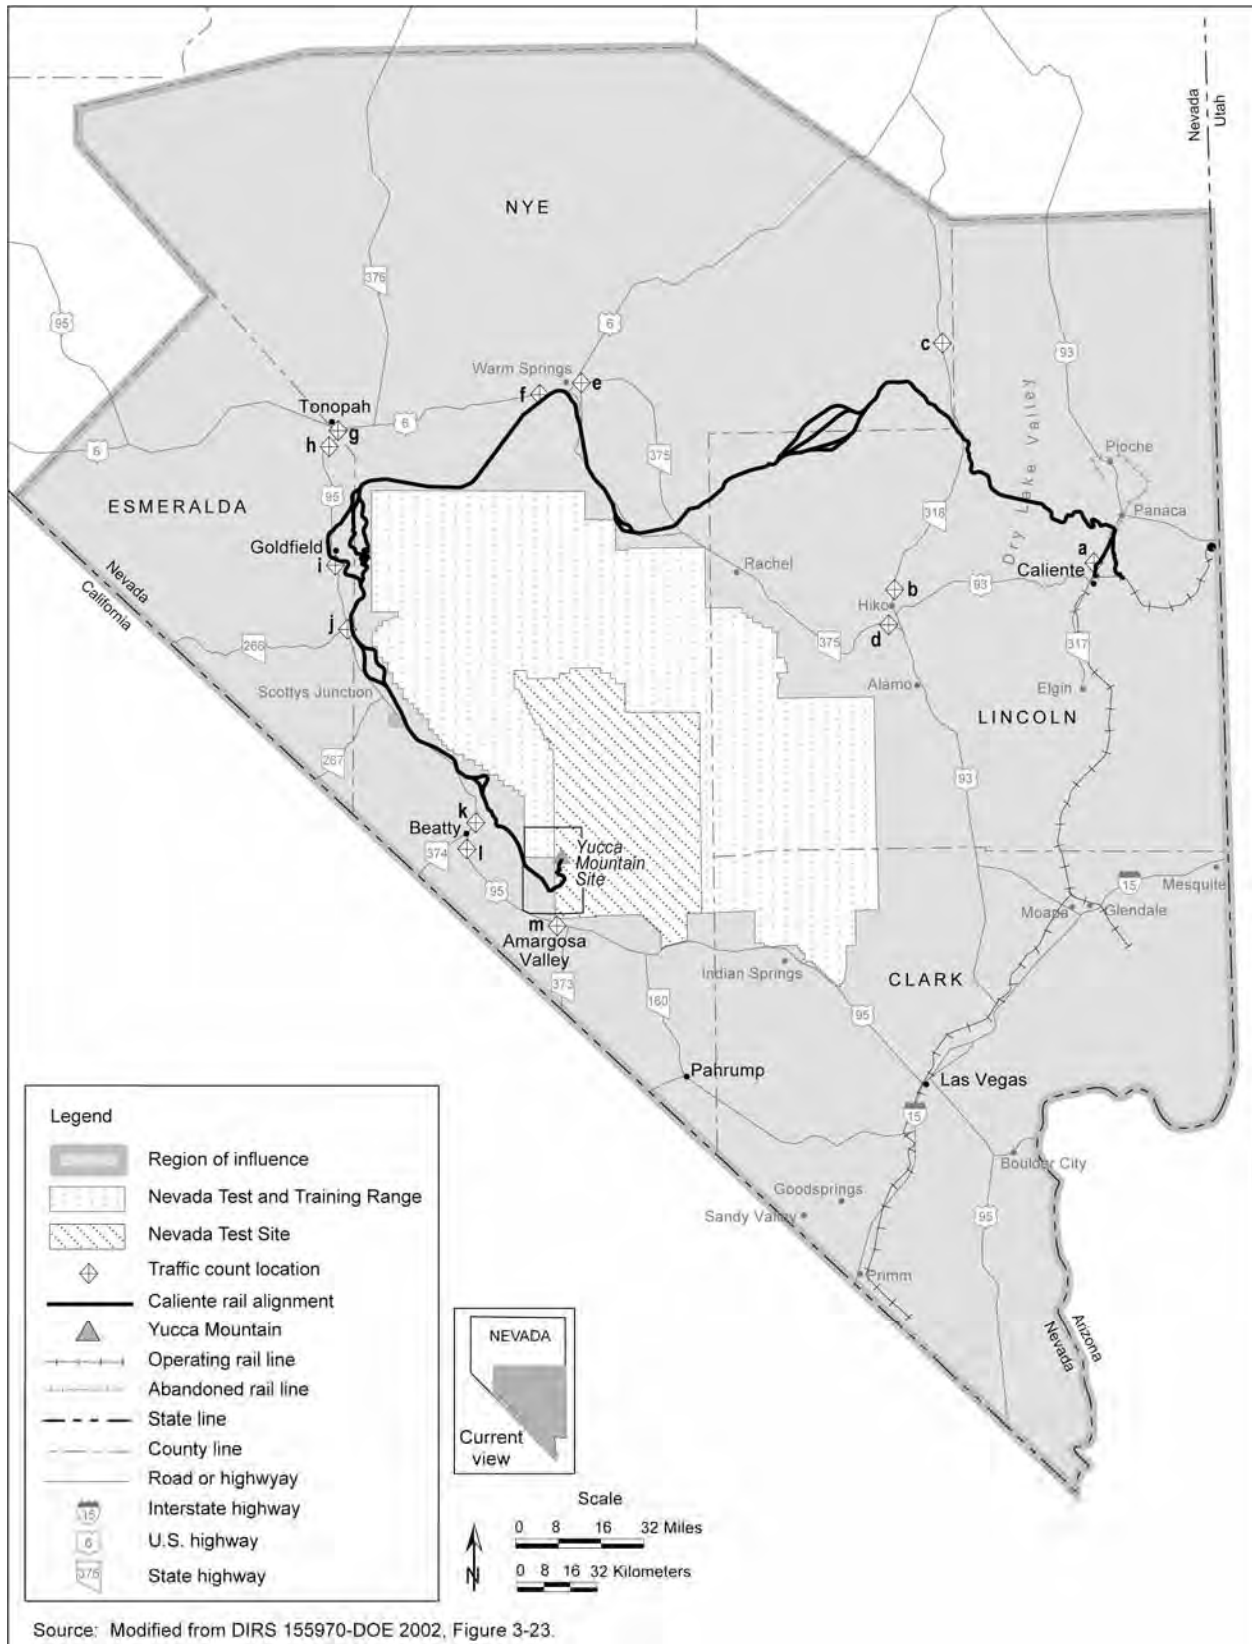


Figure 3-114. Socioeconomics region of influence – Caliente rail alignment.

DOE used an economic-demographic forecasting model known as *Policy Insight*, developed by Regional Economic Models, Inc. (DIRS 178610-Bland 2007, all), to generate employment, **real disposable income**, and **gross regional product** data for Clark, Lincoln, Nye, and Esmeralda Counties. *Policy Insight* is an eight-region model, which includes Clark, Lincoln, Nye, Esmeralda, Mineral, and Lyon Counties, the joint area of Washoe County and Carson City, and one last region encapsulating the rest of Nevada. Appendix J, Socioeconomics, contains the results of the *Policy Insight* model runs.

Real disposable income is the value of total income received after taxes; it is the income available for spending or saving.

The description of existing economic conditions in the Caliente rail alignment region of influence and the forecast values of populations, gross regional product, and real disposable income draw on data from *Policy Insight* version 9.0 (DIRS 182251-REMI 2007, all). The description includes revenue from DOE's Payments Equal to Taxes program, described in detail in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 3-90), and the Repository SEIS. Revenue from this program is not described separately. Because the model is based on nationally collected data for which there is a lag between collection and issuance by the national agencies, and another lag before the data are incorporated into the *Policy Insight* model, there is always a gap of approximately 2 to 3 years between the current year and the last history year. The year 2004 is the last history year for *Policy Insight* version 9.0 used in this baseline forecast. To compensate for this time lag, the model's employment update feature is specifically designed to accommodate new historical data provided by users, which update the model's growth-rate assumptions. *Policy Insight* version 9.0 uses an employment update module that relies on years 2004 to 2006 data from the Nevada Department of Education, Training, and Rehabilitation (DIRS 180712-NDETR 2006, all; DIRS 180740-DETR [n.d.], all; DIRS 180741-DETR 2005, all; DIRS 180742-DETR [n.d.], all). This version also incorporates information from the latest Clark County population projections prepared by the University of Nevada, Las Vegas (DIRS 178806-CBER 2006, all) and the latest population projections developed by the Nevada State Demographer (DIRS 178807-Hardcastle 2006, all).

Data for the affected environment (both those taken from the Yucca Mountain FEIS and supplemental information included here) come from various state, federal, community, and proprietary sources. DOE obtained current and historical population data from a report prepared for the Nevada Small Business Development Center (DIRS 177656-Nevada State Demographer's Office 2006, all). The Department obtained housing data, including information on housing stock, vacancy rates, median housing values, and gross rents, from the Nevada Small Business Development Center, which compiled the information from U.S. Census Bureau data (DIRS 173564-Nevada Small Business Development Center 2003, all; DIRS 173565-Nevada Small Business Development Center 2003, all; DIRS 173566-Nevada Small Business Development Center 2003, all; DIRS 173567-Nevada Small Business Development Center 2003, all). DOE uses the U.S. Census Bureau housing data because county-collected housing data can be inconsistent across counties due to unique county assessment practices. In addition, the Census Bureau's housing data contain characteristics that county housing data sources do not, such as whether a property is a rental property or owner-occupied, occupied, or vacant.

Income, poverty, and unemployment data come from the U.S. Census Bureau (DIRS 176856-U.S. Census Bureau 2003, all). DOE obtained current values for employment, real disposable income, and gross regional product for Lincoln, Nye, Esmeralda, and Clark Counties from the *Policy Insight* model, as previously described. DOE compiled business-establishment data from the *Nevada Workforce Informer, Data Analysis* (DIRS 173545-Nevada Department of Employment, Training & Rehabilitation 2005, all; DIRS 173542-Nevada Department of Employment, Training & Rehabilitation 2005, all; DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all). The Department obtained data on public services mainly from interviews with county representatives in the region of influence and from the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Chapter 3), augmented in some instances with

information from other sources cited herein. Yucca Mountain Oversight Offices in Lincoln and Esmeralda Counties provided contact information for county agencies and suggested data sources for this section. The County Manager provided similar assistance for Nye County. DOE obtained health data from the Nevada State Health Division (DIRS 173560-State of Nevada [n.d.], all); education data from Nevada District Accountability Reports (DIRS 177758-Lincoln County School District [n.d.], all; DIRS 177759-Nye County School District [n.d.], all; DIRS 177760-Esmeralda County School District [n.d.], all); law enforcement data from the Department of Public Safety (DIRS 173399-State of Nevada 2004, all; DIRS 177747-State of Nevada 2005, all; DIRS 177748-State of Nevada 2006, all).

DOE based the description of the affected transportation environment on existing traffic volumes on the roadways (measured as average daily traffic counts), and obtained traffic volumes for roads from the Nevada Department of Transportation traffic report for 2005 (DIRS 178749-NDOT [n.d.], all). The Department then estimated levels of service on the affected roadways using guidelines in the Highway Capacity Manual (DIRS 176524-Transportation Research Board 2001, all).

3.2.9.3 General Regional Socioeconomic Characteristics

DOE examined baseline socioeconomic conditions for selected communities within the region of influence that would be likely to be affected by railroad construction and operations. These communities include Caliente in Lincoln County; Tonopah, Beatty, the Town of Amargosa Valley, and Pahrump in Nye County; and Goldfield in Esmeralda County. This section presents baseline conditions for Clark County at the county level, primarily in relation to economic measures and health-care capacity. DOE assumes that there would be an overall income effect on Clark County from the workers living there and commuting to work on the proposed railroad project, but because of the large population of Clark County, the effect would be small.

3.2.9.3.1 Employment and Income

According to the *Policy Insight* baseline projections listed in Table 3-57, Lincoln County's economy is substantially smaller than Nye County's. The three largest employment sectors in Lincoln County are state and local government (27 percent of the employed population), services (21 percent), and retail trade (11 percent). Mining is also an important employment sector, with 11 percent of the employed population. The county's largest employers include the Lincoln County School District; Lincoln County; and an engineering firm, DynCorp Technical Services, LLC (DIRS 173542-Nevada Department of Employment, Training & Rehabilitation 2005, all). Lincoln County's employment has been declining after growth during the 1980s (DIRS 155970-DOE 2002, p. 3-87). According to *Policy Insight* baseline projections, the gross regional product of the county in 2007 will be \$93.6 million, and the real disposable income will be \$93.6 million.

Nye County has the second largest economy in the region of influence. The largest employment sectors are services (44 percent of the employed population), followed by retail trade (12 percent), and then transportation warehousing, information, and finance and insurance (11 percent collectively). State and local government and construction are also important sectors. The importance of construction reflects the county's population growth from 1990 to 2003 because new residents and businesses require construction materials and labor, and a range of services. Large employers include National Security Technologies, LLC (NSTec), the management and operating contractor for DOE at the Nevada Test Site, which employs between 1,000 and 1,500 people in the area, although many Nevada Test Site employees live in Clark County (DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all).

Table 3-57. Lincoln, Nye, Clark, and Esmeralda County employment by industry, 2007.^a

Industry sector	County			
	Lincoln	Nye	Esmeralda	Clark
<i>Private</i>				
Forestry and fisheries	14	67	3	306
Mining	242	1,094	84	1,420
Utilities	13	185	0	3,798
Construction	187	1,793	32	124,771
Manufacturing	32	342	1	28,737
Wholesale trade	22	186	12	26,567
Retail trade	247	2,140	30	121,883
Transportation and warehousing, information, and finance and insurance	141	1,975	23	158,506
Services	456	8,088	112	577,086
Farm	191	283	67	312
<i>Public</i>				
Federal Government–civilian	40	161	6	11,409
Federal Government–military	8	79	4	12,663
State and local government	576	1,792	101	83,135
Totals^b	2,169	18,184	475	1,150,594

a. Source: DIRS 178610-Bland 2007, all.

b. Totals might differ from sums of values due to rounding.

Local government agencies such as the Nye County School District and Nye County, and mining companies such as the Round Mountain Gold Corporation, are also major employers (DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all).

Nye County employment rebounded after a 15 percent decrease between 1990 and 1995 (DIRS 155970-DOE 2002, p. 3-87). According to *Policy Insight* baseline projections, the gross regional product of Nye County in 2007 will be \$1.16 billion, and the real disposable income will be \$1.12 billion.

Esmeralda has the smallest economy of the four counties. The county's three largest employment sectors are services, state and local government, and mining, which account for 24, 21, and 18 percent of the employed population, respectively. Employers include government agencies such as the State of Nevada and the Esmeralda County School District, and mining companies such as the Chemetall Foote Corporation, which runs Silver Peak Mine and Lode Star Gold, Inc. (DIRS 173545-Nevada Department of Employment, Training & Rehabilitation 2005, all).

According to *Policy Insight* baseline projections, the gross regional product of Esmeralda County in 2007 will be \$25.7 million, and the real disposable income will be \$29.3 million.

Clark County's economy dominates southern Nevada. The largest employment sectors are services (50 percent of the employed population; 46 percent of services employment is within the Accommodations and Food Services sectors); transportation warehousing, information, and finances and insurance (14 percent); construction (11 percent); and retail trade (11 percent). According to *Policy*

Insight baseline projections, Clark County surpasses the other counties with a gross regional product of \$95.4 billion, which is more than 80 times that of Nye County. According to *Policy Insight* baseline projections, Clark County residents will have \$60.7 billion in *real disposable personal income* in 2007.

3.2.9.3.1.1 Mining and Agriculture. This section describes existing conditions for mining and agricultural activities, because a railroad along the Caliente rail alignment would be likely to affect these interests more than other economic activities.

Mining At present, Lincoln, and Clark Counties have only industrial mines; Nye County has metallic and nonmetallic mines and oil production fields; and Esmeralda County has industrial and metallic mineral mines. In 2007, the mining industry employed 18 percent of the 475 workers in Esmeralda County and 6 percent of workers in Nye County (DIRS 178610-Bland 2007, all). Mining also constitutes a large part of the total personal income generated in the four-county region of influence. In Esmeralda County in 2002, almost 18 percent of personal income came from mining, making it the single largest source of personal income in the county (DIRS 173546-BEA 2004, Table CA05N). Almost 7 percent of personal income in Nye County came from the mining industry in 2002 (DIRS 173548-BEA 2005, Table CA05N).

Mined minerals in the region of influence include gold, silver, aggregate (consisting of crushed stone, natural sands, and gravel), salt, and a wide range of other non-metallic minerals. Gold is central to Nevada's mining industry, and at \$2.4 billion in revenue (DIRS 169127-Driesner and Coyner 2003, all; DIRS 173554-Price and Meeuwig 2003, all), it brings in more revenue than any other type of mining. Silver production is also important and was Nevada's fourth leading mineral commodity in 2002, valued at \$62 million.

The Caliente rail alignment would cross some mining areas and districts. Caliente common segment 1 would cross the northernmost portion of the Seaman Range Mining District. As discussed in Section 3.2.2.5.2, most of historic mining activity in this mining district occurred more than 5 kilometers (3 miles) south and southwest of Caliente common segment 1. The South Reveille alternative segments and common segment 3 would pass within 3 kilometers (2 miles) of the Reveille Valley Mining Area. A portion of common segment 3 would cross the Clifford Mining District, which is near Warm Springs. Goldfield alternative segments 1, 3, and 4 would cross the Goldfield Mining District; Goldfield alternative segment 1 also would cross the Diamondfield Mining District. A portion of Caliente common segment 4 would cross the westernmost portion of the Stonewell Mining District, although most of the historic mining activity in this district was approximately 5 kilometers (3 miles) east of the common segment. Finally, Caliente common segment 6 would cross the northeastern portion of the Bare Mountain Mining District, although most historical mining activity there occurred more than 3 kilometers (2 miles) south of this common segment.

Agriculture The primary agricultural activity the Caliente rail alignment would intersect would be grazing. As discussed in Section 3.2.2, Land Use and Ownership, there are 27 separate grazing allotments along the Caliente rail alignment, 24 of which are active. In Section 3.2.2, Land Use and Ownership, Tables 3-6 and 3-7 list and describe these grazing allotments, and Figures 3-26 through 3-33 show the locations of the allotments.

The permitted grazing operations support employment and provide income for ranchers and their workers, and income for the respective counties. BLM-issued grazing permits authorize these operations, and specify the total number of animal unit months apportioned (an animal unit month represents enough dry forage for one mature cow for 1 month). For those allotments for which information is available (see Table 3-6), animal unit months range from 118 to 48,250, and land area ranges from 17 to 4,363 square kilometers (4,200 to 628,000 acres). The BLM established the property base for each allotment based on land or water rights.

In addition to grazing, farming is an important source of both income and employment for the counties in the region of influence. As discussed in Section 3.2.1.2.3, less than 1 percent of soils along the Caliente rail alignment are classified as prime farmlands. Three rail alignment segments would cross prime farmland soils: Caliente common segment 1, the Caliente alternative segment, and the Eccles alternative segment (see Figure 3-5). DOE calculated the amount of potentially disturbed prime farmland soils by multiplying the total disturbance area by the percentage of prime farmland present along the construction right-of-way. Prime farmland soils along the Caliente and Eccles alternative segments consist of 0.11 square kilometer (27 acres) and 0.1 square kilometer (24 acres). This accounts for roughly 0.01 percent of Lincoln County's total 870 square kilometers (210,000 acres) of prime farmland. These soils are near private land and, at present, might be used for some farming purposes. The 0.22 square kilometer (54 acres) of prime farmland soils along common segment 1 are not being farmed, and are in a relatively isolated area in Nye County (DIRS 182843-ICF 2007, all, Plates 107 to 109). This accounts for roughly 0.04 percent of Nye County's total 610 square kilometers (150,000 acres) of prime farmland.

3.2.9.3.1.2 Personal Income, Poverty, and Unemployment. As shown in Table 3-58, Nye and Clark Counties have the highest median income in the region of influence, followed by Esmeralda and Lincoln Counties. While Nye and Clark Counties showed the highest incomes and the lowest percentage of residents in poverty in 1999 (see note on Table 3-58 for information on poverty thresholds), the unemployment rates in these counties were higher than Lincoln and Esmeralda Counties in 2000. The unemployment rate in Nye County decreased between 2000 and 2005, while Esmeralda County's unemployment rate increased over the same period. Esmeralda County had the highest unemployment rate in the region of influence.

At the community level, Beatty has the highest median income, although its poverty rate is third highest behind the City of Caliente in Lincoln County, and the Town of Amargosa Valley. The City of Caliente also has the highest unemployment rate of all communities in the region of influence.

Tonopah and Beatty in Nye County have higher median incomes and lower poverty and unemployment rates than Caliente in Lincoln County.

3.2.9.3.2 Population

Table 3-59 lists the county and community populations in the Caliente rail alignment region of influence in 1990, 2000, and 2005.

According to the Nevada State Demographer's Office Nevada 2000 census data (DIRS 173565-Nevada Small Business Development Center 2003, p. 1), the population of Lincoln County is 100-percent rural. It has a population density of only 0.15 people per square kilometer (0.4 people per square mile) (DIRS 173530-Bureau of Census 2005, all). A rail line along the Caliente rail alignment would begin in or near Caliente, Lincoln County's only incorporated city. The 2005 population of the City of Caliente accounted for more than one-fourth of the county's population (DIRS 177656-Nevada State Demographer's Office 2006, p. 6).

Nye County is the second most populous county in the region of influence. According to the U.S. Bureau of Census (DIRS 173530-Bureau of Census 2005, all), in 2005 the county had a population density of 0.69 people per square kilometer (1.8 people per square mile); according to population estimates and rural figures from the Nevada State Demographer's Office (DIRS 173564-Nevada Small Business Development Center 2003, p. 1), 55 percent of the population is considered rural. The largest town in Nye County is unincorporated Pahrump, which accounts for 80 percent of the county's population. Although Pahrump is not in the immediate vicinity of the Caliente rail alignment, it is reasonably foreseeable that some construction and operations workers would live in Pahrump, based on historical and current patterns of workers at the Nevada Test Site and the Yucca Mountain Site.

Table 3-58. County and place-level personal income, poverty, and unemployment.^a

County, city/community	Median household income in 1999 (dollars) ^b	Poverty in 1999 (percent) ^b	Unemployment in 2000 (percent) ^b	Unemployment in 2005 (percent) ^c
<i>County</i>				
Lincoln	31,979	16	5.2	5.1
Nye	36,024	11	7.1	5.2
Clark	44,616	11	6.6	4.0
Esmeralda	33,203	15	3.3	5.3
<i>City/community</i>				
Tonopah	38,029	11	7.9	No data available
Pahrump	35,313	9	7.5	No data available
Goldfield	32,969	12	3.2	No data available
Caliente	26,458	22	9.1	No data available
Amargosa Valley	34,432	15	3.2	No data available
Beatty	41,076	13	5.6	No data available

a. The U.S. Census Bureau defines poverty based on estimates of how much money families need to meet their nutritional needs for 1 year. Poverty thresholds and a more thorough definition of poverty are available from the U.S. Census Bureau at <http://www.census.gov/acs/www/UseData/Def/Poverty.htm>, all.

b. Source: DIRS 176856-U.S. Census Bureau 2003, Tables 7, 13, and 15.

c. Source: DIRS 177755-BLS [n.d.], all.

Table 3-59. County and community populations, Caliente rail alignment, 1990 to 2005.^a

County	City/ community	1990 population ^b	2000 population	2005 population	1990 to 2000 change (percent)	2000 to 2005 change (percent)
Lincoln		3,810	4,165	3,886	9	-7
	Caliente	1,146	1,123	1,015	-2	-10
Nye		18,190	32,978	41,302	81	25
	Tonopah	3,671	2,833	2,607	-23	-8
	Amargosa Valley	724	1,167	1,383	61	19
	Beatty	1,662	1,152	1,032	-31	-10
	Pahrump	7,430	24,235	33,241	226	37
Esmeralda		1,350	1,061	1,276	-21	20
	Goldfield	672	424	438	-37	3
Clark		770,280	1,394,440	1,815,700	81	29

a. Source: DIRS 177656-Nevada State Demographer’s Office 2006, all.

b. 1990 estimates for Tonopah, Amargosa Valley, Beatty, Pahrump, and Goldfield were not available through the Nevada State Demographer’s Office; therefore, subdivision-level data for these locations were taken from the U.S. Census DP-1 (DIRS 179132-Bureau of Census [n.d.], all). The Census data reflect a different time series than the Governor’s Certified Estimates.

Nye County also includes the communities of Tonopah, Beatty, and the Town of Amargosa Valley, all of which are near the Caliente rail alignment. Tonopah is the most populated of these communities.

Esmeralda County is the least populated of the counties in the Caliente rail alignment region of influence. Esmeralda is also the least densely populated county, with a density of 0.11 people per square kilometer (0.3 people per square mile) (DIRS 173534-Bureau of Census 2005, all) and a 100-percent rural population (DIRS 173566-Nevada Small Business Development Center 2003, p. 1). The community of Goldfield is close to the Caliente rail alignment, and its population accounts for more than one-third of Esmeralda County's population.

Clark County, which includes Las Vegas, is the most populated county in Nevada. It has a population density of 67 people per square kilometer (173.9 people per square mile) (DIRS 173533-Bureau of Census 2005, all), and a rural population of only 2 percent (DIRS 173567-Nevada Small Business Development Center 2003, p. 1). No part of the Caliente rail alignment is in or near Clark County; the closest part of the alignment would be common segment 6, 48 kilometers (30 miles) west of the Clark County boundary, in Nye County. However, a substantial proportion of the railroad construction workforce would probably come from Clark County.

In terms of population change, southern Nevada has been and continues to be among the fastest-growing areas in the United States (DIRS 155970-DOE 2002, p. 3-84). In the Caliente rail alignment region of influence, Lincoln and Nye Counties both experienced population increases from 1990 to 2000, with Nye County's growth of 81 percent being considerably greater than Lincoln County's growth of 9 percent. The population of Esmeralda County decreased between 1990 and 2000 by 21 percent. The growth and overall population of Clark County is substantial, with an increase of 81 percent during the same years.

Communities within these counties have also been undergoing population changes, though these shifts have not necessarily been in the same direction as the respective county. For example, Nye County experienced a substantial population increase (25 percent) between 2000 and 2005. The increase was largely fueled by population growth in Pahrump, while Tonopah's population declined by 8 percent, and Beatty's declined by 10 percent during the same period. The population of Goldfield in Esmeralda County increased by 3 percent between 2000 and 2005, which is consistent with the county's increase in population of 20 percent.

According to *Policy Insight* model baseline projections listed in Table 3-60, most of the counties in the region of influence are expected to grow through 2067, independent of potential project-related effects. These projections assume that current trends continue and incorporate county and state (that is, Nevada State Demographer's Office) demographic and economic data sources. Population projections for Lincoln, Nye, and Esmeralda Counties through 2026 are from the Nevada State Demographer's Office (DIRS 178807-Hardcastle 2006, all); population projections for these areas after 2026 assume constant growth at 2026 rates. Clark County projections to 2035 are from the University of Nevada Las Vegas Center for Business and Economic Research projections (DIRS 178806-CBER 2006, all), and projections to 2067 assume constant growth at 2035 rates. Because these projections assume a constant rate of growth over the period, rather than a growth rate that increases at a decreasing rate (which would be expected for population projections for Clark and Nye Counties), the projected populations are high estimates. This is a conservative assumption when analyzing for total radiological *dose* to resident populations, which is another use of the projections by the Yucca Mountain Project. By 2067, the population of Nye County is projected to increase by 187 percent over 2007 levels. Lincoln County's population is also projected to increase during the same period (63 percent increase over 2007 levels). Esmeralda County population is projected to decline by 2067 (11 percent decrease from 2007 levels). Clark County population is projected to increase by approximately 150 percent over 2007 levels.

Table 3-60. Projected values for population, employment, and economic variables, 2007 to 2067^a (page 1 of 2).

	2007	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2067
<i>Population</i>														
Lincoln County	4,250	4,754	5,330	5,694	5,875	5,991	6,112	6,235	6,361	6,489	6,620	6,754	6,891	6,946
Nye County	45,737	51,971	60,803	67,707	73,155	78,364	84,005	90,053	96,535	103,484	110,933	118,919	127,480	131,074
Clark County	1,990,481	2,258,748	2,652,070	2,946,350	3,169,797	3,358,455	3,544,362	3,739,880	3,946,181	4,163,863	4,393,553	4,635,913	4,891,642	4,997,841
Esmeralda County	1,215	1,147	1,069	1,012	997	1,007	1,016	1,027	1,038	1,048	1,058	1,068	1,079	1,083
All of Nevada	2,745,469	3,064,179	3,539,284	3,902,058	4,185,507	4,431,901	4,680,591	4,943,171	5,221,096	5,515,255	5,826,285	6,155,203	6,503,050	6,647,735
<i>Employment</i>														
Lincoln County	2,169	2,253	2,345	2,416	2,446	2,477	2,513	2,567	2,612	2,677	2,731	2,786	2,843	2,866
Nye County	18,184	19,194	20,585	21,683	22,628	23,706	24,923	26,310	27,732	29,274	31,381	33,640	36,062	37,079
Clark County	1,150,594	1,239,364	1,325,133	1,391,701	1,453,024	1,524,248	1,601,285	1,692,833	1,778,852	1,860,856	1,963,506	2,071,818	2,186,105	2,233,566
Esmeralda County	475	466	451	442	436	434	432	435	438	443	447	452	456	458
All of Nevada	1,609,884	1,719,682	1,834,877	1,918,883	1,996,005	2,085,078	2,182,024	2,299,188	2,409,726	2,518,704	2,659,417	2,808,145	2,965,352	3,030,717
<i>Gross regional product^{b,c}</i>														
Lincoln County	0.936	0.105	0.122	0.138	0.151	0.166	0.183	0.201	0.220	0.242	0.247	0.252	0.257	0.259
Nye County	1.164	1.302	1.550	1.798	2.052	2.340	2.664	3.037	3.447	3.903	4.184	4.485	4.808	4.943
Clark County	95.392	109.494	131.517	151.836	172.974	197.204	224.494	256.596	291.013	327.876	345.963	365.047	385.184	393.546
Esmeralda County	0.026	0.027	0.029	0.032	0.035	0.039	0.042	0.046	0.050	0.056	0.057	0.057	0.058	0.058
All of Nevada	129.036	147.283	177.133	204.369	232.647	264.813	300.888	343.229	388.550	437.450	461.921	487.785	515.120	526.484

Table 3-60. Projected values for population, employment, and economic variables, 2007 to 2067^a (page 2 of 2).

Economic parameter	2007	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2067
<i>Government spending^{b,c}</i>														
Lincoln County	0.039	0.047	0.055	0.061	0.064	0.068	0.070	0.074	0.076	0.078	0.080	0.082	0.083	0.084
Nye County	0.174	0.202	0.252	0.291	0.323	0.356	0.390	0.427	0.466	0.503	0.539	0.578	0.620	0.637
Clark County	7.269	8.460	10.543	12.146	13.427	14.617	15.780	17.043	18.266	19.411	20.482	21.612	22.804	23.299
Esmeralda County	0.007	0.007	0.007	0.007	0.007	0.007	0.008	0.008	0.008	0.008	0.008	0.008	0.008	0.008
All of Nevada	10.592	12.085	14.762	16.841	18.541	20.159	21.769	23.523	25.226	26.830	28.335	29.925	31.607	32.307
<i>Real disposable income^{b,c}</i>														
Lincoln County	0.094	0.103	0.115	0.124	0.131	0.138	0.146	0.156	0.166	0.186	0.190	0.194	0.198	0.199
Nye County	1.117	1.250	1.439	1.605	1.775	1.969	2.203	2.466	2.768	3.132	3.358	3.599	3.858	3.967
Clark County	60.731	68.974	79.836	89.500	99.788	111.517	124.864	140.518	156.612	173.027	182.571	192.642	203.269	207.682
Esmeralda County	0.029	0.030	0.033	0.035	0.037	0.041	0.043	0.047	0.050	0.054	0.054	0.055	0.055	0.056
All of Nevada	85.032	95.636	110.205	123.098	136.861	152.183	169.418	189.600	210.290	232.015	245.035	258.799	273.350	279.400

a. Source: DIRS 178610-Bland 2007, all; DIRS 178806-CBER 2006, all; DIRS 178807-Hardcastle 2006, all.
 b. Values from *Policy Insight* (DIRS 182251-REMI 2007, all), converted to 2006 dollars using the ratio of the 2000 annual Consumer Price Index (CPI) and the annual CPI from 2006.
 c. 2006 dollars in billions.

3.2.9.3.3 Housing

Table 3-61 lists housing characteristics in the Caliente rail alignment region of influence in 2000. The housing stock in Lincoln County and in Caliente consists mostly of single-family homes. Almost a fifth of housing units in Caliente are vacant. The *Lincoln County Master Plan* (DIRS 174520-State of Nevada 2001, pp. 24 and 25) identifies a potential new community development planned for the former Aerojet Nevada lands along the southern county border along U.S. Highway 93. Coyote Springs Investment owns an estimated 120 square kilometers (30,000 acres) of land in the area that is currently under development. The residential component of the development could house workers associated with the proposed railroad who might otherwise live in Caliente. Compared to Lincoln County, Nye County has a much larger housing stock, most of which is mobile (manufactured) homes; the housing stock in the Beatty *Census County Division* and the Amargosa Census County Division consists primarily of mobile homes. In Tonopah, almost one-third of the housing units are vacant, particularly in the rental segment.

Esmeralda County has the smallest housing stock. More than half the county's housing units are in Goldfield, where 48 percent are mobile homes, and 49 percent of all units were vacant in 2000. The housing stock of Clark County in 2000 reflects an increase of slightly more than 75 percent over the 1990 count (DIRS 173531-Bureau of Census 2000, Table DP-5 STF3). This increase is accounted for by the large population and employment growth in Clark County, which has spurred housing construction. Vacancy rates in both the homeowner and rental segments in Clark County tend to be lower than the rates in the other counties in the region of influence, with the exception of Lincoln County.

As shown in Table 3-62, in 2000 the median values of housing in Lincoln County and Esmeralda County were considerably below the median value in Nye County and Clark County. Similarly, rent levels in Lincoln and Esmeralda Counties were approximately half of those for Clark County and approximately two-thirds those of Nye County. Housing values in all of Southern Nevada rose rapidly between the 2000 Census and 2005. A Las Vegas-based housing research firm reported that the median price of the recorded new homes in the area in November 2005 was \$301,519, which was a 5.9 percent annual increase. Omitting apartment conversions, the median price for new homes was \$336,645, or an 18.2 percent annual increase (DIRS 176007-Home Builders Research 2005, all). Lodging options along U.S. Highway 95 between Goldfield and the Yucca Mountain Site are in and around Goldfield, Beatty, and the Town of Amargosa Valley. Visitors to Goldfield can stay in the Goldfield recreational vehicle park, which has 20 spaces (DIRS 182379-Nevada Commission on Tourism 2007, all). Beatty has a much higher accommodation capacity. It has six motels with a total of 275 rooms, and three recreational vehicle parks with a total of 63 spaces (DIRS 182381-Nevada Commission on Tourism 2007, all; DIRS 182384-Nevada Commission on Tourism 2007, all). Town of Amargosa Valley features a combined 60-room hotel and 51-space recreational vehicle park, one additional motel (17 rooms), and one additional recreational vehicle park (97 spaces) (DIRS 182380-Nevada Commission on Tourism 2007, all; DIRS 182383-Nevada Commission on Tourism 2007, all).

3.2.9.3.4 Public Services

This section summarizes conditions for health care, education, fire protection, and law enforcement. Section 3.2.11, Utilities, Energy, and Materials, describes utilities-related public services.

3.2.9.3.4.1 Health Care. While Lincoln, Nye, and Esmeralda Counties have some health care facilities, all three counties are federally designated as health professional shortage areas for primary, dental, and mental health care (DIRS 173558-State of Nevada [n.d.], all; DIRS 173559-State of Nevada [n.d.], all; and DIRS 173560-State of Nevada [n.d.], all). Health care services in the region of influence are concentrated in Clark County, particularly in the Las Vegas area.

Table 3-61. Housing characteristics in the Caliente rail alignment region of influence, 2000.^a

Geographic area	Total housing units	Single-family homes	Multiple-family homes	Mobile homes	Occupied housing units	Vacant housing units	Vacancy rate (percent)	
							Homeowner	Rental
Lincoln County ^b	2,178	1,365	196	617	1,540	638	4.0	9.2
Caliente Census County Division ^c	536	337	77	122	437	99	4.2	11.8
Nye County ^d	15,934	6,383	1,014	8,537	13,309	2,625	3.4	17.9
Tonopah Census County Division ^e	1,608	766	385	457	1,152	456	3.6	32.3
Beatty Census County Division ^e	746	181	97	468	548	198	2.6	33.0
Amargosa Census County Division ^e	536	73	7	456	422	114	2.4	17.9
Pahrump ^f	8,206	3,660	479	4,067	7,234	972	3.2	11.8
Esmeralda County ^e	833	269	121	443	455	378	4.4	40.5
Goldfield Census County Division ^c	429	162	61	206	224	205	5.7	43.8
Clark County ^f	559,799	321,801	203,411	34,587	512,253	47,546	2.6	9.7

a. Total Housing Units, Occupied Housing Units, and Vacant Housing Units counts were taken from Summary File 1 U.S. Census Bureau data, and Single Family Homes, Multiple Family Homes, and Mobile Homes counts were taken from Summary File 3 U.S. Census data. Because Summary File 1 data are collected from all households, while Summary File 3 data are compiled from a sample of approximately 19 million housing units (approximately 1 in 6 households), total housing counts differ slightly from the sum of "Single Family Homes, Multiple Family Homes, and Mobile Homes."

b. Source: DIRS 173565-Nevada Small Business Development Center 2003, p. 55.

c. Source: DIRS 173535-Bureau of Census 2000, all.

d. Source: DIRS 173564-Nevada Small Business Development Center 2003, p. 55.

e. Source: DIRS 173566-Nevada Small Business Development Center 2003, p. 55.

f. Source: DIRS 173567-Nevada Small Business Development Center 2003, p. 55.

Table 3-62. Median housing values and gross rents in the region of influence, 2000.^a

Geographic area	Median value (dollars) ^b	Median monthly gross rent (dollars)
Lincoln County	80,300	328
Caliente Census County Division	65,200	359
Nye County	122,100	541
Tonopah Census County Division	78,200	478
Beatty Census County Division	93,700	368
Amargosa Valley Census County Division	80,800	380
Pahrump	135,100	614
Esmeralda County	75,600	381
Goldfield Census County division	71,300	389
Clark County	139,500	716

a. Source: DIRS 176856-U.S. Census Bureau 2003, Tables 25 and 29.

b. Median value applies to owner-occupied units.

Lincoln County has one hospital in Caliente, the Grover C. Dils Medical Center, near U.S. Highway 93. The service area for this facility is all of (and limited to) Lincoln County (DIRS 174545-Arcaya 2005, all). The hospital employs two full-time-equivalent physicians, two full-time-equivalent physician assistants, and eight licensed nurses (DIRS 175508-Arcaya 2005, all). In addition to providing all medical services and staffing a 24-hour emergency room at Grover C. Dils Medical Center, the hospital’s physicians and physician assistants are responsible for staffing a medical clinic in Alamo, Nevada (DIRS 175508-Arcaya 2005, all). Sixteen of the beds at Grover C. Dils Medical Center are designated for long-term care and 4 are reserved for acute cases (DIRS 175508-Arcaya 2005, all). The Grover C. Dils hospital is not licensed for surgery. All patients in need of surgical procedures are referred to Valley View Medical Center in Cedar City, Utah, about 155 kilometers (96 miles) from Caliente; Dixie Regional Medical Center in St. George, Utah, about 177 kilometers (110 miles) from Caliente; or Las Vegas, about 241 kilometers (150 miles) from Caliente (DIRS 175508-Arcaya 2005, all). Lincoln County continues to be a medically underserved area and a health professional shortage area, although hospital-use data in Table 3-63 show the capacity of the health care system improving overall from 1995 to 2000.

According to a Nye County assessment, emergency service (county-wide medical and Pahrump’s fire protection) personnel are currently overextended (DIRS 174548-Abaris Group 2004, pp. 2 and 3). Nye County medical services are widely distributed and consist of a mixture of public and private clinics.

Table 3-63. Hospital use in Lincoln and Nye Counties.

County	1995	1998	2000
<i>Lincoln^a</i>			
Average number of beds	4	4	20
Beds per 1,000 residents	1	0.95	4.8
Patient days	360	300	No data available
<i>Nye^b</i>			
Average number of beds	21	10	44
Beds per 1,000 residents	0.86	0.33	1.3
Patient days	1,900	560	No data available

a. Source: DIRS 175508-Arcaya 2005, all.

b. Source: DIRS 174732-Arcaya 2005, all.

The communities of Beatty, Pahrump, and Town of Amargosa Valley all have access to ambulance service, and are served by preventive care clinics staffed by physician assistants or community health

nurses. These clinics focus on women's health, immunizations, and sexually transmitted diseases. They are funded in part by the State Rural Health Division (DIRS 174736-Arcaya 2005, all). Pahrump has a pediatric physician who runs a separate clinic in the community, a Veterans Administration clinic, and several private dermatologists, dentists, and chiropractors (DIRS 174736-Arcaya 2005, all; DIRS 174972-Arcaya 2005, all).

Additionally, Desert View Regional Medical Center (DVRMC), Pahrump's first hospital, opened in April 2006. The hospital has 24 beds and a 24-hour emergency room. The facility has a maternity ward, full-service lab and radiology services, as well as physical therapy services (DIRS 181897-Desert View Regional Medical Center 2007, all).

Nye County is also served by the Nye Regional Medical Center, a small, private hospital in Tonopah that has ambulance services. The center has 44 beds, 26 of which are long-term-care beds reserved for the hospital's nursing-home wing. Two full-time-equivalent physicians provide coverage for both the 24-hour emergency room and all other patients. The hospital's nursing home maintains 24-hour coverage consisting of one registered nurse and one certified nursing assistant. The Nye Regional Medical Center is able to perform diagnostic imagery and to provide services from its on-site laboratory, pharmacy, and outpatient clinic. However, the facility is not licensed for surgery. Nye County patients in need of more advanced care than can be provided at Tonopah's hospital are transported by helicopter to Reno or Las Vegas by Flight for Life, a medical air service (DIRS 174732-Arcaya 2005, all).

Although Nye County continues to be a medically underserved area and a health professional shortage area, Table 3-63 shows that the capacity of the health care system in Nye County improved between 1995 and 2000, with increases in the average number of beds and the number of beds per 1,000 residents.

Esmeralda County had no practicing doctors or dentists in 2005 (DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7). The U.S. Health Resources and Services Administration designated Esmeralda County as both a health professional shortage area and a medically underserved population for primary health, dental, and mental-health care for 2004 (DIRS 173560-State of Nevada [n.d.], all). Because Esmeralda County has no health-care facilities, the county has prepared a proposal to fund a new facility (DIRS 175507-McCorkel et al. 2005, all).

Clark County has 13 general acute-care medical centers with a combined total of 3,439 beds (1.9 beds per 1,000 residents) and 2,729 active, licensed physicians practicing throughout the county in 2005 (DIRS 178100-State of Nevada 2006, p. v; DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7). Sunrise Hospital and Medical Center in Las Vegas is the largest hospital in Nevada, with 701 beds (DIRS 178100-State of Nevada 2006, p. v). It is also capable of providing all medical services and staffs a 24-hour emergency room. Of the remaining 12 hospitals in Clark County, 8 (Desert Springs Hospital, Mountain View Hospital, North Vista Hospital, Southern Hills Hospital and Medical Center, Spring Valley Hospital Medical Center, Summerlin Hospital and Medical Center, University Medical Center, and Valley Hospital and Medical Center) are in Las Vegas, 2 (St. Rose Dominican Hospital and St. Rose Siena Campus) are in Henderson, 1 (Boulder City Hospital) is in Boulder City, and 1 (Mesa View Regional Hospital) is in Mesquite (DIRS 178100-State of Nevada 2006, p. v).

3.2.9.3.4.2 Education. Lincoln County has a total of nine elementary, middle, and high schools. During the 2005 to 2006 school year, Lincoln County schools had a total enrollment of 1,001 students and a graduation rate for the class of 2005 of 83 percent (DIRS 177758-Lincoln County School District [n.d.], all). The average student-to-teacher ratio for kindergarten through eighth grades was 14 to 1 (DIRS 177758-Lincoln County School District [n.d.], all). This is consistent with the 2003 national average student-to-teacher ratio of 16 to 1 across elementary and secondary grades levels (DIRS 177757-Snyder, Tan and Hoffman 2006, Table 62). Caliente has an elementary school that serves Lincoln County students and a middle and high school that exclusively serve troubled youth (DIRS 174735-Arcaya 2005,

all). Other middle- and high-school-aged students in Caliente are transported by bus approximately 24 kilometers (15 miles) to Lincoln County High School in Panaca (DIRS 174545-Arcaya 2005, all). Lincoln County High School had an enrollment of 173 students from Panaca, Caliente, Pioche, and outlying areas for the 2005-2006 school year. Lincoln County High School is functioning below maximum design capacity, with the building able to accommodate up to 240 students (DIRS 175973-Arcaya 2006, all).

During the 2005-2006 school year, Nye County had approximately 6,088 students. The county’s 2005 graduation rate was 60 percent (DIRS 177759-Nye County School District [n.d.], all). The average student-to-teacher ratio for kindergarten through fifth grades was 20 to 1 (DIRS 177759-Nye County School District [n.d.], all). Tonopah has elementary, middle, and high school facilities.

Nye County’s school system experienced approximately a 10-percent increase in enrollment in the 2004-2005 school year over the previous year. Most of this growth was due to increases in Pahrump’s population. Pahrump is home to four elementary schools, one middle school, and one high school. Table 3-64 lists enrollment for each school. All of these schools are functioning at or above maximum design capacity (that is, they are all holding as many, or more, students than they were originally built to accommodate). To alleviate overcrowding, all six schools were scheduled to receive modular units over the summer of 2005 that would each hold two additional classes. A bond for a new elementary school is also under consideration for the area, with a timeline of roughly 18 months for discussion and a decision on the bond. The new elementary school would likely be designed to hold between 400 and 600 students, making it roughly equal in size to the four existing elementary schools (DIRS 174737-Arcaya 2005, all).

Table 3-64. Enrollment in Pahrump area schools, 2004-2005.^a

School name	Type	Enrollment, 2004-2005
Pahrump Valley	High school	987
Rosemary Clark	Middle school	1,122
Hafen	Elementary school	560
JG Johnson	Elementary school	555
Mt. Charleston	Elementary school	574
Manse	Elementary school	478

a. Source: DIRS 174737-Arcaya 2005, all.

In Nye County, the Community College of Southern Nevada has a campus in Pahrump that provides post-secondary school education. The facility offers courses to fulfill general education requirements, with 4-year degree programs planned (DIRS 174737-Arcaya 2005, all). Some of these programs are also offered as distance learning courses that can be accessed at a secondary facility in Tonopah equipped for videoconferencing (DIRS 174737-Arcaya 2005, all). The nearest major university to southern Nye County is the University of Nevada, Las Vegas, 105 kilometers (65 miles) from Pahrump. The University of Nevada, Reno, is the closest major university to northern Nye County. In addition, the University of Nevada, Reno, has a Cooperative Extension Center in Pahrump.

In Esmeralda County, 86 students were enrolled in school during the 2005-2006 school year (DIRS 177760-Esmeralda County School District [n.d.], all). Three schools in the county (in Dire, Silver Peak, and Goldfield) serve kindergarten through eighth grade students. The average student-to-teacher ratio was 12 to 1 (DIRS 177760-Esmeralda County School District [n.d.], all). The county employs seven certified teachers and one certified literacy coordinator (DIRS 174970-Arcaya 2005, all). There is no high school in Esmeralda County; high-school students from Esmeralda County attend school in Tonopah, Nye County (DIRS 155970-DOE 2002, p. 3-156).

3.2.9.3.4.3 Fire Protection. Lincoln and Nye Counties meet fire suppression needs with volunteers from the individual communities in the counties. Lincoln County has four locations with all-volunteer fire departments: Caliente, Pahranaagat Valley, Panaca, and Pioche. Caliente’s fire department has 25 volunteers and owns three fully equipped fire trucks with a combined tank capacity of 10,600 liters (2,800 gallons). The Panaca Fire Department has a force of 25 volunteers and owns several firefighting vehicles, with a combined tank capacity of 9,500 liters (2,500 gallons). The Pioche Fire District has 20 volunteers and owns two outdated firefighting vehicles: a tanker with a 3,800-liter (1,000-gallon) tank and a vehicle with a 1,900-liter (500-gallon) foam tank, and extrication equipment. The Pahranaagat Valley Fire District has a force of 25 volunteers and owns three firefighting vehicles, with a total tank capacity of 6,800 liters (1,800 gallons). All four locations have access to ambulance services (DIRS 174973-Arcaya 2005, all). In addition to these four fire departments, Lincoln County commissioners are currently forming a countywide fire district. This new district would increase fire protection for places at high risk for fires, such as the Mount Wilson area (DIRS 174971-Arcaya 2005, all). There are no plans for Caliente to increase fire protection services, but Caliente and the other three fire departments in the county are currently able to meet their communities’ needs, and they maintain a stream of citizens in training to become new volunteers (DIRS 174973-Arcaya 2005, all).

Nye County has 11 volunteer fire departments, including one in Beatty and one in Town of Amargosa Valley. The county’s only paid fire department is in Pahrump. The county recently spent \$2.5 million to upgrade its fire trucks and has adequate fire protection in all areas of the county except for Pahrump, which is overextended (DIRS 174731-Arcaya 2005, all). A 2004 audit of the Pahrump Valley Fire-Rescue Service commissioned by the Pahrump Town Board found that “the community is currently underserved by fire suppression and emergency medical services operational staff” and suggested that staff be added to the service, specifically an additional daily three-person team (DIRS 174548-Abaris Group 2004, p. 3). The audit also noted that Pahrump has no overall fire suppression and emergency medical services master plan, and recommended that one be developed.

As of October 2006, Nye County did not have an agreement with DOE to provide fire protection services to the Yucca Mountain Site. At present, the Nevada Test Site provides these services. The Nevada Test Site has two active fire departments that operate 24 hours a day, 7 days a week. One of the fire departments is in Mercury, Nevada (Area 23), and the other is in Area 6 on the Nevada Test Site. The Yucca Mountain Site has two paramedics, a small medical facility, and an ambulance for emergency response. The site also has two fully trained underground rescue teams available any time underground work is underway (DIRS 177762-Gormsen 2006, all).

The BLM Las Vegas and Battle Mountain Field Offices supplement Nye County’s fire-protection resources by providing wildfire suppression services to all the public lands within Nye County that are managed by the BLM and the U.S. Forest Service (DIRS 177867-Gormsen 2006, all; DIRS 177925-Gormsen 2006, all). The Las Vegas Field Office provides fire suppression resources for wildfires during peak fire season, which is generally from April through October. The Battle Mountain Field Office provides fire suppression support from three locations in northern Nye County: Austin, Eureka, and Battle Mountain. In addition to firefighters, the fire-suppression resources available through these locations include Type-4 and Type-3 wildfire engines, a Type-3 helicopter, Type-3 incident commanders, and single engine air tanker and air attack bases (DIRS 177867-Gormsen 2006, all; DIRS 177925-Gormsen 2006, all).

In Esmeralda County, Goldfield has nine volunteer firefighters and three fire trucks; Gold Point has eight volunteer firefighters and three fire trucks; Silver Peak has six volunteer firefighters and three fire trucks; and Fish Lake Valley has 16 volunteer firefighters and three fire trucks (DIRS 180977-Gormsen 2007, all). The community fire departments have access to the county’s road department vehicles, if needed.

3.2.9.3.4.4 Law Enforcement. The Lincoln County Sheriff’s Office employs eight full-time patrolmen, one captain, one sheriff, five corrections officers, two civilian dispatchers, and one administrative assistant, which yields a ratio of 2.6 officers per 1,000 residents. This force serves an area of 27,500-square kilometers (10,600 square miles). The Lincoln County Sheriff’s Office relies heavily on federal grants for equipment, including vehicles, dispatch software systems, and communications systems (DIRS 178099-Arcaya 2006, all). However, none of the support is ongoing, so the county reapplies for federal grant assistance each year.

The Nye County Sheriff’s Office has 105 sworn officers (85 street-patrol officers and 20 corrections and detention officers) (DIRS 174974-Arcaya 2005, all). This yields a ratio of 2.2 patrol officers per 1,000 residents. The Nye County Sheriff’s Office receives some funding in the form of occasional grants from state and federal agencies (DIRS 177756-Gormsen 2006, all).

The Esmeralda County Sheriff’s Office has 14 employees – six officers that handle patrol (one sheriff, one sergeant, two resident deputies, and two full-time street deputies), three corrections officers, four full-time dispatchers, and one part-time civilian dispatcher (DIRS 174753-Arcaya 2005, all). This yields a ratio of 5 officers per 1,000 residents in Esmeralda County. By comparison, the national officer-to-population ratio is 2.4 officers per 1,000 residents (DIRS 155970-DOE 2002, p. 3-92). The Esmeralda County Sheriff’s Office receives limited state and federal support in the form of occasional equipment grants (DIRS 178094-Arcaya 2006, all). The county does not receive on-going state or federal grant support or training.

As Table 3-65 shows, crime rates for Lincoln, Nye, and Esmeralda Counties are below the national average, and decreased between 2003 and 2005.

3.2.9.3.5 Transportation Infrastructure

This section describes the public roadways and mainline railroads in the area around the Caliente rail alignment.

3.2.9.3.5.1 Public Roadways. Because the Caliente rail alignment region of influence for transportation resources is primarily in remote and rural areas, the rail line would cross mostly low-usage unpaved roads, including county roads, private roads, and off-road vehicle trails. While many of the unpaved roads are important to the daily activities of landowners and ranchers in the area, these roads are not heavily traveled. Section 4.2.10, Occupational and Public Health and Safety, describes safety issues concerning public road–rail crossings, and road traffic related to construction and operation of the proposed railroad.

In addition to the state and federal roads discussed below, there are three paved roads near the Caliente rail alignment: Cedar Pipeline Ranch Road in southern Reveille Valley and two Nevada Test and Training Range access roads (one approximately 19 kilometers [12 miles] east of Tonopah off U.S. Highway 6 and the other off U.S. Highway 95 between Scottys Junction and Beatty).

Generally, the main roads within the region of influence are two-lane highways with very little daily traffic. Table 3-66 lists annual average daily traffic volumes along primary roads in the region of influence, which DOE obtained from the Nevada Department of Transportation’s 2005 annual traffic

Table 3-65. Crime rates in the Caliente rail alignment region of influence, 2003 to 2005.

Area	Crime rate ^a (percent)		
	2003 ^b	2004 ^c	2005 ^d
Lincoln County	18	13	13
Nye County	35	35	31
Esmeralda County	13	10	7
Clark County	51	51	51
National	45	44	No data available

- a. The crime rate is based on the occurrence of an offense per 1,000 residents.
- b. Source: DIRS 173399-State of Nevada 2004, all.
- c. Source: DIRS 177747-State of Nevada 2005, all.
- d. Source: DIRS 177748-State of Nevada 2006, all.

report (DIRS 178749-NDOT [n.d.], all). These traffic volumes indicate that roadways near the Caliente rail alignment are not congested.

All references to *levels of service* of roads shown in Table 3-66 are defined by the Highway Capacity Manual 2000, which is an industry standard for traffic engineering published by the Transportation Research Board (DIRS 176524-Transportation Research Board 2000, all). This manual defines six levels of service that reflect the level of traffic congestion and qualify the operating conditions of a roadway. The six levels are given letter designations ranging from A to F, with A representing the best operating conditions (free flow, little delay) and F the worst (congestion, long delays) (DIRS 176524-Transportation Research Board 2001, all). Various factors that influence the operation of a roadway or intersection include speed, delay, travel time, freedom to maneuver, traffic interruptions, comfort, convenience, and safety. The Highway Capacity Manual describes the levels of service as follows:

Level of service A describes completely free-flow conditions. Individual drivers are virtually unaffected by the presence of other vehicles in the traffic stream.

Level of service B also indicates free flow, but the presence of other vehicles becomes more noticeable. Freedom to select desired speeds is relatively unaffected, but there is a slight decline in the freedom to maneuver within the traffic stream from Level of Service A.

Level of service C is in the range of stable flow, but marks the beginning of the range of flow in which operation of individual drivers becomes significantly affected by interactions with others in the traffic stream. The selection of speed is now affected by others and maneuvering requires substantial vigilance on the part of the driver.

Level of service D represents high density but stable flow. Speed and freedom to maneuver are severely restricted, and the driver experiences a generally poor level of comfort and convenience.

Level of service E represents operating conditions at or near capacity. All speeds are reduced to a low, but relatively uniform, value.

Level of service F indicates a breakdown of traffic flow or stop-and-go traffic. This condition exists wherever the amount of traffic approaching a point exceeds the amount that can cross the point. Queues form behind such locations. Operations within the queue are characterized by stop-and-go waves, and they are extremely unstable.

Levels of service A, B, and C are typically considered good operating conditions in which motorists experience minor or tolerable delays of service. Based on the traffic counts listed in Table 3-66, U.S. Highway 93, State Route 318, and State Route 375 are operating at a level of service A. All of U.S. Highway 95 within the Caliente rail alignment region of influence is operating at a level of service B, except for a portion that is operating at a level of C. Sections 3.2.10 and 4.2.10, Occupational and Public Health and Safety, discuss highway accidents and fatalities.

3.2.9.3.5.2 Mainline Railroads. Two major freight railroads, both Class I, serve Nevada: the Union Pacific Railroad and the Burlington Northern and Santa Fe Railway. Union Pacific is the dominant carrier of the two in terms of tonnage of freight hauled and miles of track. The Union Pacific mainlines consist of two northern routes and one southern route that cross Nevada east to west. At present, approximately 28 trains every 24 hours pass through Caliente on the Union Pacific Railroad Mainline (DIRS 178017-Holder 2006, all). Sections 3.2.10 and 4.2.10, Occupational and Public Health and Safety, discuss rail transportation in relation to public safety.

Table 3-66. Annual average daily traffic counts in southern Nevada (2005).^a

Roadway and location of traffic count station	Legend in Figure 3-114	Vehicles per day ^b	Level of service
<i>U.S. Highway 93</i>			
Near the northern city limits of Caliente (Lincoln County)	a	1,300	A
<i>State Route 318</i>			
7.2 kilometers (4.5 miles) north of Hiko (Sunnyside Road) (Lincoln County)	b	1,050	A
(Sunnyside Road) near Nye/White Pine County Line (Nye County)	c	1,050	A
<i>State Route 375</i>			
0.8 kilometers (0.5 miles) west of State Route 318 at Crystal Springs (Warm Springs Road) (Lincoln County)	d	210	A
61 meters (200 feet) south of U.S. Highway 6 (Warm Springs Road) (Nye County)	e	150	A
<i>U.S. Highway 6</i>			
61 meters (200 feet) west of State Route 375 (Warm Springs Road) (Nye County)	f	290	A
<i>U.S. Highway 95</i>			
0.3 kilometer (0.2 mile) south of U.S. Highway 6 in Tonopah (Nye County)	g	5,550	C
At the Nye-Esmeralda county line south of Tonopah (Esmeralda County)	h	2,100	B
Just south of the town of Goldfield (Esmeralda County)	i	1,950	B
0.2 kilometer (0.1 mile) south of State Route 266 at Lida Junction (Esmeralda County)	j	2,150	B
1.6 kilometers (1 mile) north of State Route 374 (Death Valley Road) (Nye County)	k	2,400	B
0.2 kilometer (0.1 mile) south of State Route 374 (Death Valley Road) (Nye County)	l	3,400	B
0.3 kilometer (0.2 mile) north of State Route 373 (Nye County)	m	2,600	B

a. Source: DIRS 178749-NDOT [n.d.], all.

b. See Figure 3-114 for location of traffic counts.

3.2.10 OCCUPATIONAL AND PUBLIC HEALTH AND SAFETY

This section describes the affected environment for occupational and public health and safety related to construction and operation of a railroad along the Caliente rail alignment. Section 3.2.10.1 describes the nonradiological, radiological, and transportation regions of influence; Section 3.2.10.2 describes the nonradiological health and safety environment; Section 3.2.10.3 describes the radiological transportation health and safety environment; Section 3.2.10.4 describes *background radiation* in the vicinity of the Yucca Mountain Site; and Section 3.2.10.5 describes the nonradiological transportation health and safety environment.

The radiological health and safety environment discussion is related to the impact analyses of public and occupational *exposure to radiation*. The nonradiological health and safety environment discussion is related to the occupational health and safety impact analysis, including occupational incidents affecting construction and operations workers resulting from workplace physical hazards, exposure to nonradiological *hazardous chemicals*, and exposure to other nonradiological hazards (such as biological hazards). The nonradiological transportation health and safety environment discussion relates to the nonradiological transportation impact analysis, which includes impacts to workers and the public from roadway and railway transportation accidents other than accidents involving releases of *radiation*.

3.2.10.1 Region of Influence

3.2.10.1.1 Nonradiological Region of Influence

The region of influence for occupational nonradiological impacts includes:

- The nominal width of the Caliente rail alignment construction right-of-way
- Public roads in Lincoln, Nye, and Esmeralda Counties that the proposed railroad workforce would use during railroad construction and operations
- Rail line construction and operations support facilities including access roads, water wells, and quarries, where workers would perform construction, operations, or maintenance activities; operations support facilities include the following:
 - Interchange Yard
 - Staging Yard
 - Maintenance-of-Way Headquarters Facility
 - Maintenance-of-Way Trackside Facility
 - Satellite Maintenance-of-Way Facilities
 - Rail Equipment Maintenance Yard
 - Cask Maintenance Facility
 - *Nevada Railroad Control Center* and National Transportation Operations Center
- Construction support facilities include the following:
 - Quarries
 - Concrete batch plants
 - Construction camps
 - Water wells

The region of influence for occupational nonradiological impacts includes public roads upon which the proposed workforce would travel and the rail line right-of-way and construction and operations support facilities where the proposed workforce would work.

3.2.10.1.2 Radiological Region of Influence

The region of influence for radiological impacts to members of the public during *incident-free transportation* includes the area 0.8 kilometer (0.5 mile) on either side of the centerline of the Caliente rail alignment, which, for purposes of analysis, includes operation of cask trains and repository construction and supplies trains from Caliente or Eccles to the Rail Equipment Maintenance Yard.

The region of influence for occupational radiological impacts during incident-free operation includes the physical boundaries of railroad operations support facilities, where workers would perform activities involving the transportation of *spent nuclear fuel* and *high-level radioactive waste*. Operations support facilities within the radiological region of influence include only the Interchange Yard, the Staging Yard, the Rail Equipment Maintenance Yard, and the Cask Maintenance Facility because DOE anticipates that the potential for workers to be exposed to *ionizing radiation* from *radioactive* materials will occur only at those facilities. Radioactive materials would not be handled at the Nevada Railroad Control Center and National Transportation Operations Center, the Maintenance-of-Way Headquarters Facility, the Satellite Maintenance-of-Way Facilities, or the Maintenance-of-Way Tracksides Facility. Radioactive materials also would not be handled at any of the construction support facilities.

For purposes of this Rail Alignment EIS, the affected environment for radiological impacts to members of the public in relation to incident-free transportation includes:

- Residents within the region of influence of the Caliente rail alignment, including persons who live within 0.8 kilometer (0.5 mile) of either side of the centerline of the rail alignment from Caliente or Eccles to the Rail Equipment Maintenance Yard. For this analysis, DOE evaluated four specific alignments: the alignment that would have the largest exposed population, the shortest alignment, the longest alignment, and the alignment with the smallest exposed population (Table 3-67). Affected populations for the four evaluated alignments would include:
 - Populations within 0.8 kilometer of either side of the centerline of the rail alignment. These populations are based on 2000 Census data.
 - Populations within 0.8 kilometer of the Interchange Yard and the Staging Yard. These populations are also based on 2000 Census data. Based on the three possible locations of the Staging Yard, DOE anticipates that there could be members of the public within the region of influence for the facility. Affected populations within 0.8 kilometer of the Interchange Yard and Staging Yard footprint for the three locations would include:
 - The population around Eccles-North location for the Staging Yard
 - The population around Caliente-Indian Cove location for the Staging Yard
 - The population around Caliente-Upland location for the Staging Yard
 - Individuals at locations such as residences or businesses near the rail alignment.

For radiological accidents and sabotage, the populations within the region of influence are based on the population within 80 kilometers (50 miles) on either side of the centerline of the rail alignment. These populations are based on 2000 Census data. DOE based this region of influence on that described in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 6-24).

3.2.10.1.3 Transportation Region of Influence

The region of influence for transportation includes public roadways in the vicinity of the Caliente rail alignment, and the Caliente rail alignment itself. The region of influence for public nonradiological transportation impacts includes public roads and the rail line right-of-way in relation to potential roadway and railway nonradiological transportation accidents that could involve the public.

Table 3-67. Alignments evaluated for radiological impacts to members of the public.^a

Alignment with the largest population	Alignment with the smallest population	Longest alignment	Shortest alignment
279 people	78 people	112 people	213 people
335 miles	329 miles	336 miles	328 miles
Caliente alternative segment	Eccles alternative segment	Eccles alternative segment	Caliente alternative segment
Caliente common segment 1	Caliente common segment 1	Caliente common segment 1	Caliente common segment 1
Garden Valley alternative segment 2	Garden Valley alternative segment 3	Garden Valley alternative segment 3	Garden Valley alternative segment 1
Caliente common segment 2	Caliente common segment 2	Caliente common segment 2	Caliente common segment 2
South Reveille alternative segment 3	South Reveille alternative segment 2	South Reveille alternative segment 3	South Reveille alternative segment 2
Caliente common segment 3	Caliente common segment 3	Caliente common segment 3	Caliente common segment 3
Goldfield alternative segment 4	Goldfield alternative segment 1	Goldfield alternative segment 4	Goldfield alternative segment 1
Caliente common segment 4	Caliente common segment 4	Caliente common segment 4	Caliente common segment 4
Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 3	Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 3
Common segment 5	Common segment 5	Common segment 5	Common segment 5
Oasis Valley alternative alignment 3	Oasis Valley alternative alignment 1	Oasis Valley alternative alignment 3	Oasis Valley alternative alignment 1
Common segment 6	Common segment 6	Common segment 6	Common segment 6

a. Populations based on 2000 Census data.

The region of influence for transportation is primarily in remote and rural areas, and there are no operating railroads along the Caliente rail alignment. Although the existing Union Pacific Railroad Mainline that serves southern Nevada is used as a point of comparison in Section 4.2.10, this Rail Alignment EIS does not assess the impacts to the Union Pacific Railroad Mainline.

During railroad construction, new access roads to construction camps, quarries, and water wells would originate from nearby intersections with existing public roadways. Most of the Caliente rail alignment would be within Nevada Department of Transportation District 1 and would cross Lincoln, Nye, and Esmeralda Counties. The region of influence focuses on the vicinity of the Caliente rail alignment, but also includes other roadways that DOE could use to supply materials, equipment, and workers during the construction phase. DOE recognizes that during construction, completed segments of the rail line could be used to transport goods and services to construction sites and camps.

3.2.10.2 Nonradiological Health and Safety Environment

Nonradiological occupational health safety considers potential recordable incidents, lost-time accidents, and worker fatalities resulting from potential exposure of workers to physical hazards and nonradiological hazardous chemicals in their work environment during railroad construction and operations. The affected environment for nonradiological occupational health and safety also includes potential occupational health effects from exposure to exhaust emissions from vehicles and heavy equipment, including, for example, earth-moving equipment.

Nonradiological public health and safety addresses potential exposure of members of the public to nonradiological chemical hazards and vehicle emissions that would result from railroad construction and operations. Section 3.2.4, Air Quality and Climate, and Section 3.2.8, Noise and Vibration, describe the affected environments for potential public exposure to criteria and nonradiological ***hazardous air pollutants***, including vehicle emissions, and potential exposure to noise and vibration from railroad construction and operations.

The types of potential nonradiological health and safety hazards to construction workers and operations and maintenance workers under the Proposed Action include:

- Incidents resulting from physical hazards, such as occupational injuries and illnesses resulting in reportable cases, ***lost workday cases***, and fatalities. Fatalities could occur on or off the work site as a result of an incident or illness experienced on the work site. Physical hazards could include the potential for falls, excavation and confined-space entry hazards, mechanical hazards, electrical hazards, ergonomic hazards, and heavy construction equipment (not passenger vehicles) hazards, and illnesses related to workplace exposure to chemical hazards.
- Off-site vehicle emissions-related health effects, such as health effects related to off-site vehicular emissions from transportation of construction workers, equipment, and materials and wastes to and from the construction sites.
- On-site vehicle and heavy equipment-related health effects, such as health effects related to diesel-engine exhaust emissions from vehicles and heavy-equipment operated by construction workers on the construction sites. These health effects encompass workers who could be exposed to vehicular and heavy equipment emissions.
- Incidents resulting from other nonradiological chemical hazards, such as occupational exposure to chemicals (such as solvents and lubricants), dust (such as silica dust), and other nonradiological substances from railroad construction and operations. The U.S. Department of Labor Bureau of Labor Statistics incident rates include occupational illnesses and fatalities that could result from nonradiological chemical exposure. However, the Bureau of Labor Statistics incident rates do not include a breakdown by incident type (DIRS 179129-BLS 2007, all; DIRS 179131-BLS 2006, all).
- Noise hazards, such as short-term or long-term occupational exposure to noise that could impair hearing.
- Biological hazards that workers could encounter, such as venomous animals, West Nile Virus, valley fever, Hantavirus, and rabies.

3.2.10.3 Radiological Health and Safety Environment

There are ambient levels of radiation in the vicinity of the Caliente rail alignment, just as there are around the world. All people are inevitably exposed to the three sources of ionizing radiation: sources of natural origin unaffected by human activities, sources of natural origin but affected by human activities (called enhanced natural sources), and manmade sources. Natural sources (natural background radiation) include ***cosmic radiation*** from space, ***cosmogenic radionuclides*** produced when cosmic radiation interacts with matter in the atmosphere or ground, and naturally occurring, long-lived ***primordial radionuclides*** in the Earth's mantle. Enhanced natural sources include those that can increase exposure as a result of human actions, deliberate or otherwise. For example, a mill tailings pile from a uranium extraction process probably would contain concentrated levels of naturally occurring ***radionuclides***. A variety of radiation exposures, generally smaller than those caused by natural sources, result from manmade sources including nuclear medicine, medical ***X-rays***, and consumer products.

Natural background radiation is the largest contributor to the average radiation dose of individuals. The natural occurrence of cosmic radiation, cosmogenic radionuclides, and primordial radionuclides varies throughout the world depending on such factors as altitude and geology. External radiation comes from all three of these natural sources, but cosmic radiation and radiation from primordial radionuclides are the largest contributors to dose. Cosmic radiation consists of charged particles (primarily protons from extraterrestrial sources) that have sufficiently high energies to generate secondary particles that have direct and indirect ionizing properties. The three main primordial radionuclide contributors to external terrestrial gamma radiation are potassium-40 and the members of the thorium and uranium *decay series*. Most external terrestrial gamma radiation comes from the top 20 centimeters (8 inches) of soil, with a small contribution from airborne radon *decay* products.

Internal radiation dose from natural sources comes primarily from the primordial radionuclides and their *decay products*. The largest individual source of internal dose comes from the inhalation of radon-222 and its decay products, which are all members of the uranium-238 decay series. This exposure comes mainly from inhalation of these radionuclides in indoor air, coming from the soil underneath buildings. All of the primordial radionuclides are in the body in various concentrations, incorporated by ingesting or inhaling these radionuclides in air, water, and all types of food products. Although of smaller importance to natural internal dose than the other mechanisms, four cosmogenic radionuclides, tritium (hydrogen-3), beryllium-7, carbon-14, and sodium-22, produce quantifiable internal doses. Table 3-68 lists estimated radiation doses to individuals from natural sources in the region of influence and other locations in the United States. The radiation doses shown in the table are in terms of *effective dose equivalent*, which is an expression of the radiation dose received by an individual from external radiation and from radionuclides internally deposited in the body. Effective *dose equivalent* has units of *rem*.

Sources of Radiation Exposure

Nationwide, on average, members of the public are exposed to approximately 360 millirem per year from natural and manmade sources. The relative contributions by radiation source to people living in the United States are (DIRS 155970-DOE 2002, p. F-4):

- Radon in homes and buildings: 200 millirem per year
- Medical radiation: 53 millirem per year
- Internal radiation from food and water: 40 millirem per year
- Terrestrial (external radiation from rocks and soil): 28 millirem per year
- Cosmic (external radiation from outer space): 27 millirem per year
- Consumer products: 10 millirem per year
- Other sources: Less than 1 millirem per year

Table 3-68 lists the background radiation results for Tonopah, Las Vegas, Goldfield, Beatty, Caliente, and Town of Amargosa Valley. DOE obtained cosmic and terrestrial background radiation for these Nevada locations from the Desert Research Institute Community Environmental Monitoring Program (DIRS 179137-CEMP 2006, all; DIRS 179138-CEMP 2006, all; DIRS 179139-CEMP 2006, all; DIRS 179140-CEMP 2006, all; DIRS 179141-CEMP 2006, all; DIRS 179142-CEMP 2006, all) and are based on radiological monitoring data from September 1999 through 2006. The average background radiation for the United States, including terrestrial and cosmic radiation, radon exposure, and natural radiation in the body, is 300 millirem per year, with radon exposure comprising 200 millirem per year, cosmic and terrestrial radiation comprising 55 millirem per year, and natural body radiation comprising 39 millirem per year (DIRS 100473-National Research Council 1990). The background radiation for Las Vegas (the closest large city to the Caliente rail alignment region of influence) is 328 millirem per year, with cosmic and terrestrial radiation doses resulting in a slightly higher total annual dose than the average for the United States (DIRS 179137-CEMP 2006; DIRS 179138-CEMP 2006; DIRS 179139-CEMP 2006; DIRS 179140-CEMP 2006; DIRS 179141-CEMP 2006; DIRS 179142-CEMP 2006). The background radiation

for the reported locations within the region of influence range from 328 millirem per year to 390 millirem per year. Background data include background radiation resulting from fallout.

The Yucca Mountain FEIS includes a detailed discussion (DIRS 155970-DOE 2002, pp. 3-95 to 3-101) of the natural radiation levels, mineral-related radiation risks, and historical activities in the Yucca Mountain region that might have resulted in radiation effects to workers and the public.

Table 3-68. Radiation exposure from natural sources.

Source ^b	Annual dose in millirem (effective dose equivalent)							
	National	Tonopah	Las Vegas	Caliente	Beatty	Amargosa Valley	Goldfield	Yucca Mountain
Cosmic and terrestrial	55	143	88 ^a	133 ^a	150 ^a	107 ^a	130 ^a	160 ^a
Radon in homes (inhaled) ^c	200	200	200	200	200	200	200	200
Naturally occurring radiation in the body	39	39	39	39	39	39	39	39
Totals^d	300	382	327	372	389	346	369	399

a. Combined cosmic and terrestrial radiation sources.

b. Sources: DIRS 100473-National Research Council 1990, p. 18, Table 1-3; DIRS 179137-CEMP 2006, all; DIRS 179138-CEMP 2006, all; DIRS 179139-CEMP 2006, all; DIRS 179140-CEMP 2006, all; DIRS 179141-CEMP 2006, all; DIRS 179142-CEMP 2006, all.

c. Value for radon is an average for the United States.

d. Totals might differ from sums of values due to rounding.

Radiation: Radiation is energy travelling through space. Radiation can be non-ionizing, like radio waves, ultraviolet radiation, or visible light, or ionizing, depending on its effect on atomic matter. In this Rail Alignment EIS the word "radiation" refers to ionizing radiation. Ionizing radiation has enough energy to ionize atoms or molecules while non-ionizing radiation does not. Radioactive material is a physical material that emits ionizing radiation.

Cosmic radiation: A variety of high-energy particles including protons that bombard the Earth from outer space. They are more intense at higher altitudes than at sea level where the Earth's atmosphere is most dense and provides the greatest protection.

Cosmogenic radionuclides: Radioactive nuclides generated when the upper atmosphere interacts with many of the cosmic radiations. Despite their short half-lives, they are found in nature because their supply is always being replenished.

Decay product: A nuclide resulting from the radioactive decay of a parent isotope or precursor nuclide. The decay product might be stable or it might decay to form a decay product of its own.

Decay series: The succession of elements initiated in the radioactive decay of a parent, as thorium or uranium, each of which decays into the next until a stable element, usually lead, is produced.

Effective dose equivalent: Often referred to simply as dose, it is an expression of the radiation dose received by an individual from external radiation and from radionuclides internally deposited in the body.

Half-life: The time in which half the atoms of a radioactive substance decay to another nuclear form. Half-lives range from millionths of a second to billions of years depending on the stability of the nuclei.

Primordial radionuclides originate mainly from the interiors of stars and are still present because their half-lives are so long that they have not yet completely decayed.

3.2.10.4 Background Radiation at the Yucca Mountain Site

Ambient radiation levels from cosmic and terrestrial sources in the Yucca Mountain region are higher than the United States average. The higher elevation at Yucca Mountain results in higher levels of cosmic radiation because there is less *shielding* by the atmosphere. The United States average for cosmic and terrestrial radiation exposures is 55 millirem per year (DIRS 100473-National Research Council 1990, p. 18, Table 1-3). The exposures at the Yucca Mountain ridge and Yucca Mountain surface facilities are about 160 and 150 millirem per year, respectively. Moreover, there are higher amounts of naturally occurring radionuclides in the soil and parent rock of this region than in some other regions of the United States, which also results in higher radiation doses.

3.2.10.5 Transportation Health and Safety Environment

3.2.10.5.1 Public Roadways

Because the region of influence includes public roads primarily located in remote and rural areas, the Caliente rail alignment would cross areas with relatively low traffic volumes. Section 3.2.9, Socioeconomics, describes the public-road infrastructure and baseline traffic conditions along the Caliente rail alignment in more detail. In summary, the Caliente rail alignment would cross paved highways with low traffic volumes and unpaved roads with low traffic volumes. While many of the unpaved roads are important to the daily activities of landowners and ranchers in the area, these unpaved roads are not heavily traveled.

Table 3-69 lists the paved highways the Caliente rail alignment would cross. Figure 2-4 shows the locations of these crossings (DIRS 176165-Nevada Rail Partners 2006, Table D-1). Additionally, the primary paved highways near the Caliente rail alignment are U.S. Highway 93 and State Route 318 in the eastern portion of the rail alignment; State Route 375 in the central portion; and U.S. Highway 95 in the western portion. Overall highway safety statistics for Nevada show that the fatality rate per 100 million vehicle-miles traveled is approximately 1.28 (1.65 in rural areas). The national average is approximately 40 percent lower at 0.91 fatalities per 100 million vehicle-miles traveled (1.42 in rural areas) (DIRS 180484-FHWA 2006, p. 1, Section V, Tables FI-20 and VM-2).

Table 3-69. Potential rail line crossings of main highways.

Segment	Highway	County
Caliente and Eccles alternative segments; Caliente common segment 1	U.S. Highway 93	Lincoln
Caliente common segment 1	State Route 318	Lincoln
Caliente common segment 2	State Route 375	Nye
Goldfield 4 alternative segment	U.S. Highway 95 (at two locations)	Esmeralda

3.2.10.5.2 Railroad Accidents

This section describes the general characteristics of railroad accidents in the United States and in the State of Nevada. DOE commissioned a railroad study – *The Nevada Railroad System: Physical, Operational, and Accident Characteristics* (DIRS 104735-YMP 1991, all) (the Nevada railroad study), which covers the period between 1979 and 1988. Because the number of annual rail-related accidents and incidents in Nevada is very small, it is difficult to draw conclusions about how the safety of rail operations in Nevada has changed since 1988. However, the study is the most comprehensive and relevant rail accident study to date regarding the State of Nevada and it provides some insights into the general characteristics of rail accidents in Nevada and the United States. The study presented information on types, causes, and

frequency of railroad accidents; accident locations; and some of the more significant accidents from 1979 through 1988. The important findings of the Nevada railroad study were:

- Numbers and types of accidents. During the study period, the numbers of reported rail accidents in Nevada and the entire United States were 208 and 48,256, respectively. The most common accident types for Nevada and the rest of the United States were derailment and rail–highway crossing collision.
- Causes of rail accidents. Track/roadbed conditions caused proportionately more accidents in the rest of the United States than in Nevada, and mechanical/electrical failure caused proportionately more accidents in Nevada than in the rest of the United States. Nevada showed a higher proportion of its reported accidents in the higher speed ranges than did the rest of the Nation.
- Speeds at times of accidents. In general, most rail accidents happened at very low speeds. Approximately half of all reported accidents in Nevada occurred at speeds of 16 kilometers (10 miles) per hour or less, and 40 percent of all accidents in Nevada were at 8 kilometers (5 miles) per hour or less. Nationally, 73 percent of all accidents occurred at 16 kilometers per hour or less, and 53 percent of all rail accidents occurred at 8 kilometers per hour or less.
- Elapsed time on duty. The Nevada railroad study showed that about 45 percent of all accidents occurred within the first 4 hours on duty, approximately 41 percent occurred between 4 to 8 hours on duty, and approximately 14 percent occurred after 8 hours on duty.
- Weather and time of day. In Nevada, approximately 73 percent of all accidents reported occurred in clear weather, while approximately 19 percent occurred in cloudy weather. Rain, fog, and snow accounted for lower proportions. In Nevada, approximately half (49 percent) of all rail accidents occurred at night. Nationally, approximately 42 percent of all accidents occurred at night.
- Locations of accidents. The Nevada railroad study revealed that accidents occur at slightly higher rates at switchyard tracks.
- Rail–highway *at-grade crossing* accidents. Excluding the switching and handling incidents, rail accidents seemed to occur at random locations. The notable exception was rail–highway at-grade crossings. In the United States, rail–highway at-grade crossings in general were a higher accident location.
- Fatal rail accidents. Fewer accidents occurred at the higher speeds, but the chance that an accident, once it did occur, produced a fatality increased as speed increased. Comparing the total number of accidents at each speed interval to the total number of fatal accidents at each speed interval revealed that an accident occurring at above 97 kilometers (60 miles) per hour was 31 times more likely to cause a fatality than an accident occurring at 8 kilometers (5 miles) per hour or less.

With the exception of accident causes, the Nevada railroad study found that rail-accident characteristics in Nevada were not markedly different from rail-accident characteristics in the rest of the United States. The most apparent differences related to the relatively large proportion of Nevada rail lines in open country where higher operating speeds are maintained, compared to the United States as a whole. Most rail accidents, both in Nevada and in the rest of the United States, happened at very low speeds. Nevada showed a slightly higher number of high-speed accidents compared to the national average. The Nevada railroad study also showed that Nevada had a larger percentage of accidents caused by equipment failure and human factors and that for accidents involving only rail equipment, there were no classical “high” accident locations as there typically are with highway transport. Instead, minor accidents tended to happen in rail yards and during switching operations. More severe accidents, occurring at higher speeds on open track, seemed to happen at random.

Railroads are required by law to submit accident/incident reports within 30 days after the end of the month to which they pertain. The Federal Railroad Administration annually publishes *Railroad Safety Statistics*, which contains statistical data, tables, and charts based on railroad accident reporting. In this publication, the terms “accidents” and “incidents” are used to describe the entire list of reportable events, which includes collisions, derailments, and other events involving the operation of on-track equipment and causing reportable damage above an established threshold; impacts between railroad on-track equipment and highway users at crossings; and all other incidents or exposures that cause a fatality or injury to any person, or an occupational illness to a railroad employee. As defined in *Railroad Safety Statistics*, accidents/incidents are divided into three major groups for reporting purposes:

- Train accident. A safety-related event involving on-track rail equipment (both standing and moving), causing monetary damage to the rail equipment and track above a prescribed amount.
- Highway–rail grade crossing incident. Any impact between a rail and highway user (both motor vehicles and other users of the crossing) at a designated crossing site, including walkways, sidewalks, and the like, associated with the crossing.
- Other incident. Any death, injury, or occupational illness of a railroad employee that is not the result of a train accident or highway–rail incident.

Table 3-70 summarizes rail accident data from the *Railroad Safety Statistics – Annual Report 2004* for the years 2000 through 2004 (DIRS 178016-DOT 2005, pp.13 and 17). Accident and incidents rates are not available for Nevada because train mile data is only available on a nationwide basis.

The data listed in Table 3-70 reflect rail operations involving general freight service. *Dedicated train* service, which would be used to move cask railcars to the Yucca Mountain repository, would follow stringent safety regulations. Additionally, dedicated train service has increased control and command capabilities, because shorter trains allow better visual monitoring from the locomotive and the escort car. Therefore, accident and incident rates for dedicated train service are expected to be lower than the ones listed in Table 3-70.

Table 3-70. Rail accidents in Nevada and the United States (2000 through 2004).^a

	2000	2001	2002	2003	2004
<i>Train accidents</i> (excluding highway–rail crossing incidents)					
Nevada	12	14	9	8	17
United States	2,983	3,023	2,738	2,997	3,296
<i>Train accidents rate (accidents per train mile)</i> (excluding highway–rail crossing incidents)					
Nevada	NA ^b	NA	NA	NA	NA
United States	4.1×10 ⁻⁰⁶	4.2×10 ⁻⁰⁶	3.8×10 ⁻⁰⁶	4.0×10 ⁻⁰⁶	4.3×10 ⁻⁰⁶
<i>Total highway-rail incidents at public crossings^c</i>					
Nevada	1	2	1	1	2
United States	3,032	2,843	2,709	2,610	2,644
<i>Total highway-rail incident rates (incidents per train mile) at public crossings^c</i>					
Nevada	NA	NA	NA	NA	NA
United States	4.2×10 ⁻⁰⁶	4.0×10 ⁻⁰⁶	3.7×10 ⁻⁰⁶	3.5×10 ⁻⁰⁶	3.4×10 ⁻⁰⁶

a. Source: DIRS 178016-DOT 2005, pp. 13 and 17.

b. NA = Not available.

c. Any impact, regardless of severity, between railroad on-track equipment and any user of a public or private crossing site must be reported to the U.S. Department of Transportation, Federal Railroad Administration, on Form F 6180.57. The crossing site includes sidewalks and pathways at, or associated with, the crossing. Counts of fatalities and injuries include motor vehicle occupants, people not in vehicles or on the trains, and people on the train or railroad equipment.

3.2.11 UTILITIES, ENERGY, AND MATERIALS

This section describes the affected environment for public-service utilities (water, wastewater treatment, telecommunications, and electricity), energy (fossil fuels), and construction materials within the Caliente rail alignment region of influence.

Section 3.2.11.1 describes the regions of influence for utilities, energy resources, and construction materials; Section 3.2.11.2 describes public-service utilities in the region of influence; Section 3.2.11.3 describes energy resources (not related to public-service utilities) in the region of influence; and Section 3.2.11.4 describes resources for construction materials in their regions of influence.

3.2.11.1 Regions of Influence

3.2.11.1.1 *Regions of Influence for Utilities*

The regions of influence for public water systems, wastewater treatment, telecommunications, and electricity differ and are described below.

- **Public water systems:** The region of influence for public water systems is Lincoln, Nye, and Esmeralda Counties and communities within those counties.
- **Wastewater treatment:** The region of influence for wastewater transported offsite for treatment and disposal is the existing permitted treatment facilities in Lincoln, Nye, and Esmeralda Counties and communities within those counties. (Note: For wastewater treated using other methods [for example, on-site portable wastewater-treatment facilities], DOE would recycle treated wastewater, and there is no associated region of influence.)
- **Telecommunications:** The region of influence for telephone and fiber-optic telecommunications is the southern Nevada region serviced by Nevada Bell Telephone Company (AT&T Nevada), Citizens Telecommunications Company of Nevada, and Lincoln County Telephone System, Inc.
- **Electricity:** The region of influence for electric-power resources includes areas serviced by the southern Nevada electrical grid operated by Caliente Public Utilities, Lincoln County Power District No. 1, Nevada Power Company; Sierra Pacific Power Company; and Valley Electric Association, Inc.

3.2.11.1.2 *Region of Influence for Energy Resources (Fossil Fuels)*

The description of the affected environment for energy resources focuses on consumption of fossil fuels. For purposes of this analysis, the region of influence for fossil fuels is limited to regional suppliers within the State of Nevada.

3.2.11.1.3 *Regions of Influence for Construction Materials*

Construction materials include concrete, ballast, subballast, steel, steel rail, and general building materials. The region of influence for each material is defined by the distribution networks and suppliers of that material to the general project area.

The region of influence for cast-in-place concrete and subballast is limited to the State of Nevada. Subballast, sand, and gravel would be generated from available sources within the rail roadbed earthwork area, overburden at quarries and borrow sites near the rail alignment. There is a high likelihood DOE would also find subballast, sand, and gravel along cuts for the rail line on alluvial fans. DOE would use some of the natural sand and gravel excavated from cuts and crushed rock from the quarries to make concrete aggregate (DIRS 176034-Shannon & Wilson 2006, pp. 24 to 26).

DOE would obtain ballast rock from potential quarry sites close to the rail line construction right-of-way during the construction phase and from commercial quarry sites in southern Utah and in California during the operations phase. Therefore, the region of influence for obtaining ballast rock would encompass the State of Nevada during the construction phase, and Utah and California during the operations phase.

Other materials, including steel, steel rail, general building materials, concrete ties, and other precast concrete, could be procured and shipped on a national level. Therefore, the region of influence for these materials is national.

3.2.11.2 Utilities

3.2.11.2.1 Utility Corridors and Rights-of-Way

Section 3.2.2, Land Use and Ownership, describes the major utilities and utility corridor networks in the Caliente rail alignment region of influence.

3.2.11.2.2 Public Water Systems

Figure 3-115 shows the locations of *public water systems* in Lincoln, Nye, and Esmeralda Counties. There are more than 100 regulated public water systems in these counties, including the 31 *community water systems* listed in Table 3-71.

Within the Caliente rail alignment region of influence, public water systems are generally in or near the City of Caliente, and the unincorporated towns of Town of Armargosa Valley, Beatty, and Pahrump. In addition, although not a community water system, the Yucca Mountain Site has a regulated public water system (NV0000867). This system is classified as a *non-transient, non-community public water system*.

3.2.11.2.3 Wastewater-Treatment Facilities

DOE would treat wastewater using municipal wastewater-treatment facilities, on-site portable wastewater-treatment facilities (*package plants*), or a combination of the two.

Most communities in southern Nye County rely primarily on individual dwelling or small communal wastewater-treatment systems, with the exception of Beatty, which has municipal sewer service. For example, Pahrump has no community-wide wastewater-treatment system. Several wastewater-treatment units serve parts of the town, such as the dairy and the jail, but most households have septic-tank and drainage-field systems, which are likely to be typical of the small communities in southern Nye County.

Municipalities with wastewater-treatment facilities include Caliente, Goldfield, Beatty, Tonopah, and Round Mountain. Table 3-72 lists the capacity of each system and the current load.

In 2003, a grant from the U.S. Department of Agriculture, Rural Development Nevada, allowed the City of Caliente, in Lincoln County, to complete the rehabilitation of its wastewater-collection system. Infiltration to the collection line and overflows to sewage treatment ponds made this rehabilitation necessary (DIRS 173561-USDA 2004, p. 9).

In Esmeralda County, Goldfield's sewage collection system was built in the 1940s and 1950s, and some of the system's original terra-cotta pipes are deteriorating. There are two lagoons, each 4,000 square meters (1 acre) in area, and a rapid infiltration system 1.6 kilometers (1 mile) north of Goldfield.

Public water system: A water system that provides water for human consumption for an average of at least 25 persons per day (or 15 or more service connections) and is in use for at least 60 days each year.

Community water system: A public water system that serves at least 15 service connections used by year-round residents or regularly serves at least 25 year-round residents.

Non-transient, non-community water system: A public water system that is not a community water system and that regularly serves at least 25 of the same persons over 6 months per year.

Source: 40 CFR 141.2.

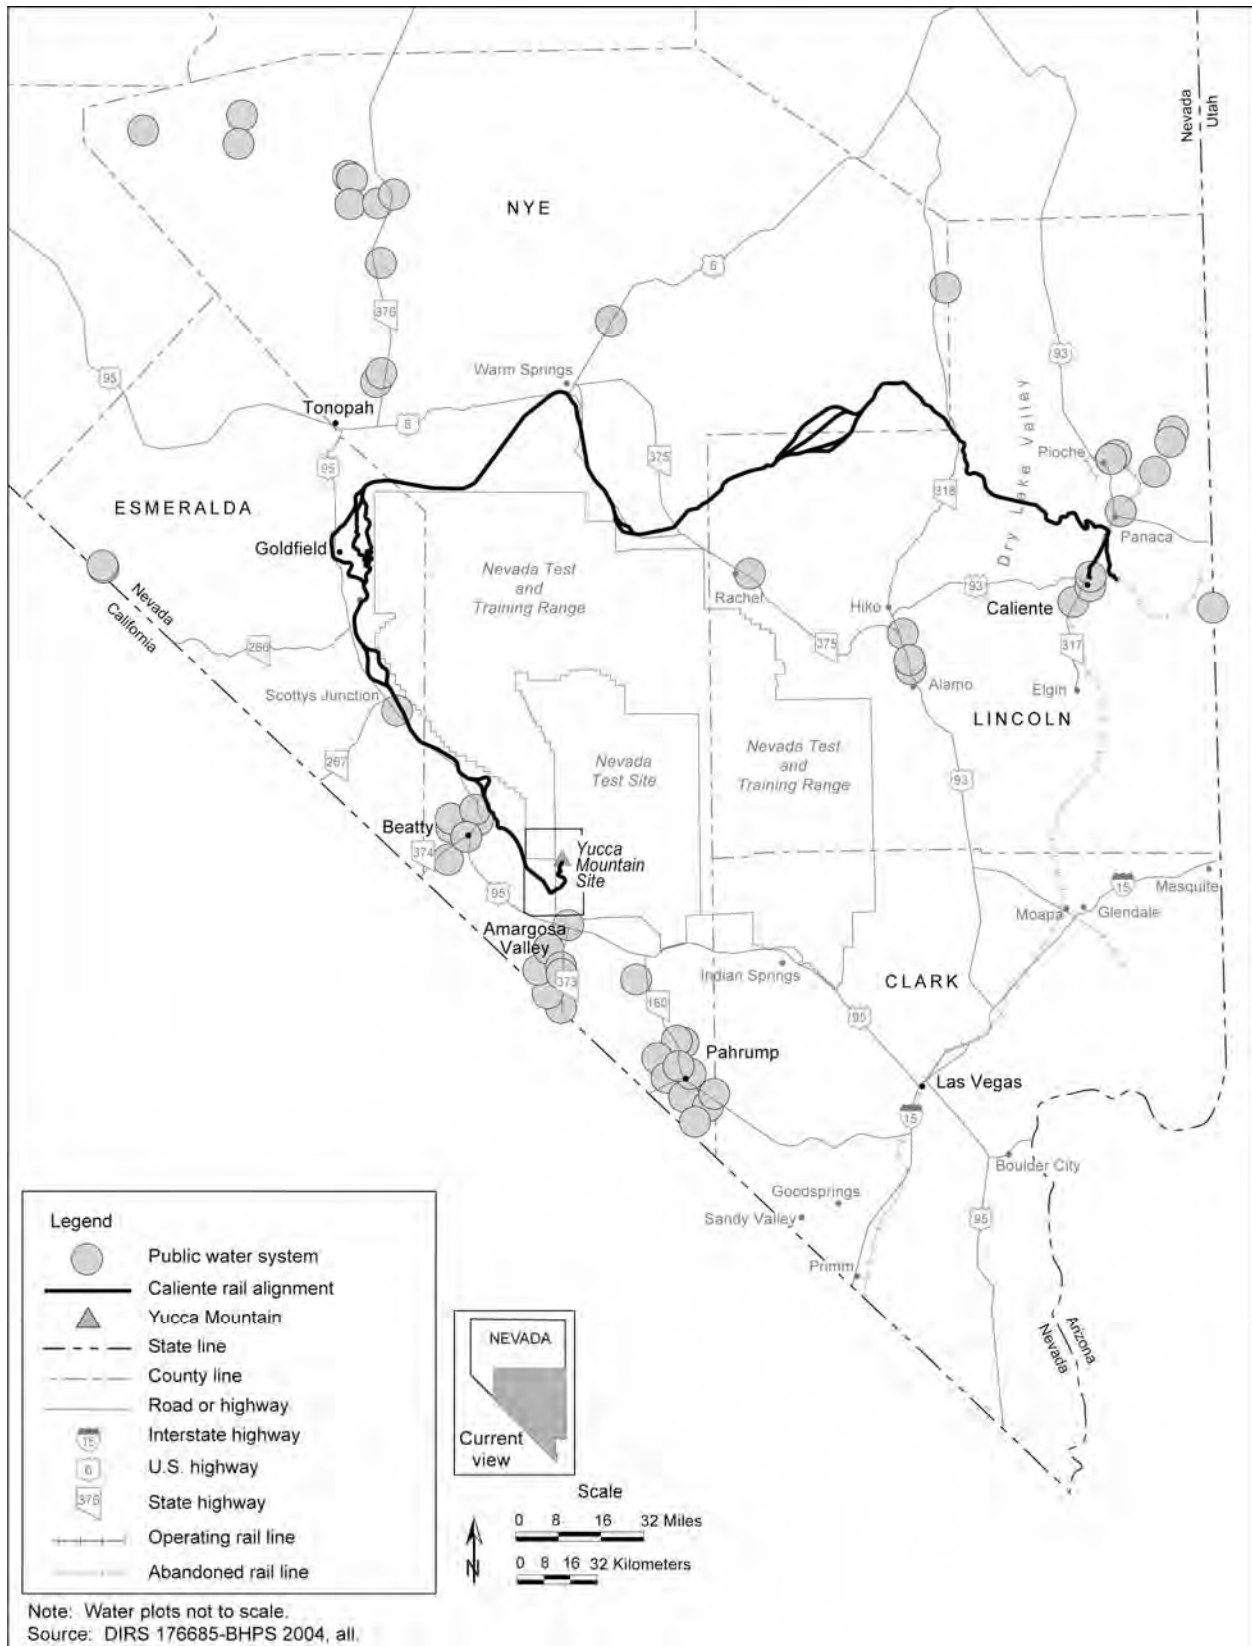


Figure 3-115. Public water systems in Lincoln, Esmeralda, and Nye Counties.

Table 3-71. Community water systems in Lincoln, Nye, and Esmeralda Counties.^a

County	Public water supply identification number	Name
Lincoln	NV0000005	Alamo Sewer and Water
	NV0000013	Caliente Public Utilities
	NV0000185	Panaca Farmstead Water Association
	NV0000186	Pioche Public Utilities
	NV0000187	Pioche Public Utilities Castelton
Nye	NV0002558	Amargosa Valley Water Association
	NV0005033	Anchor Inn Mobile Home Park
	NV0000009	Beatty Water and Sanitation District
	NV0000362	Big Five Parks
	NV0000369	Big Valley Mobile Home Park
	NV0002538	C Valley Mobile Home Park
	NV0002589	Calvada North, Utilities Inc. of Central Nevada
	NV0000218	Carver Smokey Valley Recreational Vehicle and Mobile Home Park
	NV0005032	Country View Estates, Utilities Inc. of Central Nevada
	NV0000831	Desert Mirage Home Owners Association
	NV0000300	Desert Utilities
	NV0002552	Escapee Co-Op of Nevada
	NV0000063	Gabbs Water System
	NV0004074	Hadley Subdivision
	NV0000926	Hafen Ranch Estates
	NV0000175	Manhattan Town Water
	NV0000920	Mountain Falls Water System
	NV0005067	Mountain View Mobile Home Park, Utilities Inc. of Central Nevada
	NV0000183	Pahrump Mobile Home Park
	NV0005028	Shoshone Estates Water Company
NV0000359	Shoshone Water Company	
NV0005066	Sunset Mobile Home Park	
NV0000237	Tonopah Public Utilities	
NVU0000270	Utilities Inc. of Central Nevada	
Esmeralda	NV0000072	Goldfield Town Water
	NV0000363	Silver Peak Water System

a. Source: DIRS 176686-BHPS 2004, all.

Table 3-72. Municipal wastewater-treatment facilities in the Caliente rail alignment region of influence.

Location	Capacity (liters per day) ^a	Existing load (liters per day)
Alamo, Lincoln County	260,000 ^b	230,000 ^b
Caliente, Lincoln County	1,500,000 ^b	980,000 ^b
Panaca, Lincoln County	150,000 ^b	300,000 ^b
Pioche, Lincoln County	340,000 ^b	340,000 ^b
Beatty, Nye County	570,000 ^b	420,000 ^b
Gabbs, Nye County	190,000 ^b	190,000 ^b
Tonopah, Nye County	3,800,000 ^b	1,600,000 ^b
Round Mountain (Hadley Subdivision), Nye County	610,000 ^c	260,000 ^c
Goldfield, Esmeralda County	170,000 ^b	114,000 ^b

a. To convert liters to gallons, multiply by 0.26418.

b. Source: DIRS 178590 U.S. EPA 1999, all.

c. Source: DIRS 178697-Kaminski 2003, all.

The community has recently been awarded a \$3 million grant under the Water Resource Development Act of 2000 (114 Stat. 2472) to renovate and upgrade the system. These renovations will allow Esmeralda County to increase the number of users served by its sewer system (DIRS 174751-Arcaya 2005, all).

3.2.11.2.4 Telecommunications Services

Local telephone service in the Caliente rail alignment region of influence is provided by Nevada Bell Telephone Company (AT&T Nevada), Citizens Telecommunications Company of Nevada, and Lincoln County Telephone System, Inc. (DIRS 173401-Nevada Telecommunications Association 2005, all). One or more broadband providers (such as Comcast Cable and Bandwidth T1) serve Caliente, Tonopah, Goldfield, and Amargosa Valley (DIRS 176453-FCC 2005, pp. 348 to 350).

3.2.11.2.5 Electrical Services

Nevada Power Company is the electric utility serving most customers in southern Nevada, covering a territory of 12,000 square kilometers (4,600 square miles). Its customer base includes approximately 630,000 residential and 84,000 commercial or industrial accounts (DIRS 172302-Nevada Power Company 2004, all). The utility has 2,200 megawatts of generating capacity and purchases additional power to meet peak load demands of 5,800 megawatts. Nevada Power Company forecasts a 1.8 percent average annual rate of growth in peak-load demand through 2020. Total electricity sales in 2005 were 19 million megawatt-hours (DIRS 173383-Nevada State Office of Energy 2005, p. 23).

Sierra Pacific Power Company serves 330,000 electricity customers in a 130,000-square-kilometer (50,000-square-mile) territory that encompasses Carson City, Reno, Winnemucca, Elko, and Tonopah in Nevada, as well as the Lake Tahoe area in northeastern California (DIRS 173382-Sierra Pacific Power 2005, all). The utility has 1,100 megawatts of generating capacity and purchases additional power to meet peak load demands of 1,900 megawatts. Sierra Pacific Power Company forecasts a 1.6 percent average annual rate of growth in peak-load demand through 2020. Total electricity sales in 2005 were 8.8 million megawatt-hours (DIRS 173383-Nevada State Office of Energy 2005, p. 9). Both Nevada Power Company and Sierra Pacific Power Company are wholly owned subsidiaries of Sierra Pacific Resources.

Valley Electric Association, Inc., and Lincoln County Power District No. 1 are members of the Nevada Rural Electric Association. Nevada Rural Electric Association members are customer-owned, not-for-profit electric utilities with no generating capacity. They purchase power from other sources to supply rural customers.

Valley Electric Association, Inc., distributes power to southern Nye County, including the Pahrump Valley, Amargosa Valley, Beatty, and the Nevada Test Site. The Western Area Power Administration allocates a portion of the lower-cost hydroelectric power from the Colorado River dams to Valley Electric Association, Inc. The private power market supplies the supplemental power necessary to meet the needs of the members. Valley Electric Association, Inc., sells about 400,000 megawatt-hours to more than 15,000 members (DIRS 173383-Nevada State Office of Energy 2005, p. 39).

Lincoln County Power District No. 1 is a general improvement district that supplies power to about 800 customers, totaling more than 72,000 megawatt-hours per year (DIRS 173383-Nevada State Office of Energy 2005, p. 40). Its maximum peak load has been 16 megawatts. All of this power normally comes from the Hoover Dam, although a supplemental agreement with Nevada Power Company allows Lincoln County Power District No. 1 to buy extra energy when Colorado River levels are too low to support demand. Although demand has remained relatively steady over the past several years (growing by 1 to 2 percent per year), Lincoln County Power District No. 1 has plans to increase long-term supply by buying into the planned coal-fired Intermountain Power Project plant in Delta, Utah. This plant could be running as early as 2010, and Lincoln County would purchase 15 megawatts of additional capacity (DIRS 175509-Kahn 2005, all).

A small municipal utility, Caliente Public Utilities, purchases and then resells electricity to customers in Caliente. It sells less than 10,000 megawatt-hours annually and the reported peak load demand is 3 megawatts (DIRS 173383-Nevada State Office of Energy 2005, p. 39).

3.2.11.3 Energy

Existing fossil-fuel supplies within the Caliente rail alignment region of influence are available from nearby communities, mainly from relatively highly populated towns such as Tonopah, and along busy highways, such as on U.S. Highway 6 between Warm Springs and Tonopah. The regional supply system can respond flexibly to demand. Table 3-73 lists sales of distillate fuel oils (diesel fuel) in Nevada from 1997 through 2004. Fuel consumption remained fairly constant through 2003. The recent upward trend reflects current population growth in southern Nevada as a key determinant of total energy consumption closely linked to rising demand for housing, services, and travel.

3.2.11.4 Construction Materials

Most of the Caliente rail alignment area is in the remote Nevada countryside, but is within the southern Nevada supply chain for construction materials.

The region of influence for cast-in-place concrete is the State of Nevada, where annual production in 2004 equaled approximately 16 million metric tons (18 million tons) (DIRS 173400-NRMCA 2004, p. 2).

Table 3-73. Sales of distillate fuel oils in Nevada, 1997 through 2004.

Year	Annual sales of distillate fuel oils (millions of liters) ^a
1997	1,640 ^b
1998	1,530 ^b
1999	1,580 ^c
2000	1,620 ^c
2001	1,550 ^d
2002	1,580 ^d
2003	1,510 ^e
2004	1,810 ^e

a. To convert liters to gallons, multiply by 0.26418.

b. Source: DIRS 178588-EIA 1999, Table 4

c. Source: DIRS 178609-EIA 2001, Table 4.

d. Source: DIRS 173384-EIA 2003, Table 4.

e. Source: DIRS 176397-EIA 2005, Table 4.

Precast concrete is available nationally, and annual national production in 2003 equaled approximately 15 million metric tons (17 million tons) (DIRS 173392-van Oss 2003, Table 15). Annual national production of pre-cast concrete railway ties was about 720,000 ties in 2004 and is projected to grow to about 1,180,000 ties by 2007 (DIRS 173573-Gauntt 2004, p. 17).

Ballast for rail roadbed construction is generally obtained locally because of the costs associated with transporting large volumes of these materials. Within the Caliente rail alignment region of influence there are large areas of public lands that contain materials suitable for use as ballast. DOE has identified six potential quarry sites near the Caliente rail alignment (see Chapter 2, Table 2-16) of which the Department could develop up to four. However, if DOE selected the Eccles alternative segment, there would not be a suitable quarry location available along this portion of the rail alignment and the Department would have to obtain ballast from an existing commercial quarry – which most likely would be the nearest active quarry, at Milford, Utah, approximately 200 kilometers (120 miles) east of Caliente. Following construction, the DOE-developed quarries would be closed. During the operations phase, DOE would obtain ballast for track maintenance commercially. Again, the nearest active quarry to the region of influence is the Milford Quarry. The Milford Quarry is on the Union Pacific Railroad route that travels from Salt Lake City, Utah, to Los Angeles, California, and processes much of the high-quality ballast for the Union Pacific Railroad lines throughout the southwest. There is an active quarry at Oroville, California, approximately 650 kilometers (400 miles) west-northwest of Caliente, which is a commercial source of ballast in the western United States. Suitable sands and gravels would likely be available along cuts for the rail line and from overburden at potential quarry rock and borrow sites.

The steel market is worldwide in scope, but the region of influence DOE considered for steel supply is national. Raw production of carbon steel in the United States in 2003 equaled 86 million metric tons (95 million tons) (DIRS 173387-Fenton 2003, Table 1). Steel rail production equaled 540,000 metric tons (600,000 tons) in 2002 and 520,000 metric tons (570,000 tons) in 2003 (DIRS 173387-Fenton 2003, Table 3).

3.2.12 HAZARDOUS MATERIALS AND WASTE

This section describes existing facilities in Nevada that could receive and dispose of *hazardous waste* derived from hazardous materials, *low-level radioactive wastes*, and nonhazardous waste associated with constructing and operating the proposed railroad along the Caliente rail alignment. Section 3.2.12.1 describes the region of influence for hazardous materials and wastes. Section 3.2.12.2 describes landfills for the disposal of nonhazardous, nonrecyclable, nonreusable wastes; Section 3.2.12.3 describes disposal facilities for hazardous wastes; and Section 3.2.12.4 describes the disposal of low-level radioactive wastes. Hazardous materials DOE might use during construction and operation of the proposed railroad are described throughout Section 4.2.12.

Hazardous waste: Waste designated as hazardous by U.S. Environmental Protection Agency or State of Nevada regulations. Hazardous waste, defined under the Resource Conservation and Recovery Act of 1976 (42 U.S.C. 6901 *et seq.*), is waste that poses a potential hazard to human health or the environment when improperly treated, stored, or disposed of. Hazardous wastes appear on special Environmental Protection Agency lists or possess at least one of the following characteristics: ignitability, corrosivity, toxicity, or reactivity.

Low-level radioactive waste: Radioactive waste that is not classified as high-level radioactive waste, transuranic waste, or byproduct tailings containing uranium or thorium from processed ore. Usually generated by hospitals, research laboratories, and certain industries (42 U.S.C. 108).

3.2.12.1 Region of Influence

The region of influence for the use of hazardous materials and the generation of hazardous and nonhazardous wastes includes the nominal width of the rail line construction right-of-way, and the locations of railroad construction and operations support facilities.

The region of influence for the disposal of hazardous wastes includes the entire continental United States because commercial hazardous waste disposal vendors could utilize facilities throughout the country.

The region of influence for the disposal of nonhazardous waste includes the disposal facilities in Lincoln, Nye, Esmeralda, and Clark Counties in Nevada.

The region of influence for the disposal of low-level radioactive wastes includes DOE low-level waste disposal sites, sites in *Agreement States*, and U.S. Nuclear Regulatory Commission-licensed sites.

Industrial and special wastes: Construction debris and other *solid waste*, such as tires, that have specific management requirements for permitted landfill disposal.

Solid waste: For purposes of this analysis, defined as nonhazardous general household waste.

3.2.12.2 Nonhazardous Waste Disposal

DOE would dispose of nonhazardous, nonrecyclable, nonreusable wastes in municipal landfills in Nevada. Nevada has 23 operating municipal landfills that combined accept more than 12,700 metric tons (14,000 tons) of waste per day (DIRS 174663-State of Nevada 2005, Slide 5; DIRS 181625-Simpson 2007, all). According to the *Draft Solid Waste Management Plan* (DIRS 174041-State of Nevada 2004, p. 7), Nevada municipalities have ensured landfill capacity for

decades into the future. Table 3-74 lists the capacities the Nevada Division of Environmental Protection reported in 2002 (DIRS 174041-State of Nevada 2004, Appendixes 2 and 3) for the active landfills in Lincoln, Nye, Esmeralda, and Clark Counties. All of these landfills have permits to accept *industrial and special wastes*.

DOE would utilize a contractor for the disposition of recyclable materials.

Table 3-74. Capacities of active landfills in Lincoln, Nye, Esmeralda, and Clark Counties.^a

County	Facility name ^b	Operator	Capacity (cubic meters) ^c	Per day disposal rate (metric tons) ^d	Projected closure (year)
Lincoln	Crestline Class II	Crestline Recycling and Disposal	550,000	20	2049
Nye	Round Mountain Class I Expansion	Nye County	540,000	10	2028
	Tonopah Class II	Nye County	120,000	15	2011
Esmeralda	Goldfield Class I	Esmeralda County	210,000	4	2023
Clark	Apex Regional Classes I and III	Republic Silver State	61,900,000	8,000	2147
	Laughlin Class I	Silver State Services	4,600,000	85	2019
Totals			67,920,000	8,134	

a. Source: DIRS 174041-State of Nevada 2004, Appendixes 2 and 3.

b. Class I landfills receive 18 metric tons or more of waste per day; Class II landfills receive less than 18 metric tons of waste per day; and Class III landfills receive only industrial waste. Each of these landfills accepts solid and industrial and special waste.

c. To convert cubic meters to cubic yards, multiply by 1.3079.

d. To convert metric tons to tons, multiply by 1.1023.

3.2.12.3 Hazardous Waste Disposal

The U.S. Ecology Treatment and Disposal Site in Beatty, Nevada, is a Nevada-permitted hazardous waste disposal site (DIRS 173918-American Ecology Corporation 2005, all). This facility treats and disposes of hazardous wastes and nonhazardous industrial wastes. Safety-Kleen Systems, Inc., operates a hazardous waste-permitted treatment, storage, and disposal facility in North Las Vegas, Nevada, and Philip Services Corporation operates a similar facility in Fernley, Nevada (DIRS 177662-NDEP 2006, all). Hazardous waste disposal capacity in western states has been estimated to be 50 times the demand for landfills and 7 times the demand for incineration until at least 2013 (DIRS 103245-EPA 1996, pp. 32, 33, 36, 46, 47, and 50).

3.2.12.4 Low-Level Radioactive Waste Disposal

Low-level radioactive wastes would be generated during operation of the Cask Maintenance Facility. DOE would control and dispose of site-generated low-level radioactive waste in a DOE low-level waste disposal site, a site in an Agreement State, or in a U.S. Nuclear Regulatory Commission-licensed site.

3.2.13 CULTURAL RESOURCES

Section 106 of the National Historic Preservation Act of 1966 (16 U.S.C. 470), as amended, requires federal agencies to take into account the effects of their undertakings on historic properties. The procedures established by the Advisory Council on Historic Preservation, described in 36 CFR Part 800, define how federal agencies meet these statutory responsibilities. The section 106 process seeks to accommodate historic preservation concerns with the needs of federal undertakings through consultation between the agency official and other parties with an interest in the effects of the undertaking on historic properties, commencing at the early stages of project planning. The goal of consultation is to identify historic properties potentially affected by the undertaking, assess effects, and seek ways to avoid, minimize, or mitigate any adverse effects on historic properties.

Identification of sites eligible for listing on the *National Register of Historic Places* is a primary component of historical preservation work. Evaluation of archaeological sites with the purpose of determining National Register significance is accomplished through the application of eligibility criteria identified in 36 CFR Part 60, as follows:

- The quality of significance in American history, architecture, archeology, and culture is present in districts, sites, buildings, structures, and objects of state and local importance that possess integrity of location, design, setting, material, workmanship, feeling and association and
- (a) that are associated with events that have made a significant contribution to the broad patterns of our history; or
 - (b) that are associated with the lives of persons significant in our past; or
 - (c) that embody the distinctive characteristics of a type, period, or method of construction, or that represent the work of a master, or that possess high artistic values, or that represent a significant and distinguishable entity whose components may lack individual distinction; or
 - (d) that have yielded, or may be likely to yield, information important in prehistory or history.

Prehistoric archaeological sites are most often found eligible under criterion (d), while archaeological sites containing historical deposits and some prehistoric sites are also often considered under other criteria. For example, ordinarily, cemeteries, birthplaces or graves of historical figures, properties owned by religious institutions or used for religious purposes, structures that have been moved from their original locations, reconstructed historic buildings, properties primarily commemorative in nature, and properties that have achieved significance within the past 50 years shall not be considered eligible for the National Register. However, such properties will qualify if they are integral parts of districts that do meet the criteria or if they fall within the following categories: (a) a religious property deriving primary significance from architectural or artistic distinction or historical importance; (b) a building or structure removed from its original location but which is significant primarily for architectural value, or which is the surviving structure most importantly associated with a historic person or event; (c) a birthplace or grave of a historical figure of outstanding importance if there is no appropriate site or building directly associated with his productive life; (d) a cemetery which derives its primary significance from graves of persons of transcendent importance, from age, from distinctive design features, or from association with historic events; (e) a reconstructed building when accurately executed in a suitable environment and presented in a dignified manner as part of a restoration master plan, and when no other building or structure with the same association has survived; (f) a property primarily commemorative in intent if design, age, tradition, or symbolic value has invested it with its own exceptional significance; or (g) a property achieving significance within the past 50 years if it is of exceptional importance.

Likewise, historic structures (as opposed to archaeological sites) are assessed under a variety of National Register criteria.

While nearly all sites have the potential to yield information useful in addressing a limited number of research questions, this limited potential is not considered sufficient to qualify a site for inclusion on the National Register under criterion (d). By establishing guidelines, agencies have clearly set the precedent that not all information is important, and thus, not all sites are important. Federal guidelines encourage the use of a set of research questions that are generally recognized as important research goals as a means of evaluating significance. If a site contains information that is demonstrably useful in answering such questions, it can be considered an important site. National Register evaluation guidelines state that a site must retain integrity to be considered eligible under one or more of the criteria.

The *National Register of Historic Places* describes buildings, structures, objects, sites, and districts that are at least 50 years old, or have achieved significance within the past 50 years. Archaeological resources are prehistoric or historic remains of human lifeways or activities that are at least 100 years old, and include artifact concentrations or scatters, whole or fragmentary tools, rock carvings or paintings, and buildings or structures. Resources that incorporate geographic areas, including both cultural and natural features, and that are associated with historic events or other cultural values include ***traditional cultural properties***, cultural landscapes (DIRS 174501-Birnbaum 1994, all), ***ethnographic landscapes*** (DIRS 155897-Parker and King 2002, all), rural historic landscapes (DIRS 155896-McClelland et al. 1990, all), and historic mining landscapes (DIRS 175489-Noble and Spude 1997, all).

For purposes of analysis in this Rail Alignment EIS, DOE has completed a sample inventory of the Caliente rail alignment alternative segments and common segments which provides a thorough characterization of the nature and distribution of resources along the rail alignment. The Department would perform an intensive cultural-resource inventory before starting construction of any specific alternative segment or common segment, and would compile a data recovery plan that would include prudent and feasible practices and measures to avoid or reduce potential adverse impacts to archaeological and historical resources.

This section focuses on cultural resources in the Caliente rail alignment region of influence, including those associated with the American Indian culture. Section 3.4 further identifies and discusses American Indian interests in the region. This section summarizes information obtained through a review of available data from federal, state, and local agencies, and findings of data-gathering efforts and field investigations.

Section 3.2.13.1 describes the region of influence for cultural resources along the Caliente rail alignment; Section 3.2.13.2 describes the methodology DOE used to identify such sources; Section 3.2.13.3 is a general description of the cultural resources setting and characteristics; Section 3.2.13.4 describes site-specific cultural resources; and Section 3.2.13.5 describes cultural resources for each Caliente alternative segment and common segment, including those associated with American Indian culture.

3.2.13.1 Region of Influence

The region of influence for the cultural resources analysis includes two levels of coverage that incorporate areas where construction or other land disturbances could directly or indirectly affect cultural resources:

- Level I – The first level of coverage is the nominal width of the construction right-of-way, the area where ground disturbance could have direct or ***indirect impacts*** on cultural resources. Under Section 106 of the National Historic Preservation Act, the Level I region of influence would comprise the project's Area of Potential Effect.
- Level II – The second level of coverage is a 3.2-kilometer (2-mile)-wide area centered on the rail alignment, and includes the area of potential disturbances that could have indirect impacts on cultural resources. Unless otherwise noted, references to historic and archaeological sites in the text that

follows refer to the Level II region of influence. For example, impacts could extend beyond this area where railroad operations and maintenance activities could have an aesthetic, auditory, or visual impact on a potentially significant historic or *ethnographic* vista.

3.2.13.2 Methodology

DOE prepared cultural resource documents to support the description of the affected environment and the impacts assessments for the Caliente rail alignment. For this analysis, the Department used the following methods to evaluate known and potential resources in the Caliente rail alignment region of influence:

- **Class I inventory.** Reviewing existing cultural resource files, examining the literature, and interviewing knowledgeable people to identify potentially significant resources within the Level II region of influence of the alternative segments and common segments. DOE compiled the results into an historic context baseline report on cultural resources (DIRS 174688-AGEISS 2005, all; DIRS 182291-Desert Research Institute 2007, all) that establishes the basis for the analytical methodology and the results of the site-file and literature reviews. This report also lists all published and unpublished documents and archival sources DOE consulted during the analysis.
- **Class II inventory.** Conducting a statistical sample field survey (DIRS 174691-BLM 1990, all) of the Level I region of influence for the alternative segments and common segments. The Class II inventory involved intensive inspection of 184 sample units that measured 122 meters (400 feet) by 800 meters (2,625 feet), centered on the rail alignment. This inventory was guided by a research design prepared in consultation with the BLM and State Historic Preservation Office and was designed to provide a 20-percent sample of the length of common segments and alternative segments. The results of this effort provide a predictive view of the possible types of cultural resources that might be expected to occur along the alternative segments and common segments and an evaluation of the possible significance of potential historic properties. To augment the Class II inventory and help to minimize later resource conflicts, DOE performed additional preliminary archaeological reconnaissance in locations of potential ballast quarries and areas of restricted construction right-of-way. The Class II survey report summarizes the results of this effort (DIRS 174689-HRA Conservation 2005, all).
- Consultation with American Indians with regional ties. Interactions with American Indian tribes and organizations that have ties to the region to identify traditional cultural places within the Level I and II regions of influence that are important to American Indian cultural and religious values and beliefs, and to identify other resources, such as plants and animals, that might have historic or current uses. The perspectives of American Indian tribes and organizations that have traditional ties to the region of influence are compiled in *American Indian Perspectives on the Proposed Rail Alignment Environmental Impact Statement for the U.S. Department of Energy's Yucca Mountain Project* (the American Indian Resource Document) (DIRS 174205-Kane et al. 2005, all), which assesses American Indian interests.

As previously noted, DOE prepared cultural-resource reports to support the description of the affected environment and the impacts assessments for this Rail Alignment EIS. The reports include detailed information about the methods and investigative approaches DOE utilized and about evaluation of the findings. Preparation of the baseline resource reports involved consulting and citing a large number of published and unpublished sources, and contacting knowledgeable persons, institutions, and offices holding relevant data.

DOE is using a phased cultural-resource identification and evaluation approach, as described in 36 CFR 800.4(b)2, to identify specific cultural resources along a final alignment. Under this approach, DOE has completed Class I and Class II inventories of rail alignment alternative and common segments. The Department would perform final field surveys (the BLM Class III intensive inventories) of the actual

right-of-way and centerline, as provided in the programmatic agreement between DOE, the BLM, the STB, and the Nevada State Historic Preservation Office (DIRS 176912-Wenker et al. 2006, p. 15). In the interim, the 20-percent Class II inventories have provided more than enough information to characterize the nature and distribution of cultural resources along the Caliente rail alignment alternative segments and common segments. Before starting any ground-disturbing activities that could affect cultural resources, the Department would perform the intensive *Class III inventory* of the selected alternative segments, site evaluations, impact assessments, and implement impacts reduction or prevention measures, as appropriate.

3.2.13.3 General Environmental Setting and Characteristics

Sections 3.2.13.3.1 through 3.2.13.3.4 summarize the prehistoric, American Indian, and Euroamerican cultural history of southern Nevada. Additional detail, including sources and references, is presented in the historic context report prepared in support of the Rail Alignment EIS. (DIRS 174688-AGEISS 2005, all; DIRS 182291-Desert Research Institute 2007, all).

3.2.13.3.1 Prehistoric Period

Native people inhabited the region that encompasses the Caliente rail alignment for thousands of years and left artifacts and traces of their settlement and subsistence patterns and religious beliefs. The prehistoric archaeological record in the vicinity of the Caliente rail alignment is subdivided into the following three cultural periods:

- Pre-Archaic (11,500 to 7,500 years before present). The Pre-Archaic cultural period is marked by relatively few people, who traveled in small bands hunting game and gathering food. Archaeological sites dating to this period are commonly preserved on gravel bars and other landforms associated with *pluvial lakes*, marshes, and riparian zones. These sites and their artifacts indicate a reliance on wetlands, with an emphasis on hunting large game. Isolated finds of distinctive fluted points associated with the Clovis and Folsom groups of people have a wide but sporadic distribution throughout the region.
- Early to Middle Archaic (7,500 to 1,500 years before present). During the Early to Middle Archaic cultural period, a shift occurred to a wider use of the environment, including sites near springs, perennial streams, caves, and rockshelters. A gradual increase in populations was marked by the use of plant seeds and nuts, along with hunting small game. Seventeen rockshelters dating to this period and the Late Archaic period have been investigated in the vicinity of the Caliente rail alignment.
- Late Archaic (1,500 to 150 years before present). Hallmarks of the Late Archaic cultural period include ceramics and small projectile points, along with the bow and arrow. Settlement patterns and subsistence practices continued from the earlier period, with sites in a variety of settings but clustered around permanent springs and riparian settings.

3.2.13.3.2 American Indian Historic Period

The Caliente rail alignment would cross lands historically occupied by two indigenous ethnic groups, the Western Shoshone and the Southern Paiute. Other neighboring groups, such as the Owens Valley Paiute and Shoshones from adjacent regions, had strong kinship ties and occasionally visited the region.

Both the Western Shoshone and the Southern Paiute were characterized by local subgroups, defined by slight language or dialectical differences, traditional centers of residential occupation, more or less regular home ranges or districts, and closeness of kin ties. Local subgroups clustered around small oases scattered throughout the desert where springs and flowing streams could be found.

Mountains and surrounding valleys were important resource collection areas, but seasonal changes in food availability prevented areas from being occupied year-round. Figure 3-116 shows areas occupied by these subgroups.

The Caliente rail alignment would cross or be adjacent to the territories of several American Indian subgroups. Western Shoshone areas include the Oge’pi District near Beatty; the Piadoya District in the Kawich Range, extending into Stone Cabin Valley and Reveille Valley; the Lida-Goldfield area; and other subgroups in Ralston Valley, Hot Creek Valley, and Railroad Valley. The eastern part of the rail alignment was inhabited by two Southern Paiute subgroups, the Pahrnat of the Pahrnat Valley and Pahroc Range areas, and the Panaca of Meadow Valley Wash near the present-day City of Caliente and town of Panaca.

Following initial contact by European Americans in the early to middle 1800s, native people in central and southern Nevada began to adapt to changing conditions as settlement and development by miners, prospectors, and ranchers rapidly encroached on the landscape. As their essential resources were being lost to the Euroamerican expansion, both the Western Shoshone and the Southern Paiute were forced to confine their activities to selected reservations carved out of small portions of their traditional lands. Given the difficulties of making a living on these restricted areas, many responded by providing labor and other services to mining and ranching ventures, oftentimes living in mining towns or at ranches. In the vicinity of the region of influence, there were Indian encampments at mining communities in the Beatty–Bullfrog, Goldfield, Tonopah, Reveille Valley, and Panaca–Pioche areas. There was another Western Shoshone village on the eastern side of Stone Cabin Valley, where American Indians worked as ranch hands and laborers for the Reeds Ranch and the Reeds United Cattle and Packing Company, which operated over 12,000 square kilometers (3 million acres) between 1906 and 1940. American Indian children attended small schools set up at places such as Reeds Ranch and the Reveille Mill.

3.2.13.3 Euroamerican Historic Period

Initial forays by European Americans (settlers and explorers) into the region of influence began in 1849 along the Jayhawker’s Emigrant Trail to California, which the eastern part of the Caliente rail alignment would cross. The alignment would also cross areas of later exploratory surveys by Lt. John C. Fremont, in 1854, and Lt. George Wheeler, in 1869 and 1872.

Settlement of the area began with Mormon colonization of Meadow Valley and Pahrnat Valley in the eastern part of the rail alignment. These efforts began in the late 1850s and involved both mining, primarily for silver and gold, and agricultural developments. Another early mining center was developed in the Reveille Range in the 1860s, with a mill built in Reveille Valley in 1869. Later mining districts that developed in the early 1900s include the Freiberg District in the northern Worthington Mountains and the Harriman, Eden, Clifford, Horseshoe, Bellehellen, Golden Arrow, and Blake’s Camp districts in the Kawich Range. Of these districts, only the Clifford District would be within the Caliente rail alignment region of influence, although resources that were common to mining, such as roads, might also be present. More extensive mining developments took place in the Goldfield area and in the vicinity of Beatty.

Contemporaneous with mining was widespread ranching that took advantage of the valley floors and adjacent mountain ranges for grazing of cattle and sheep. Within the Caliente rail alignment region of influence, early historic ranching operations are found in Reveille Valley, Stone Cabin Valley, and upper Oasis Valley along the Amargosa River drainage.

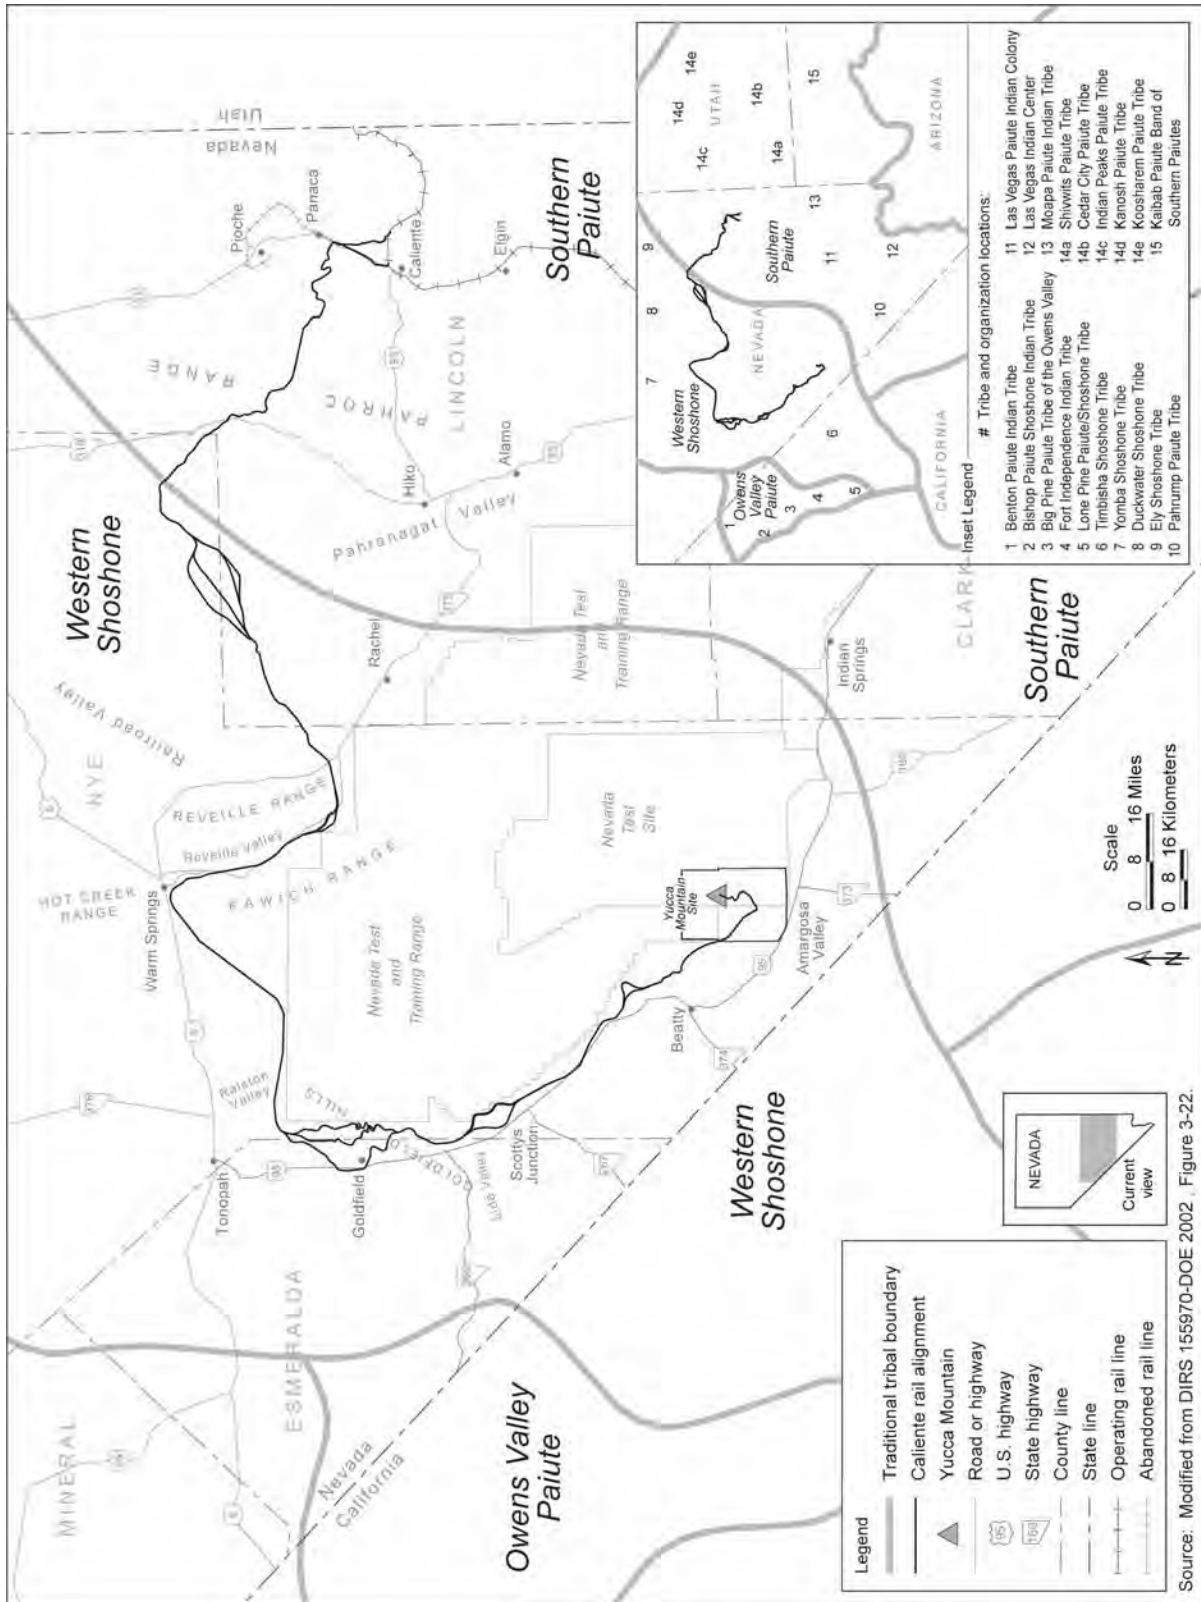


Figure 3-116. Traditional boundaries and locations of federally recognized tribes.

3.2.13.3.4 Cultural Landscapes

Based on the literature review of the cultural history of the region of influence, DOE identified several examples of potential cultural landscapes reflecting significant ethnographic, mining, ranching, and railroading activities within the Level II region of influence that might be eligible for listing on the *National Register of Historic Places* (DIRS 174688-AGEISS 2005, all). These include:

- Ethnographic. Historic period Western Shoshone villages and surrounding use areas in Oasis Valley, the Goldfield area, Stone Cabin Valley, and Reveille Valley
- Rural historic. Early cattle ranching operations in Oasis Valley, Stone Cabin Valley, Reveille Valley, and Railroad Valley, sheep ranching in northern Garden Valley and Coal Valley (including the neighboring Quinn Canyon, Golden Gate and Seaman Mountain Ranges), and the early Mormon settlement of Meadow Valley Wash
- Historic mining districts in the Goldfield, Clifford, and Reveille areas

3.2.13.4 Site-Specific Cultural Resources

The corridor through which the rail alignment would pass demonstrates a history of diverse prehistoric and historic land-use patterns. Native peoples occupied this area for many thousands of years, as exhibited by the archaeological sites identified in the area. These sites include campsites, rockshelters, rock-art sites, quarries, *lithic scatters*, rock rings and alignments, and trail systems. Important residential camps dating to the early contact and ethnographic periods are also known. Euroamerican presence in the area is largely limited to the past 150 years or so, and is characterized by diverse activities represented at a wide variety of site types. Recorded and anticipated sites include early exploration and transportation features such as trails, wagon and stage roads; railroads and railroad camps and sidings; early ranching features such as homesteads, farms, and ranches; cattle and sheep camps, enclosures, and other features; mining features such as claim markers and mines, mills, and mining camps; and wells, pipelines, and irrigation systems. Isolated features and artifacts related to all of these activities can also be anticipated.

This section presents data on both previously recorded cultural resources and known, but unrecorded, properties along the Caliente rail alignment. This section first presents the results of the Class I site-file search of the Level II region of influence and the Class II inventory (field survey) of the Level I region of influence for the entire Caliente rail alignment, including alternative segments. The results are followed by a segment-by-segment discussion for each of the alternative segments and common segments. DOE based individual segment analyses on three data sources: (1) the known-site file search and literature review (DIRS 174688-AGEISS 2005, all); (2) the Class II inventory (DIRS 174689-HRA Conservation 2005, all); and (3) information from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, all). All references consulted or used in the different analyses can be found in those reports.

3.2.13.4.1 Previously Recorded Prehistoric Resources

A Class I site-file search for archaeological sites within the Level II region of influence identified 432 prehistoric recorded sites and *isolates* (Table 3-75). Of this total, 107 (25 percent) are isolated artifacts that were previously assigned archaeological site numbers. Although isolates are generally considered not eligible for listing on the *National Register of Historic Places*, they indicate, along with other types of sites, the presence of prehistoric people in the region of influence. A total of 118 (27 percent) of the sites and isolates have been recorded within the current *Yucca Mountain Site boundary*, where there have been more intensive field surveys. Site-type terminology reflects the site classification system employed in the BLM Draft Ely District Resource Management Plan (DIRS 174518-BLM 2005, Section 3.9).

In total, 30 sites are considered eligible for listing on the *National Register of Historic Places*, including five prehistoric specialized activity area sites within the Level I region of influence.

Table 3-75. Previously recorded prehistoric archaeological sites in the Level II region of influence.^a

Site type	Number of sites and isolates	Eligible ^b	Not eligible	Unevaluated
Specialized activity areas (campsites)	23	12	4	7
Rockshelters	17	6	1	10
Rock-art sites	4	3	0	1
Toolstone sources and quarry sites	19	2	11	6
Specialized activity areas (lithic scatters)	254	7	207	40
Isolates ^c	107	0	103	4
Other:				
Rock ring	2	0	0	2
Rock features	5	0	5	0
Hearth	1	0	0	1
Unknown	0	0	0	0
Totals	432	30	331	71

a. Source: Data from a site-file search at Southern Nevada Site Survey Repository, Harry Reid Center for Environmental Studies, University of Nevada, Las Vegas (DIRS 174688-AGEISS 2005, all; DIRS 182291-Desert Research Institute 2007, all).

b. Eligibility determinations taken from archaeological site forms on file, as evaluated against significance criteria for potential eligibility for listing on the *National Register of Historic Places*.

c. Isolates include artifact occurrences that have been given a site number in the Nevada statewide archaeological recording system. Isolates are generally considered ineligible for listing on the *National Register of Historic Places*.

3.2.13.4.2 Previously Recorded Historic Euroamerican Resources

A Class I site-file and literature search for historical Euroamerican sites within the Level II region of influence identified 147 historic sites and isolates (see Table 3-76). Of this total, 17 (11 percent) are isolated artifacts that were previously assigned site numbers and 47 (32 percent) sites have both prehistoric and historic components.

In total, 23 sites are considered eligible for listing on the *National Register of Historic Places*, and two of these sites, the Goldfield downtown district and the Caliente Union Pacific Depot, are listed on the National Register. Of the 23 eligible sites within the Level II region of influence, seven are within the Level I region of influence. Historic resources identified as being either within the Level I region of influence or adjacent thereto include the following:

- Caliente Union Pacific Depot, listed on the *National Register of Historic Places*. The depot is within the Caliente alternative segment.
- Meadow Valley. Early Mormon colonization; the Caliente and Eccles alternative segments would cross this valley.

Table 3-76. Previously recorded historic Euroamerican sites in the Level II region of influence.^a

Site type	Number of sites	Eligible ^b	Not eligible	Unevaluated
Historic town sites	3	3	0	0
		Goldfield downtown district listed on the <i>National Register of Historic Places</i>		
Historic railways	10	5	3	2
		Caliente Union Pacific Depot listed on the <i>National Register of Historic Places</i>		
Historic mining sites	27	4	21	2
Historic ranching sites	4	1	1	2
Campsite	1	1	0	0
Historic roads	2	0	2	0
Historic cemetery	2	0	0	2
Historic debris scatters	34	1	30	3
Sites with both historic and prehistoric components	47	8	27	12
Isolates ^c	17	0	16	1
Totals	147	23	100	24

a. Source: Data from site-file search at Southern Nevada Site Survey Repository, Harry Reid Center for Environmental Studies, University of Nevada, Las Vegas (DIRS 174688-AGEISS 2005, all).

b. Eligibility determinations taken from archaeological site forms on file, as evaluated against significance criteria for potential eligibility for the *National Register of Historic Places*.

c. Isolates include artifact occurrences that have been given a site number in the Nevada statewide archaeological recording system.

- **Historic railroads.** The Las Vegas and Tonopah, Tonopah and Goldfield, and Union Pacific railroads, including the present-day mainline and the abandoned Caliente and Pioche spur line. The Caliente alternative segment would follow the Caliente and Pioche spur line for most of the segment’s 18-kilometer (11-mile) length and Caliente common segment 4 would intersect or follow many segments of the Las Vegas and Tonopah line for 11 kilometers (7 miles), south of Goldfield. In these locations, DOE would refurbish the historic rail beds for use with the proposed rail line.
- **Ralston (ghost town).** A station on the Las Vegas and Tonopah Railroad with a small store and saloon, established in 1907. Located southeast of Goldfield, this site lacks remaining architecture but is a historical archaeological site adjacent to Caliente common segment 4.
- **Cedar Pipeline Ranch.** In Reveille Valley, just south of Caliente common segment 2 and the South Reveille alternative segments.
- **Reveille Mill.** In Reveille Valley, east of Caliente common segment 3; the segment would intersect the original wagon road leading to the mines.
- **Reveille Mining District.** In Reveille Range, just west of South Reveille alternative segment 4.
- **Reeds Ranch.** In Stone Cabin Valley, just north of Caliente common segment 3.
- **Black Rock Spring Dugout.** South of Caliente common segment 3.

- Possible World War II airplane crash sites associated with training at the Tonopah Army Air Base. In the Mud Lake vicinity, just south of Caliente common segment 3 and east of Goldfield alternative segment 3.
- The downtown district of Goldfield, listed on the *National Register of Historic Places*. The town dump and a cemetery (determined eligible for listing on the National Register) are located within the Goldfield 4 alternative segment.
- Clifford Mine. In Stone Cabin Valley, within the Caliente common segment 4 Level II region of influence.
- Beatty Cattle Company Ranch and Colson Ranch, with associated Western Shoshone villages, Oasis Valley. One site is within the Oasis Valley alternative segment 3 Level II region of influence; the other is within the Oasis Valley alternative segment 1 Level II region of influence.

3.2.13.4.3 Known American Indian Resources

Previous American Indian studies and consultations associated with the Yucca Mountain Project, the Nevada Test Site, the Nevada Test and Training Range, and other projects have yielded significant information on the concerns of modern-day American Indians regarding traditional and cultural values (DIRS 174205-Kane et al. 2005). These concerns include evidence of their ancestors' occupation and use of traditional homelands, and their feelings about natural resources and geologic formations in the region, such as plants, animals, and natural landforms that mark important locations. Opportunities for the identification of traditional cultural properties and additional places of concern to American Indians will remain open through the consultation process.

Based on past studies and research for this Rail Alignment EIS, DOE has obtained information regarding the following potentially eligible historic properties that could be of cultural value for American Indians:

- Hot springs, rockshelters, plant resources, and trails used by Southern Paiutes in the Caliente area, including Meadow Valley and Clover Creek. Within the Level II region of influence.
- Black Rock Spring Campsite in North Pahroc Range. Within the Level II region of influence.
- *Petroglyphs*. Within the Level II region of influence.
- Western Shoshone camp in Reveille Valley. Within the Level II region of influence.
- Western Shoshone winter camp in the vicinity of Warm Springs. Within the Level II region of influence.
- Western Shoshone winter village of Hugwapagwa in Stone Cabin Valley. Within the Level II region of influence.
- Rabbit Spring Rock shelter camp near Goldfield. Within the Level II region of influence.
- Winter village, probable site of a Western Shoshone village named Matsum in the vicinity of Willow Springs. Within the Level II region of influence.
- Beatty area petroglyphs. Within the Level II region of influence.
- Western Shoshone Ogwe'pi District, a cluster of winter villages along the upper Oasis Valley and the headwaters of the Amargosa River, including two probable villages. Within or adjacent to Level II region of influence.
- Black Cone site, a place of religious significance near the Crater Flat area. Within the Level II region of influence.

- Significant crossroad where numerous traditional American Indian trails came together near Fortymile Wash. Within the Yucca Mountain Site boundary.
- Rock art near Busted Butte. Within the Yucca Mountain Site boundary.

3.2.13.5 Cultural Resources by Alternative Segments and Common Segments

Sections 3.2.13.5.1 through 3.2.13.5.12 describe the cultural resources for each of the Caliente rail alignment common segments and alternative segments, including data from the previously recorded Class I site-file and literature search (DIRS 174688-AGEISS 2005, all), the results of the Class II inventory (DIRS 174689-HRA Conservation 2005, all), and associated American Indian interactions (DIRS 174205-Kane et al. 2005, all).

3.2.13.5.1 Alternative Segments at the Interface with the Union Pacific Railroad Mainline

3.2.13.5.1.1 Caliente Alternative Segment. The Class I site-file search identified 11 previously recorded cultural resources along the Caliente alternative segment. These resources include three prehistoric sites (two rockshelters and a campsite), three isolated artifacts, and five historic sites (two railroad features, two trash scatters, and a cemetery). The search revealed that one site, the Caliente Union Pacific Railroad Depot, is listed on the *National Register of Historic Places* and two sites, the Caliente-Panaca Railroad *berm*, and a prehistoric rockshelter site, are evaluated as eligible for listing on the *National Register of Historic Places*. The rails have been removed from the eligible railroad berm, but the proposed rail line would cover several undocumented wooden and metal bridges that remain. Additionally, the Caliente Union Pacific Railroad Depot, listed on the *National Register of Historic Places*, is in the middle of town, south of the proposed rail line departure point. Historic maps and photographs indicate several buildings, including a depot and a roundhouse, that existed in the area. It is probable that subsurface historical Euroamerican remains exist even though the structures have been removed.

Also in the vicinity of the Interface with the Union Pacific Railroad Mainline is the potential historic property of the Caliente Hot Springs Motel and Bath (Figure 3-117). The City of Caliente has other potential historic sites, including a hotel. Also of note, the hot springs were known to have been used by American Indian people for medicinal purposes.

The area known as Indian Cove, just north of the City of Caliente, through which the Caliente alternative segment would pass, has evidence of prehistoric use in the form of a previously recorded rockshelter (evaluated as eligible for listing on the *National Register of Historic Places*), an unevaluated rock-art panel, and lithic scatters and isolates.

Nearly the entire length of this segment would lie in the potential early Mormon colonization cultural landscape along Meadow Valley Wash. Examples of architecture typical of early Mormon farming ventures can still be found in the ranches and communities in this area. This segment is also characterized as a historic railroad alignment, but DOE could not inventory this area because the Department did not have the access to private property necessary to perform the inventory.

Most of the lands along the Caliente alternative segment are privately owned, but sufficient data have been collected on the area to characterize archaeological sensitivity. If DOE selected the Caliente alternative segment, the Department would complete the cultural resources inventory of this segment before starting construction.

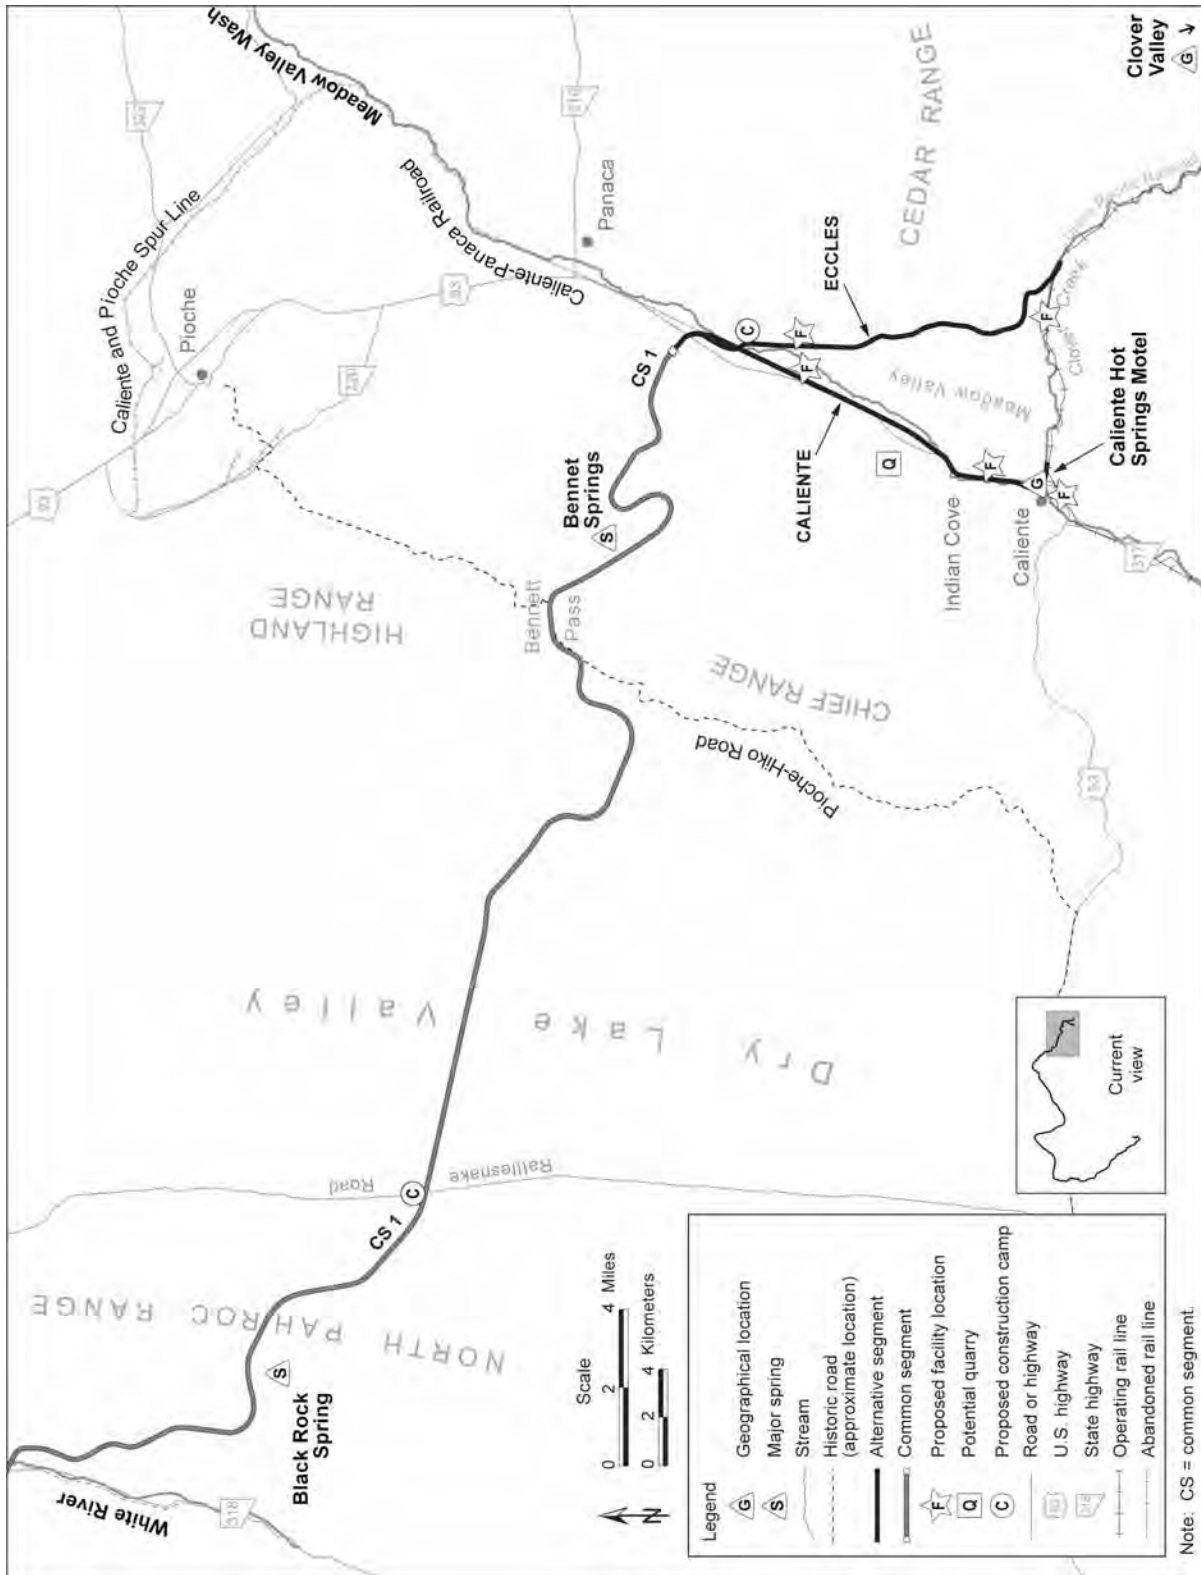


Figure 3-117. Major historic and geographical locations within map area 1.

There is a potential quarry site (CA-8B) along the Caliente alternative segment on the eastern exposure of a rocky ridge overlooking Meadow Valley Wash. Preliminary archaeological reconnaissance of the location did not identify any cultural materials or other evidence of prehistoric or historic activities.

3.2.13.5.1.2 Eccles Alternative Segment. The Class I site-file search identified three previously recorded cultural resources along the Eccles alternative segment. These resources include two prehistoric rockshelter sites and one isolated artifact. One rockshelter site is located in the Level I region of influence. If DOE selected the Eccles alternative segment, the Department would complete the cultural resources inventory along the segment, much of which lies on private property, prior to construction. However, there are two previously recorded but unevaluated prehistoric rockshelters in the vicinity of the proposed location of the Staging Yard (Eccles-North). The American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) also indicates that Clover Valley is a culturally important place with associated songs, plants and animals, and water resources.

DOE inventoried three Class II survey sample units along this segment, a total of 2.4 kilometers (1.5 miles). No sites were recorded, but five isolated artifact occurrences were found. In the area of the Meadow Valley Wash at the northern end of the segment, there is a potential early Mormon colonization cultural landscape.

3.2.13.5.2 Caliente Common Segment 1 (Dry Lake Valley Area)

The Class I site-file search identified 39 previously recorded cultural resources along Caliente common segment 1 (see Figure 3-118), including nine within the Level I region of influence. These resources include 11 prehistoric sites (a toolstone quarry locale and 10 lithic scatters), seven historic sites (three ranching campsites, three trash scatters, and Old State Route 38 along the White River), one site with both prehistoric and historic components, and 20 isolated artifacts. One site with both historic and prehistoric components, located in the Level II region of influence, has been evaluated as eligible for listing on the *National Register of Historic Places*. The site is in the vicinity of Black Rock Spring and includes a prehistoric campsite with abundant lithics and ceramics, and an early historic-period habitation site. This spring is one of three in the vicinity, and field reconnaissance of the place indicates that there are archaeological sites associated with each of the springs.

DOE surveyed 23 sample units during the Class II effort, a total of 19 kilometers (12 miles). The survey recorded two sites, a prehistoric lithic scatter and an historic campsite; neither site was recommended as eligible for listing on the *National Register of Historic Places*. Seventeen isolated artifact occurrences were also recorded during the field survey along this segment.

The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all), does not identify any potentially significant American Indian resources in the Caliente common segment 1 region of influence. However, the American Indian Writers Subgroup notes that systematic ethnographic studies have not been conducted. The subgroup does note the significance of cultural resources in the White River Valley, such as the well-known White River Narrows rock-art sites, charcoal ovens, and the area of Pahranaagat Valley. These resources would be several kilometers from the proposed rail alignment region of influence.

The eastern part of Caliente common segment 1 would begin in the potential early Mormon colonization cultural landscape and quickly leave it going westward. The segment from Meadow Valley Wash passing through Bennett Pass, Dry Lake Valley, the White River Valley, and eastward to Garden Valley is historically important as the route of one of the 1849 Jayhawkers Emigrant parties, the Bennett-Arcane Party. One of the leaders of this party, Asabel Bennett, left his name inscribed in rock at the pass.

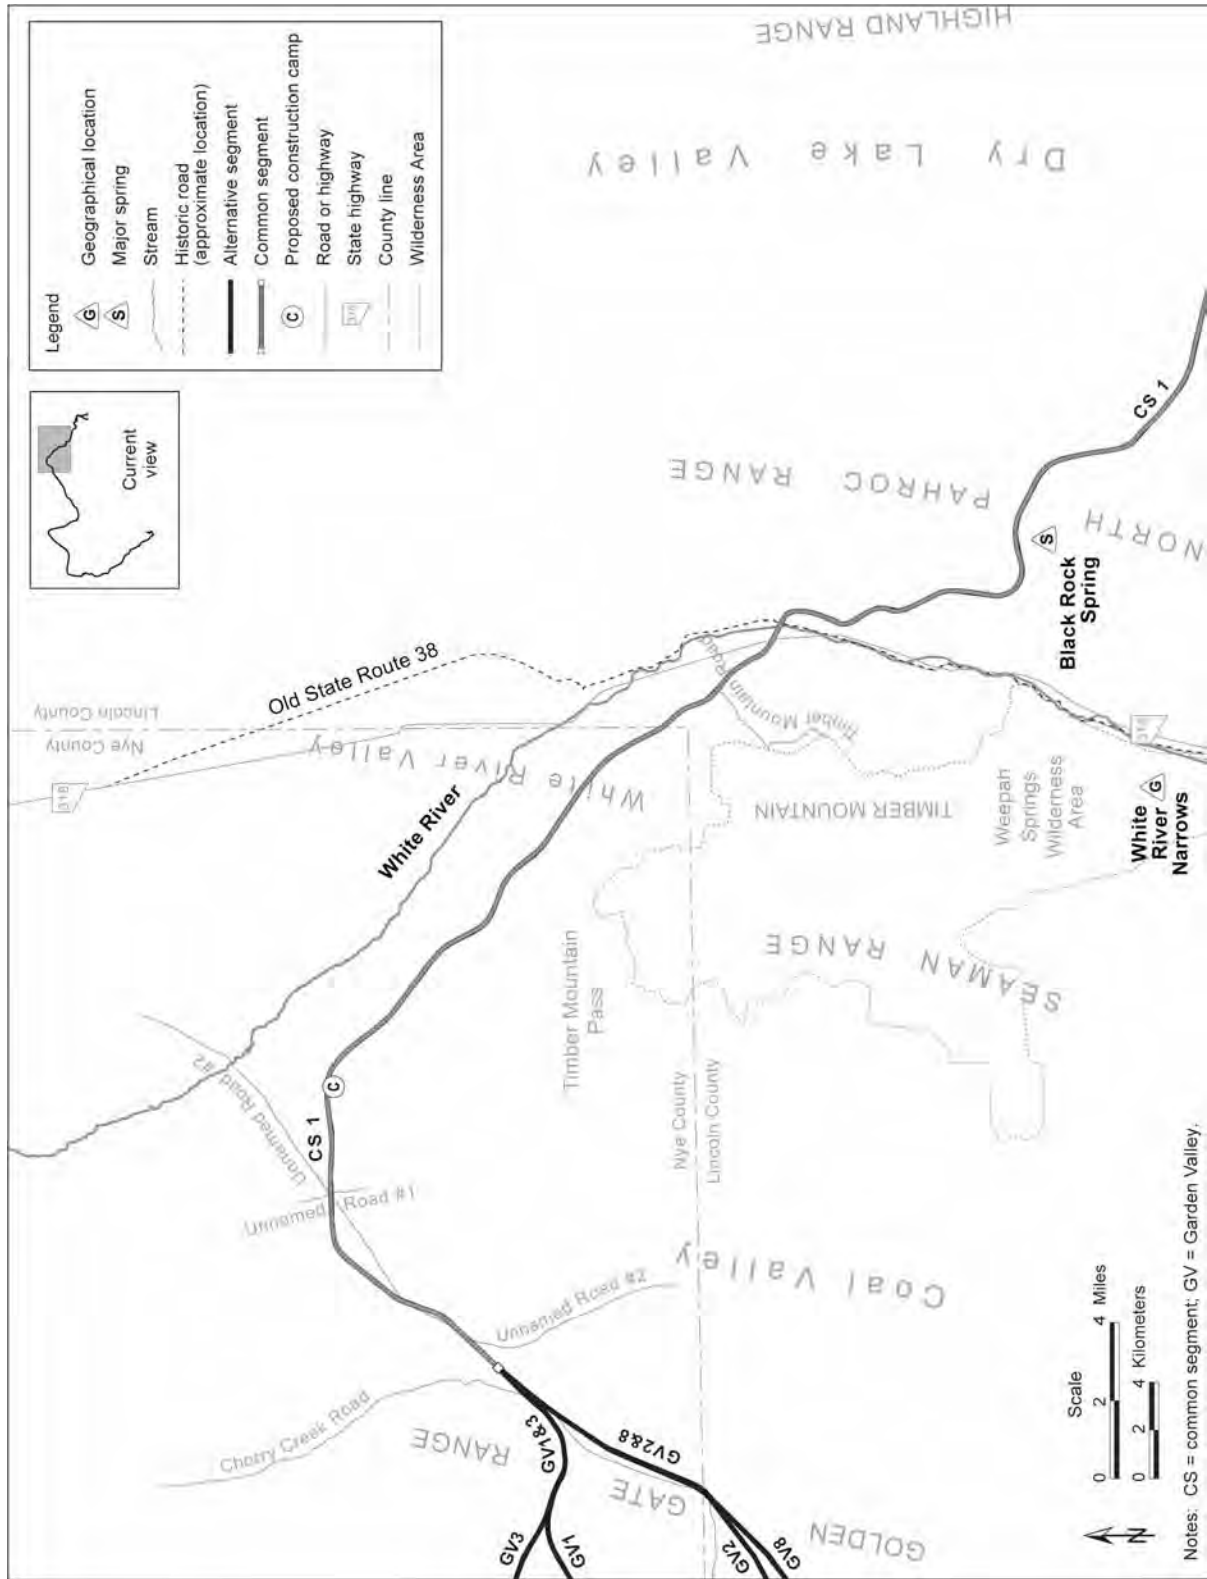


Figure 3-118. Major historic and geographical locations within map area 2.

The 1849 party reportedly camped at Bennett Springs, about 1.6 kilometers (1 mile) from the common segment. The party also camped in the vicinity of Black Rock Spring before crossing the North Pahroc Range. The route the party followed, commonly referred to as the Lost '49er Trail, has not been physically identified but is known to have crossed Bennett Pass and Pahroc Summit. To date, no archaeological sites associated with the Bennett-Arcane Party are identified in the Caliente common Segment 1 region of influence. In the 1870s, Bennett Pass became a well-traveled route between the silver mining communities of Pioche and Hiko. The Pioche-Hiko road remained a principal east-west route into the early 1900s.

3.2.13.5.3 Garden Valley Alternative Segments

3.2.13.5.3.1 Garden Valley Alternative Segment 1. The Class I site-file and literature search identified 10 previously recorded cultural resources along Garden Valley alternative segment 1 (Figure 3-119). These resources include five prehistoric sites (two rockshelters and three lithic scatters), four isolated artifacts, and one historic trash scatter. No sites have been evaluated as eligible for listing on the *National Register of Historic Places*. DOE surveyed five sample units during the Class II effort, a total of 4 kilometers (2.5 miles); only six isolated artifact occurrences were recorded.

The American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) notes that Garden Valley had extensive American Indian trail systems used for trade, commerce, pilgrimage, and for access to mountain ranges. The Resource Document does not give specific locations for trails or other potential American Indian resources.

3.2.13.5.3.2 Garden Valley Alternative Segment 2. The Class I site-file search revealed 12 previously recorded cultural resources along Garden Valley alternative segment 2 (Figure 3-119). These resources include four prehistoric sites (two campsites and two lithic scatters), and eight isolated artifacts that include a prehistoric Folsom point reported in the vicinity of Water Gap. Three of these sites are evaluated as eligible for listing on the *National Register of Historic Places*, including the two campsites and a lithic scatter associated with a cluster of rock features. DOE surveyed four sample units during the Class II effort, a total of 3.2 kilometers (2 miles); two isolates were recorded.

The same comments from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) made for Garden Valley alternative segment 1 apply to this segment.

Of the four Garden Valley alternative segments, Garden Valley 2 would pass closest to the historic Freiberg Mining District in the northeast part of the Worthington Mountains. The segment would pass about 5 kilometers (3 miles) north of the district.

3.2.13.5.3.3 Garden Valley Alternative Segment 3. The Class I site-file search identified 17 previously recorded cultural resources along Garden Valley alternative segment 3 (Figure 3-119). These resources include two prehistoric sites (a rock feature and lithic scatter), 13 isolated artifacts, and two historic trash scatters. DOE surveyed four sample units during the Class II effort, a total of 3.2 kilometers (2 miles). Only two isolates were recorded.

The same comments from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) made for Garden Valley alternative segment 1 apply to this segment.

3.2.13.5.3.4 Garden Valley Alternative Segment 8. The Class I site-file and literature search identified five previously recorded cultural resources along Garden Valley alternative segment 8. These resources include three prehistoric lithic scatters and two isolated artifacts. DOE surveyed three sample units during the Class II effort, a total of 2.4 kilometers (1.5 miles); eight isolated artifacts were recorded.

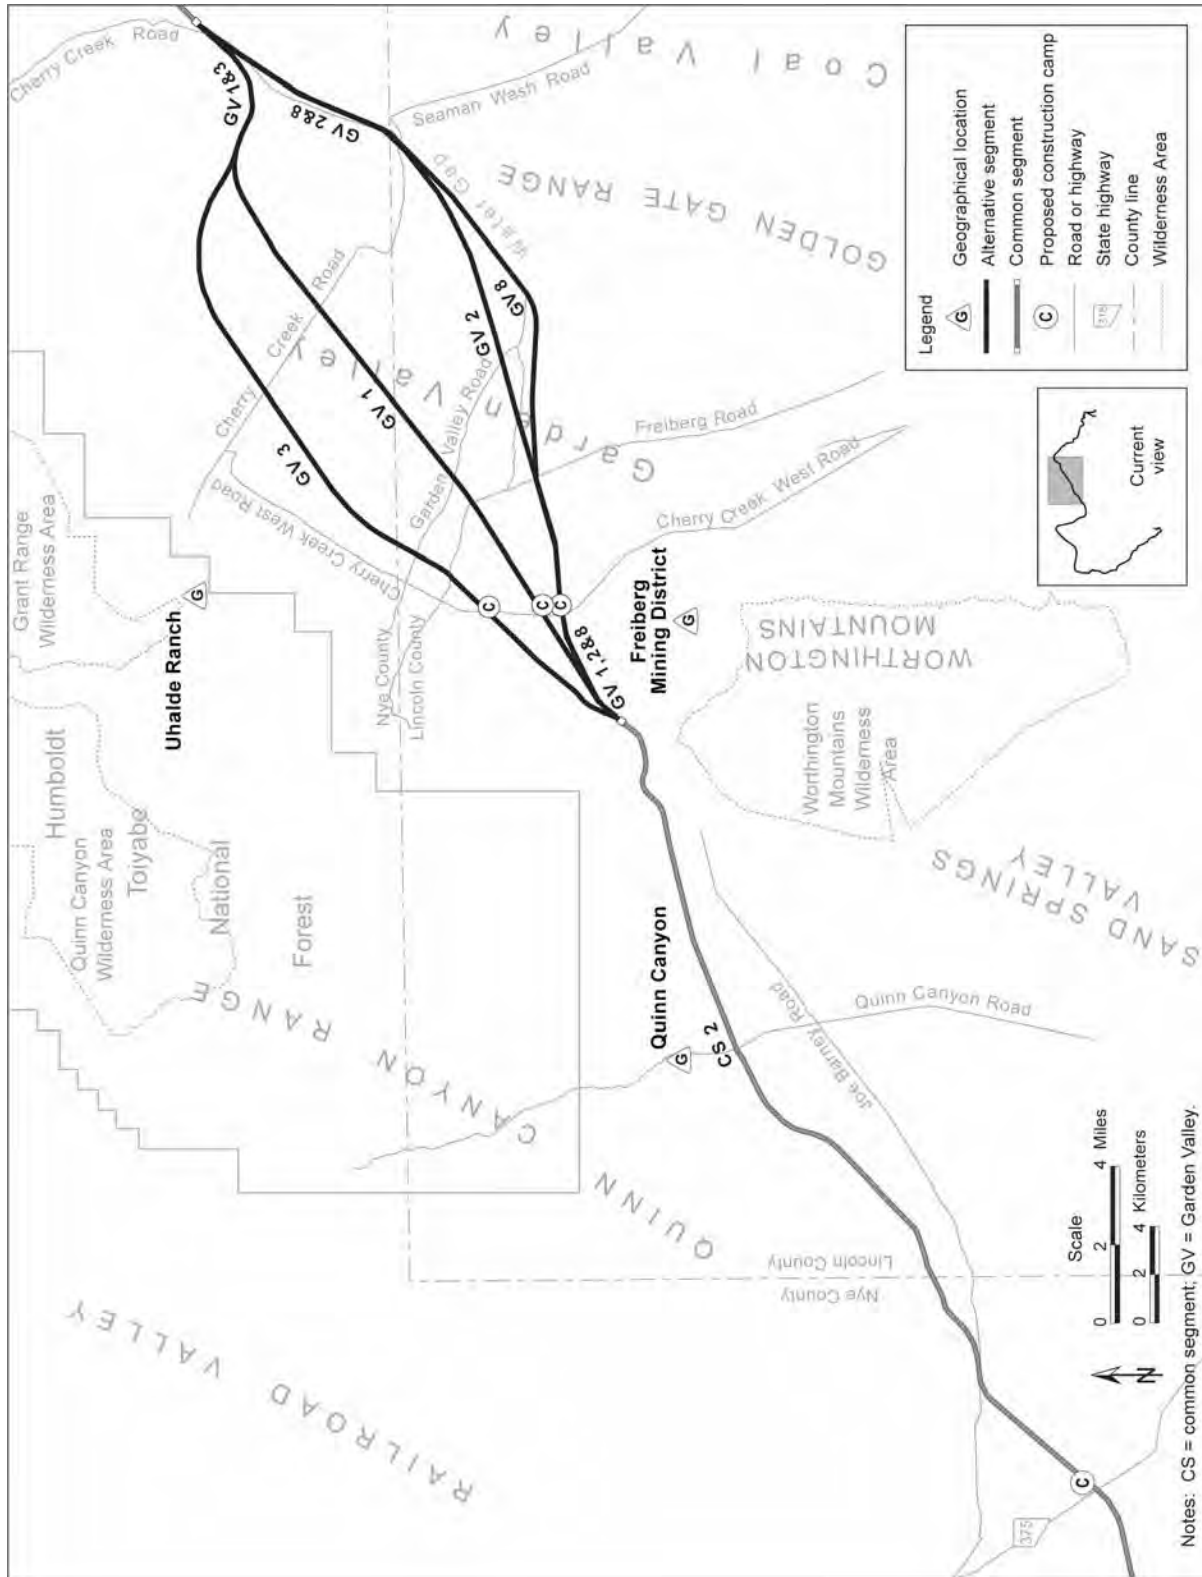


Figure 3-119. Major historic and geographical locations within map area 3.

The same comments from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) made for Garden Valley alternative segment 1 apply to this segment.

3.2.13.5.4 Caliente Common Segment 2 (Quinn Canyon Range Area)

The Class I site-file search identified eight previously recorded cultural resources along Caliente common segment 2 (Figure 3-119). These resources include seven prehistoric sites (two campsites, a rockshelter, and four lithic scatters) and one isolated artifact. DOE surveyed seven sample units during the Class II effort, a total of 5.6 kilometers (3.5 miles); three prehistoric sites and 16 isolated artifacts were recorded. Three sites are evaluated as eligible for listing on the *National Register of Historic Places*, including two lithic scatters and one locale with rockshelters and an associated scatter of artifacts. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) notes the rockshelter site as a culturally significant place, and refers to it as the “Black Top Archaeological Locality.”

The unrecorded historic Cedar Pipeline Ranch is at the western end of and about 1.6 kilometers (1 mile) south of Caliente common segment 2. This ranch was an element of the early vast holdings of the Reed Ranch and later part of the historic Twin Springs Ranching operations. Together, these ranches form a potential ranching cultural landscape that includes all of Reveille Valley and Stone Cabin Valley to the west, along with the adjacent Reveille and Kawich Mountain Ranges. The vicinity of Cedar Pipeline Ranch also marks the intersection of Caliente common segment 2 with the trail explorer John C. Fremont followed in 1854.

3.2.13.5.5 South Reveille Alternative Segments

Because the Level II region of influence for the South Reveille alternative segments (Figure 3-120) overlap, they are discussed jointly for the Class I site-file search and the Class II survey. The Class I site-file search revealed the presence of three cultural resources along these segments. These resources include two recorded prehistoric lithic scatter sites and one historic mine prospect. Also in this vicinity are the Reveille Valley rock-art panels. This location was identified in the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) as a culturally important site for American Indian people.

DOE examined two sample units for each of these alternative segments during the Class II field survey, a total of 1.6 kilometers (1 mile) or 8.5 percent of the segments. Only a single isolate was encountered along South Reveille 2. The Class II survey also recorded the rock-art site noted above.

A potential quarry (NN-9A) would be along South Reveille alternative segments 2 and 3. The potential NN-9A quarry site would occupy the top and eastern face of a broad, flat terrace, which drops steeply down to a wash along the eastern face. Preliminary archaeological reconnaissance of this site did not identify any cultural materials or other evidence of historic or prehistoric activities.

Another potential quarry (NN-9B) would be in south Reveille Valley, along South Reveille alternative segments 2 and 3. The NN-9B quarry site would occupy a long, narrow sandy ridge with frequent rocky outcrops. Preliminary archaeological reconnaissance of this site did not identify any cultural materials or other evidence of prehistoric or historic activities.

3.2.13.5.6 Caliente Common Segment 3 (Stone Cabin Valley Area)

Caliente common segment 3 (Figure 3-120) would pass close to a number of potentially important sites and through several potential cultural landscapes. The Class I site-file search identified 35 cultural resources along Caliente common segment 3. These resources include 29 prehistoric sites and six historic sites.

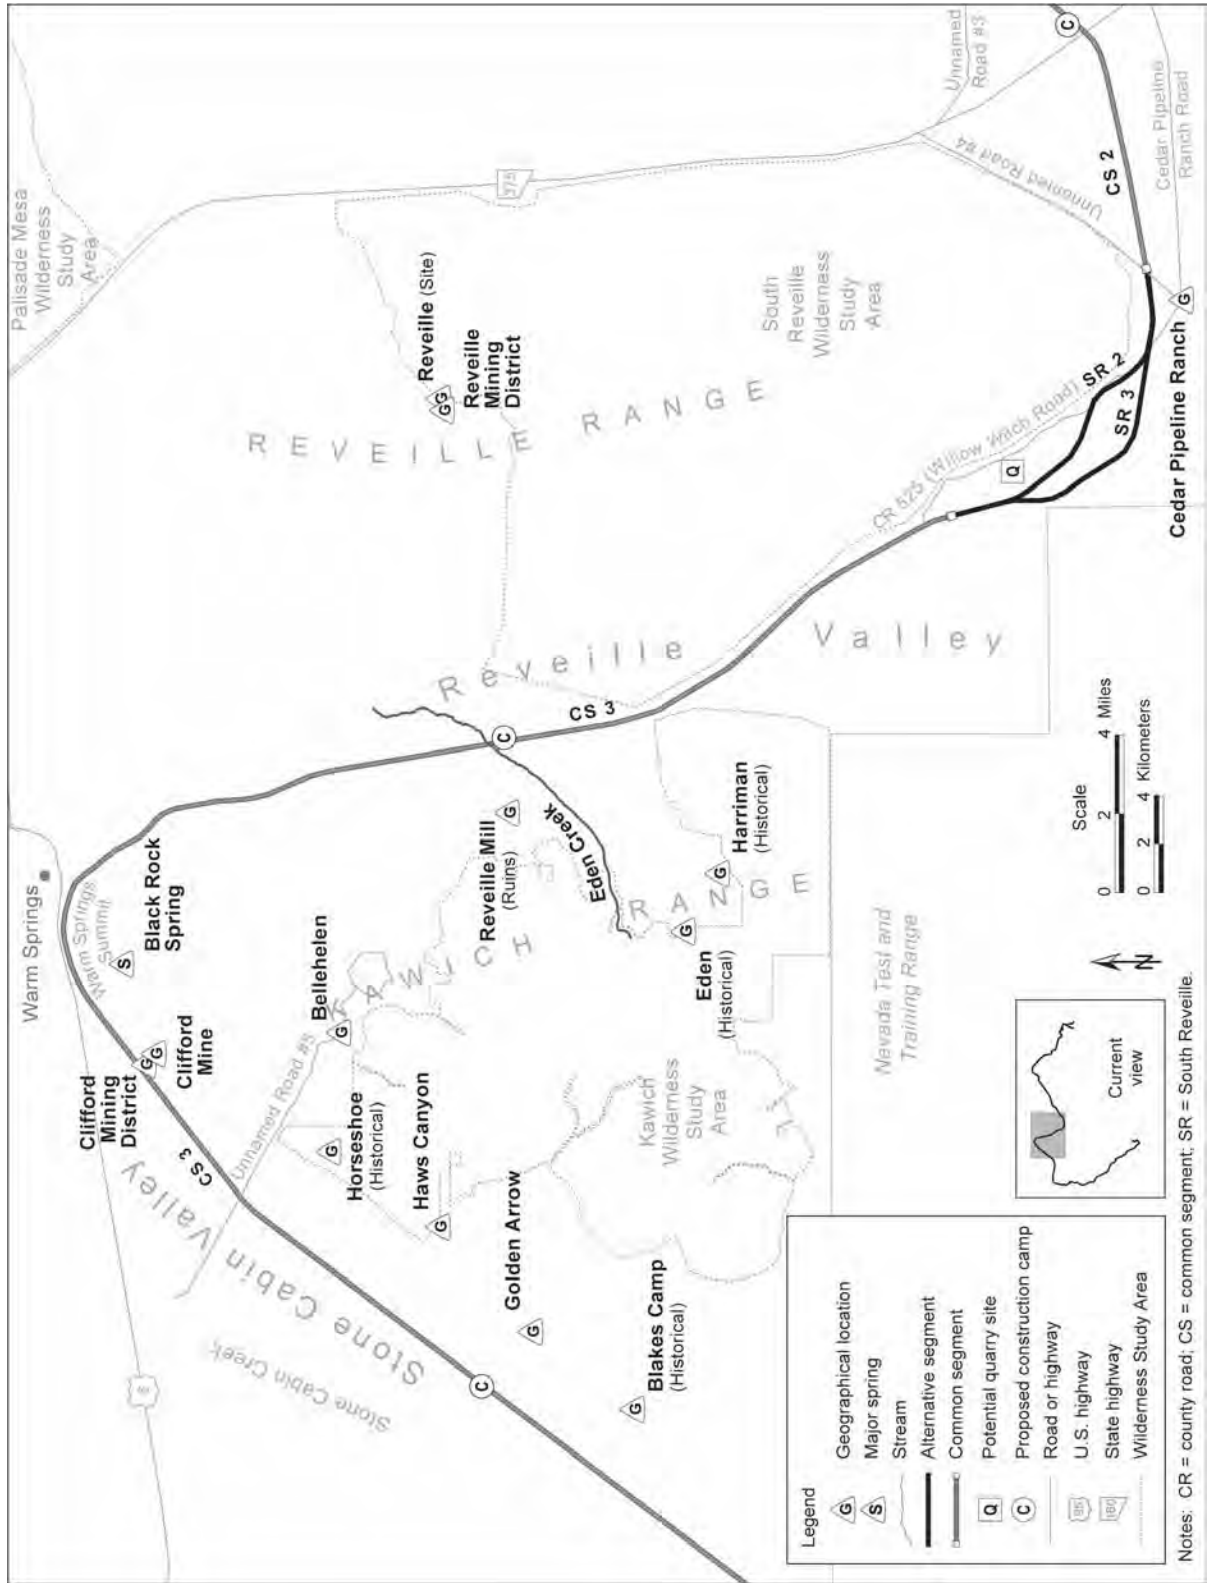


Figure 3-120. Major historic and geographical locations within map area 4.

The Class II survey examined 22 sample units, a total of 18 kilometers (11 miles). Three prehistoric sites are evaluated as eligible for listing on the *National Register of Historic Places*, including two lithic scatters within the Level I region of influence and a rock-art site within the Level II region of influence. Several potentially important cultural resources are found along Caliente common segment 3, although most are just outside the Level II region of influence.

The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) also notes the high significance of locations within this region to American Indian people. The entire Kawich Range, including the foothills along the eastern and western edges of the adjacent valleys, provided traditional homelands and use areas for Western Shoshone people. Especially important in these areas were a number of springs. Special reference is made in the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) to the Warm Springs and Reveille Mill areas. As discussed in Section 3.4, American Indian Interests in the Proposed Action, American Indians still use the Warm Springs area and it is highly revered for its healing power. In addition, a Western Shoshone man initially discovered the Clifford Mine.

3.2.13.5.7 Goldfield Alternative Segments

3.2.13.5.7.1 Goldfield Alternative Segment 1. The Class I site-file search identified four cultural resources within Goldfield alternative segment 1 (Figure 3-121). These resources include two prehistoric lithic scatters and two historic sites (a trash scatter and a campsite). The Class II survey examined six sample units along this segment, a total of 4.8 kilometers (3 miles), and 52 isolated artifacts were recorded. No sites are eligible for listing on the *National Register of Historic Places*.

Within this area, the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) identifies possible Western Shoshone camps east of Goldfield. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) also notes the existence of a rockshelter along the shoreline of Mud Lake in the vicinity of Goldfield alternative segment 1, and states that this site retains a high level of cultural significance. There are also rock-art panels at this location. These locations are outside the Level II region of influence.

3.2.13.5.7.2 Goldfield Alternative Segment 3. The Class I site-file and literature review revealed three previously recorded cultural resources along Goldfield alternative segment 3 (Figure 3-121). These resources include two rockshelters and a prehistoric campsite. The Class II survey covered 2.4 kilometers (1.5 miles), and 13 isolated artifacts were recorded. The campsite is the same possible group of Western Shoshone winter camps discussed in the preceding section. The American Indian Resource Document discussion from Goldfield alternative segment 1 also applies for this segment.

A potential quarry (NS-3A) would occupy a large area on the crest and slopes of two adjacent ridges in the Goldfield Hills, south of Mud Lake, along Goldfield alternative segment 3. No cultural materials or other evidence of prehistoric or historic activities were noted during preliminary archaeological reconnaissance of the potential quarry NS-3A location. Access roads to this quarry location from Goldfield to the south and west would pass through recent and historic mining areas, but neither the quarry location nor the access roads would directly overlie the historic mining areas.

3.2.13.5.7.3 Goldfield Alternative Segment 4. Because of its proximity to the Goldfield community, there are numerous known historic sites in the vicinity of Goldfield alternative segment 4 (Figure 3-121). The Class I site-file search revealed 154 previously recorded cultural resources. These resources include 74 prehistoric sites, five isolated artifacts, and 71 historic sites. Sites that are evaluated as being *National Register of Historic Places*-eligible include the downtown section of

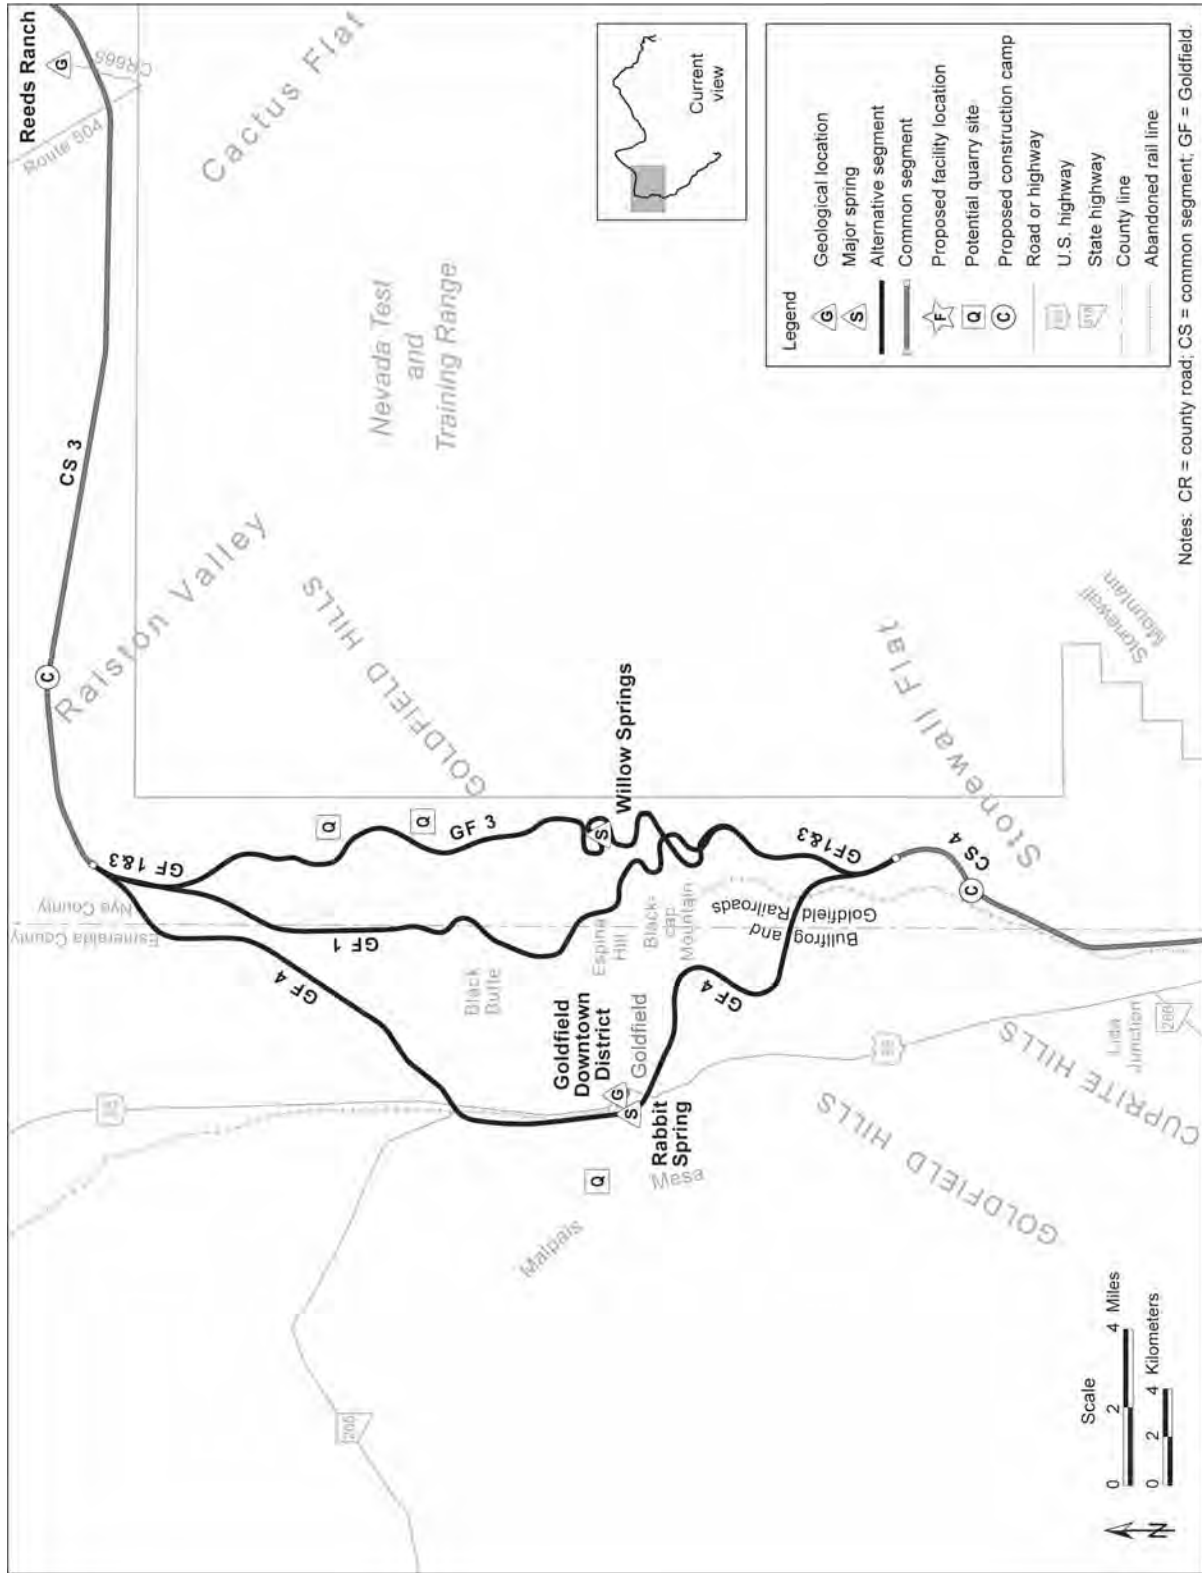


Figure 3-121. Major historic and geographical locations within map area 5.

Goldfield itself, which is National Register listed. Goldfield alternative segment 4 would pass through the National Register-eligible historic Goldfield town dump area and two mining sites. Other eligible sites outside the Level I region of influence include two town-related features, three mining sites, and three lithic scatters. In addition, several unrecorded prehistoric and historic sites are known to exist in the region of influence (see Section 3.2.13.1), based on literature reviews and field reconnaissance, along with an unmarked historic cemetery. The Class II field effort examined eight sample units along this segment, a total of 6.4 kilometers (4 miles), resulting in the identification of 69 isolates.

The American Indian Resource Document comments on the known presence of numerous American Indian resources in the vicinity of Goldfield alternative segment 4 (DIRS 174205-Kane et al. 2005, Section 2.3). Field reconnaissance by the American Indian Writers Subgroup noted the presence of several rockshelters, a boulder with rock art, and several unrecorded lithic scatters. Also of interest in the Level II region of influence is the presence of a grave marker in the paupers' section of the historic Goldfield Cemetery indicating that an American Indian woman was buried there in 1908.

A potential quarry (ES-7) would be near Goldfield alternative segment 4, west of the community of Goldfield. No cultural materials or other evidence of prehistoric or historic activities were noted during preliminary archaeological reconnaissance of the quarry area. However, recent mining-claim markers are present in the area. Access to this quarry from Goldfield would pass through recent and historic mining areas, but neither the potential quarry location nor the access road would directly overlie the historic mining areas.

3.2.13.5.8 Caliente Common Segment 4 (Stonewall Flat Area)

In Stonewall Flat, Caliente common segment 4 (Figures 3-121 and 3-122) would generally follow an abandoned historic rail line for much of its length to a place in Lida Valley. The Class I site-file search identified one previously recorded but unevaluated rockshelter site along this segment. The Class II survey examined four sample units, a total of 3.2 kilometers (2 miles). Eight isolates were recorded. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) does not note any specific areas of importance to American Indians.


There are unrecorded and unevaluated segments of historic rail roadbeds along Caliente common segment 4, although the rails were removed many decades ago. Of note is the unrecorded train stop of Ralston where limited commercial establishments once stood, along with railroad crew quarters and a water tower. Nothing remains of the architectural elements of Ralston, but historical archaeological features and artifacts are certain to exist.

3.2.13.5.9 Bonnie Claire Alternative Segments

DOE is considering two alternative segments in the area north of Scottys Junction–Bonnie Claire alternative segments 2 and 3 (Figure 3-122).

3.2.13.5.9.1 Bonnie Claire Alternative Segment 2. The Class I site-file search identified one cultural resource site along Bonnie Claire alternative segment 2. The site includes both prehistoric and historic components (a lithic scatter and mining prospects and debris). The prehistoric component was evaluated as being eligible for listing on the *National Register of Historic Places*.

The Class II survey examined five sample units, a total of 4 kilometers (2.5 miles). Two sites and five isolates were recorded. The sites include a prehistoric campsite with a lithic and groundstone scatter,

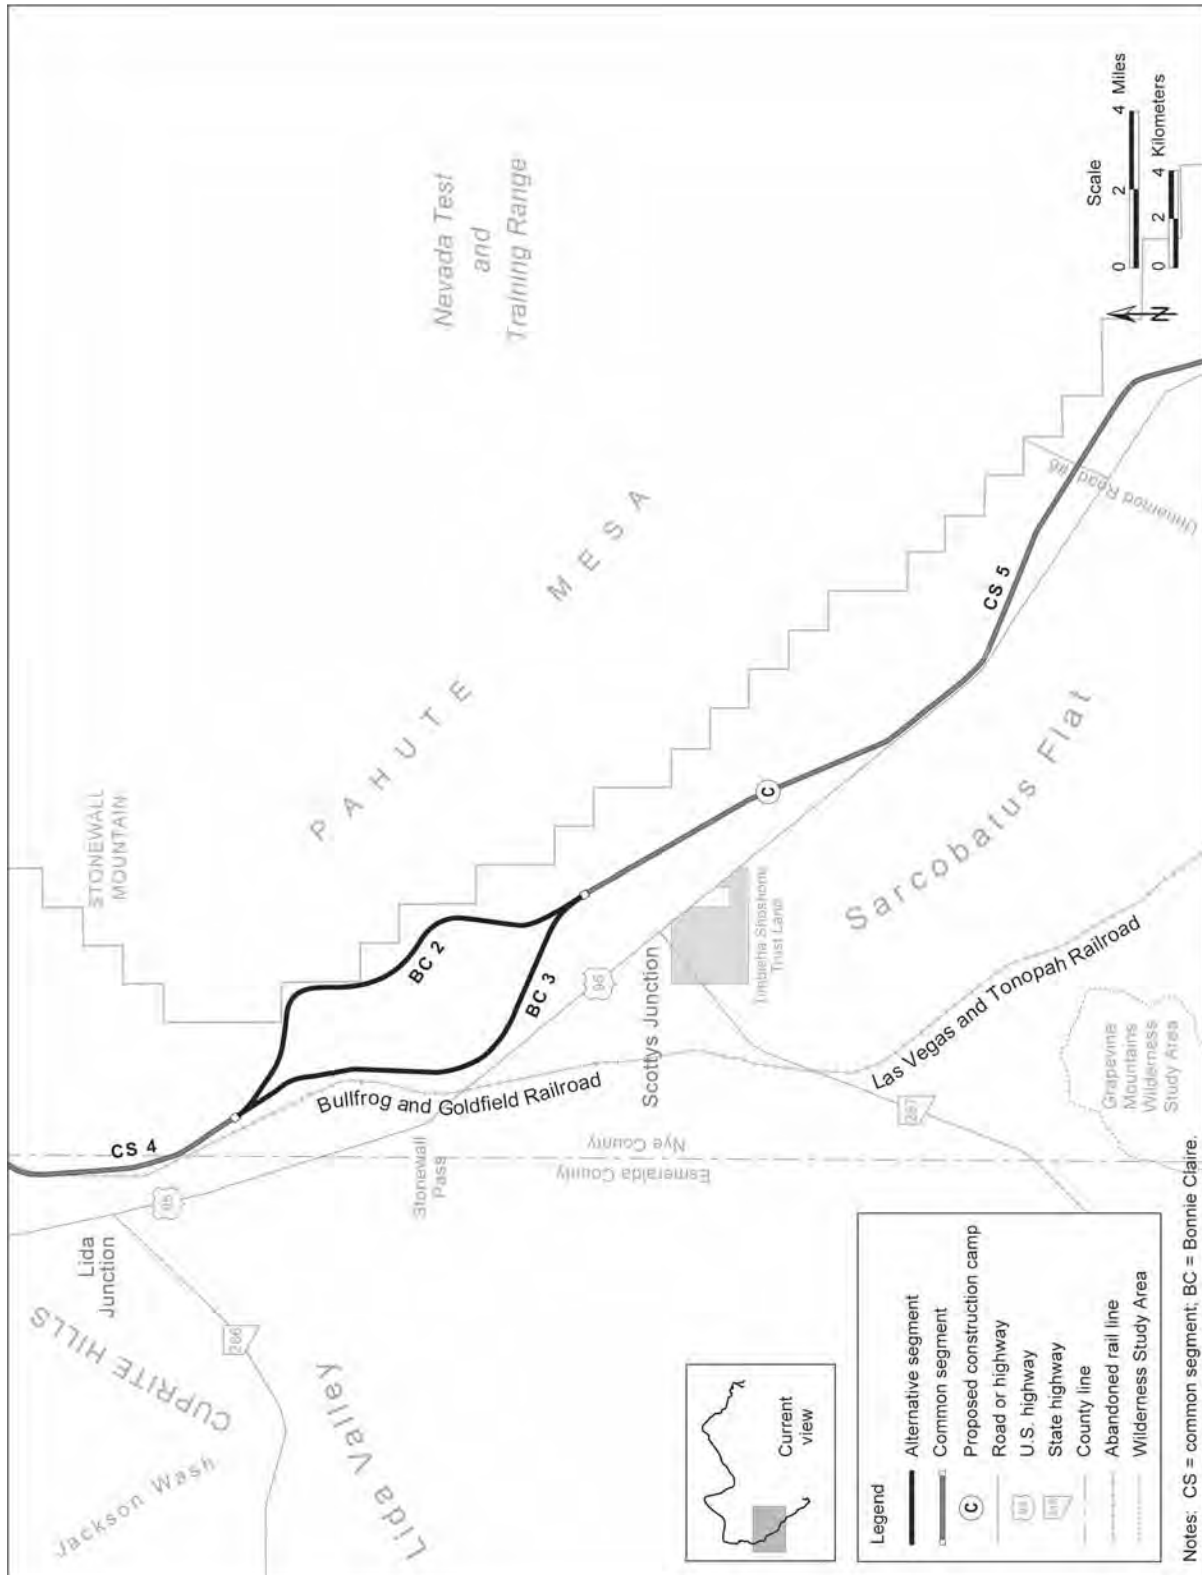

Notes: CS = common segment; BC = Bonnie Claire.

Figure 3-122. Major historic and geographical locations within map area 6.

evaluated as being eligible for listing on the *National Register of Historic Places*, and a lithic scatter for which eligibility is under review. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) does not identify any known areas of importance to American Indians along this alternative segment.

3.2.13.5.9.2 Bonnie Claire Alternative Segment 3. The Class I site-file search identified four cultural resources along Bonnie Claire alternative 3. These resources include four previously recorded but unevaluated prehistoric sites. One of these is a rockshelter, and the other three are extractive sites located in areas of obsidian cobble occurrences. The Class II survey inspected four sample units along this segment, a total of 3.2 kilometers (2 miles). One site and 24 isolates were recorded. The site is an historic rail line construction camp along the abandoned combined Bullfrog and Goldfield/Las Vegas and Tonopah rail bed, recommended as eligible for listing on the *National Register of Historic Places*. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) does not identify specific resources for this alternative segment.

3.2.13.5.10 Common Segment 5 (Sarcobatus Flat Area)

The Class I site-file search identified 33 cultural resources within common segment 5 (Figures 3-122 and 3-123). These resources include 20 prehistoric sites (14 lithic scatters and six quarry extractive sites), four historic sites (a Tolicha mining district campsite, two debris scatters, and a railroad segment), seven isolates, and two unknown sites. Of these sites, one lithic scatter has been recommended as eligible for listing on the *National Register of Historic Places*; 11 are not eligible, and 14 remain unevaluated. DOE surveyed 10 sample units along this segment for the Class II effort, a total of 8 kilometers (5 miles). Four prehistoric sites (three lithic scatters and one campsite) and 33 isolates were recorded. Of these sites, the campsite was recommended as eligible for listing on the *National Register of Historic Places*, and the three lithic scatters are not eligible. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) does not identify specific resources for this common segment.

3.2.13.5.11 Oasis Valley Alternative Segments

The Class I site-file search identified three cultural resources along Oasis Valley alternative segments 1 and 3 (Figure 3-123). These resources include one prehistoric campsite (recommended as eligible for nomination to the *National Register of Historic Places*) and two sites with both prehistoric and historic components (unevaluated ethnographic village sites).

3.2.13.5.11.1 Oasis Valley Alternative Segment 1. The Class II survey looked at three sample units along Oasis Valley 1, a total of 2.4 kilometers (1.5 miles). Two prehistoric sites (lithic scatters) and one historic mine site were recorded.

DOE surveyed three sample units along this segment for the Class II effort; 19 isolates were recorded. Oasis Valley alternative segment 1 would pass to the east of the historic ranch known today as the Beatty Cattle Company Ranch. In addition to being an unrecorded historic ranch, the area adjacent to the ranch is known to be the location of an early historic Western Shoshone winter camp. This camp has been partially recorded but has not been evaluated.

The American Indian Resource Document notes the presence of the early Western Shoshone camp and also states that, because of its abundant water supply and large variety of culturally important plants and animals, American Indian people extensively used the entire valley (DIRS 174205-Kane et al. 2005, Section 2.3). Recent ethnographic studies on the nearby Nevada Test and Training Range revealed cultural links to Oasis Valley. The Oasis Valley area is both a potential ethnographic and historic ranching cultural landscape. In later historic times, these landscapes overlapped, as American Indian people collocated with and supplied labor for the ranches.

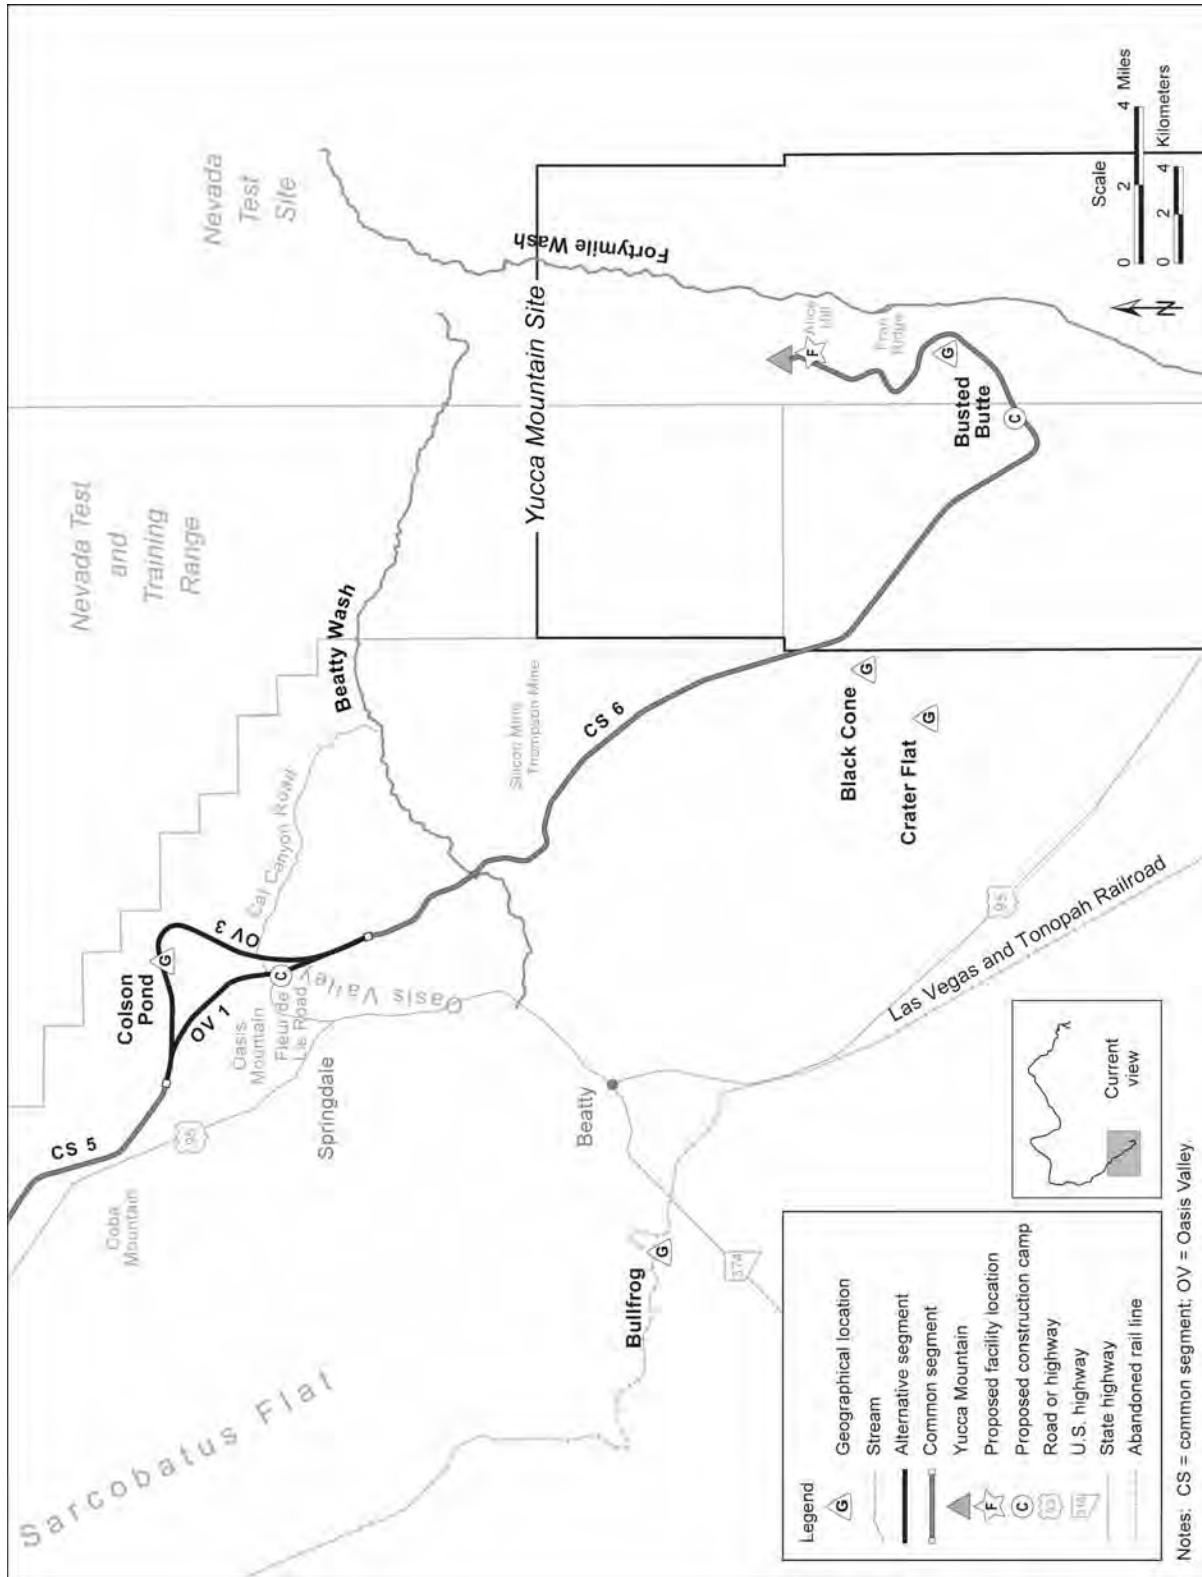


Figure 3-123. Major historic and geographical locations within map area 7.

3.2.13.5.11.2 Oasis Valley Alternative Segment 3. Oasis Valley alternative segment 3 would cross Oasis Valley farther to the east than Oasis Valley 1, but because of proximity, much of the discussion for Oasis Valley 1 applies to this alternative segment. During the Class II survey, DOE inspected four sample units, a total of 3.2 kilometers (2 miles); five sites and 28 isolates were recorded. These resources include five prehistoric sites (four lithic scatters and one campsite with a lithic scatter and cleared rock rings). The campsite has been determined eligible for listing on the *National Register of Historic Places*.

Oasis Valley 3 also would cross the culturally sensitive Oasis Valley. It would pass just east of another historic ranch, the Colson or Indian Camp Ranch, which also has an early Western Shoshone winter camp adjacent to the ranch buildings. While both the ranch and Western Shoshone camp are unevaluated, rock lines (geoglyphs) were observed at the Indian camp area during field reconnaissance. These resources would be additional components of the potential Oasis Valley ethnographic and historic ranching cultural landscapes. Construction of the alternative segment could result in a visual intrusion to these cultural landscapes.

3.2.13.5.12 Common Segment 6 (Yucca Mountain Approach)

The Yucca Mountain area has been heavily analyzed in conjunction with repository site characterization studies. Intensive cultural resource studies related to the development of the repository site have been completed. Consequently, a large number of archaeological sites have been found along common segment 6 (Figure 3-123). This is due more to the intensive nature of past studies than actual site density characteristics.

A Class I site-file search identified a total of 204 cultural resources along common segment 6. These resources include 152 prehistoric sites, 3 historic sites, one site with both prehistoric and historic components, and 49 isolates. Prehistoric sites include eight rockshelters (four eligible), two eligible rock-art sites, 13 campsites (five eligible), six quarry sites (two eligible), four rock features and two rock rings, and 117 lithic scatters (one eligible). Historic sites include two debris scatters and one rail segment.

The Class II survey for common segment 6 did not extend inside the Yucca Mountain Site boundary. DOE inspected 13 sample units, a total of 11 kilometers (7 miles). Seven sites (two prehistoric lithic scatters, four eligible sites with both prehistoric and historic components, and one historic debris scatter) and 52 isolates were recorded.

To provide additional information on cultural resources along common segment 6 within the Yucca Mountain Site boundary, Desert Research Institute (DRI) conducted a Class III supplementary field survey along the section of proposed rail alignment inside the Yucca Mountain Site boundary (DIRS 182290-Desert Research Institute 2007, all). This survey investigated a 150-meter (500-foot)-wide corridor centered on the rail alignment for an approximate length of 5.9 kilometers (3.7 miles). This land comprised acreage that was previously surveyed during repository site characterization activities. DRI identified eight cultural resources (two prehistoric sites, five isolates, and one historic site) during the Class III survey. All were evaluated as ineligible for National Register listing.

Given the large number of cultural resources in the area, construction of common segment 6 could result in direct and indirect impacts to prehistoric and historic sites. Three National Register-eligible prehistoric quarry sites are in this area within the Level I region of influence. The Beatty Wash Petroglyphs Site, listed on the National Register, is in the vicinity of a proposed bridge over Beatty Wash. Direct and indirect impacts from construction activities would include vibration of the rock *matrix* exhibiting the rock-art panels and a potential for inadvertent or deliberate adverse impacts due to increased access and worker presence. The site holds important cultural value for American Indians. Over the long term, American Indians would likely view the bridge and operating trains as a visual and noise impact to the rock-art cultural landscape site.

After common segment 6 crossed onto the Yucca Mountain Site, it would cross an area that has undergone earlier intensive archaeological inventory and has been the subject of previous American Indian studies during repository characterization. As discussed in Section 4.2.13.1, DOE would consider identification, evaluation, and mitigation of potential impacts to these resources under a separate programmatic agreement with those along the proposed rail alignment. Based primarily on previous ethnographic studies, the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) identifies several areas of cultural significance for American Indians along this common segment. Several of these fall inside the Yucca Mountain Site boundary, including the Busted Butte rock-art site, Fortymile Wash, and Alice Hill. The American Indian Writers Subgroup also notes the cultural importance of the Beatty area rock-art site and Crater Flat, specifically the Black Cone geological feature in Crater Flat, which would be within 0.8 kilometer (0.5 mile) of common segment 6.

3.2.14 PALEONTOLOGICAL RESOURCES

Paleontology is a science that uses fossil remains to study life in past geological periods. DOE, the BLM, and other federal agencies recognize paleontological resources as a fragile and nonrenewable scientific

Fossil: Fossils include the body remains, traces, and imprints of plants or animals that have been preserved in the Earth's crust since some past geologic or prehistoric time. Generally, to be considered a fossil, the remains must be older than recent in age (older than 10,000 years). Fossils are found in sedimentary rock.

Sedimentary rock: Rock formed from material deposited by water, wind, or glaciers.

record of the history of life on earth and consider them a critical component of America's natural heritage. Once such resources are damaged, destroyed, or improperly collected, their scientific and educational value could be greatly reduced or forever lost.

The BLM manages and protects paleontological resources under the Federal Land Policy and Management Act of 1976 (43 U.S.C. 1701 *et seq.*), and in accordance

with 43 CFR 8365 and 43 CFR 3622. The BLM has developed policies and management actions to protect and manage paleontological resource areas of high scientific value consistent with the *Draft - Resource Management Plan/Environmental Impact Statement for the Ely District* (DIRS 174518-BLM 2005, all) and the *Tonopah Resource Management Plan and Record of Decision* (DIRS 173224-BLM 1997, all), while allowing casual and academic collecting of invertebrate (animals without backbones) fossils within the regulatory framework. Because of their relative rarity and scientific importance, vertebrate (animals with backbones) fossils may only be collected with a BLM permit and remain the property of all Americans in museums or other public institutions (*Collecting on Public Lands*, DIRS 180122-BLM [n.d.], all, and *Fossils on America's Public Lands*, DIRS 180123-BLM 2007, all).

Section 3.2.14.1 describes the region of influence for paleontological resources along the Caliente rail alignment, and Section 3.2.14.2 describes the paleontological resources within the region of influence, including the identification of previously recorded important fossil resources and the approaches for managing those resources.

3.2.14.1 Region of Influence

The region of influence for paleontological resources along the Caliente rail alignment is the nominal width of the rail line construction right-of-way, and the footprints of railroad construction and operations support facilities.

3.2.14.2 Affected Environment

The BLM has established a classification system to rank areas according to their potential to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils (*Paleontological Resource Management and General Procedural Guidance for Paleontological Resource Management*). The BLM uses these rankings (called **Condition 1**, **Condition 2**, and **Condition 3**) in land-use planning and to identify areas that might warrant special management or special designation (DIRS 176085-BLM 1998, all; DIRS 176084-BLM 1998, all).

BLM ranking of areas for their potential to contain paleontological resources (DIRS 176084-BLM 1998, pp. II-2 and II-3):

Condition 1 - Areas that are known to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

Condition 2 - Areas with exposures of geological units or settings that have high potential to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

Condition 3 - Areas that are very unlikely to produce vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

To determine the affected environment for paleontological resources along the Caliente rail alignment, DOE consulted the BLM and reviewed existing documentation of paleontological resources, including applicable BLM resource management plans.

A rail line along the Caliente rail alignment would cross large areas of volcanic rock and granite. It is not likely that there would be paleontological resources within these types of rock; fossils are more likely to be found in sedimentary rock. There are no known or likely occurrences of paleontological resources within the region of influence of the Caliente rail alignment alternative segments and common segments. However, there is one known paleontological resource near Caliente common segment 1.

Caliente common segment 1 would cross Bennett Pass. There is a Condition 1 paleontological resource within an area known as Ruin Wash, approximately 4.8 to 8 kilometers (3 to 5 miles) south of Bennett Pass. Ruin Wash contains outcrops of the fossil-rich Pioche Formation (DIRS 174204-Palmer 1998, all; DIRS 173841-Shannon & Wilson 2005, pp. 108 and 109; DIRS 174509-Russ 2005, all). Area outcrops of the Pioche Formation are among the most fossil-rich late Lower Cambrian and early Middle Cambrian (about 510 to 530 million years ago) outcrops in the western United States, and these fossil beds contain important scientific information regarding the timing of extinctions of many species (DIRS 174509-Russ 2005, all; DIRS 174204-Palmer 1998, all; DIRS 174518-BLM 2005, p. 3.10-1). These specimens of soft-bodied marine animals are scientifically important because of their completeness and excellent state of preservation.

There are other outcrops of the Pioche Formation within 2 kilometers (1.2 miles) of the Caliente rail alignment, also in the vicinity of Bennett Pass. The BLM has not fully evaluated these resources.

A rail line along the Caliente rail alignment would not cross any known fossil-rich rock outcrops. The possibility exists that beds containing fossils could be uncovered during construction in those few areas along the rail alignment containing sedimentary rock.

3.2.15 ENVIRONMENTAL JUSTICE

To support the assessment of the potential for *disproportionately high and adverse impacts* on *minority* and low-income communities, this section provides the information on minority and *low-income populations* and communities in the Caliente rail alignment region of influence. Section 3.2.15.1 describes the region of influence, Section 3.2.15.2 describes the methodology DOE used to determine population groups, and Section 3.2.15.3 describes regional population characteristics for *environmental justice* considerations.

Minority individuals are members of the following population groups: American Indian or Alaskan Native, Asian or Pacific Islander, Black, and Hispanic.

A **low-income** household is one for which the household income is below the U.S. Census Bureau poverty thresholds.

Source: DIRS 155970-DOE 2002, Section 3.1.13.1.

Executive Order 12898, *Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations*, directs federal agencies to make achieving environmental justice part of their missions by identifying and addressing, as appropriate, disproportionately high and adverse human health or environmental effects of its programs, policies, and activities on minority and low-income populations, and provide access to public information on, and an opportunity for public participation in, matters relating to human health or the environment. Executive Order 12898 also directs agencies to provide opportunities for public input on the incorporation of environmental justice principles into federal agency programs or policies. Executive Order 12898, and associated implementing guidance, establishes the framework for characterizing existing conditions related to environmental justice. For this analysis, DOE uses the terms minority and low-income in the context of environmental justice as described in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Section 3.1.13.1) and *Poverty Thresholds* (DIRS 174625-Bureau of Census 2005, all).

3.2.15.1 Region of Influence

The Caliente rail alignment region of influence for environmental justice encompasses the regions of influence for all other resource areas because impacts in other resource areas could result in environmental justice impacts. Section 3.2 describes the regions of influence for the environmental resource areas analyzed in this Rail Alignment EIS. For some resource areas, the relevant region of influence is an area extending a given distance from the centerline of the rail alignment. For others, the relevant region of influence is not so precisely definable, but generally includes the landscape the rail line would cross. However, the most inclusive region of influence is that defined for hazardous materials and waste (see Section 3.2.12), which considers a nationwide region of influence.

In addition to the regions of influence delineated via direct physical proximity to the Caliente rail alignment, the environmental justice region of influence includes populations that could be affected by the project that have cultural or religious ties in the area, even though the population may not have a physical presence. For a discussion of American Indian populations, and resulting region of influence, see Section 3.4, American Indian Interests in the Proposed Action, and *American Indian Perspectives on the Proposed Rail Alignment Environmental Impact Statement for the U.S. Department of Energy's Yucca Mountain Project* (the American Indian Resource Document) (DIRS 174205-Kane et al. 2005, all).

3.2.15.2 Methodology

Following the Council on Environmental Quality guidance (DIRS 103162-CEQ 1997, all) and the approach used in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Section 3.1.13), DOE considered that a minority population exists where either: (a) the minority population of the affected area exceeds 50

percent; or (b) the minority population percentage of the affected area is meaningfully greater than the minority population percentage in the general population or other appropriate unit of geographic analysis (DOE used both the United States and the State of Nevada minority populations).

DOE used the Council on Environmental Quality definition of low income and the annual statistical poverty thresholds from the U.S. Census Bureau.

A low-income community exists when the low-income population percentage in the area of interest is meaningfully greater than the low-income population in the general population. For purposes of the analysis of low-income communities, DOE applied the U.S. Nuclear Regulatory Commission guidance of a 20-percent threshold above the state average of 11 percent (that is, 31 percent) for low-income populations (69 FR 52040).

To identify low-income populations, DOE used U.S. Census Bureau data for census block groups. The census block group, which typically consists of between 600 and 3,000 people with an optimum size of 1,500 people, is the smallest census unit for which the Census Bureau collects 100-percent data. Block groups on American Indian reservations, off reservation trust lands, and special places must contain a minimum of 300 people. (Special places include correctional institutions, military installations, college campuses, workers' dormitories, hospitals, nursing homes, and group homes). To identify minority populations, DOE used U.S. Census Bureau data for *census blocks*. The census block is the smallest census unit for which the Census Bureau collects 100-percent data. The Department assessed the population within 3 kilometers (1.8 miles) on either side of the centerline of the Caliente rail alignment, to be consistent with the Yucca Mountain FEIS.

A **census block** is a subdivision of a census tract (or, prior to 2000, a block numbering area). A block is the smallest geographic unit for which the Census Bureau tabulates 100-percent data.

A **census county division (CCD)** is a subdivision of a county that is a relatively permanent statistical area established cooperatively by the Census Bureau and state and local government authorities. It is used for presenting decennial census statistics in those states that do not have well-defined and stable minor civil divisions that serve as local governments.

A **census block group** is a subdivision of a census tract (or, prior to 2000, a block numbering area). A block group is the smallest geographic unit for which the Census Bureau tabulates sample data. A block group consists of all the blocks within a census tract with the same beginning number.

A **census tract** is a small, relatively permanent statistical subdivision of a county delineated by a local committee of census data users for the purpose of presenting data. Designed to be relatively homogeneous units with respect to population characteristics, economic status, and living conditions at the time of establishment, census tracts average about 4,000 inhabitants.

Sources: DIRS 181904-U.S. Census Bureau 2007; DIRS 181905-U.S. Census Bureau [n.d.].

DOE developed these analyses by creating Geographic Information System (GIS) representations of the Caliente rail alignment alternative segments and common segments and creating a computer program to extract specific census data based on the 3-kilometer buffer distance. The specific census data required to develop the analyses included:

- Total population and number of minority persons by census block
- Total population and number of individuals below the poverty level by census block group

For Census 2000, the Census Bureau used two forms, one short and one long. The Bureau sent the short form to every household, and sent the long form, containing the seven 100-percent questions plus the sample questions, to only a limited number of households. Generally, about one in every six households nationwide received the long form. The rate varied from one in two households in some smaller areas, to one in eight households for more densely populated areas. The long form requests information on the

numbers and ages of members of each household and income received during the previous full year. From this information, the Census Bureau makes a determination of the poverty status of the individuals living in the household. The Census Bureau additionally uses school districts, child protective services, and social services to supplement the census data to develop estimates that more fully represent actual poverty status among all populations.

3.2.15.3 Regional Characteristics

3.2.15.3.1 Minority and Low-Income Populations

The Caliente rail alignment would affect portions of three counties in southern Nevada (Nye, Esmeralda, and Lincoln). Table 3-77 summarizes Census 2000 data on the relative size of minority and low-income populations within these general areas. The table includes specific county subdivisions and small population centers that encompass or are near the Caliente rail alignment. For comparison, the table includes statewide and countywide minority and poverty data.

There are no census blocks in the region of influence with minority population percentages that are at or more than 50 percent. This calculation includes federally recognized American Indian lands, because American Indians are included in the definition of minority populations. Based on Census 2000 estimates, the population living within 3 kilometers (1.8 miles) on either side of the Caliente rail alignment is approximately 1,800.

Census block groups, depending on their size, can be further divided into smaller sections and provided a number designation. For example, the population center of Caliente, the largest population center in census block group 2, which is part of census tract 9502 in Lincoln County, comprises more than 90 percent of the population of the block group. Of these people, 15 percent are members of minority groups. This percentage is lower than the percent of the minority population for the State of Nevada and is well within the percent of the minority population of counties along the Caliente rail alignment (10 to 19 percent).

Based on Census 2000 estimates, the population within 3 kilometers (1.8 miles) on either side of the centerline of the Caliente rail alignment for whom poverty status is determined is approximately 1,100. Of these, about 150, or 13 percent, are living below the poverty level. This percentage is higher than the percent of the population living in poverty for the State of Nevada as a whole (11 percent) and is generally lower than the population living in poverty in the counties along the Caliente rail alignment (11 percent to 17 percent) (see Table 3-77). There are no census block groups with poverty rates more than 20 percent above the state average (11 percent). Census block group 2 of census tract 9502 in Lincoln County has the highest percentage of low-income populations with 22 percent (250 people) of the population below the poverty level. The Department also used county subdivisions and population centers for comparative analyses. Based on the data in Table 3-77, most of the county subdivisions that would surround the Caliente rail alignment have a higher proportion of minority residents than the associated county-wide proportion of minority residents. The Amargosa Valley *Census County Division*, a subdivision of Nye County, shows the widest percentage difference with a 28-percent minority population compared to only a 13-percent minority population for Nye County as a whole. However, for purposes of analyses in this Rail Alignment EIS, DOE has chosen 50 percent as the threshold. As shown in Table 3-77, there are no minority populations that exceed that benchmark.

As shown on Table 3-77, poverty rates in the affected county subdivisions tend to be higher than the associated county-wide poverty percentages, except in the Goldfield subdivision, where the poverty rate is lower than the Esmeralda County percentage (DIRS 176856-Bureau of Census 2003, all). In all cases, poverty rates in the county subdivisions are higher than the state-wide figure of 11 percent. However, for the purposes of this analysis, DOE has chosen 20 percent above the state average (10.5 percent) as the

threshold (31 percent) and there are no low-income populations that exceed that benchmark as can be seen in Table 3-77.

Population centers are often assessed in relation to the county in which they are located. As shown in Table 3-77, Caliente has a higher minority population rate and higher poverty rate than Lincoln County. Compared to Nye County, Beatty has a slightly lower minority population rate but a higher poverty rate.

Table 3-77. Minority and low-income populations in the jurisdictions potentially affected by construction and operation of the proposed rail line – Caliente rail alignment.^a

Areas	Population	Percent minority	Percent low-income
State of Nevada	2,000,000 ^b	35	11
<i>Counties</i>			
Nye County	32,500	13	11
Esmeralda County	970	19	15
Lincoln County	4,200	10	17
<i>County subdivisions</i>			
Amargosa Valley Census County Division, Nye County, Nevada	1,100	28	15
Beatty Census County Division, Nye County, Nevada	1,090	11	13
Goldfield Census County Division, Esmeralda County, Nevada	450	4.5	12
Caliente Census County Division, Lincoln County, Nevada	1,200	15	22
<i>Small population centers</i>			
Beatty (Nye County)	1,090	11	13
Caliente (Lincoln County)	1,130	15	22

a. Source: DIRS 176856-Bureau of Census 2003, all.

b. The state population is rounded to 2 million for consistent analysis.

3.2.15.3.2 American Indian Perspectives

Section 3.4 addresses American Indian interests in potential impacts to the environment along the Caliente rail alignment, including environmental justice.

3.3 Mina Rail Alignment

This section describes the affected environment along the Mina rail alignment. The scope of the affected environment reflects the *region of influence* for each resource area. DOE expects that most potential impacts would occur within a certain distance from the centerline of the rail alignment and within the *footprints* of construction and operations support facilities. However, resource area regions of influence vary, depending on the nature and type of the resource. Each environmental resource section fully describes the region of influence for the resource. Table 3-78 summarizes the regions of influence for the Mina rail alignment analyzed in this Rail Alignment EIS.

The **region of influence** is the physical area that bounds the environmental, sociologic, economic, or cultural features of interest for analysis purposes.

Table 3-78. Regions of influence for environmental resource areas – Mina rail alignment (page 1 of 4).

Resource area	Region(s) of influence
Physical setting	All areas that would be affected by construction and operation of the proposed railroad. These areas include the nominal width of the rail line construction right-of-way, and the footprints of construction and operations support facilities beyond the nominal width of the construction right-of-way. See Section 3.3.1.1.
Land use and ownership	The nominal width of the construction right-of-way, including all private land (including patented mining claims), American Indian lands, and public land fully or partially within this area. Also includes the locations of construction and operations support facilities outside the nominal width of the construction right-of-way. See Section 3.3.2.1.
Aesthetic resources	The <i>viewshed</i> around all alternative segments, common segments, and proposed locations of construction and operations support facilities. DOE used a conservative region of influence extending 40 kilometers (25 miles) on either side of the centerline of the rail alignment. See Section 3.3.3.1.
Air quality and climate	A small portion of Churchill County near Hazen, Nevada, and Lyon, Mineral (including the Walker River Paiute Reservation), Esmeralda, and Nye Counties. See Section 3.3.4.1.
Surface-water resources	The nominal width of the construction right-of-way for most analyses. In cases where surface-water flow patterns (including floodwaters) could be modified or surface-water drainage patterns could carry eroded soil, sedimentation, or spills downstream, the region of influence extends to 1.6 kilometers (1.0 mile) on either side of the centerline of the rail alignment. See Section 3.3.5.1.
Groundwater resources	<i>Aquifers</i> that would underlie areas of proposed railroad construction and operations, portions of groundwater aquifers DOE would use to obtain water for construction and operations support and that would be affected by these groundwater withdrawals, and nearby springs that might be affected by such groundwater withdrawals. The horizontal extent of the region of influence varies depending on the particular aspects of the specific project activity. See Section 3.3.6.1.

Table 3-78. Regions of influence for environmental resource areas – Mina rail alignment (page 2 of 4).

Resource area	Region(s) of influence
Biological resources	<p>DOE used two areas of assessment to describe the affected environment for biological resources: a region of influence and a study area.</p> <p><i>Region of influence:</i> Generally, the nominal width of the construction right-of-way. For facilities that would be outside the nominal width of the construction right-of-way (such as quarries), the footprint of the proposed facility.</p> <p><i>Study area:</i> A 16-kilometer (10-mile)-wide study area, extending 8 kilometers (5 miles) on either side of the centerline of the proposed rail alignment, for use in database and literature searches to ensure the identification of sensitive habitat areas near the Mina rail alignment and transient or migratory wildlife, particularly special status species, that could pass through the region of influence.</p> <p>See Section 3.3.7.1.</p>
Noise and vibration	<p>The nominal width of the construction right-of-way out to variable distances, depending on several analytical factors (<i>ambient noise</i> level, train speed, number of trains per day, and number of rail cars). For construction and operations support facilities, the region of influence varies depending on the magnitude of noise that would be generated and ambient noise levels, which would affect how far away the noise might be heard. Therefore, the region of influence varies along the rail alignment. Also includes the locations of receptors that might be affected by noise, vibration, or both.</p> <p>See Section 3.3.8.1.</p>
Socioeconomics	<p><i>Employment and income, population and housing, and public services:</i> Lyon, Mineral, Nye, Esmeralda, and Clark Counties, and the Walker River Paiute Reservation in Nevada. A second scenario includes Washoe county and Carson City.</p> <p><i>Transportation resources:</i> Public roadways near the Mina rail alignment and the rail alignment itself.</p> <p>See Section 3.3.9.1.</p>
Occupational and public health and safety	<p><i>Nonradiological region of influence</i></p> <p>The region of influence for public nonradiological impacts includes:</p> <ul style="list-style-type: none"> • The nominal width of the construction right-of-way • Public roads in Washoe, Douglas, Storey, Churchill, Lyon, Mineral, Esmeralda, and Nye Counties and the Walker River Paiute Reservation that the workforce would use during railroad construction and operations • The railroad construction and operations support facilities including access roads, water wells, and quarries where workers would perform construction, operations, or maintenance activities <p><i>Radiological region of influence</i></p> <p>The region of influence for radiological impacts for incident-free transportation includes the area 0.8 kilometer (0.5 mile) on either side of the centerline of the Mina rail alignment.</p> <p>The region of influence for occupational radiological impacts for incident-free operation also includes the physical boundaries of railroad operations support facilities, where workers would perform operations involving <i>casks</i> and <i>cask cars</i>. Railroad operations support facilities within the radiological region of influence include only the <i>Staging Yard</i>, the <i>Rail Equipment Maintenance Facility</i>, and the <i>Cask Maintenance Facility</i> because DOE anticipates that radioactive materials would be managed only at those facilities.</p>

Table 3-78. Regions of influence for environmental resource areas – Mina rail alignment (page 3 of 4).

Resource area	Region(s) of influence
Occupational and public health and safety (continued)	<p>For purposes of this Rail Alignment EIS, the affected environment for public radiological impacts includes:</p> <ul style="list-style-type: none"> • Residents within the region of influence of the Mina rail alignment, including persons who live within 0.8 kilometer (0.5 mile) of either side of the centerline of the rail alignment. For the public radiological impact analysis, DOE evaluated four specific alignments: the alignment with the highest exposed population, the shortest alignment, the longest alignment, and the alignment with the lowest population. • Individuals at locations such as residences or businesses near the rail alignment. • Individuals within the region of influence for radiological impacts for potential public exposure related to accidents and sabotage. This includes the area 80 kilometers (50 miles) on either side of the centerline of the rail line. <p>See Section 3.3.10.1.</p>
Utilities, energy, and materials	<p><i>Regions of influence for utilities and energy</i></p> <ul style="list-style-type: none"> • Public water systems: The region of influence for public water systems is Lyon, Mineral, Esmeralda, and Nye Counties, communities within those counties, and the Walker River Paiute Reservation, the bulk of which lies within Mineral County with smaller portions within Lyon and Churchill Counties. • Wastewater treatment: The region of influence for wastewater transported offsite for treatment and disposal is the existing permitted treatment facilities in Lyon, Mineral, Esmeralda, and Nye Counties and communities within those counties, and the Walker River Paiute Reservation. (Note: For wastewater treated using other methods [for example, on-site portable wastewater-treatment facilities], treated wastewater would be recycled, and there is no associated region of influence.) • Telecommunications: The region of influence for telephone and fiber-optic telecommunications is the southern Nevada region serviced by Nevada Bell Telephone Company (AT&T Nevada), Citizens Telecommunications Company of Nevada, and Verizon. • Electricity: The region of influence for electric-power resources includes areas serviced by the southern Nevada electrical grid operated by Nevada Power Company; Sierra Pacific Power Company; and Valley Electric Association, Inc. <p><i>Regions of influence for materials</i></p> <ul style="list-style-type: none"> • The region of influence for cast-in-place concrete and subballast is limited to the State of Nevada. Subballast, sand, and gravel would be generated from overburden at quarries and borrow sites near the rail alignment. There is a high likelihood DOE would also find subballast, sand, and gravel along cuts for the proposed rail line on alluvial fans. DOE would use some of the natural sand and gravel excavated from cuts and crushed rock from the quarries to make concrete aggregate. • DOE would obtain ballast rock from potential quarry sites close to the construction right-of-way during the construction phase and from commercial quarry sites in southern Utah and in California during the operations phase. Therefore, the region of influence for obtaining ballast rock would encompass the State of Nevada during the construction phase, and Utah and California during the operations phase. • Other materials, including steel, steel rail, general building materials, concrete ties, and other precast concrete could be procured and shipped from various national suppliers. Therefore, the region of influence for these materials is national.

Table 3-78. Regions of influence for environmental resource areas – Mina rail alignment (page 4 of 4).

Resource area	Region(s) of influence
Utilities, energy, and materials (continued)	<p><i>Regions of influence for materials</i> (continued)</p> <ul style="list-style-type: none"> • The region of influence for cast-in-place concrete and subballast is limited to the State of Nevada. Subballast, sand, and gravel would be generated from overburden at quarries and borrow sites near the rail alignment. There is a high likelihood DOE would also find subballast, sand, and gravel along cuts for the proposed rail line on alluvial fans. DOE would use some of the natural sand and gravel excavated from cuts and crushed rock from the quarries to make concrete aggregate. • DOE would obtain ballast rock from potential quarry sites close to the construction right-of-way during the construction phase and from commercial quarry sites in southern Utah and in California during the operations phase. Therefore, the region of influence for obtaining ballast rock would encompass the State of Nevada during the construction phase, and Utah and California during the operations phase. • Other materials, including steel, steel rail, general building materials, concrete ties, and other precast concrete could be procured and shipped from various national suppliers. Therefore, the region of influence for these materials is national. <p>See Section 3.3.11.1.</p>
Hazardous materials and waste	<p><i>Use of hazardous materials and the generation of hazardous and nonhazardous wastes:</i> The nominal width of the construction right-of-way, and the locations of rail-line construction and operations support facilities beyond this area.</p> <p><i>Disposal of low-level radioactive waste:</i> DOE low-level waste disposal sites, sites in <i>Agreement States</i>, and U.S. Nuclear Regulatory Commission-licensed sites</p> <p><i>Disposal of hazardous wastes:</i> The entire continental United States.</p> <p><i>Disposal of nonhazardous waste:</i> Disposal facilities in Mineral, Nye, Esmeralda, and Clark Counties in Nevada.</p> <p>See Section 3.3.12.1.</p>
Cultural resources	<p>Two levels of coverage, based on the location from the rail alignment:</p> <ul style="list-style-type: none"> • Level I. The first level of coverage is within the nominal width of the construction right-of-way, the area where ground disturbance could have direct or indirect impacts on cultural resources. • Level II. The second level of coverage is a 3.2-kilometer (2-mile)-wide area centered on the rail alignment. This area includes the area of potential disturbances that could have indirect impacts on cultural resources. <p>See Section 3.3.13.1.</p>
Paleontological resources	<p>The nominal width of the rail line construction right-of-way, and the footprints of railroad construction and operations support facilities.</p> <p>See Section 3.3.14.1</p>
Environmental justice	<p>An area encompassing the regions of influence for all other resource areas. Includes populations that could be affected by the project that have cultural or religious ties to the area.</p> <p>See Section 3.3.15.1.</p>

3.3.1 PHYSICAL SETTING

This section describes physiography, geology, and soils along the Mina rail alignment. Characterization of the physical setting also identifies relationships to other resource areas described in this Rail Alignment EIS, such as aesthetics, land use, biological (vegetation) resources, and surface-water resources.

Section 3.3.1.1 describes the region of influence for physical setting along the Mina rail alignment; Section 3.3.1.2 describes the general physical setting and characteristics in the region of influence; and Section 3.3.1.3 describes the physical setting in more detail for the Mina rail alignment alternative segments and common segments.

3.3.1.1 Region of Influence

The region of influence for physical setting along the Mina rail alignment includes all areas that would be directly or indirectly affected by construction and operation of the proposed railroad. These areas include the nominal width of the rail line construction right-of-way, and the footprints of facilities outside the nominal width of the construction right-of-way.

3.3.1.2 General Setting and Characteristics

3.3.1.2.1 Physiography

The Mina rail alignment would cross the western Great Basin of the Basin and Range Physiographic Province. The terrain consists of relatively narrow mountain ranges separated by broad sediment-filled basins approximately 16 to 24 kilometers (10 to 15 miles) wide. The mountain ranges are mostly tilted, fault-bounded crustal blocks that are as much as 120 kilometers (75 miles) long. Mountain ranges typically rise from 910 to 1,520 meters (3,000 to 5,000 feet) above the adjacent valley floors. As shown in Figure 3-124, from north to south, a rail line along the Mina rail alignment would use gaps, passes, and valleys to cross or travel near the following mountain ranges: Terrill Mountains, Calico Hills, Monte Cristo Range, Clayton Ridge, Montezuma Range, and Goldfield Hills.

From north to south, the rail line would cross Campbell Valley, Sunshine Flat, Long Valley, Soda Spring Valley, Rhodes Salt Marsh, Columbus Salt Marsh, Big Smoky Valley, Montezuma Valley, Clayton Valley, Stonewall Flat, Lida Valley, Sarcobatus Flat, Oasis Valley, Crater Flat, and Jackass Flats (see Figure 3-124). All lowlands, except for Campbell Valley, Oasis Valley, Crater Flat, and Jackass Flats have interior drainage to *playas* or dry washes and are therefore closed basins. The design of the rail alignment accounts for the locations of the playas in these basins to avoid them. Section 3.3.5 describes surface-water resources in the Mina rail alignment region of influence.

Sediment in the valleys are composed of coarse to fine alluvial debris (boulders, cobbles, sand, silt, and clay) eroded from the adjacent mountains. Large alluvial fans, a common landform in the region, originate at the base of the mountains, and occasionally extend far into the valleys.

Alluvial fan: A low, outspread, relatively flat-to-gently sloping mass of loose rock material, shaped like an open fan or a segment of a cone, deposited by a stream where it issues from a narrow mountain valley on a plain or break valley.

Playa: A nearly level area at the bottom of a desert basin that does not drain to a river and is temporarily covered with water from heavy rains or snowmelts. Normally a dry lakebed that may contain water in response to seasonally high runoff.

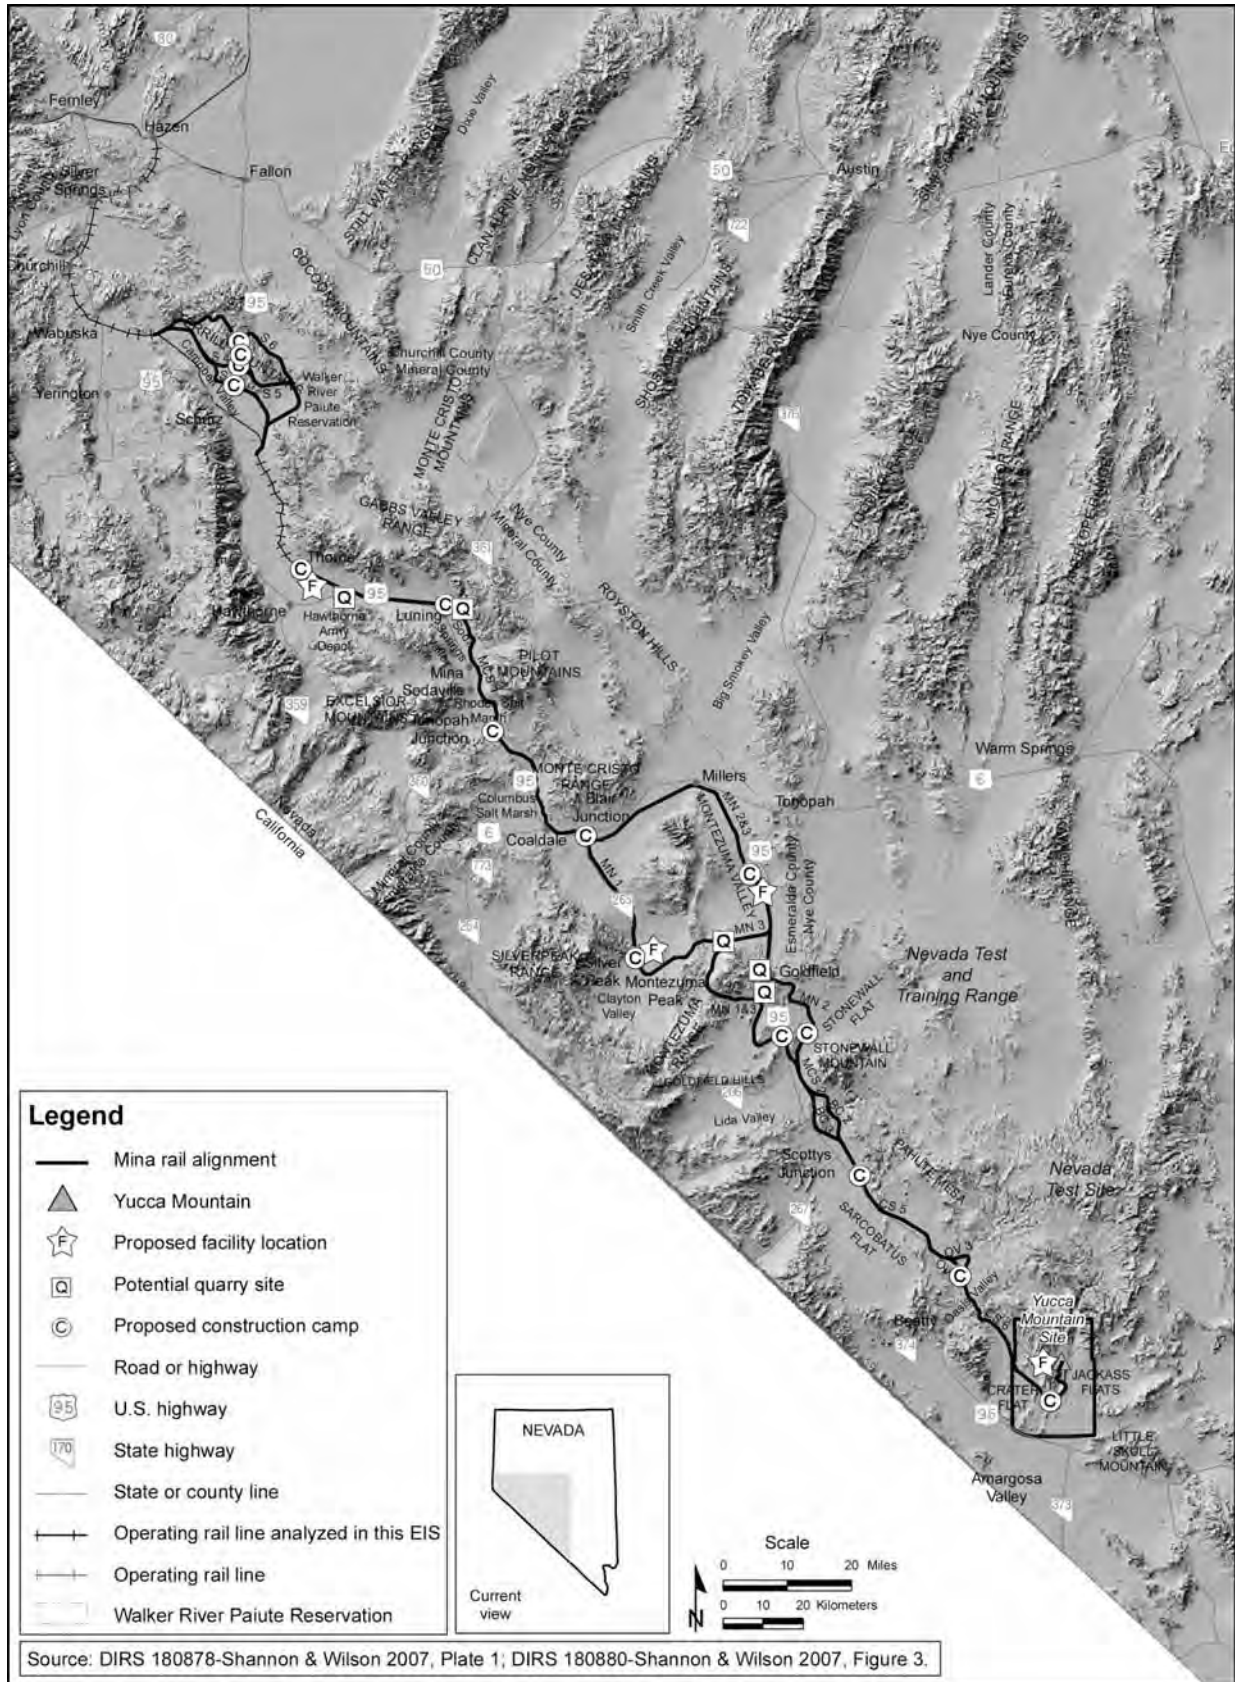


Figure 3-124. Physiographic setting along the Mina rail alignment.

Playas occur in the lowest parts of some valleys. After heavy rains or snowmelt, the lowlands can fill with water. Evaporation of this water over days or weeks leaves a variety of salts near the surface that limit the growth of vegetation. In some locations, where the surface water percolates at a sufficient depth, the water can enter deep saline aquifers. Valleys with playas are sometimes referred to as closed basins, because no surface water flows out of them.

Elevations along the Mina rail alignment range from approximately 980 meters (3,200 feet) above mean sea level at the base of Busted Butte on the west side of Jackass Flats to approximately 2,000 meters (6,500 feet) above mean sea level at an unnamed pass in the Montezuma Range (DIRS 176184-Shannon & Wilson 2006, Figure 3; DIRS 180880-Shannon & Wilson 2007, Figure 3).

3.3.1.2.2 Geology

This section summarizes regional geology along the Mina rail alignment. The geotechnical reports to support the preliminary design effort (DIRS 180878-Shannon & Wilson 2007, all; DIRS 180880-Shannon & Wilson 2007, all) provide a more detailed discussion of regional geology.

The Mina rail alignment would cross a region of complex stratigraphic and structural elements that includes major north-south trending basins and ranges and broad volcanic uplands. Table 3-79 provides a generalized stratigraphic description and lists rock sequences according to the geologic age during which they were deposited, and their locations from north to south along the Mina rail alignment. Table 3-79 also defines the geologic periods discussed in the geology sections of this Rail Alignment EIS.

North of the Montezuma Range, exposures consist of *sedimentary rocks* (such as carbonate) and *volcanic rocks* of Paleozoic age, as well as Tertiary volcanic flows and ash fall deposits. South of the Montezuma Range, only the Tertiary volcanic rocks are visible at the surface.

Soils in the valleys were primarily formed from late Tertiary and Quaternary and some Paleozoic debris eroded from neighboring mountains, wind-blown sand and silt, fine-grained lake deposits, evaporite deposits, and marsh and playa sediments. In some areas, alluvial fans are thin and overlie bedrock surfaces. Elsewhere, basin-fill sediments are more than 1,200 meters (4,000 feet) thick (DIRS 180878-Shannon & Wilson 2007, p. 14).

The oldest *outcrops* in the region are Precambrian Era *metamorphic rocks*, which are exposed in hills west of Montezuma alternative segment 1 and west of Mina common segment 6. Other than these exposures, Precambrian bedrock is covered by younger rocks.

Metamorphic rocks are rocks in which the original mineralogy, texture, or composition has changed due to the effects of pressure, temperature, or the gain or loss of chemical components.

Sedimentary rocks are rocks formed by the accumulation of sediment in water or land. Sandstone, chert, limestone, dolomite, shale, siltstone, and mudstone are types of sedimentary rocks that are found in the Great Basin. They are differentiated by chemistry, deposition, and grain size.

Volcanic rocks are rocks that have been ejected at or near the earth's surface. Tuffs, lava flows, volcanic breccias, basalt, andesite, and rhyolite are types of volcanic rocks that are found in the Great Basin. They are differentiated by chemistry and texture.

During the late Paleozoic Era, the area was periodically covered by shallow seas to the east that generally deepened westward. Thick layers of limestone, shale, sandstone and some volcanic rocks, now exposed widely in the mountains along Mina common segment 1, are the remains of these Paleozoic seas (DIRS 180878-Shannon & Wilson 2007, p. 11).

Table 3-79. General stratigraphy – Mina rail alignment (page 1 of 2).

Geologic age ^a	Northern portion of the Mina rail alignment ^{b,c}	Northern portion of Mina common segment ^{1,b,d}	Southern portion of Mina common segment ^{1,b,e}	Montezuma alternative segments 1, 2, and 3 ^{b,f}	Southern portion of the Mina rail alignment (southwest Nevada volcanic field) ^g
Cenozoic Era ^h (less than 65 Ma) -Quaternary Period (less than 1.6 Ma)	Stream channel and lake alluvium; wind-blown, playa, and basin-fill deposits.	Stream channel, lake, floodplain and fan alluvium; wind-blown, playa and basin-fill deposits.	Stream channel, lake, floodplain and fan alluvium; wind-blown and basin-fill deposits.	Stream channel and fan alluvium; dune, playa and landslide deposits; basalt flows and cinder cones.	Stream channel and floodplain alluvium; wind-blown, playa, and landslide deposits; fan alluvium; basin-fill deposits. Basalt flows.
Cenozoic Era (less than 65 Ma) -Tertiary Period (65 to 1.6 Ma)	Late Tertiary rocks include alluvial fan and landslide deposits; gravel; basalt and andesite lava flows; sedimentary and volcanic rocks; sedimentary breccia; conglomerate; and sandstone. No mid-Tertiary rocks. Early Tertiary rocks include dacite, rhyodacite, tuffs, and rhyolite dikes.	Late Tertiary rocks include alluvial, fan, landslide and gravel deposits, conglomerate, lava flows, dikes, fine grained lake deposits, stream alluvium, sandstone, lava flows, dikes, cinder cones, claystone. Mid-Tertiary rocks include lava flows, interbedded with tuffs, and other volcanic rocks. Early Tertiary rocks include dacite, rhyodacite, tuffs, and rhyolite dikes.	Late Tertiary rocks include basalt lava flows, cinder cones, sandstone and conglomerate, tuff, basalt lava flows, andesite, breccia. Mid-Tertiary rocks include dacite and andesite to rhyodacite, tuff, tuff breccia, lava flows, and intrusive volcanic rocks. No early Tertiary rocks area exposed along this portion of the alignment.	Late Tertiary rocks include conglomerate and sandstone, basalt siltstone, claystone, tuff, volcanic and lava flows. Mid-Tertiary rocks include lava flows, and dykes, andesite breccia, silicic dykes, tuff, volcaniclastic, sandstone and shale. Early Tertiary rocks include sandstone and siltstone, conglomerate, sandstone and basalt flows, rhyolite, and ash fall tuff.	Silicic ash-flow tuffs; minor basalts. Predominantly volcanic rocks of the southwestern Nevada volcanic field.
Mesozoic Era (240 to 65 Ma)	Late Mesozoic rocks include granite, granodiorite and quartz monzonite, diorite, tonalite gabbro, hornfels, schist and marble. Early Mesozoic rocks include andesite lava flows, tuff, metamorphosed volcanoclastic rocks.	Granite, quartz monzonite, granodiorite, diorite, tonalite and serpentine, volcanic rocks, <i>clastic</i> , volcaniclastic and carbonate sedimentary rocks. Metamorphosed marine and submarine sedimentary rocks, lava flows and flow breccia, tuff, hornfels, greywacke, argillite and limestone (such as marine volcanic and sedimentary rocks).	Late Mesozoic (Cretaceous) age rocks include quartz monzonite, granodiorite, and granite. No early or mid-Mesozoic rocks are exposed along this portion of the alignment.	Late Mesozoic (Cretaceous) age rocks include granite, quartz monzonite, granodiorite, mafic and felsic dikes. No early or mid-Mesozoic rocks are exposed along this portion of the alignment.	Granitic rocks of Late Mesozoic (Cretaceous) age occur. No early or mid-Mesozoic rocks are exposed along this portion of the alignment.

Table 3-79. General stratigraphy – Mina rail alignment (page 2 of 2).

Geologic age ^a	Northern portion of the Mina rail alignment ^{b,c}	Northern portion of Mina common segment 1 ^{b,d}	Southern portion of Mina common segment 1 ^{b,e}	Montezuma alternative segments 1, 2, and 3 ^{b,f}	Southern portion of the Mina rail alignment (southwest Nevada volcanic field) ^g
Paleozoic Era (570 to 240 Ma)	Rocks of this age are not exposed in the region.	Submarine lava flows, volcanic clast sedimentary rock, and conglomerate. Limestone, dolomite chert, chert-clast sandstone, and chert pebble conglomerate. Sandstone, fine-grained clastic rocks, quartzite, hornfels, siltstone, and shale. Early Paleozoic (Ordovician and Cambrian) rocks are shale, siltstone, claystone, limestone, marble, and metamorphosed sedimentary rocks.	Dolomite chert, chert-clast sandstone and chert pebble conglomerate. Fine-grained clastic rocks, conglomerate, limestone, quartzite, and partially altered mafic volcanic rocks.	Rocks of Middle and Late Paleozoic age are not exposed along this portion of the alignment. Early Paleozoic (Ordovician and Cambrian) rocks are shale, siltstone, claystone, limestone, marble, and metamorphosed sedimentary rocks.	Alternating marine and terrestrial sediments comprised mostly of shale, quartzite, limestone, and dolomite.
Precambrian Era (greater than 570 Ma)	Rocks of this age are not exposed along this portion of the alignment.	Rocks of this age are not exposed along this portion of the alignment.	Rocks of this age are not exposed along this portion of the alignment.	Claystone, siltstone, fine-grained sandstone, sandy limestone, dolomite, and slightly metamorphosed sedimentary rocks.	Conglomerate, quartzite, sandstone, shale, dolomite, limestone, chert, and diabase overlie old <i>igneous</i> and metamorphic rocks that form the crystalline “basement.”

a. Ma = approximate years ago in millions.

b. Source: DIRS 180880-Shannon & Wilson 2007, Table 2 and Table 3.

c. Includes Wassuk Range, Walker River Basin, and Whiskey Flat.

d. Includes Candelaria and Goldfield Hills, Excelsior Mountains, Columbus and Rhodes Salt Marshes, Soda Spring Valley, Pilot Mountain, Gabbs Valley, and Gibbs Range.

e. Includes Monte Cristo Range.

f. Includes Montezuma Range, Clayton Ridge, Paymaster Ridge, Palmetto Mountains, Silver Peak Mountains, Mineral Ridge, Weepah Hills, Big Smoky Valley, Goldfield Hills, Malpais Mesa, Mt. Jackson Ridge, Montezuma and Lida Valleys, and Lone Mountain.

g. Includes Sarcobatus Flat, Palute Mesa, Oasis Valley, Crater Flat, Yucca Mountain, Jackass Flats, Rock Valley, and Yucca Flat. Source: DIRS 176184-Shannon & Wilson 2006, Tables 2 and 3.

h. The Cenozoic Era consists of both the Quaternary and the Tertiary periods.

In Mineral County, off-shore sedimentation continued throughout the Mesozoic era, before ending with new tectonic movement (DIRS 180878-Shannon & Wilson 2007, pp. 11 to 12).

Major east-west compression occurred periodically in the Great Basin between about 350 million and 65 million years ago (DIRS 169734-BSC 2004, p. 2-16). This compression moved large sheets of old rock great distances upward and eastward over young rocks along *thrust faults* to produce mountains. Most of the thrust *fault* traces have eroded away; however, there is evidence of thrust motion in the Garfield Hills area, where Triassic rocks overlie Jurassic rocks (DIRS 180878-Shannon & Wilson 2007, p. 14). Range-bounding *normal faults*, which have developed in response to *crustal extension* over approximately the last 20 million years, are conspicuous features in this part of Nevada and are especially visible in parts of Nye County. These faults have surface traces that form distinctive segments 5 to 30 kilometers (3.1 to 19 miles) long (DIRS 174214-Kleinhampl and Ziony 1985, p. 144). Although generally coincident with the range fronts, in places these normal faults, and shorter *splay faults* radiating outward from these normal faults, extend into adjacent valleys where they are buried by recent alluvial deposits. Both the exposed and buried parts of active faults could be capable of rupturing the surface.

Crustal extension in the region, which began about 20 million years ago, is still occurring (DIRS 176184-Shannon & Wilson 2006, p. 12). By about 11.5 million years ago, present-day mountains and valleys were well developed. Evidence for recent, continuing crustal extension is based on Holocene-age (approximately the last 10,000 years) faults, recurring *earthquakes*, and geothermal features. The Holocene-age faults are visible in many valleys in Mineral, Esmeralda, and Nye Counties that the proposed rail line would cross (Figure 3-125).

Evidence of crustal extension is seen in the Walker-Lane Structural Belt, a 96-kilometer (60-mile)-wide deformation zone that parallels the Nevada-California border from Las Vegas to northern California. The belt includes generally northwest-trending faults that were active within the last 20 million years (DIRS 180878-Shannon & Wilson 2007, p. 16). The earthquakes along the western section of the Great Basin are primarily connected to ruptures along surface or buried faults in the Walker-Lane Belt (DIRS 180878-Shannon & Wilson 2007, p. 17). Section 3.3.1.2.2.1 provides more information on *seismic* activity along the Mina alignment.

The southwestern Nevada volcanic field is a volcanic plateau that developed between 16 and 7 million years ago, with the greatest eruptions occurring between 14 and 11 million years ago (DIRS 176184-Shannon & Wilson 2006, p. 11). The volcanic field encompasses common segment 5, the Oasis Valley alternative segments, and common segment 6 (Sarcobatus Flat, Pahute Mesa, Oasis Valley, Crater Flat, Yucca Mountain, Jackass Flats, Rock Valley, and Yucca Flat).

The field has a complex history of volcanism and deformation (DIRS 169734-BSC 2004, pp. 2-4 through 2-15). Eruption of 17 ash-flow *tuff* sequences and lava flows occurred from at least seven large, overlapping *caldera* complexes to form the southwestern Nevada volcanic field.

Faulting is movement of the earth's crust that produces relative displacement of adjacent rock masses along a fracture. Generally, the fracture is referred to as a fault.

Splay faults are minor faults that branch off of a primary fault, or interconnect to form a fault zone.



A **normal fault** is a fault where the block above an inclined fault has moved down relative to the other block.



A **thrust fault** is a fault that occurs when squeezing forces push the block above an inclined fault up in relation to the other block.

Source: DIRS 155970-DOE 2002, Figure 3-9.

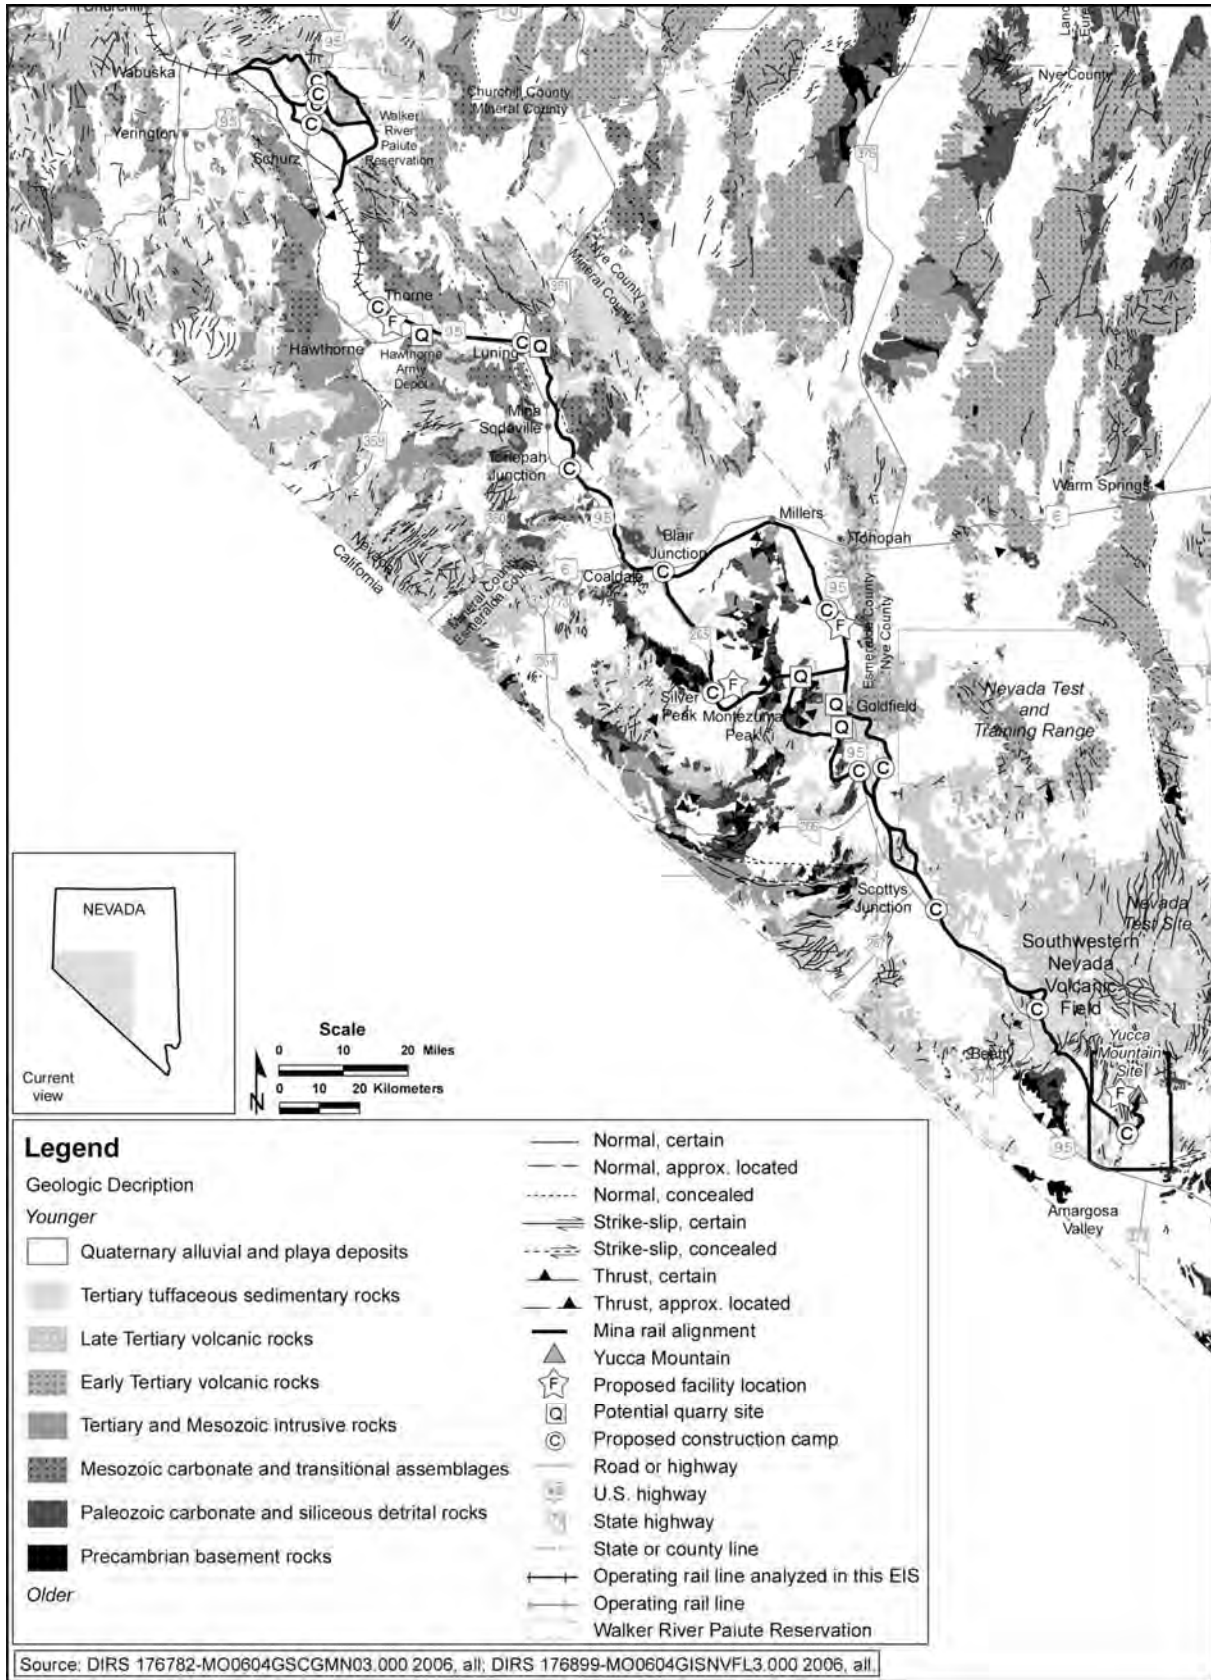


Figure 3-125. Geologic setting along the Mina rail alignment.

The youngest caldera-forming events associated with this feature occurred between 7.5 and 7.6 million years ago with eruptions southeast of Mina common segment 2 (DIRS 180878-Shannon & Wilson 2007, p. 13). The mid-Tertiary eruptions deposited ash-fall and volcanic-ash flows with minor lava flows and reworked materials. Only Tertiary and younger rocks are exposed in the southwestern Nevada volcanic field area.

There are cinder cones (a type of volcano formed by ejected cinders) south of Blair Junction in Big Smoky Valley, the northwest corner of Clayton Valley, and Oasis Valley. The *basalt* flows and associated material ejected from volcanoes are dated approximately between 1.6 million years and 10,000 years old (DIRS 180878-Shannon & Wilson 2007, p. 29; DIRS 176184-Shannon & Wilson 2006, pp. 25 and 26).

3.3.1.2.2.1 Faulting and Seismic Activity. Historically, there have been numerous earthquakes in the Great Basin region as a result of the ongoing crustal extension (see Figure 3-126). Consistent with geologic evidence, the historical record of Holocene-age *seismicity* (occurring within the last 10,000 years) suggests that seismic activity was concentrated in the western part of the Great Basin (DIRS 180878-Shannon & Wilson 2007, p. 16 and Plate 4). Modern earthquakes in the area predominantly occur at depths of 2 to 12 kilometers (1.2 to 7.4 miles) below Earth's surface (DIRS 169734-BSC 2004, p. 4-35).

The western Great Basin contains many Quaternary fault traces; however, there are few instances of surface rupture within the last 10,000 years (DIRS 180878-Shannon & Wilson 2007, p. 16). These faults are characterized by discontinuous scarps (vertical displacement along a fault), from surface displacement. Studies of Holocene faults have calculated slip rates of 0.01 to 0.1 millimeter (0.000039 to 0.0039 inch) per year, with a surface-rupturing recurrence of approximately 100 years (DIRS 176905-Workman et al. 2002, p. 18). Studies of fractures other than *block-bounding faults* around Yucca Mountain determined that fault displacements of about 0.1 centimeter (0.039 inch) would have an exceedance *probability* of once every 100,000 years (DIRS 169734-BSC 2007, p. 4-64).

Figure 3-126 shows the number and locations of earthquakes of magnitude 3.0 and greater on the Richter scale based on available historical and recorded data from 1852 to 2004. Most of the earthquakes around the Mina rail alignment fall within a magnitude range of 3.0 to 3.9, the range that most people start to feel ground shaking (DIRS 180969-USGS 2006, all). As magnitude increases, the potential for damage from ground shaking also increases. The highest concentration of earthquakes, large and small, along the Mina rail alignment occur in the northern portion of Mina common segment 1, centered around Garfield Hills and Soda Spring Valley.

There have been many seismic events with a magnitude 5.0 or larger on the Richter scale within 30 kilometers (19 miles) of the proposed rail alignment, several occurring on the Nevada Test Site north of Yucca Mountain. Most seismic events on the Nevada Test Site are associated with historical underground testing, not natural *faulting*. Seismic activity from man-made tests has not activated local faults (DIRS 169734-BSC 2004, pp. 4-33 and 4-35). There is another cluster of earthquakes around the northern portion of the Mina rail alignment, in the mountains around Soda Spring Valley. This seismic activity is believed to be connected to stretching along the Walker Lane Structural Belt (DIRS 180878-Shannon & Wilson 2007, pp. 16 and 17). The closest major earthquake to the rail alignment was a magnitude 6.3 magnitude event in 1959 near Schurz. In 1932, there was a magnitude 7.2 earthquake near Cedar Mountain that caused cracking in some structures. A 1992 earthquake near Little Skull Mountain is the largest recorded earthquake in the vicinity of Yucca Mountain. The magnitude 5.6 event was apparently triggered by a magnitude 7.3 earthquake which occurred 20 hours earlier at Landers, California, 300 kilometers (190 miles) southwest of Yucca Mountain (DIRS 169734-BSC 2004, pp. 4-38 and 4-39). Since 1978, DOE has monitored seismic activity in the area around Yucca Mountain to pinpoint seismic events (DIRS 155970-DOE 2002, p. 3-32). In the area around the Mina rail alignment, earthquakes with a magnitude of 6.1 to 6.4 are predicted to have a return period of 2,500 years (DIRS 174296-Shannon & Wilson 2005, p. 14).

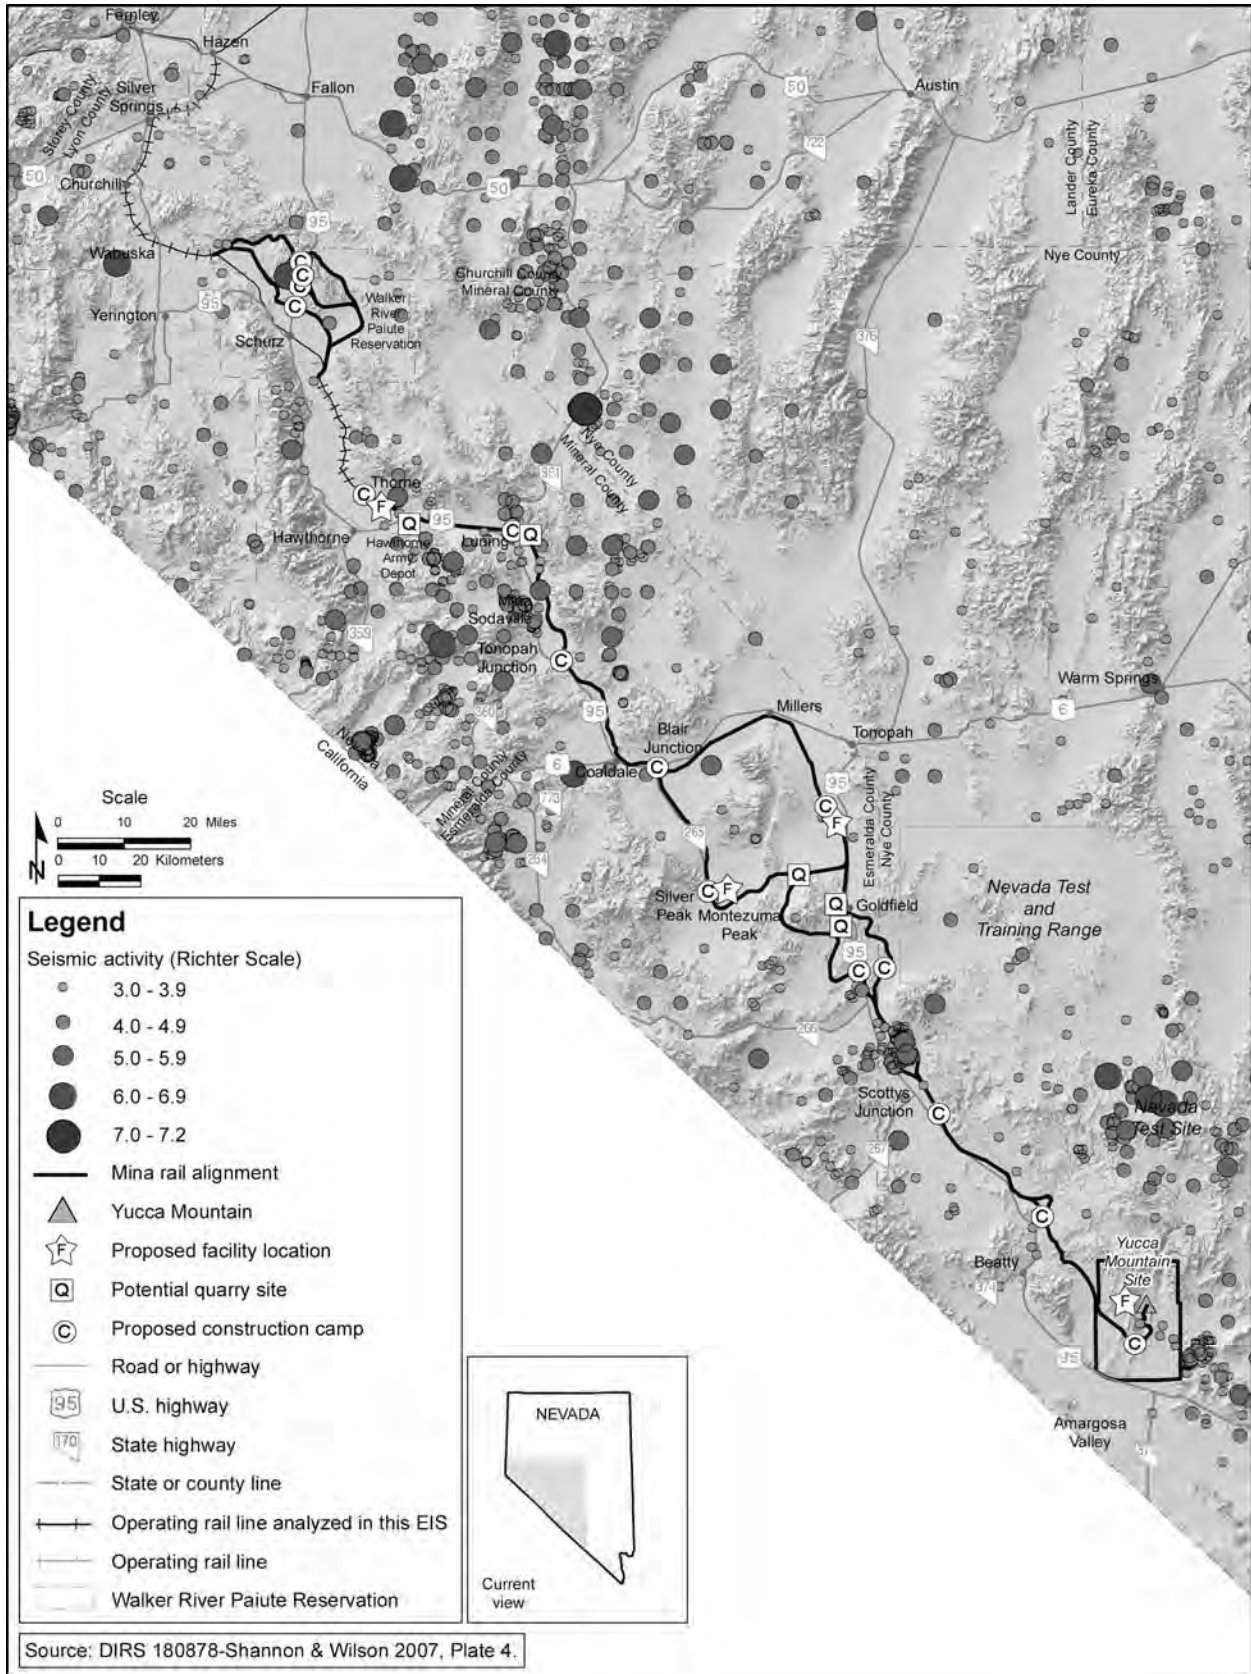


Figure 3-126. Seismic activity in Nevada along the Mina rail alignment from 1852 to 2004.

Through the National Earthquake Hazard Reduction Program, national and regional shaking-hazard maps are used to determine the probability of seismic-related damage based on regional earthquake occurrence rates and how far the shaking travels horizontally (DIRS 174194-USGS 2005, all). These maps are used to meet modern seismic design provisions for the construction of buildings, bridges, highways, and utilities. Shaking-hazard maps, also known as peak acceleration maps, show the levels of horizontal shaking that have a certain probability of being exceeded in a 50-year period (see Figure 3-127). When an earthquake occurs, the forces caused by the shaking can be measured as a percentage of the constant known as g , which is the acceleration of a falling object due to gravity. The resulting map uses contour lines to show the amount of shaking a location would experience during any area earthquake, regardless of its distance to the epicenter.

The predicted peak horizontal accelerations tend to decrease from northwest to southeast along the Mina rail alignment. The northern portion of the Mina rail alignment shows a 2-percent probability of exceeding a peak horizontal acceleration of 50-percent g within a 50-year period (Figure 3-127) and a 10-percent probability of exceeding a peak horizontal acceleration of 25-percent g within a 50-year period (DIRS 174296-Shannon & Wilson 2005, Figure 3). In other words, the Mina rail alignment would experience shaking of 50-percent g or more from a seismic event with a return period of approximately 2,500 years (DIRS 174296-Shannon & Wilson 2005, p. 14). Peak horizontal acceleration of 10-percent g is considered to be capable of minor structural damage in normal buildings, while 50-percent g could cause damage to most structures.

3.3.1.2.2.2 Mineral and Energy Resources. For more than 100 years, parts of the western Great Basin have produced substantial amounts of base and precious metals, particularly gold and silver (DIRS 180882-Shannon & Wilson 2007, pp. 5 and 6). Parts of the Mina rail alignment, especially in the vicinity of the Goldfield Mining District, have been intensely mined and have extensive surface and underground mine workings. Energy resources reported along and near the rail alignment include low-temperature geothermal water. Section 3.3.2, Land Use and Ownership, describes *mining districts* and associated land claims along the Mina rail alignment in more detail.

3.3.1.2.2.3 Potential Sources of Construction Materials. As described in Chapter 2, there would be local sources for some construction materials. The estimated quantity of *ballast* required for construction of a rail line along the Mina rail alignment would range from 2.49 to 2.73 million metric tons (2.74 to 3.01 million tons) (DIRS 180875-Nevada Rail Partners 2007, p. 3-1). DOE has identified five potential ballast quarry locations along the Mina rail alignment with sufficient topographic and geologic characteristics to accommodate excavation and preparation facilities. Figures 2-29 through 2-33 show the potential quarry sites along Mina common segment 1 and Montezuma alternative segments 1, 2, and 3. The topography and geology of potential ballast quarry sites are described in more detail in the discussion of the alternative segment or common segment with which they are associated.

The amount of material excavated from cuts would not equal the fill requirements to construct the rail alignment. Therefore, borrow pits would need to be excavated to supplement the difference in subballast. There is also a high likelihood the Department would find suitable sands and gravels on the alluvial fans along the rail alignment for this use. Section 3.3.11, Utilities, Energy, and Materials, discusses the regional supply chains for other construction materials.

3.3.1.2.3 Soils

DOE used soil survey databases from the U.S. Department of Agriculture, Natural Resources Conservation Service (DIRS 176781-MO0603GSCSSGEO.000), to identify soil types and characteristics along the Mina rail alignment. Approximately 95 percent of the project area has been surveyed. However, soil surveys around the Nevada Test and Training Range have not been completed.

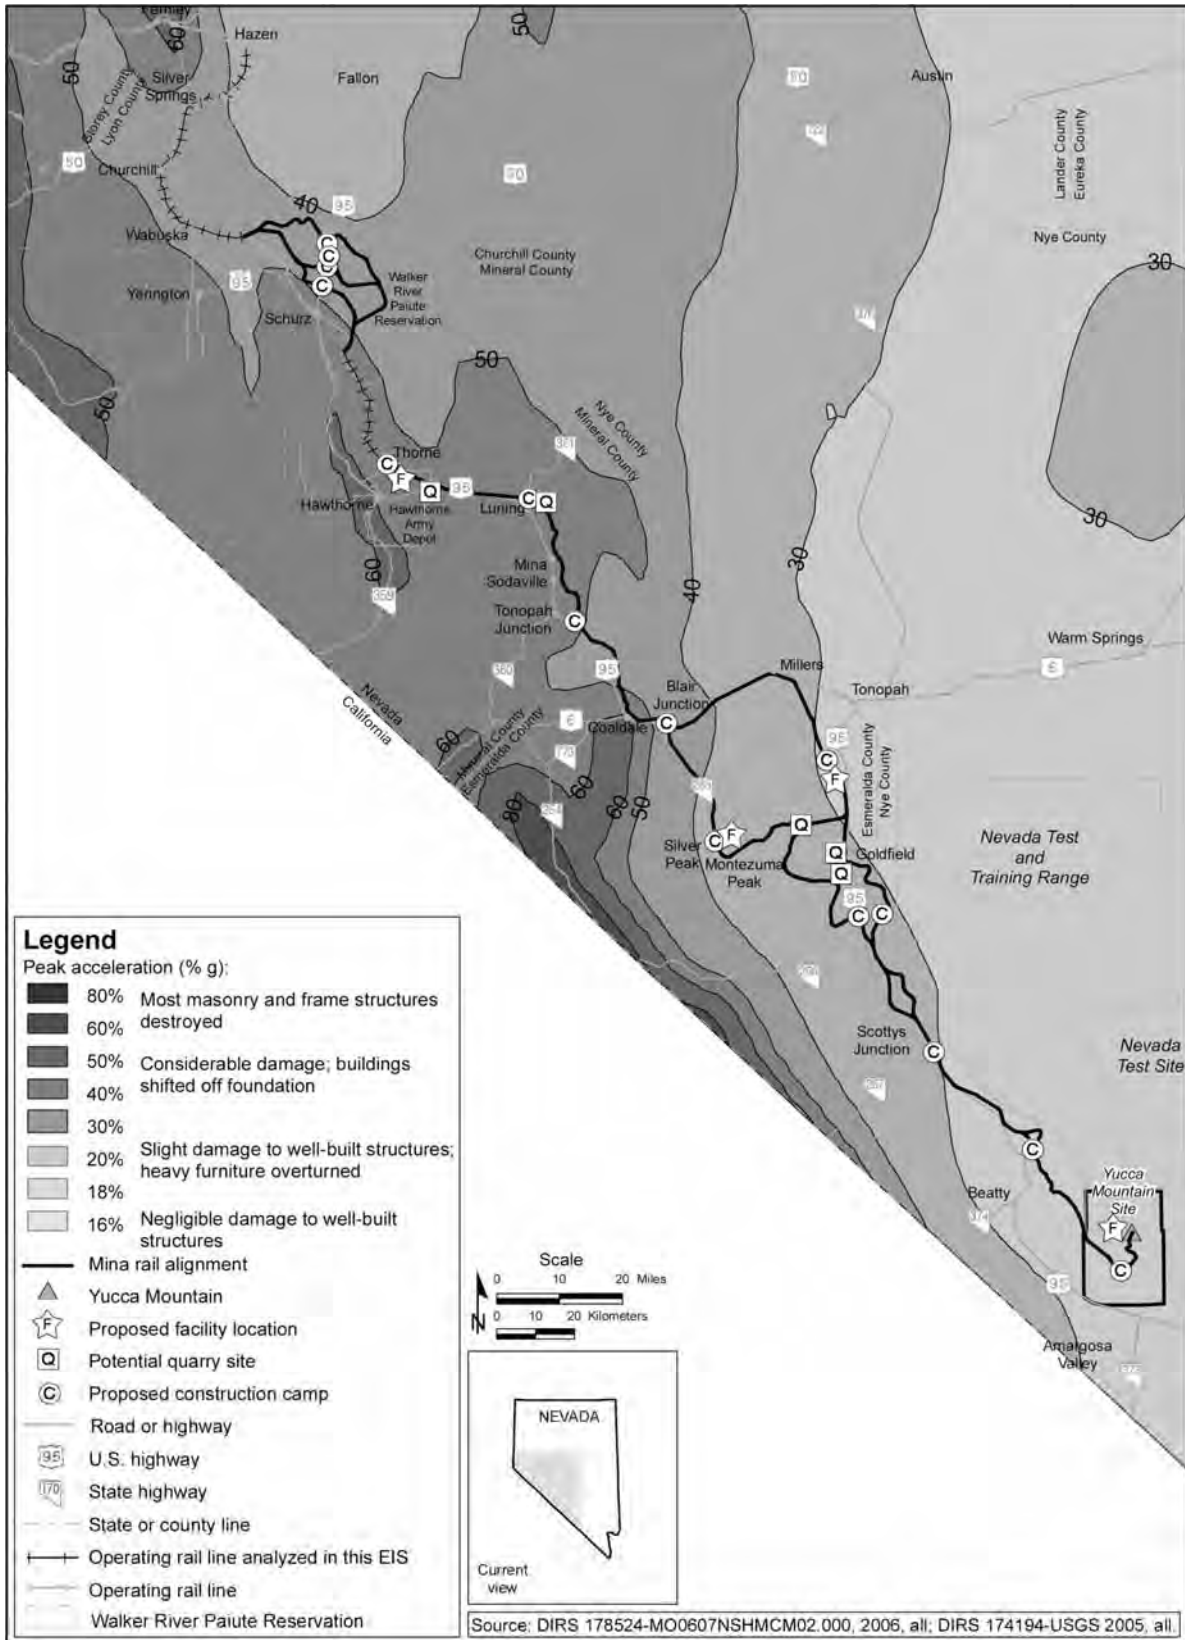


Figure 3-127. Seismic hazards along the Mina rail alignment: peak acceleration (percent g) with 2-percent probability of exceedance in 50 years.

In areas where soils data are not available, DOE does not consider the unavailable data critical to the design and construction of a railroad along the Mina rail alignment, because soils are expected to be similar to those already surveyed. In addition, as part of the design, DOE would place geotechnical borings along the entire rail alignment to obtain site-specific soils data.

This Rail Alignment EIS identifies the specific soil characteristics relevant to proposed railroad construction and operations. From a potential impact perspective, soil designated as supporting *prime farmland* is considered one of the relevant characteristics. The Natural Resources Conservation Service (DIRS 181427-NRCS 2007, Part 622.04(a)) defines prime farmland as:

Land that has the best combination of physical and chemical characteristics for producing food, feed, forage, fiber, and oilseed crops and that is available for these uses. It has the combination of soil properties, growing season, and moisture supply needed to produce sustained high yields of crops in an economic manner if it is treated and managed according to acceptable farming methods. In general, prime farmland has an adequate and dependable water supply from precipitation or irrigation, a favorable temperature and growing season, an acceptable level of acidity or *alkalinity*, an acceptable content of salt and sodium, and few or no rocks. Its soils are *permeable* to water and air. Prime farmland is not excessively eroded or saturated with water for long periods of time, and it either does not flood frequently during the growing season or is protected from flooding.

The prime farmland soil label is applied to the soil types and associations that the National Resources Conservation Service identifies as satisfying this definition. Less than 0.1 percent, or about 0.14 square kilometer (35 acres), of the Mina rail-alignment construction right-of-way would contain soils classified as prime farmland (see Figure 3-128). All of the prime farmland soils that the Mina rail alignment would cross are found on the Walker River Paiute Reservation, which contains 5.5 square kilometers (1,400 acres) of prime farmland soils. Lyon, Churchill, Mineral, and Nye Counties contain 299 square kilometers (74,000 acres), 407 square kilometers (100,000 acres), 44 square kilometers (11,000 acres), 610 square kilometers (150,000 acres), respectively, soils classified as prime farmland (DIRS 176781-MO0603GSCSSGEO.000). Esmeralda County has none. The amount of prime farmland soils within the Mina rail alignment construction right-of-way would consist of 2.6 percent of the total prime farmland soils on the Walker River Paiute Reservation but less than 0.01 percent of the total prime farmland soils on the Walker River Paiute Reservation, and in Lyon, Churchill, Mineral, and Nye Counties. DOE has also contacted the Nevada Natural Resource Conservation Service office to collaborate on the identification of prime, unique statewide, or locally important farmland along the alignment. This correspondence is further described in Section 4.3.1.2.1.3, and in the individual segment discussions in Section 4.3.1.2.2.

Table 3-80 lists the prime farmland and quantity of soils with other characteristics along the Mina rail alignment. The table lists the percentage of the area within the nominal width of the construction right-of-way that contains soils with a particular characteristic. In some locations along the rail alignment, DOE would occupy and disturb less of the construction right-of-way to avoid sensitive environmental resources and private property. Because different combinations of alternative segments and common segments would be different lengths and have different disturbed areas, DOE judged the impacts from soil erosion based on the acreage of specific soil types that would be affected by construction-related disturbance. Section 4.3.1.2.1.3 provides a more detailed discussion of how railroad construction and operations could affect topsoil.

Other soil characteristics that are particularly relevant to proposed railroad construction and operations are classified on Table 3-80 as *erodes easily* and *blowing soil*. Soil with either of these characteristics can be quite susceptible to erosion. As seen in Table 3-80, these soil types are found in similar amounts within each group of alternative segments.

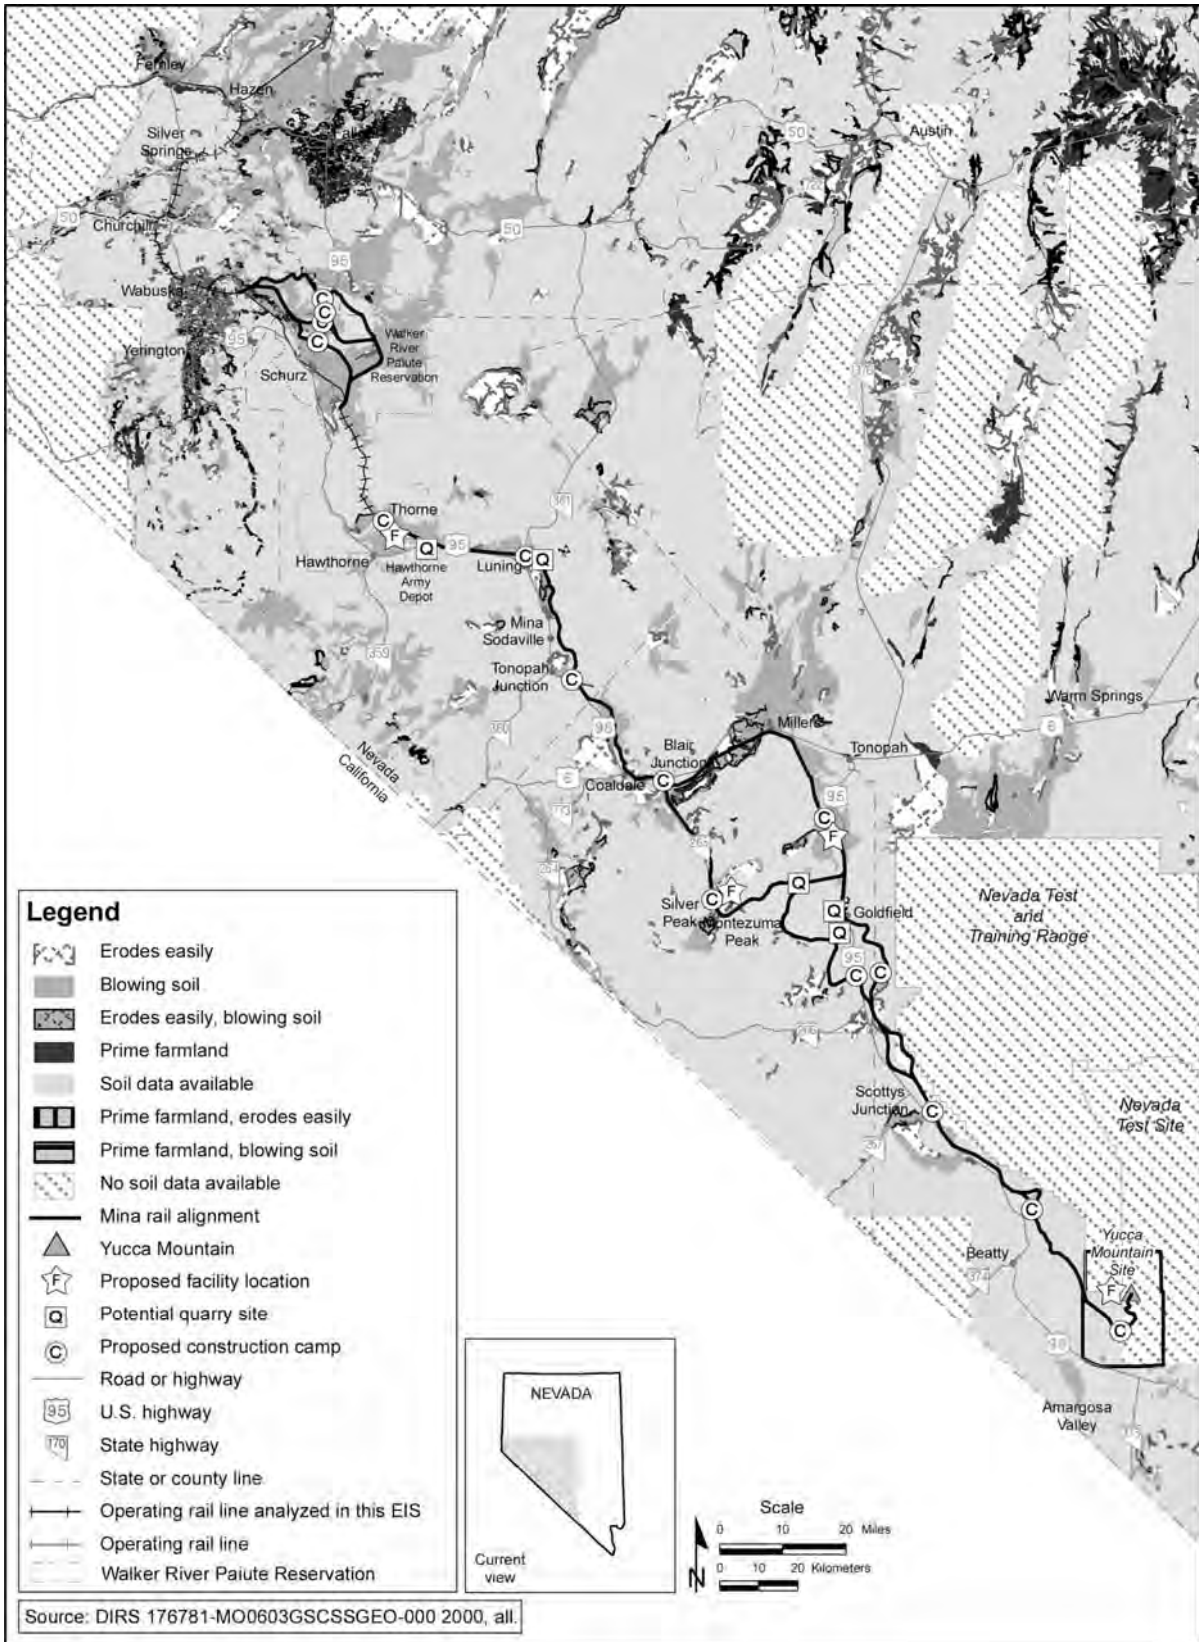


Figure 3-128. Soils with prime farmland, erodes easily, and blowing soil characteristics along the Mina rail alignment.

Table 3-80. Percent of soil characteristics within the Mina rail alignment construction right-of-way.^a

Rail line segment	Percent prime farmland	Percent blowing soil	Percent erodes easily	Percent soil survey coverage ^b
Union Pacific Railroad Hazen Branchline ^c	NA	NA	NA	NA
Department of Defense Branchline North ^c	NA	NA	NA	NA
Schurz alternative segment 1	d	83	4.7	100
Schurz alternative segment 4	d	69	4.8	100
Schurz alternative segment 5	d	63	2.9	100
Schurz alternative segment 6	d	51	2.9	100
Department of Defense Branchline South ^f	e	39	e	100
Mina common segment 1	e	39	7.9	100
Montezuma alternative segment 1	e	5.2	15	100
Montezuma alternative segment 2	e	33	13	100
Montezuma alternative segment 3	e	26	10	100
Mina common segment 2	e	e	100	100
Bonnie Claire alternative segment 2	e	e	27	18
Bonnie Claire alternative segment 3	e	e	25	77
Mina common segment 5	e	2.6	e	74
Oasis Valley alternative segment 1	e	13	e	100
Oasis Valley alternative segment 3	e	4.8	e	100
Mina common segment 6	e	e	e	74

a. Source: DIRS 176781-MO0603GSCSSGEO.000.

b. There are data gaps for Nye County around the Nevada Test and Training Range because those soil surveys have not been completed.

c. Soil survey is not described because there would be no surface disturbance along this portion of the rail alignment. NA = not applicable.

d. Amount is less than 1 percent.

e. Characteristic not present. Soil percentages do not add up to 100 percent.

f. Soil characteristics are identified because DOE would establish a construction camp and build a siding along this branchline.

The erodes easily characteristic is a measure of the susceptibility of bare soil to be detached and moved by water. These soils, which tend to contain relatively high amounts of silts and *loams*, tend to erode easily when disturbed. Approximately 19 percent of the entire Mina rail alignment has soils with this characteristic (DIRS 176781-MO0603GSCSSGEO.000).

The blowing soil characteristic is based on the soil survey classification of susceptibility of a given soil to wind erosion. This classification method uses eight groupings. Soils assigned to Group 1 are the most susceptible to wind erosion and those assigned to Group 8 are the least susceptible. Soils listed in Table 3-80 with the blowing soil characteristic are those assigned to erodibility Group 1 or 2 (DIRS 181427-NRCS 2007, Exhibit 618-16). The blowing soil characteristic identifies areas where fine-textured, sandy materials predominate and where uncontrolled soil disturbance could result in increased wind erosion. Depending on the combination of alternative segments and common segments, between 23 and 26 percent of the entire Mina rail alignment would have soils with the blowing soil characteristic (DIRS 176781-MO0603GSCSSGEO.000). Figure 3-128 identifies the locations of prime farmland, erodes easily, and blowing soils.

3.3.1.3 Setting and Characteristics along Alternative Segments and Common Segments

3.3.1.3.1 Union Pacific Railroad Hazen Branchline (Hazen to Wabuska)

There would be no new construction along the Union Pacific Railroad Hazen Branchline. Therefore, DOE has not characterized the physical setting in this area.

3.3.1.3.2 Department of Defense Branchline North (Wabuska to the Boundary of the Walker River Paiute Reservation)

Figure 3-129 shows this existing rail line. DOE would build a passing *siding* adjacent to the existing rail line on previously disturbed land within the existing right-of-way. Therefore, the Department has not characterized the physical setting in this area.

3.3.1.3.3 Schurz Alternative Segments

3.3.1.3.3.1 Physiography. The Schurz alternative segments would be in the Walker River Basin, northeast of the Wassuk Range.

There is an existing rail line (in this Rail Alignment EIS, called the Department of Defense Branchline through Schurz), which connects Department of Defense Branchlines North and South (see Figure 3-130). The branchline travels along the southern edge of Campbell Valley, along the eastern side of the Wassuk Range, through the town of Schurz on the Walker River Paiute Reservation, and terminates at Hawthorne.

Each of the Schurz alternative segments would start at the north end of Campbell Valley and end near Gillis Canyon (see Figure 3-130). In flat locations, the alternative segments would travel along a similar path, and divert around hilly terrain.

Schurz alternative segment 1 would run through Sunshine Flat and travel east of the Weber Reservoir through the Walker River Paiute Reservation. Schurz alternative segment 4 would also cross Sunshine Flat, traveling north of the Calico Hills. Schurz alternative segment 4 would then curve along the southern edge of the Terrill Mountains and travel along an unnamed valley. Schurz alternative segment 5 would travel along the southern edge of the Desert Mountains (elevation 2,040 meters [6,700 feet] above mean sea level), then southeast through Long Valley (elevation 1,300 meters [4,300 feet] above mean sea level), between the Calico Hills and Terrill Mountains, and through the unnamed valley at the southern edge of the Walker River Paiute Reservation. Schurz alternative segment 6 would also travel along the southern edge of the Desert Mountains, and southeast through Long Valley, then curve northeast around the Terrill Mountains, west of the Rawhide Flats, and then down through the unnamed valley before terminating at Gillis Canyon.

3.3.1.3.3.2 Geology. All of the Schurz alternative segments would cross a variety of recent alluvial fans, wind-blown and river deposits, playas, Tertiary sedimentary rocks, basalt, ash-fall deposits, and Mesozoic granite bedrock. Sections of the bedrock in this area have been altered with intrusive volcanic veins, resulting in variable concentrations of commercial minerals. Metallic and nonmetallic minerals of variable quantity and quality have been identified in the surrounding mountains. Surveys and drill cores have identified an iron-rich ore called the Hottentot prospect within Calico Hills (DIRS 180882-Shannon & Wilson 2007, pp. 29 and 30). To construct any of the Schurz alternative segments, DOE would use *alluvium* within the nominal construction right-of-way as fill materials, but otherwise would not excavate construction materials.

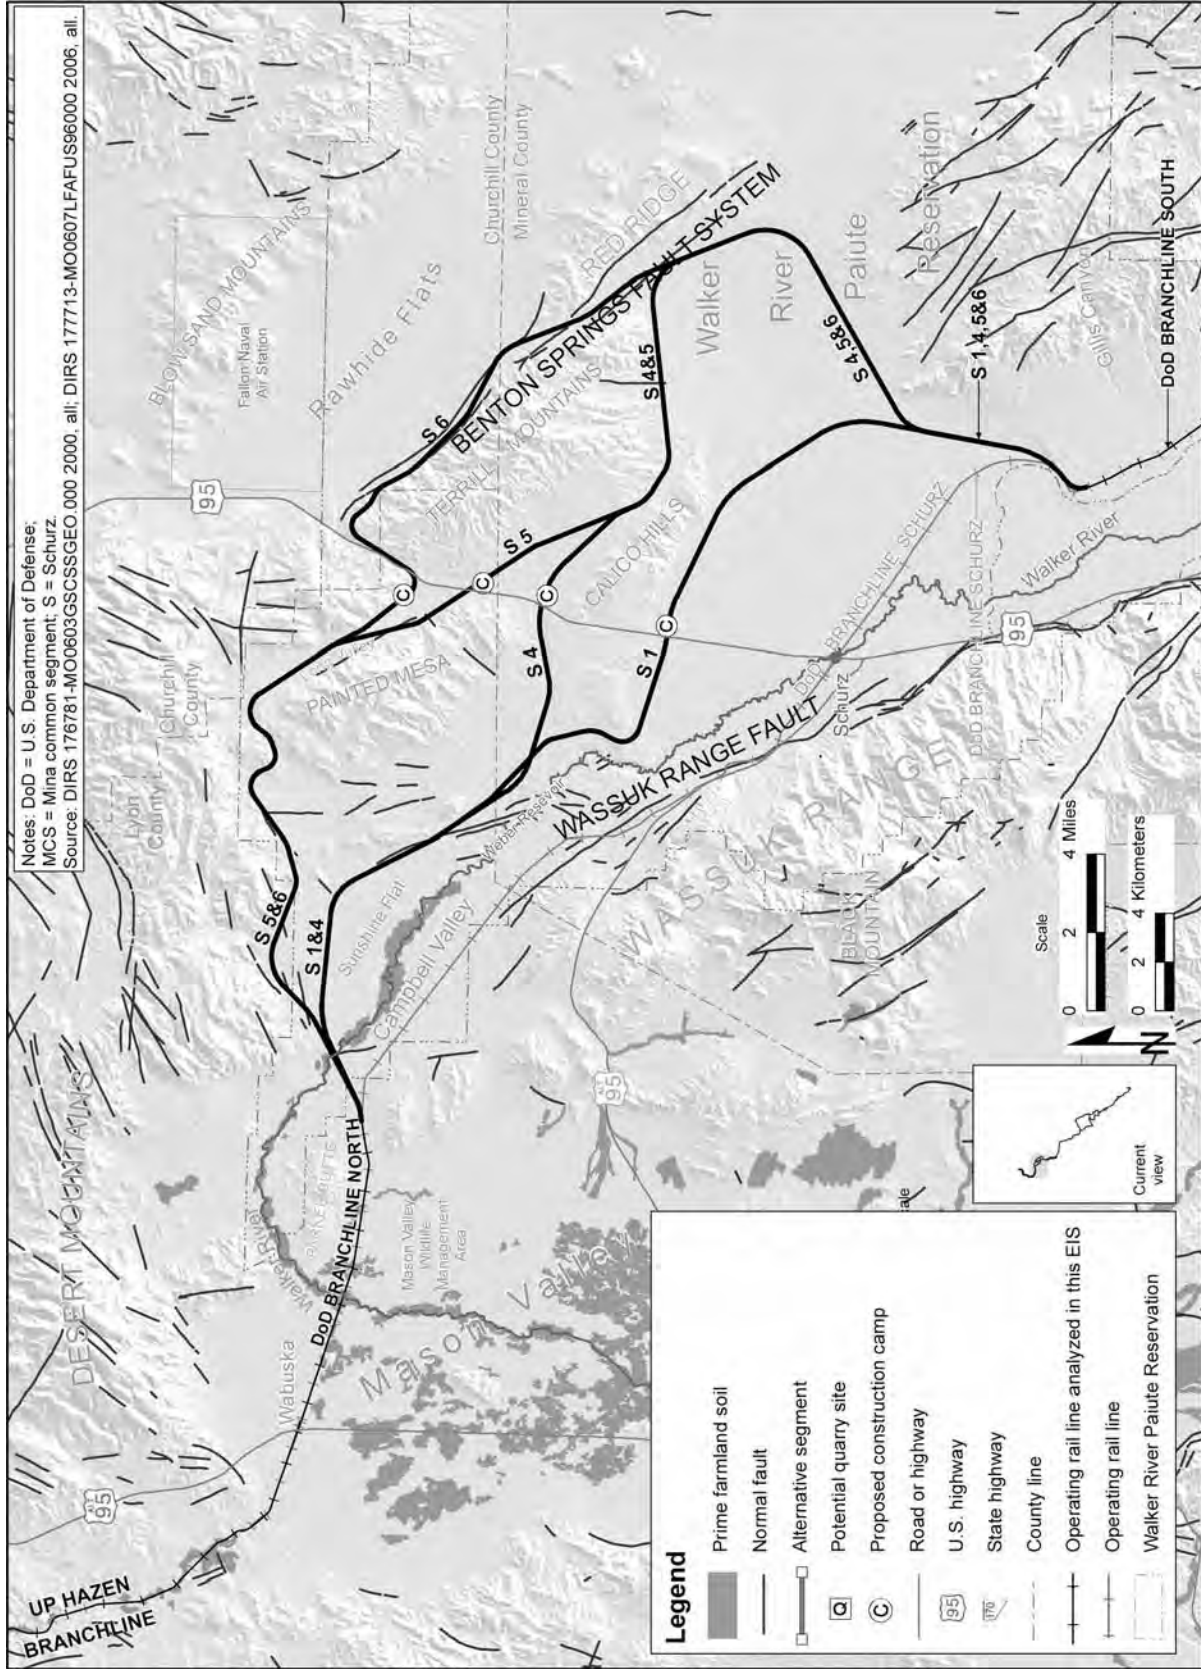


Figure 3-129. Physiographic features of common segments and alternative segments in map area 1.

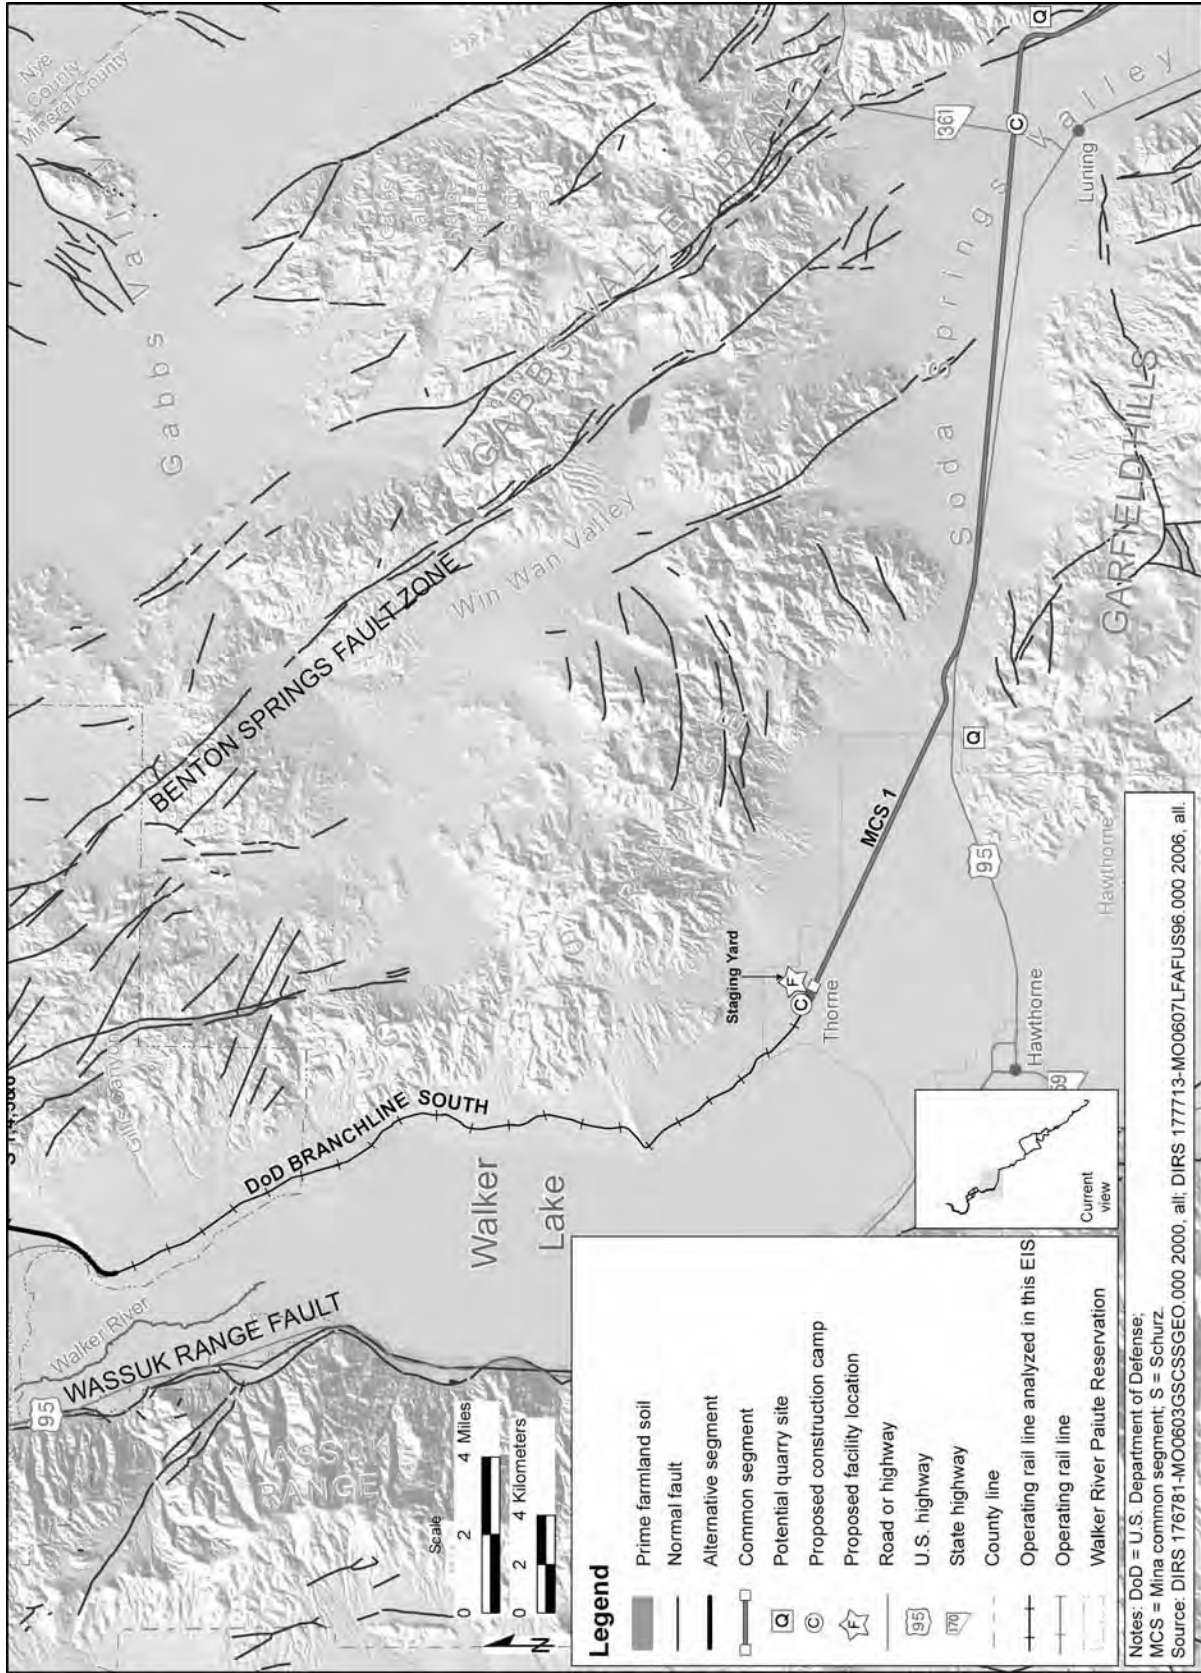


Figure 3-130 Physiographic features of common segments and alternative segments in map area 2.

There are both metallic minerals and nonmetallic minerals of variable quality and quantity in the surrounding mountains (DIRS 180882-Shannon & Wilson 2007, pp. 22, 31, and 32). Geothermal resources include warm springs and steam wells that are found approximately 14 kilometers (8.5 miles) west of the beginning of the Schurz alternative segments. A geothermal power plant and biodiesel plant use energy heat from the steam wells in Wabuska. Section 3.3.2, Land Use and Ownership, provides additional information about the mining districts around the Schurz alternative segments.

All four Schurz alternative segments would cross a small normal fault, and Schurz alternative segments 1 and 4 would cross another linear fault, both of which are part of the Wassuk Range Fault System. This fault system is a series of north-trending faults along the eastern edge of the Wassuk Range. The Walker River Basin was formed during the Quaternary as the western edge of the valley downslipped along the fault system. Schurz alternative segment 6 would cross northern-tracing faults along the eastern edge of the Terrill Mountains. These faults could be correlated with the Benton Springs Fault system to the southeast (DIRS 181849-Sawyer 1999, all). There has been one magnitude 6.3 earthquake, one magnitude 5.0 earthquake, and three of magnitude 4.0 earthquakes in the vicinity of the Schurz alternative segments (see Figure 3-127). The magnitude 6.3 earthquake occurred in 1959, approximately 2.3 miles to the east of Schurz alternative segment 1 (DIRS 180878-Shannon & Wilson 2007, p. 17).

3.3.1.3.3.3 Soils. Soils along the Schurz alternative segments occur on *fan piedmonts*, *fan remnants*, *fan skirts*, *sand sheets*, wind-blown sand, dunes, river valleys, lake plains, and closed valley sediments. They are derived from mixed alluvium, sand sheets, wind-blown and lake deposits, and reworked sedimentary deposits.

The Schurz alternative segments each contain more than 50 percent blowing soils. Schurz alternative segment 1 contains the most blowing soils (83 percent of the alternative segment). Schurz alternative segment 6 contains the least blowing soils (51 percent of the alternative segment). All of the Schurz alternative segments have lower quantities of erodes easily soils, ranging from Schurz alternative segments 5 and 6 at 2.9 percent each, to Schurz alternative segment 4 at 26 percent. Each of the Schurz alternative segments contains less than 1 percent prime farmland soils (see Table 3-80).

Fan piedmonts, fan remnants, and fan skirts refer to locations within a large alluvial fan. Fan piedmonts refer to the area along the base of a mountain slope. Fan remnants refer to parts of an older alluvial fan that remain after erosion has removed most of the fan. Fan skirts refer to the area along the base of the alluvial fan in a valley.

Sand sheets are large, irregularly shaped, commonly thin, surficial mantles of windblown sand that lack the discernible slip faces that are common on dunes.

3.3.1.3.4 Department of Defense Branchline South (Boundary of the Walker River Paiute Reservation to Thorne)

One construction camp (number 17) would be located at the south end of Department of Defense Branchline South where it would connect with Mina common segment 1. The construction camp would be on the Hawthorne Army Depot and would not require additional road construction. Approximately 39 percent of the soils in the proposed construction camp footprint are considered blowing soils. DOE would also build a siding within the construction right-of-way. Aside from the camp and the siding, there would be no surface disturbance along this portion of the Mina rail alignment. Therefore, DOE has not characterized the physical setting in this area.

3.3.1.3.5 Mina Common Segment 1 (Gillis Canyon Area to Blair Junction)

3.3.1.3.5.1 Physiography. Mina common segment 1 would travel south of the Gillis Range through Soda Spring Valley, with the Gabbs Valley Range to the north and east and Garfield Hills to the west (see Figure 3-131). The common segment would pass to the east of Rhodes Salt Marsh between the

Excelsior Mountains and Pilot Mountains, and then to the east of Columbus Salt Marsh between Candelaria Hills and the Monte Cristo Range (see Figure 3-131). Elevations along this common segment generally range from 1,300 meters (4,300 feet) above mean sea level at Rhodes Salt Marsh to 1,500 meters (4,900 feet) above mean sea level at the lower valley floors of the Monte Cristo Range. The location of the common segment would avoid existing sand dunes in the Soda Spring Valley and playa deposits in the Rhodes and Columbus Salt Marshes.

3.3.1.3.5.2 Geology. Mina common segment 1 would primarily cross sedimentary material including alluvial fan, wind-blown, basin-fill, lake deposits, and playas in addition to old basalt flows, sedimentary rocks, and locally altered sedimentary and volcanic bedrock.

Most of the hills surrounding Mina common segment 1 are part of local mining districts, due to the many types of minerals found in the bedrock within the mountain ranges. Historically, gold, silver, lead, copper, iron, uranium, thorium, manganese, turquoise, calcium carbonate, and halite have been mined or documented in the surrounding mountains (DIRS 180882-Shannon & Wilson 2007, pp. 38, 40 and 41, 44, 60, 64, and 79). The rail line would travel along the valleys, avoiding the calcium carbonate and salt deposits around the playas. It would not cross or approach energy or geothermal resources.

DOE has identified two potential quarry sites along Mina common segment 1. The Garfield Hills quarry would mine basalt at the beginning of Mina common segment 1 in the northern edge of the Garfield Hills. The Gabbs Range quarry would be on the northeastern edge of the Soda Spring Valley where the rail line would turn south. The quarry would mine granite from a foothill at the base of the Gabbs Valley Range.

There are several northwest-trending Quaternary faults in the mountains north of Mina common segment 1. The Gabbs Valley Range, Pilot Mountains, and Soda Spring Valley are all bounded by the Benton Spring Fault. In 1932, there was a magnitude 7.2 earthquake to the northeast of Mina common segment 1 at Cedar Mountain. There have been numerous other earthquakes greater than magnitude 3.0 in the northeastern corner of Soda Spring Valley; however, the number and magnitude of earthquakes decreases farther south around the Monte Cristo Range.

3.3.1.3.5.3 Soils. Soils along Mina common segment 1 consist primarily of alluvial fan deposits comprising sorted sand and gravels, and occasionally overlie shallow bedrock made up of recent volcanic material. Deposits of calcium carbonate in the form of calcrete are also occasionally found within the soils. The common segment would avoid playa deposits in the area of Rhodes Salt Marsh and Columbus Salt Marsh. Approximately 39 percent of Mina common segment 1 is made up of blowing soils and 7.9 percent of the soils have the erodes easily characteristic. There are no prime farmland soils along Mina common segment 1.

3.3.1.3.6 Montezuma Alternative Segments

3.3.1.3.6.1 Physiography. Montezuma alternative segment 1 would travel southeast from Blair Junction, through Clayton Valley, and within a pass between Paymaster Ridge and Clayton Ridge (Figures 3-132 and 3-133). The alternative segment would then turn south through an unnamed valley, then cross the Montezuma Range in an unnamed pass and switchback between the Goldfield and Cuprite Hills. Elevations along Montezuma alternative segment 1 would range from 1,300 meters (4,300 feet) at Clayton Valley to 1,980 meters (6,500 feet) above mean sea level at the south end of the Montezuma Range.

Montezuma alternative segment 2 would travel from Blair Junction northeast through Big Smoky Valley, around Lone Mountain, southeast through Montezuma Valley, and would weave through the Goldfield Hills, with elevations ranging from 1,500 meters (4,900 feet) at Montezuma Valley to 1,950 meters (6,400 feet) above mean sea level at Goldfield Hills.

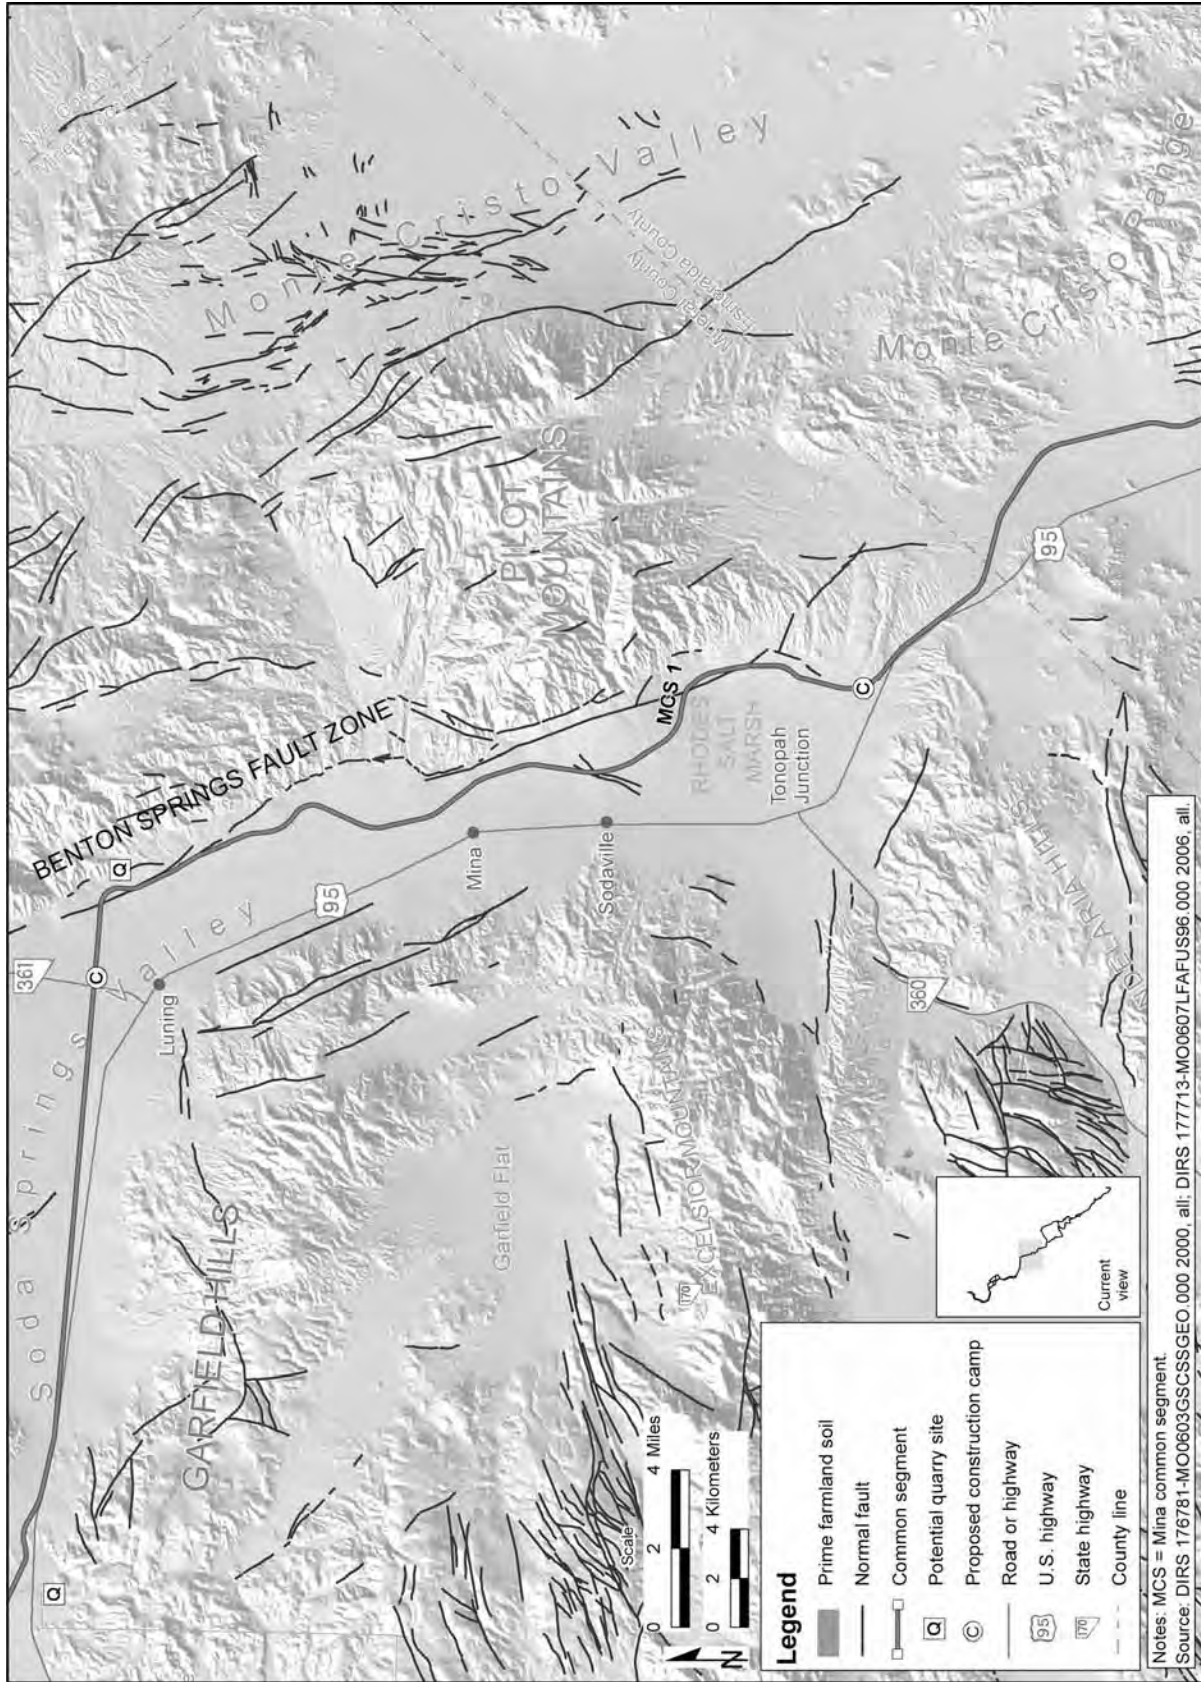


Figure 3-131. Physiographic features of common segments and alternative segments in map area 3.

Montezuma alternative segment 3 would travel from Blair Junction northeast through Big Smoky Valley, around Lone Mountain, southeast through Montezuma Valley, and then cross west near the north end of Montezuma Range. Montezuma alternative segment 3 would continue south through an unnamed valley and cross the Montezuma Range in an unnamed pass and switchback between the Goldfield and Cuprite Hills. The elevations ranges along Montezuma alternative segment 3 would be the same as Montezuma alternative segment 2, with the low point in Montezuma Valley and the high point at Goldfield Hills.

3.3.1.3.6.2 Geology. All of the Montezuma alternative segments would cross a combination of recent alluvial and playa deposits overlying Quaternary volcanic rocks, Mesozoic granite, and Cambrian limestone bedrock. A variety of metallic minerals (silver, gold, and copper; iron and hematite) have been mined in Lone Mountain, Silver Peak, Montezuma Range, and the Cuprite and Goldfield Hills. All of the Montezuma alternative segments would travel through valleys near a range that contains either active or historic mining operations. Montezuma alternative segments 1 and 3 would also cross the Montezuma Range, and Montezuma alternative segment 2 would cross through the Goldfield Hills, where gold, silver, and zeolite have been mined since 1900.

In addition to the metallic minerals identified within the mountains surrounding the Montezuma alternative segments, there are nonmetallic minerals in the valleys. Montezuma alternative segment 1 would cross Clayton Valley and approach the town of Silver Peak. Minerals such as alum, native sulfur, and kaolinite have been found in Clayton Valley, and a large-scale brine facility in Silver Peak extracts lithium from salt-rich aquifer water. There are warm springs in the Silver Peak area; however, at present, they are not used as an energy resource. In the Cuprite Hills, at the end of the Montezuma alternative segments, there is a large geothermal system with multiple warm heat-flow wells, also not currently used as geothermal resources (DIRS 180882-Shannon & Wilson 2007, Plate 3). Section 3.3.2, Land Use and Ownership, describes the history and extent of the regional mining districts in more detail.

DOE has identified several potential quarry sites along the Montezuma alternative segments. The North Clayton Quarry would be along the northern tip of the Montezuma Range, and would serve either Montezuma alternative segment 1 or 3. The quarry would mine granite from the bottom of the ridge, moving up as additional rock is quarried. The Malpais Mesa Quarry would be on the northwestern edge of the Goldfield Hills and would be accessed by Montezuma alternative segment 1 or 3. This quarry would mine basalt from the bowl-shaped cliff. Potential quarry ES-7, on the northern edge of Malpais Mesa, would serve Montezuma alternative segment 2.

The mountain ranges in this area are typically bounded on one side by linear, north-trending faults. Montezuma alternative segment 1 would cross the Clayton Valley Fault Zone, Paymaster Ridge Fault Zone, Montezuma Range Fault Zone, and Cuprite Hills Fault Zone. These faults are primarily late Quaternary in age. Montezuma alternative segment 2 would cross the Cuprite Hills Fault Zone along the northern edge of the Goldfield Hills. Montezuma alternative segments 2 and 3 would cross the Lone Mountain Fault Zone along the northern edge of the Lone Mountain foothills. Some of the faults associated with this fault zone were active within the last 15,000 years (DIRS 181852-Sawyer and Anderson 1999, all). Seismic activity in the area around the Montezuma alternative segments is limited to a magnitude 5.0 earthquake west of Lone Mountain, and several magnitude 3.0 earthquakes in the immediate vicinity of Lone Mountain and along the Cuprite Hills (see Figure 3-126).

3.3.1.3.6.3 Soils. Soils along the Montezuma alternative segments vary based on their location and the source bedrock. The alternative segments would cross soils consisting of alluvial deposits on fan skirts, fan remnants, and fan piedmonts; sand sheets and basins; and alluvial flats. The soils are derived from mixed alluvium, wind-blown sand, and volcanic sedimentary (limestone) rocks.

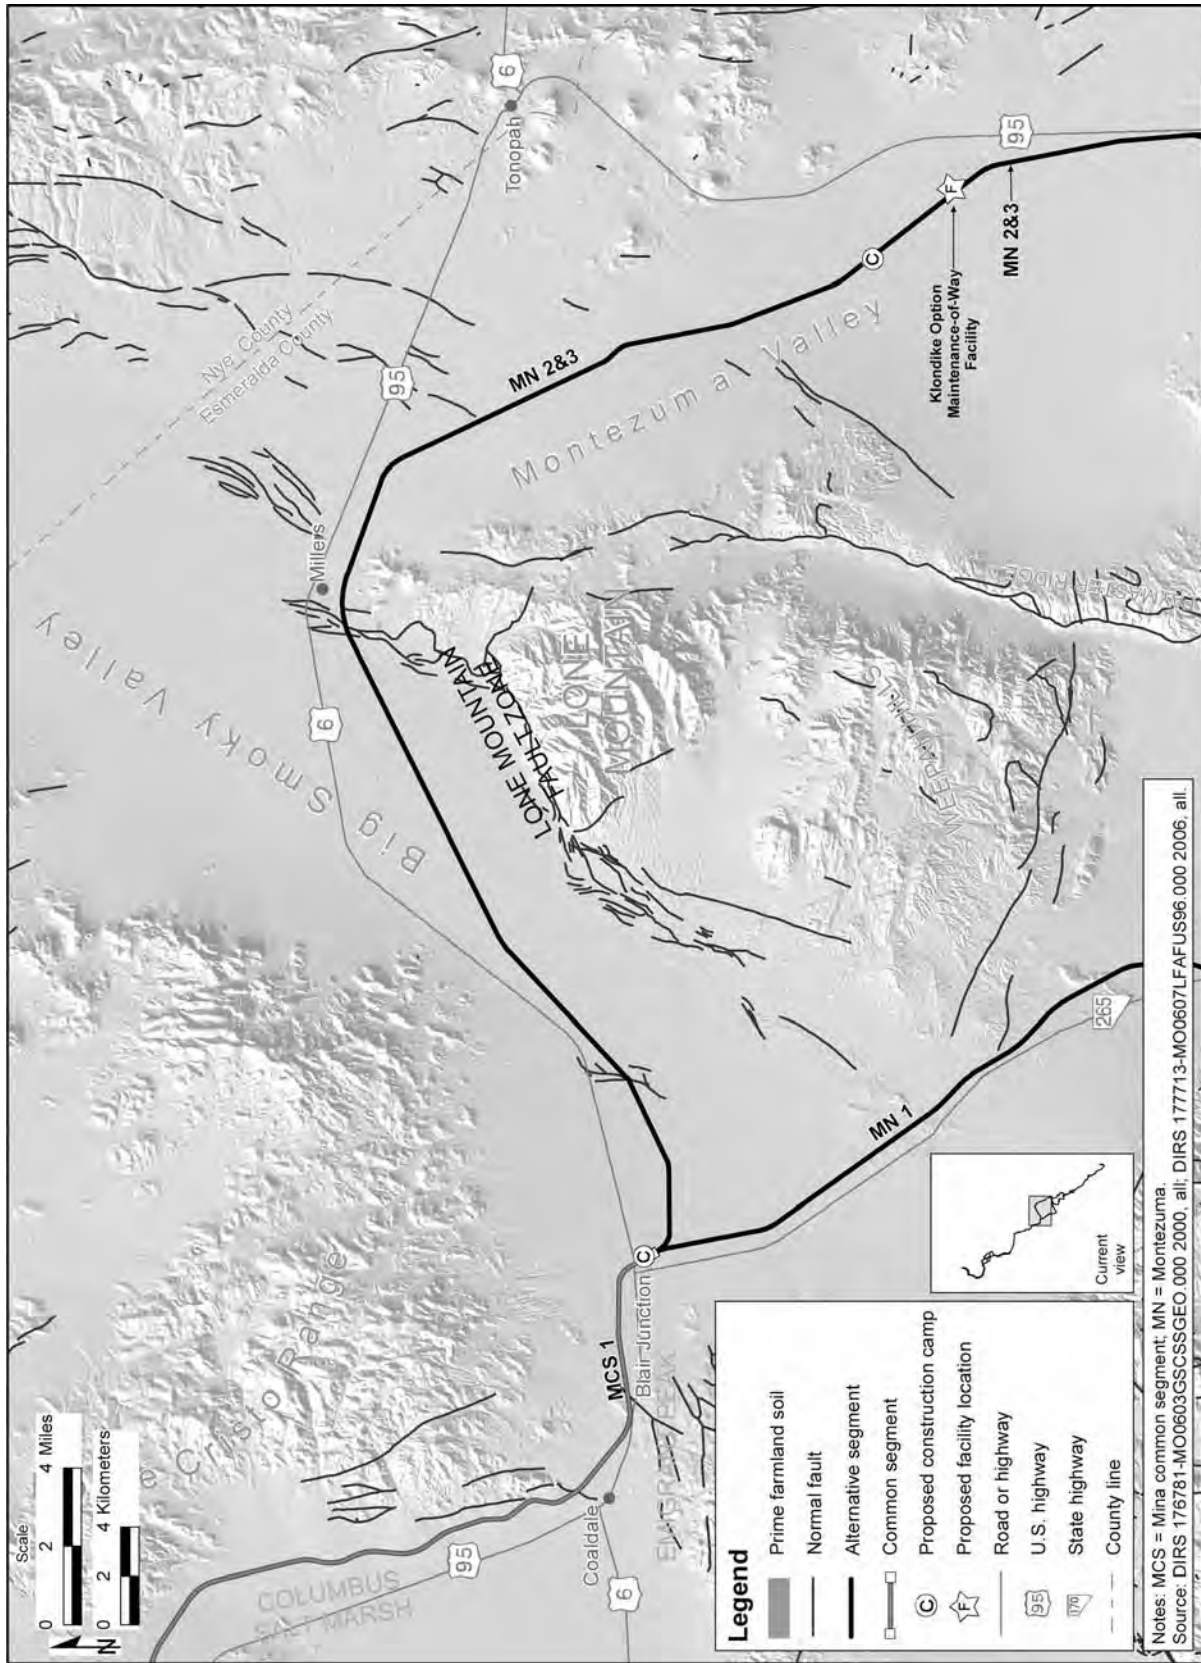


Figure 3-132. Physiographic features of common segments and alternative segments in map area 4.

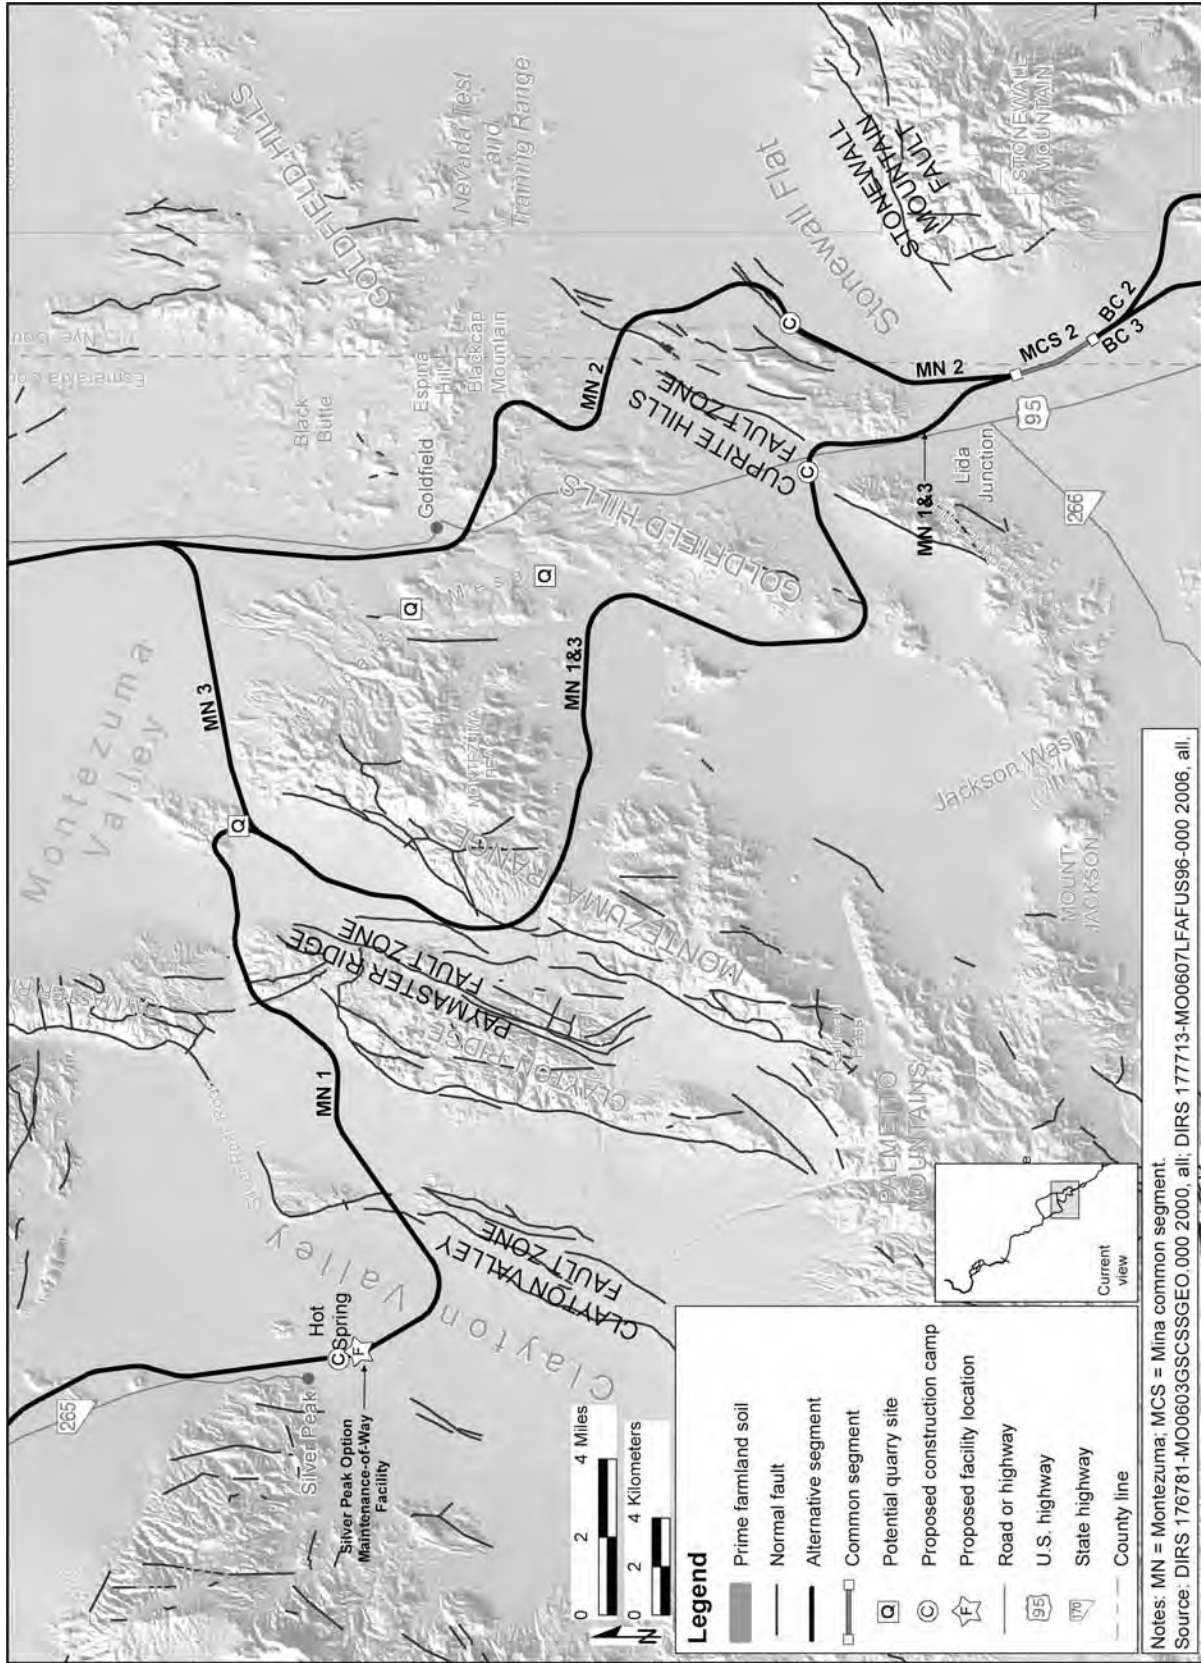


Figure 3-133. Physiographic features of common segments and alternative segments in map area 5.

In some locations along Montezuma alternative segments 1 and 3, thin soils derived from volcanic, sedimentary, or limestone material overlie the mountain bedrock. Along all of the alternative segments, the soils are considered well drained to excessively drained.

There are no prime farmland soils in Esmeralda County, the location of most of the length of the Montezuma alternative segments. Other soil characteristics are variable, depending on their position in the valley (see Table 3-80). Montezuma alternative segment 2 would contain the most blowing soils (33 percent), while Montezuma alternative segment 1 would contain only 5.2 percent. However, Montezuma alternative segment 1 would contain the most erodes easily soils (15 percent), and Montezuma alternative segment 3 would contain the least (10 percent).

3.3.1.3.7 Mina Common Segment 2 (Stonewall Flat Area)

3.3.1.3.7.1 Physiography. Mina common segment 2 would cross Lida Valley, a depression with numerous alkali flats (see Figure 3-133), at an elevation of approximately 1,430 meters (4,700 feet) above mean sea level. Stonewall Mountain is a prominent feature that would border the common segment on the east.

3.3.1.3.7.2 Geology. Through the Stonewall Flat area, Mina common segment 2 would mostly cross fan and stream-channel alluvium filling a *graben* (a depression between normal faults) formed by the northerly-trending Stonewall Mountain Fault.

There has been some seismic activity around the Cuprite Hills and at Stonewall Mountain within the past 150 years (see Figure 3-126).

There are metallic minerals, including copper, silver, and gold along this common segment. The deposits occur in sedimentary and volcanic rocks that have been altered by hot fluids. Quartz veins are also mined for silica. Drilling in the Cuprite Hills suggests the existence of a large geothermal system in the area, with multiple warm heat-flow wells drilled in the Cuprite Hills; however, at present, these are not used as geothermal resources (DIRS 180882-Shannon & Wilson 2007, Plate 3). Except for alluvium, the common segment would not cross rocks suitable for construction.

3.3.1.3.7.3 Soils. Soils along Mina common segment 2 are derived from alluvium and occur on fan piedmonts and fan skirts (DIRS 176781-MO0603GSCSSGEO.000). All of the soils are considered to be easily erodible. There are no blowing soils or prime farmland soils along the segment.

3.3.1.3.8 Bonnie Claire Alternative Segments

3.3.1.3.8.1 Physiography. The physiography of the Bonnie Claire area is characterized by the southern boundary of Lida Valley and the northern portion of Sarcobatus Flat, which are depressions with numerous alkali flats. Pahute Mesa is to the east of the alternative segments; Stonewall Mountain is to the northeast (see Figure 3-134). Bonnie Claire alternative segment 2 would pass to the east of an unnamed 1,500-meter (4,900-foot)-high bedrock knoll that separates Sarcobatus Flat and Lida Valley; Bonnie Claire alternative segment 3 would pass this knoll to the west (DIRS 176184-Shannon & Wilson 2006, Figure 3). Elevations in this area range from about 1,250 to 1,400 meters (4,100 to 4,600 feet) above mean sea level.

3.3.1.3.8.2 Geology. The Bonnie Claire alternative segments would cross the eastern portion of the southwestern Nevada volcanic field. Bonnie Claire alternative segment 3 would cross a mixture of young volcanic rocks and ash-flow sedimentary rocks, while Bonnie Claire alternative segment 2 would primarily cross alluvium on the western edge of Sarcobatus Flat (DIRS 176184-Shannon & Wilson 2006, Table 5).

The two alternative segments would bypass a sequence of interconnected unnamed faults. These faults are not well studied, although recent seismic activity has been recorded in the area. In 1999, there was a magnitude 5.3 earthquake in the area between the Bonnie Claire alternative segments. As seen in Figure 3-126, many aftershocks were recorded in the area, most between magnitudes 2.0 and 3.5. Since then, earthquakes immediately around the Bonnie Claire alternative segments have been below magnitude 3.0 (DIRS 176184-Shannon & Wilson 2006, Plate 4).

Metallic minerals such as gold and copper have been found within the volcanic rocks around the Bonnie Claire alternative segments. The Wagner Mining District is in this area, and is discussed in more detail in Section 3.3.2, Land Use and Ownership.

There are no known energy or geothermal resources in the area surrounding the Bonnie Claire alternative segments, and other than gravel and alluvial materials present on the floor of Lida Valley, the Bonnie Claire alternative segments would not cross any known mineral deposits.

3.3.1.3.8.3 Soils. Soils along Bonnie Claire alternative segments 2 and 3 are derived from alluvium and *colluvium*, and are found on hills, alluvial fan piedmonts, and fan skirts. Soils are mainly identified for Bonnie Claire alternative segment 3, because soil data are not available for the area around the Nevada Test and Training Range.

Soils with the erodes easily characteristic comprise 27 and 25 percent of the soils along Bonnie Claire alternative segments 2 and 3, respectively. Available data do not indicate any soils with the blowing soil or prime farmland characteristic.

3.3.1.3.9 Common Segment 5 (Sarcobatus Flat Area)

3.3.1.3.9.1 Physiography. The physiography of common segment 5 consists of most of Sarcobatus Flat. Pahute Mesa would be to the northeast (see Figure 3-134). Coba Mountain is a prominent feature in the area that extends from common segment 5 to the southwest (see Figure 3-135). Rail alignment elevations in the Sarcobatus Flat area would range from 1,200 to 1,250 meters (3,900 feet to 4,100 feet) above mean sea level.

3.3.1.3.9.2 Geology. Common segment 5 would cross Quaternary alluvium and mid-Tertiary ash-flow tuffs, minor lava flows, and reworked materials associated with the southwestern Nevada volcanic field. The common segment would not cross Quaternary faults (see Figures 3-134 and 3-136). Commercial minerals found within the area include gold and silver (DIRS 173841-Shannon & Wilson 2005, pp. 51 and 52). Additionally, an actively mined, relatively large gravel pit at the alluvial fan boundary between Pahute Mesa and Sarcobatus Flat would be within 0.8 kilometer (0.5 mile) of the rail alignment in this area.

Geothermal occurrences in Sarcobatus Valley include one warm spring and one hot well, which would be about 0.20 kilometer (0.12 mile) from the rail alignment.

3.3.1.3.9.3 Soils. Area soils are derived from alluvial deposits and are well drained. They occur on alluvial flats and fan piedmonts. Soils with the blowing soil characteristic comprise about 2.6 percent of the soils. There are no soils along common segment 5 with the erodes easily or prime farmland characteristics.

3.3.1.3.10 Oasis Valley Alternative Segments

3.3.1.3.10.1 Physiography. Oasis Valley alternative segments 1 and 3 would be in Oasis Valley, which is incised by the Amargosa River, an *ephemeral stream*, and tributary washes (see Figure 3-135).

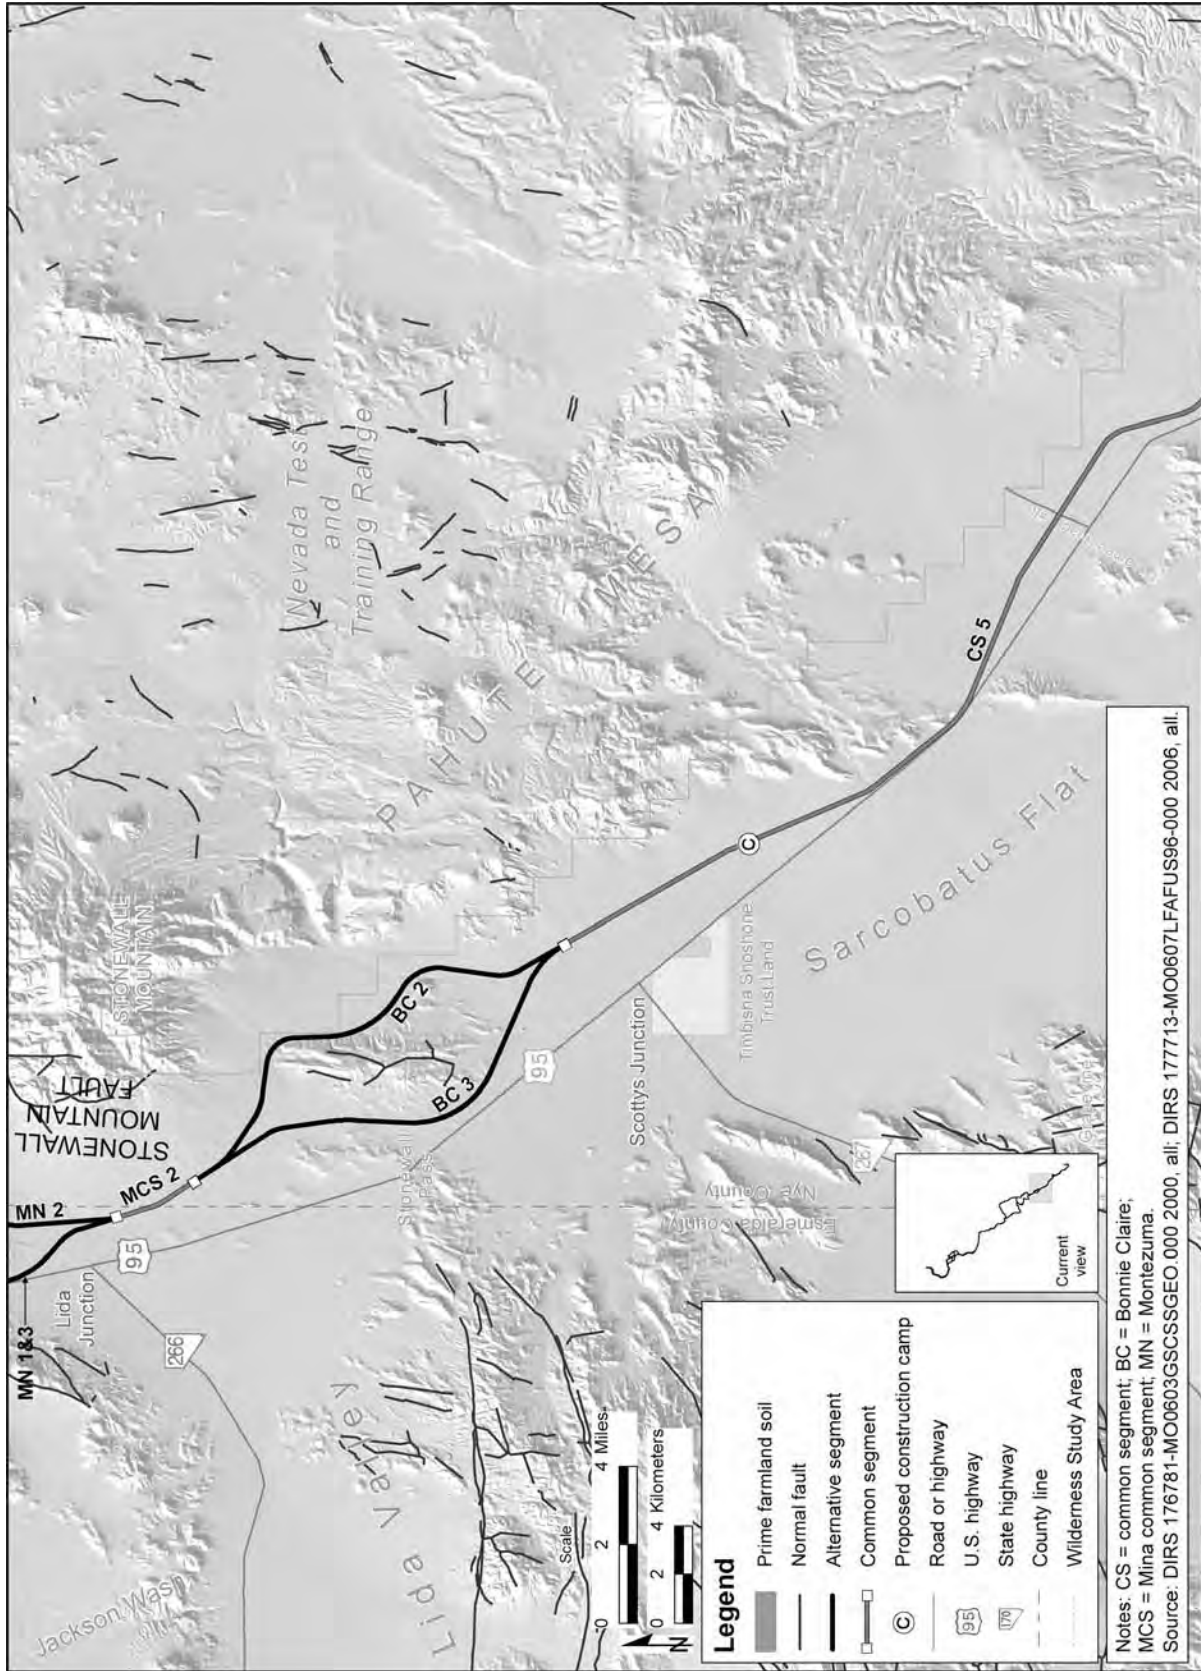


Figure 3-134. Physiographic features of common segments and alternative segments in map area 6.

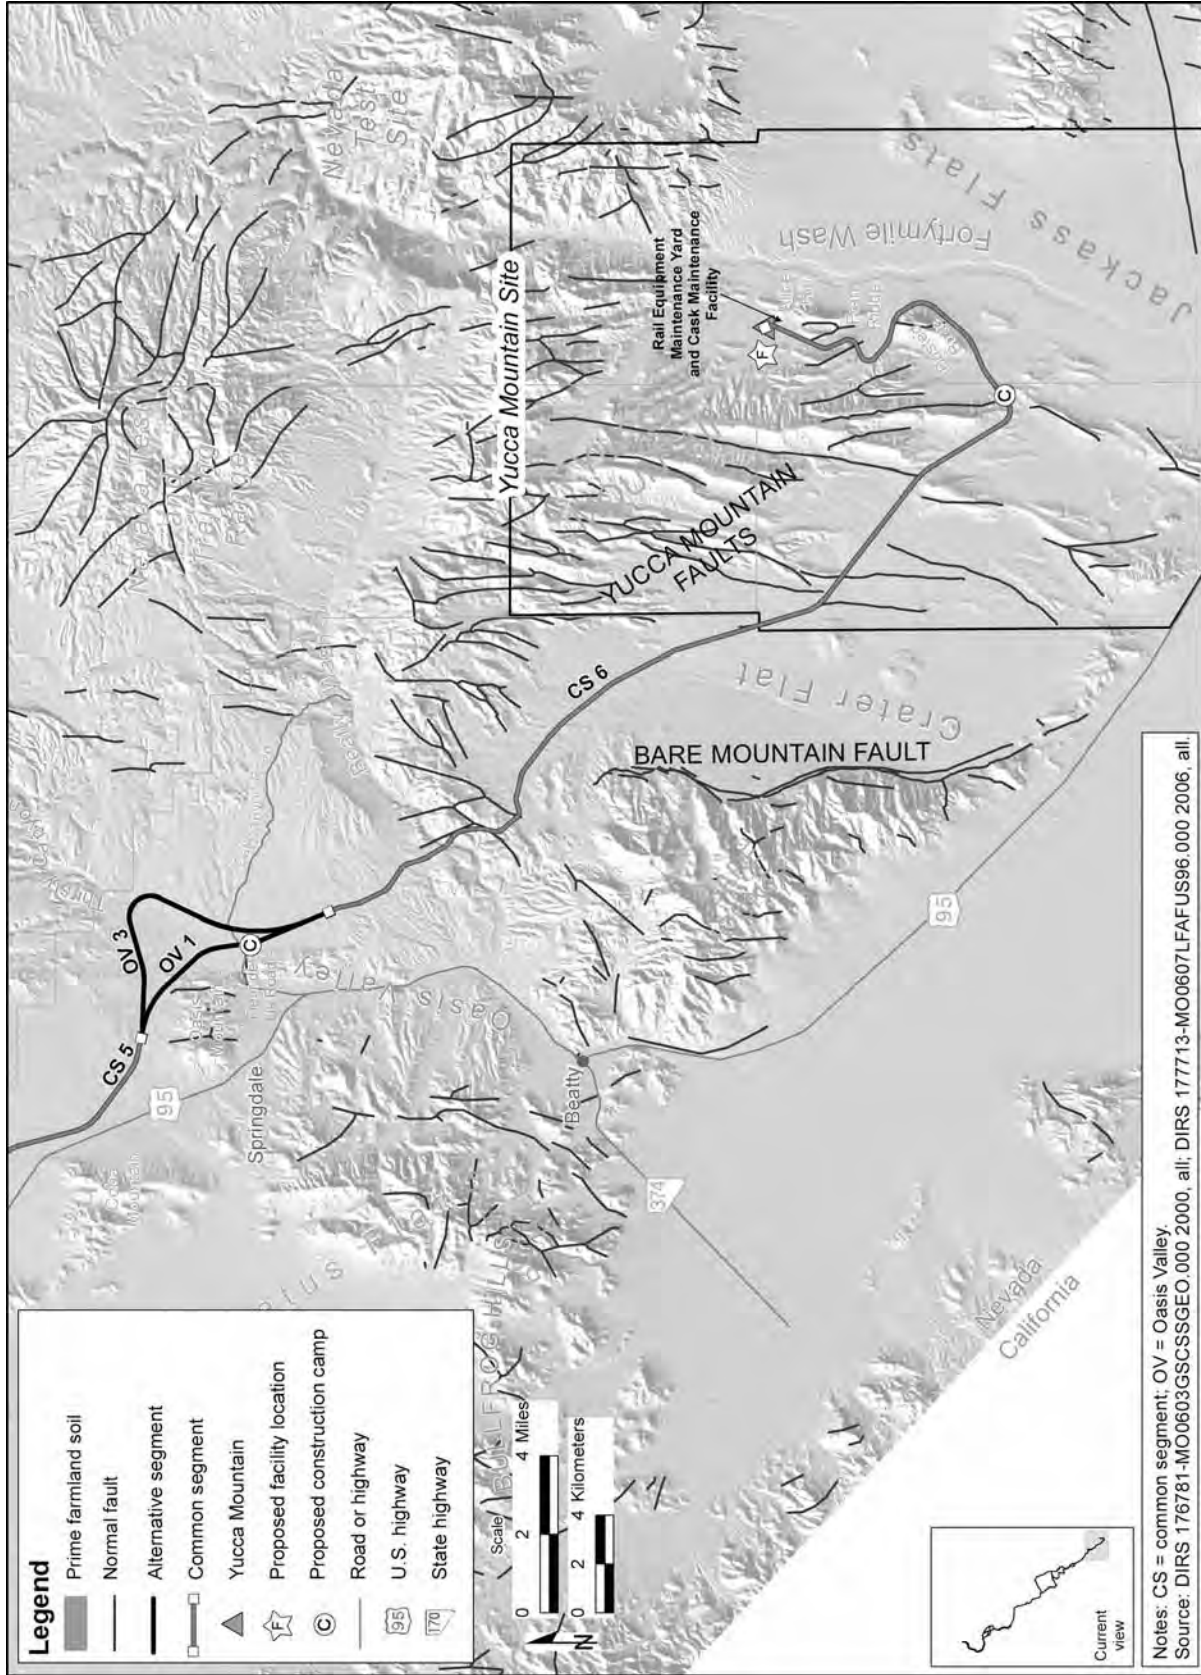


Figure 3-135. Physiographic features of common segments and alternative segments in map area 7.

Elevations range from about 1,200 to 1,300 meters (3,900 to 4,200 feet) above mean sea level. At the northwest end, the alternative segments would cross alluvial fans extending from Pahute Mesa on the north and Oasis Mountain (in Bullfrog Hills) on the south.

3.3.1.3.10.2 Geology. The two Oasis Valley alternative segments would cross sedimentary rocks overlain in part by recent sediment from alluvial fans and Amargosa River floodplain deposits. Small outcrops of young volcanic rocks from the southwestern Nevada volcanic field area are also exposed. The rail alignment would not cross Quaternary faults, commercial mineral operations, geothermal resources or materials suitable for construction purposes.

3.3.1.3.10.3 Soils. Soils along Oasis Valley alternative segments 1 and 3 are derived from alluvium and are well drained to somewhat excessively drained. Soils occur on fan skirts and fan piedmonts. Oasis Valley 1 contains approximately 13 percent soils with the blowing soil characteristic, while Oasis Valley 3 contains approximately 5.3 percent of blowing soils. There are no prime farmland or erodes easily soils along either of the Oasis Valley alternative segments.

3.3.1.3.11 Common Segment 6 (Yucca Mountain Approach)

3.3.1.3.11.1 Physiography. The physiography of common segment 6 is characterized by Beatty Wash, Crater Flat, and several ridges and valleys that make up Yucca Mountain, Busted Butte, and Jackass Flats (see Figure 3-135). The common segment would go around the east side of Busted Butte, with Fortymile Wash and most of Jackass Flats to the east. North of Busted Butte, it would cross a series of washes and valleys flanked by multiple ridges, where it would terminate near Yucca Mountain. Rail alignment elevations would range from about 1,300 meters (4,300 feet) at Tram Ridge to 1,000 meters (3,300 feet) above mean sea level at the base of Busted Butte (DIRS 176184-Shannon & Wilson 2006, Figure 3, Sheets 70 and 71).

3.3.1.3.11.2 Geology. This area is in the southern edge of the southwestern Nevada volcanic field. Common segment 6 would cross a variety of alluvial deposits and sedimentary rocks, and young volcanic rocks. Faults in the area increase in number closer to the Yucca Mountain uplands. The fault traces generally trend to the north, including the Bare Mountain Fault and the eastern and western Yucca Mountain fault groups. Displacements along faults are characterized in terms of the amount of movement per seismic event. For the set of block-bounding faults of primary significance to the *Yucca Mountain Site*, these surface values range from 0 to 1.7 meters (0 to 5.6 feet) per event (DIRS 155970-DOE 2002, Table 3-8).

DOE has monitored seismic activity at the Nevada Test Site since 1978. The largest recorded earthquake within 50 kilometers (30 miles) of Yucca Mountain was the Little Skull Mountain earthquake in 1992 (DIRS 169734-BSC 2004, p. 4-34 and Figure 4-19), which had a magnitude of 5.6 (DIRS 169734-BSC 2004, p. 4-38). DOE buildings at the Nevada Test Site were damaged and there was also damage in Beatty, Amargosa Valley, and Mercury, Nevada. DOE would continue to monitor the seismic activity around Yucca Mountain with an array of monitoring stations spread throughout the area.

The bedrock around Mina common segment 6 contains metallic minerals such as gold and silver, and nonmetallic deposits, including fluorspar and silica (DIRS 173841-Shannon & Wilson 2005, pp. 38 to 45). There are also several hot springs around the Beatty Wash area, some of which are used by a hotel (DIRS 173841-Shannon & Wilson 2005, Plate 1).

3.3.1.3.11.3 Soils. Soils along common segment 6 occur on fan piedmonts, skirts, and fan remnants. The soils derived from Tertiary volcanic rocks and Quaternary alluvium are well drained to somewhat excessively drained. Soils on alluvial flats are derived from lake deposits and are well drained. None of the soils along common segment 6 contain prime farmland, blowing soil, or soils with the erodes easily characteristic.

3.3.2 LAND USE AND OWNERSHIP

This section describes the affected environment for land use and ownership along and adjacent to the Mina rail alignment. At the recommendation of the U.S. Bureau of Land Management (BLM; a cooperating agency in the preparation of the this Rail Alignment EIS), DOE organized this section by types of land uses rather than by rail alignment segments to enable the reader to quickly review topics of interest to them. The section provides an overview of land uses on private, American Indian, and public lands. The BLM, DOE, and the Department of Defense manage public land the Mina rail alignment would cross. The uses of public land discussed in detail in this section include grazing (within BLM-designated *grazing allotments*), mineral and energy extraction, and recreation. This section also discusses land access and existing utility rights-of-way.

Section 3.3.2.1 describes the region of influence for land use and ownership; Section 3.3.2.2 describes private land, including relevant land-use plans; Section 3.3.2.3 describes American Indian land; Section 3.3.2.4 describes public lands, BLM *resource management plans*, and project-related land *withdrawals*; and Section 3.3.2.5 describes the general environmental setting and land-use characteristics along the Mina rail alignment.

Other sections of this Rail Alignment EIS describe additional subjects related to land use. Section 3.3.1, Physical Setting, describes farmland and prime farmland; Section 3.3.7, Biological Resources, describes wild horse and burro *herd management areas*; and Section 3.3.11, Utilities, Energy, and Materials addresses utilities. Section 3.4 describes American Indian interests and concerns related to the Proposed Action.

3.3.2.1 Region of Influence

The region of influence for land use and ownership is the nominal width of the rail line construction right-of-way, and includes all private land (including patented mining claims), American Indian lands, and public land that would be fully or partially within the construction right-of-way. The land use and ownership region of influence also includes the locations of proposed railroad construction and operations support facilities outside the nominal width of the construction right-of-way.

Although the railroad operations right-of-way would be smaller than the construction right-of-way, DOE evaluated the construction right-of-way as the basis for identifying potential land-use impacts because:

- It provides a more conservative estimate of the amount of land that would be utilized than the operations right-of-way, providing an upper bound for analysis.
- The construction phase encompasses the most intensive land use in terms of noise, human activity, and disruptions to land access.
- The construction right-of-way footprint would be the basis for the initial right-of-way applications submitted to the BLM for the project.

3.3.2.2 Private Land

Private lands in Mineral, Esmeralda, and Nye Counties are either clustered in towns and along highways, or are widely scattered. Private lands make up a very small portion of these counties. Figure 3-136 provides an overview of privately owned lands near the Mina rail alignment.

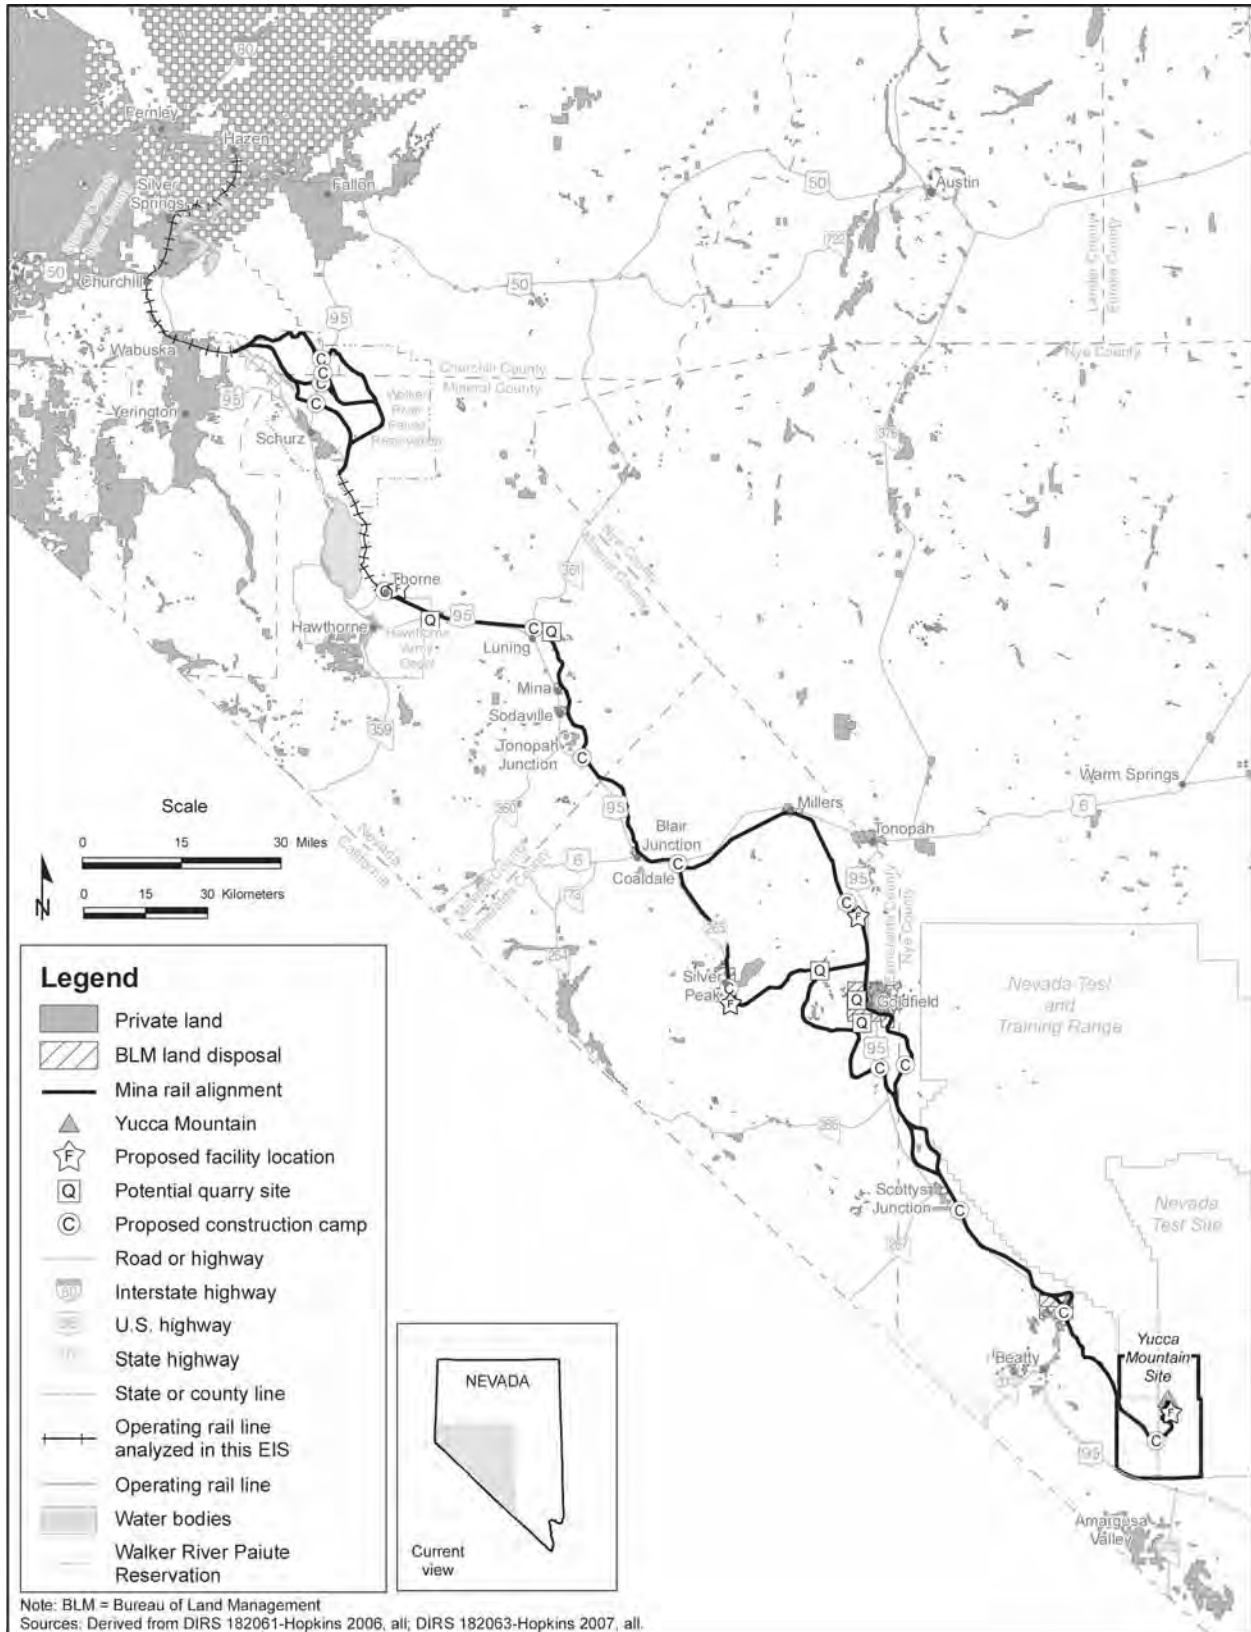


Figure 3-136. Private land along the Mina rail alignment.

3.3.2.2.1 County Land-Use Plans

The Mina rail alignment would cross parts of Churchill, Lyon, Mineral, Esmeralda, and Nye Counties. County plans that could affect land use along the rail alignment include the *Churchill County Master Plan* (DIRS 180482-Churchill County 2005, all), the *Esmeralda County Master Plan* (DIRS 176770-Duval et. al. 1976, all) and *Nye County Comprehensive Plan* (DIRS 147994-McRae 1994, all).

3.3.2.2.1.1 Churchill County. In Churchill County, the northernmost section of the Mina rail alignment would be the existing Union Pacific Railroad Hazen Branchline. A portion of Schurz alternative segment 6 would cross land within Churchill County, although entirely within the Walker River Paiute Reservation. Therefore, there would be no construction activities that could affect land use and ownership within lands under the jurisdiction of Churchill County, and its master plan would not apply to the Mina rail alignment.

3.3.2.2.1.2 Lyon County. A portion of the Union Pacific Railroad Hazen Branchline, all of Department of Defense Branchline South, and 0.6 kilometer (0.4 mile) of the western portions of the Schurz alternative segments lie within Lyon County. Lyon County is in the process of updating its 1990 Comprehensive Master Plan and the process will last through 2008. However, the Mina rail alignment would travel on existing railroad, within the Walker River Paiute Reservation, or on BLM-administered land for its entire length through Lyon County. Because there would be no new railroad construction on land under Lyon County jurisdiction, the Lyon County master plan would not apply to the Mina rail alignment.

3.3.2.2.1.3 Mineral County. Mineral County covers more than 9,900 square kilometers (3,800 square miles), of which 81.3 percent is controlled and managed by the federal government. The Walker River Paiute Reservation is at the very northern end of Mineral County. In the Hawthorne area, the Department of Defense has large land holdings used for storage of conventional weapons. In Hawthorne, land uses are mixed, with primarily commercial and residential developments on the highway corridor. In Mina and Luning, the predominant land uses are small tourist commercial and residential (DIRS 180702-Mineral County Nuclear Projects Office 2005, p. 30). While there are zoning designations within Hawthorne, Walker Lake, Mina, and Luning (DIRS 180702-Mineral County Nuclear Projects Office 2005, pp. 26 to 29), there are no county master plans or town land-use plans in Mineral County that would apply to the Mina rail alignment.

3.3.2.2.1.4 Esmeralda County. The BLM manages more than 92 percent of the approximately 9,000 square kilometers (3,600 square miles) in Esmeralda County. Two percent of the land in Esmeralda County is National Forest land, and a small portion of the county falls within Death Valley National Park. Less than 5 percent of the land in the county is privately owned. The two most heavily populated areas in Esmeralda County at the issuance of the *Esmeralda County Master Plan* were Goldfield and Silver Peak (DIRS 176770-Duval et. al. 1976, p. 25). Goldfield is the county seat for Esmeralda County; there are no incorporated cities in the county. Under the *Esmeralda County Master Plan*, land use has been divided into three basic categories: multiple use, agriculture, and urban expansion. The multiple-use category is suggested for those areas where federal or state ownership is expected to remain. Grazing, mining and prospecting, and recreation activities are recommended under the multiple-use concept. The plan also recommends that residential and commercial development be concentrated in the existing communities of Goldfield and Silver Peak, where public facilities can be most economically concentrated (DIRS 176770-Duval et. al. 1976, p. 73).

3.3.2.2.1.5 Nye County. Nye County has an area of approximately 47,000 square kilometers (18,000 square miles) and is the largest county in Nevada. The federal government manages almost 93 percent of the county's land. Federally owned or managed lands in Nye County include the Nevada Test and

Training Range, the Nevada Test Site, BLM-administered public land, a portion of Death Valley National Park, and portions of the Humboldt-Toiyabe National Forest. Private lands in Nye County are used for residential, commercial, and industrial purposes largely, but not exclusively, within the boundaries of unincorporated towns, and agricultural and mining uses both inside and outside these towns. The *Nye County Comprehensive Plan* guides growth and development, but is not equivalent to a zoning ordinance, nor does it regulate the use of land. However, the Nye County Board of Commissioners may choose to enact a zoning ordinance or other growth-management mechanisms to accomplish certain objectives of the plan. The plan also serves as a framework for local land-use plans and other growth-management mechanisms (DIRS 147994-McRae 1994, all).

3.3.2.2 Local Land-Use Planning

The initial design phase for the Mina rail alignment emphasized avoiding private land, which is generally concentrated near towns. While distinct town boundaries are not always available, DOE believes the rail alignment would not fall within Hawthorne, Luning, Mina, Sodaville, Tonopah Junction, Coaldale, Blair Junction, Millers, Silver Peak, Klondike, Ralston, Lida Junction, Scottys Junction, Springdale, or Beatty, which would be the towns or places closest to the rail alignment. A portion of Montezuma alternative segments 2 and 3 would pass through private lands to the south of Millers, but this very small town does not have zoning or land-use plans.

Montezuma alternative segment 2 would also pass through Goldfield. Goldfield, an unincorporated town, is the county seat for Esmeralda County. The Goldfield census county division encompasses an area of more than 3,900 square kilometers (1,500 square miles) (DIRS 176855-U.S. Census Bureau 2003, p. 5). During its most prominent mining period at the beginning of the 20th Century, a number of passenger and freight railroad lines served Goldfield. The Goldfield Historic District, listed on the *National Register of Historic Places* in 1982 and entered onto the *Nevada State Register of Historic Places* on December 7, 2005, is in Goldfield and roughly bounded by Fifth Street, Miner Avenue, Spring Street, Elliot Street, and Crystal Avenue (DIRS 176854-National Register of Historic Places 1982, all). Although there is no zoning plan for Goldfield, the historic nature of its buildings and features are generally protected by the designation of its historic district. The Goldfield Historic District would be about 0.7 kilometer (0.4 mile) northwest of the Montezuma alternative segment 2 construction right-of-way.

3.3.2.2.3 Private Parcels

Table 3-81 lists the number of privately owned parcels of land that are within the construction right-of-way of each Mina rail alignment segment. Figures 3-137 through 3-143 show privately owned land along the Mina rail alignment segments.

Table 3-81. Private land that would be within or intersect the Mina rail alignment construction right-of-way.

Rail line segment ^a	Number of parcels	Area of parcels (square kilometers) ^b
Mina common segment 1	1	0.21
Montezuma alternative segment 2	34	0.24
Montezuma alternative segment 3	1	0.01
Oasis Valley alternative segment 1	1	0.04

a. No other segments would intersect private land.
 b. To convert square kilometers to acres, multiply by 247.10.

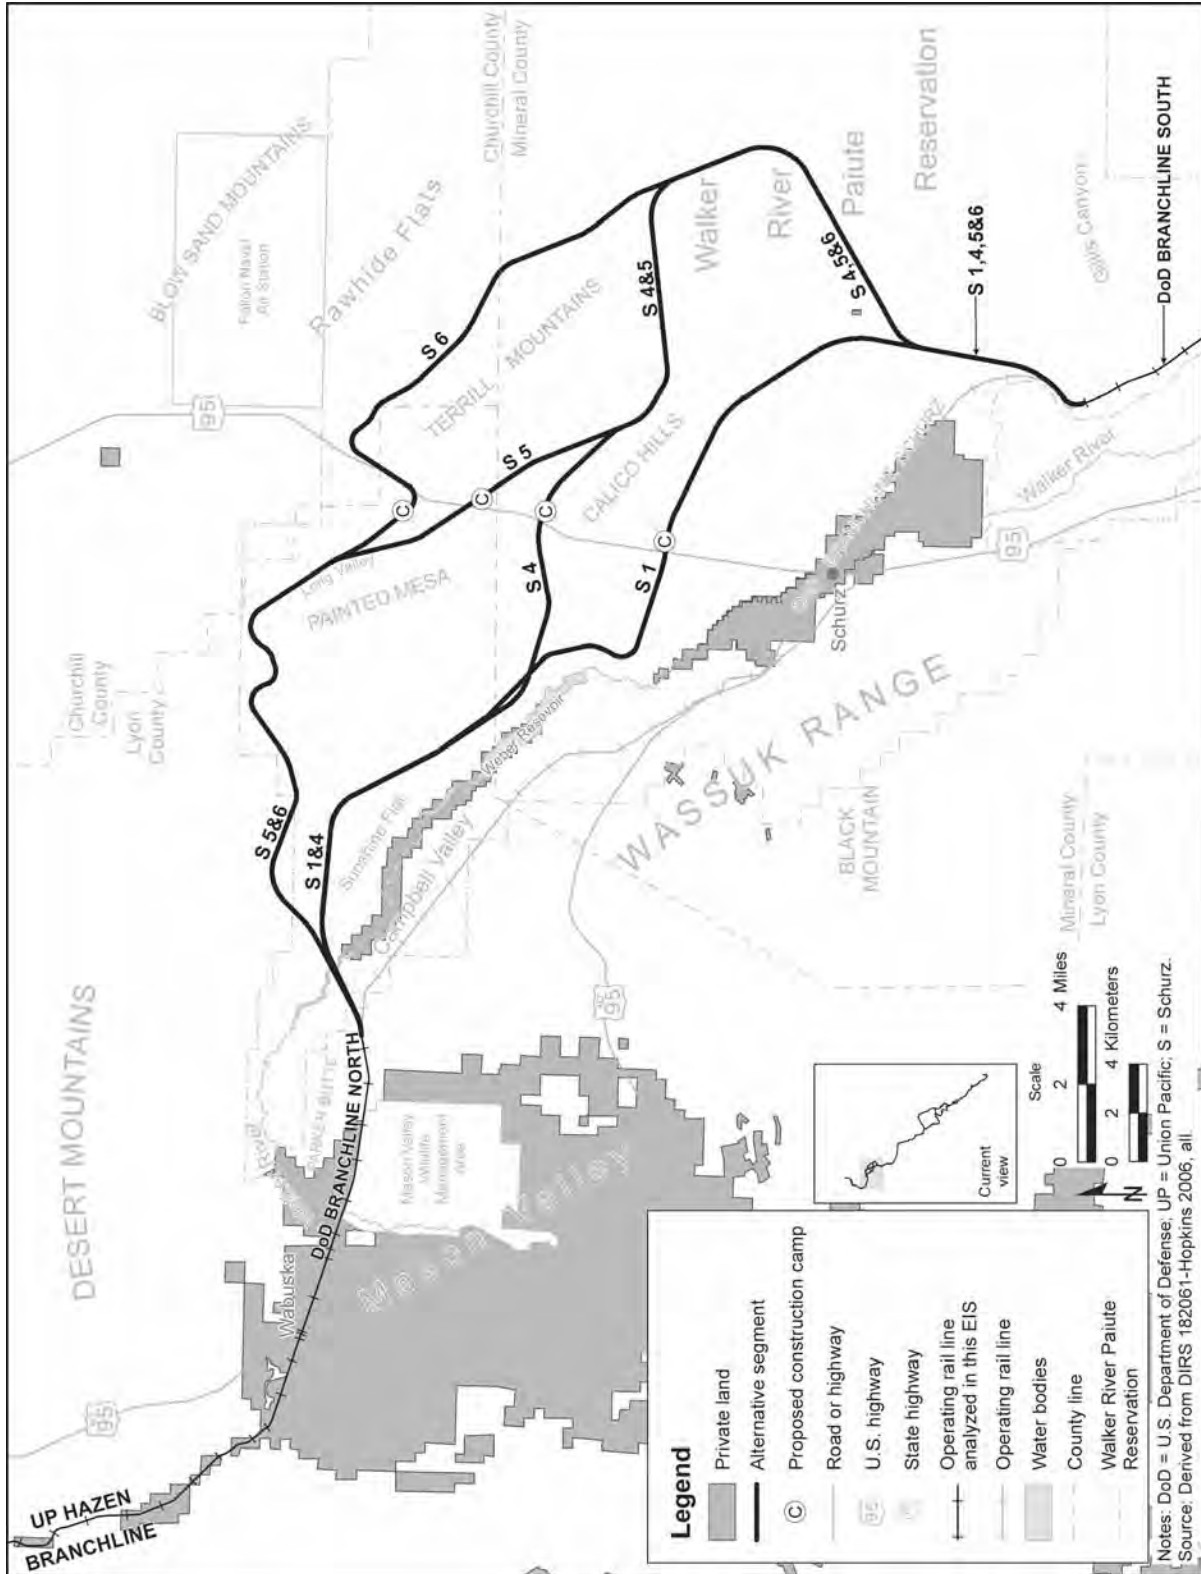


Figure 3-137. Private land within map area 1.

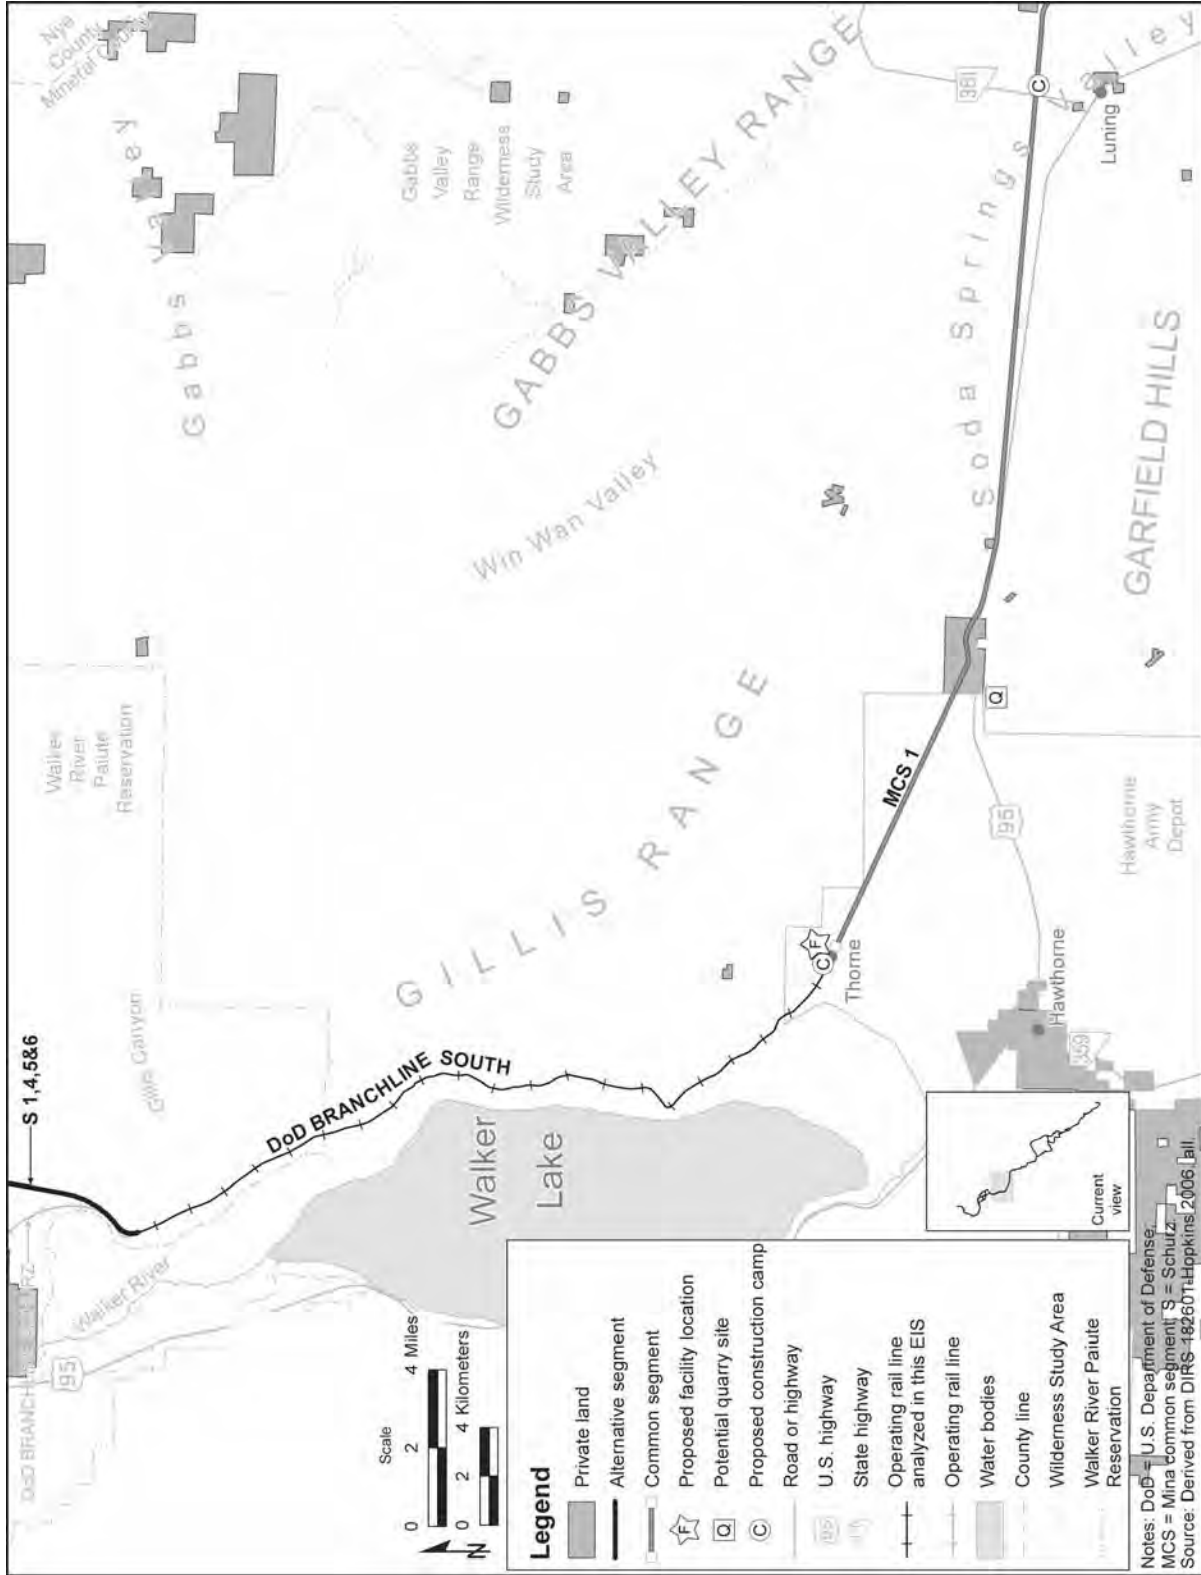


Figure 3-138. Private land within map area 2.

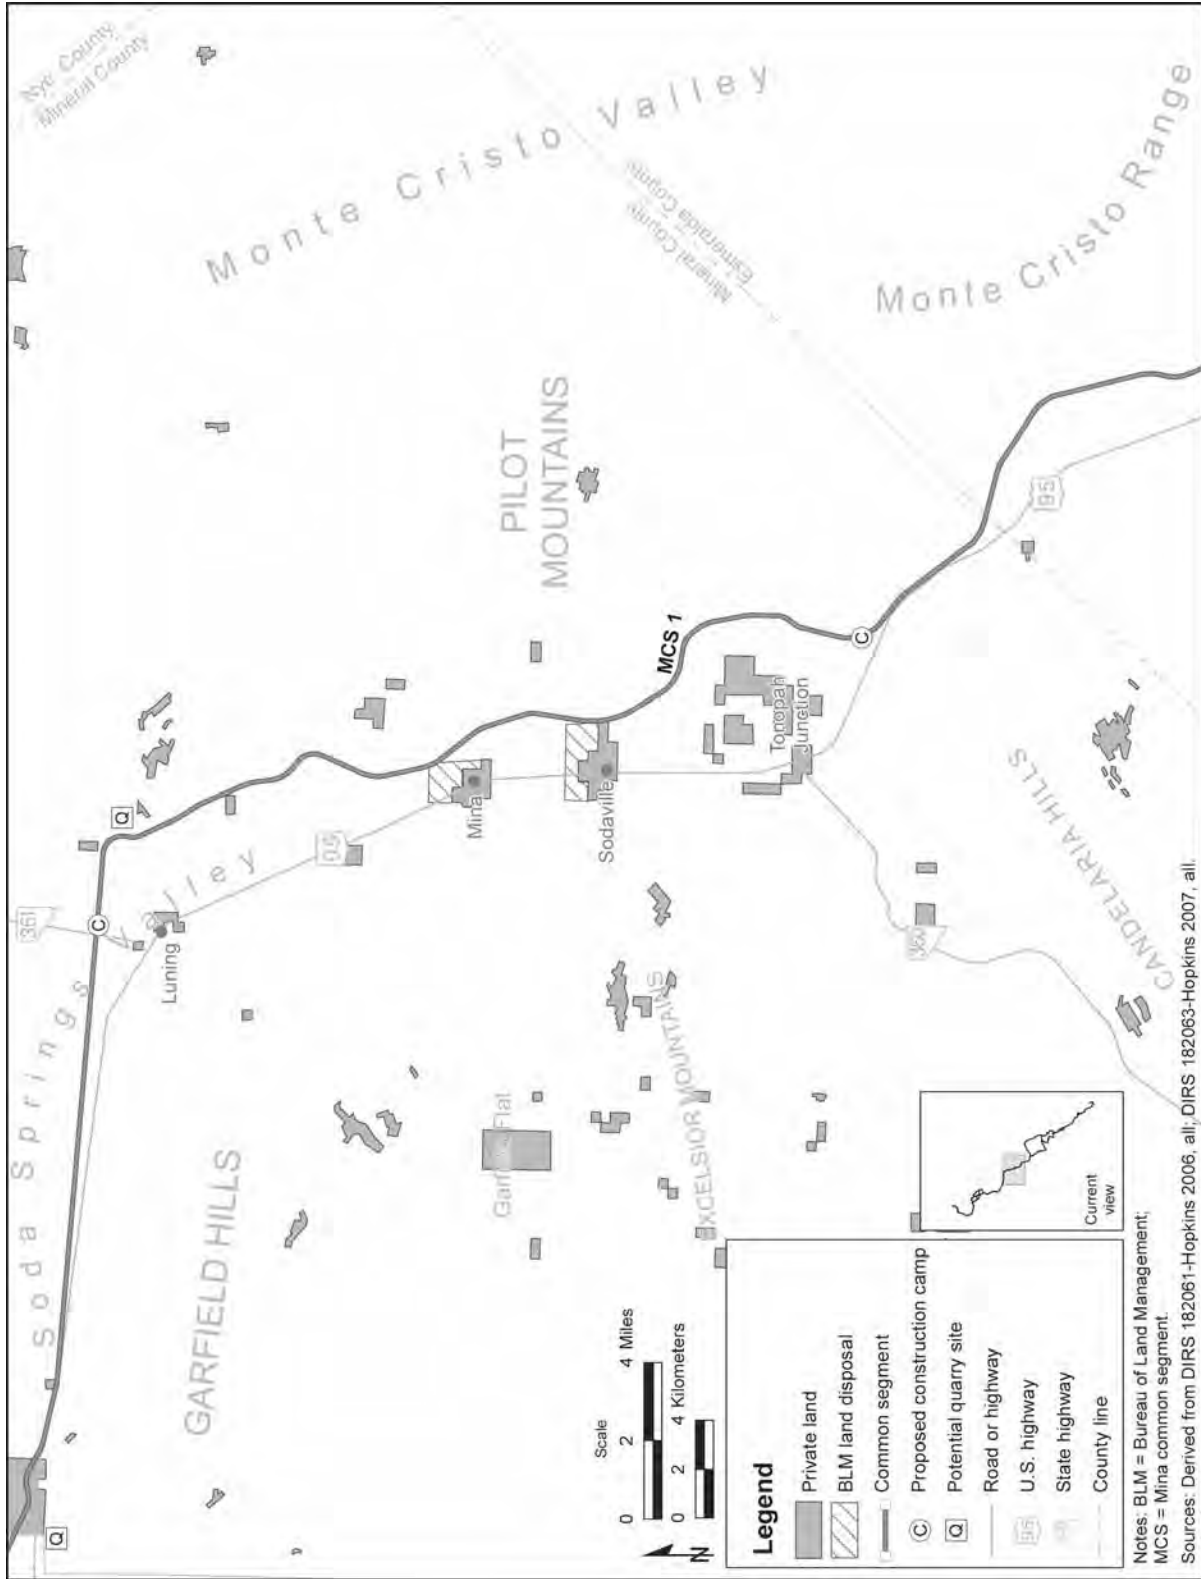


Figure 3-139. Private land within map area 3.

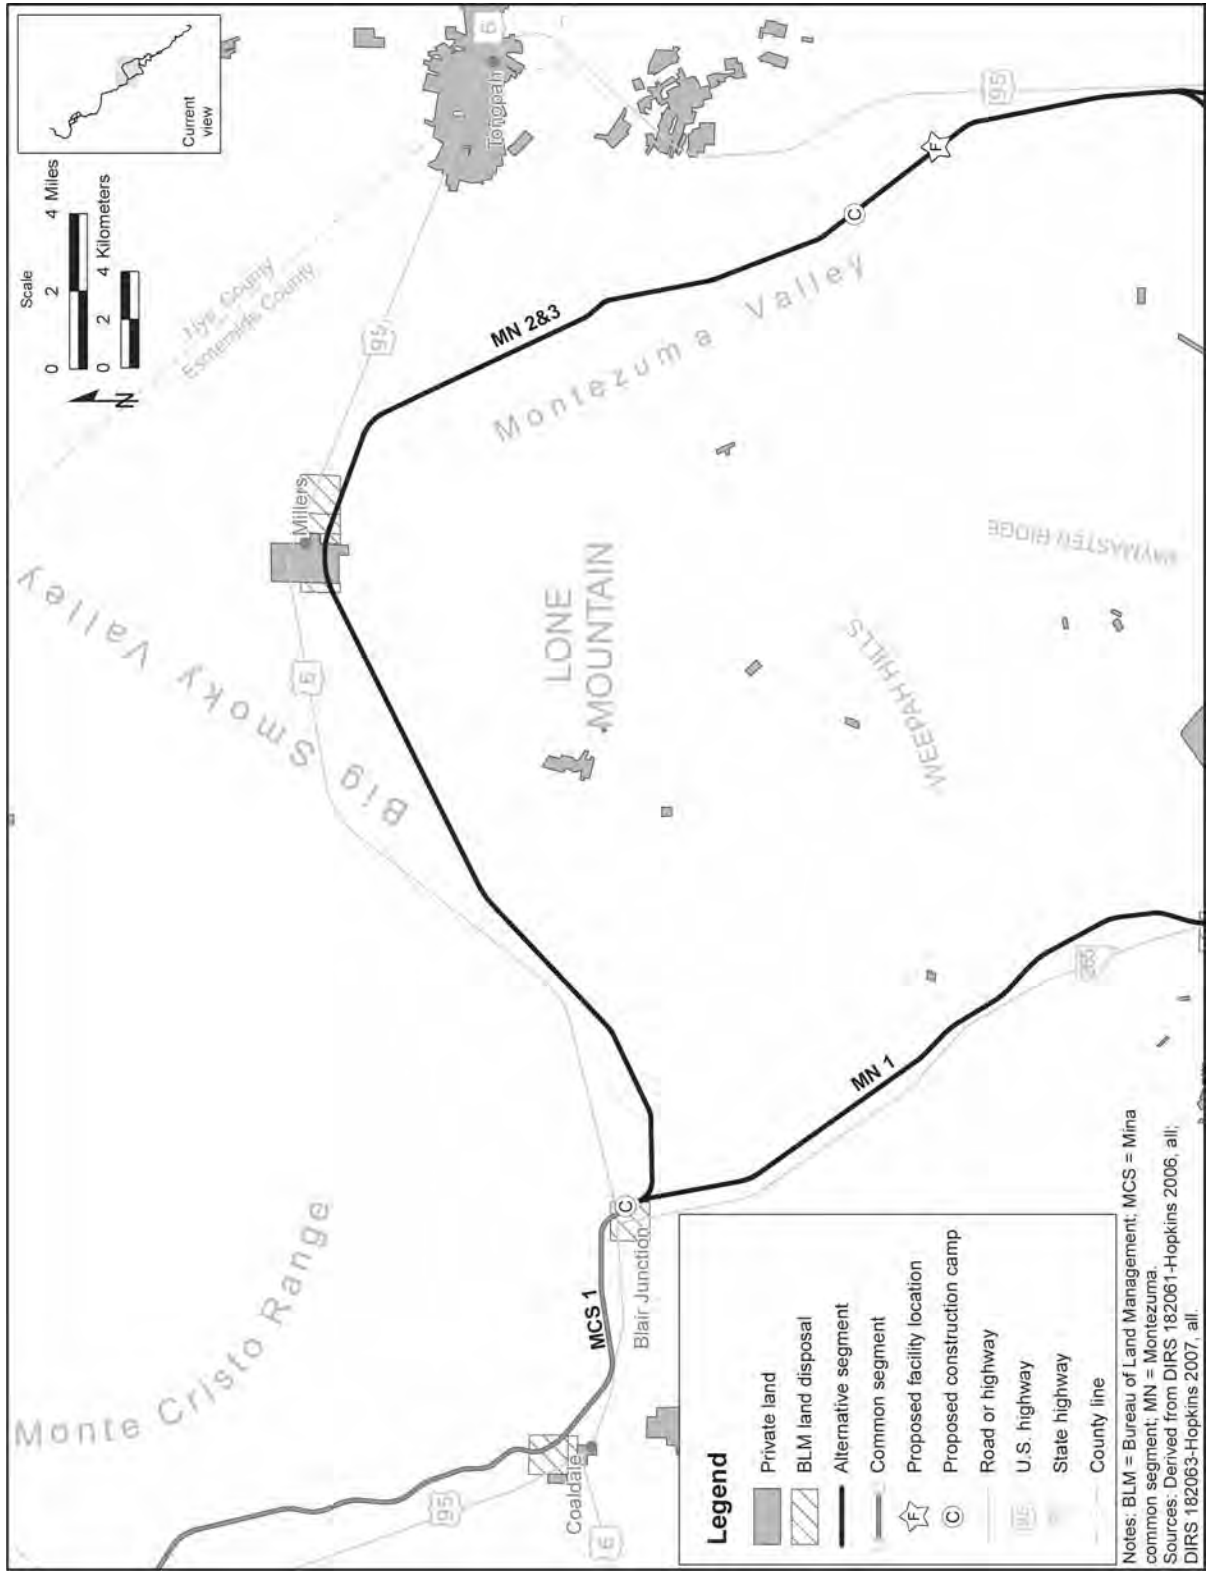


Figure 3-140. Private land within map area 4.

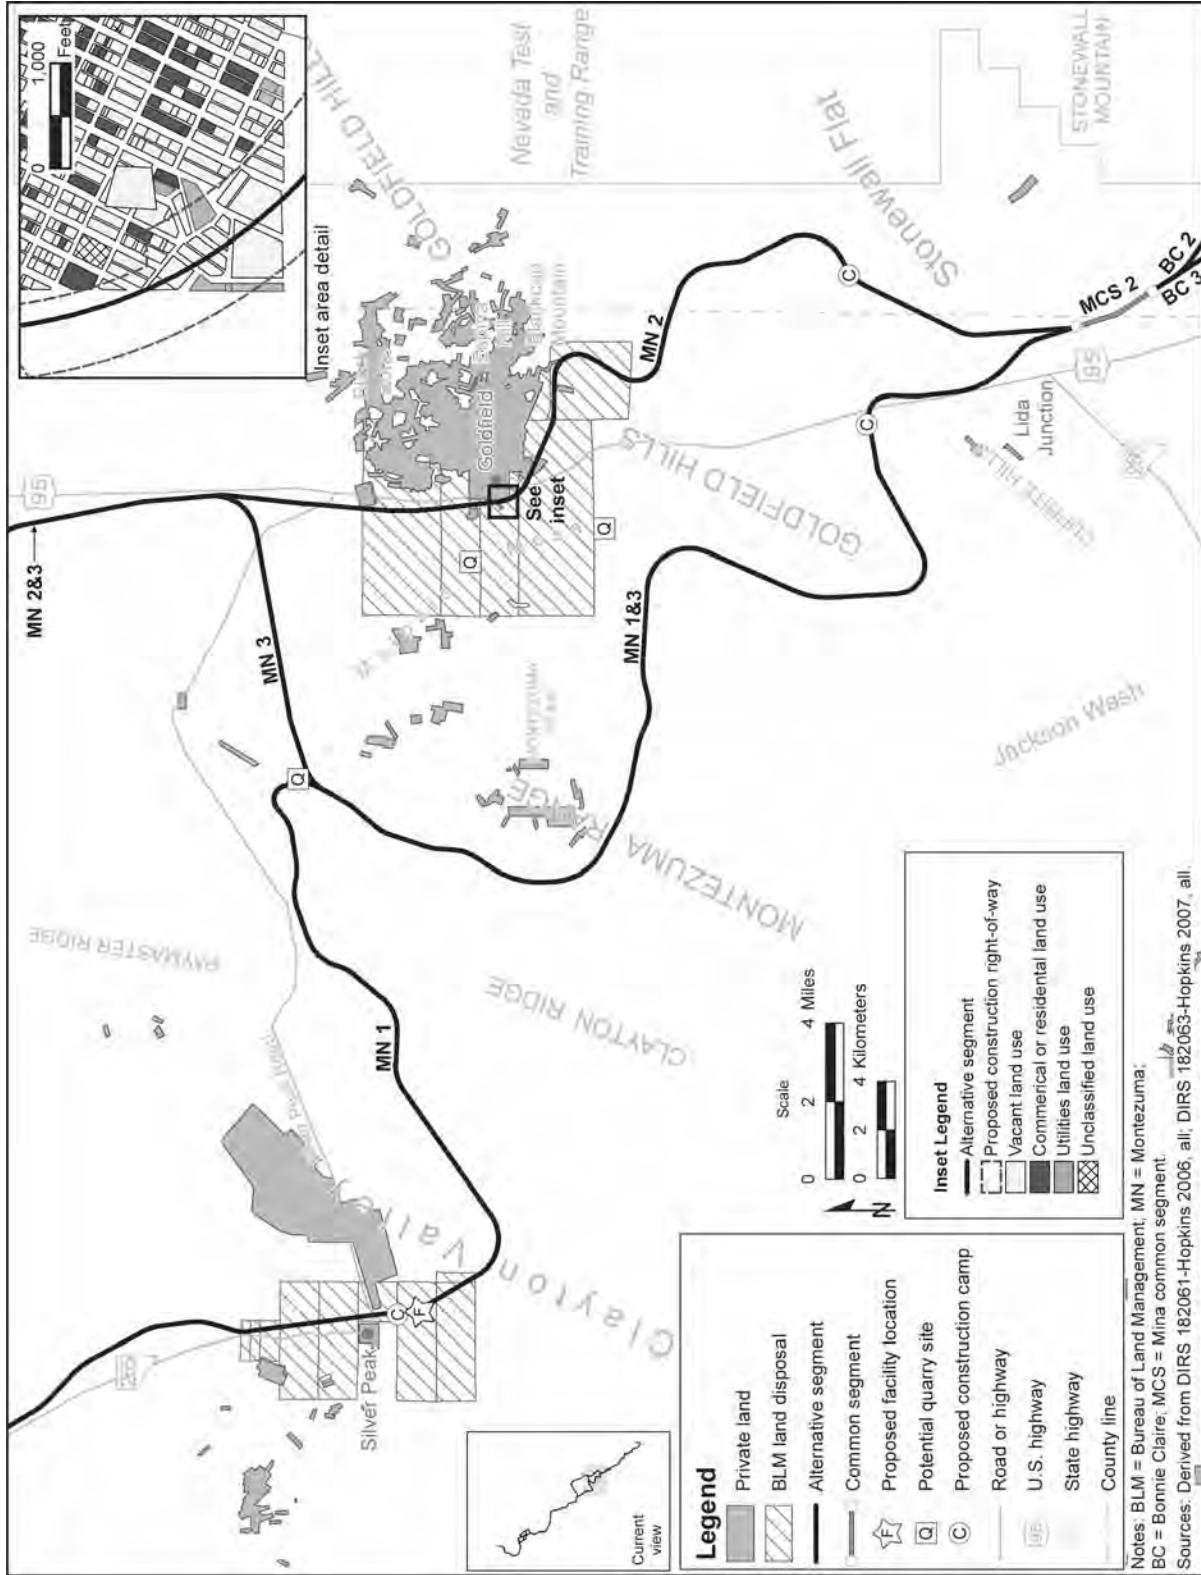


Figure 3-141. Private land within map area 5.

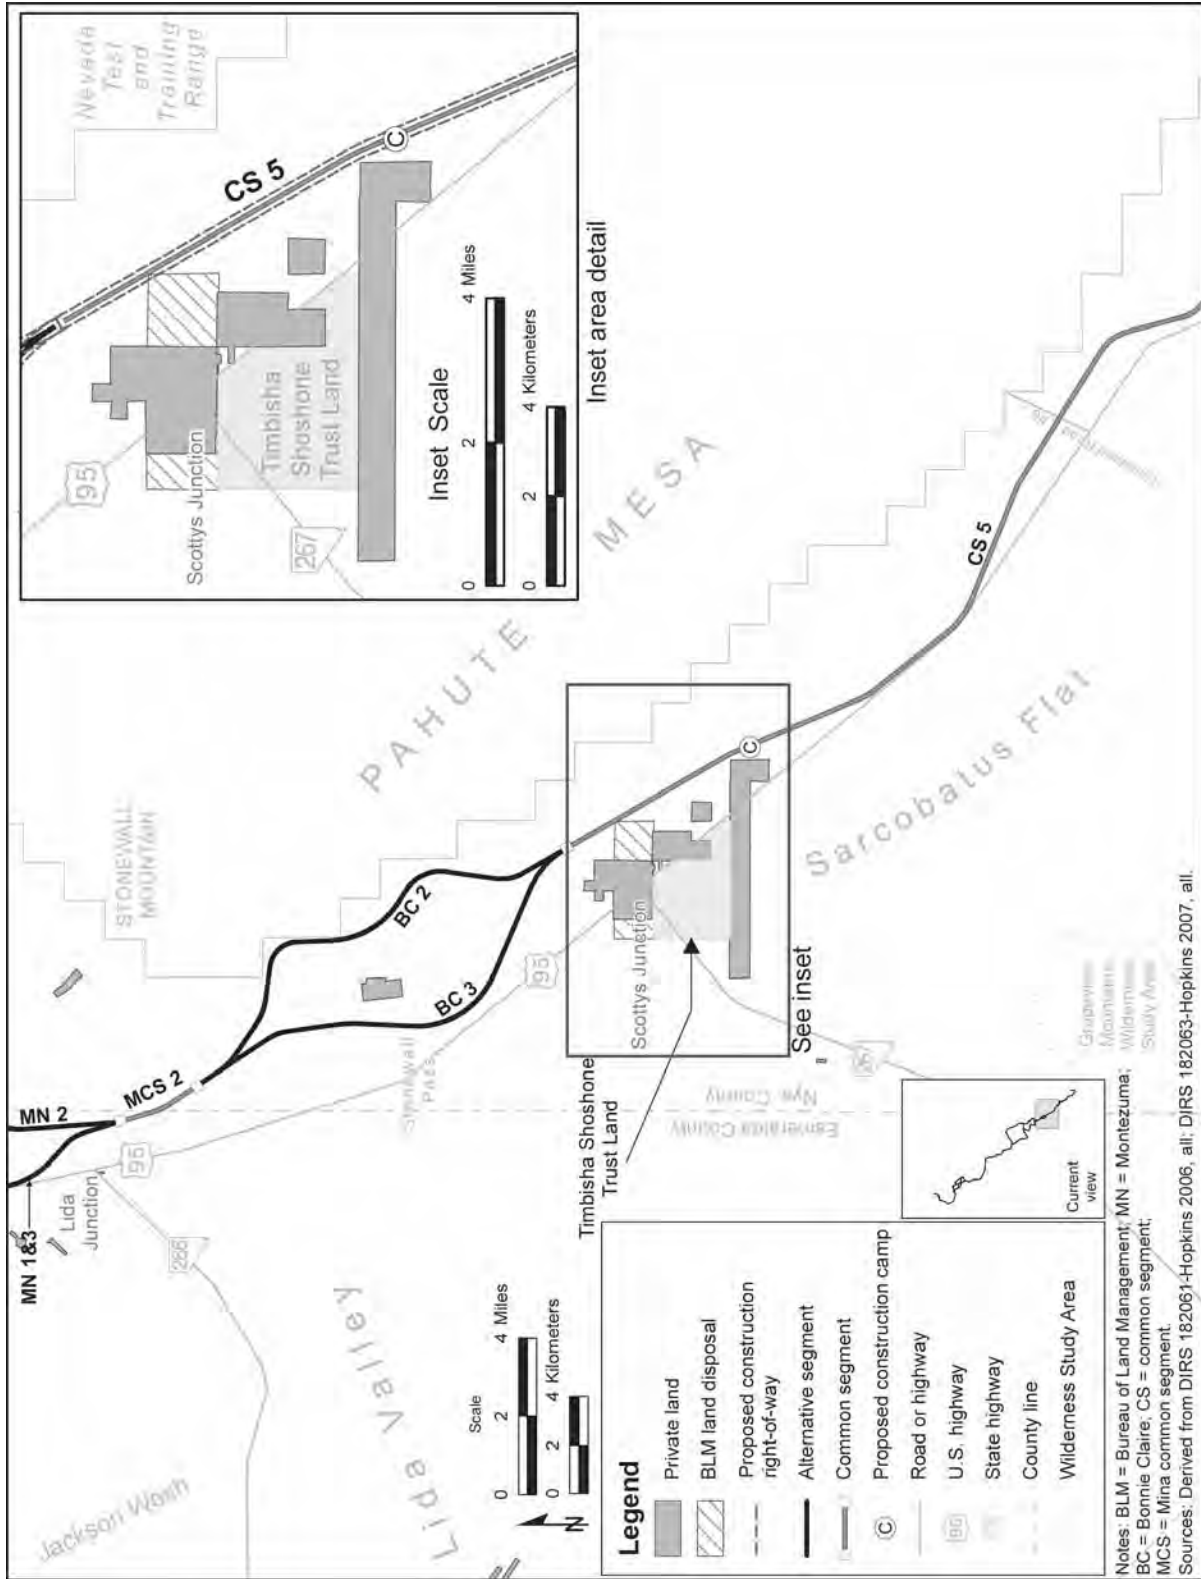


Figure 3-142. Private land within map area 6.

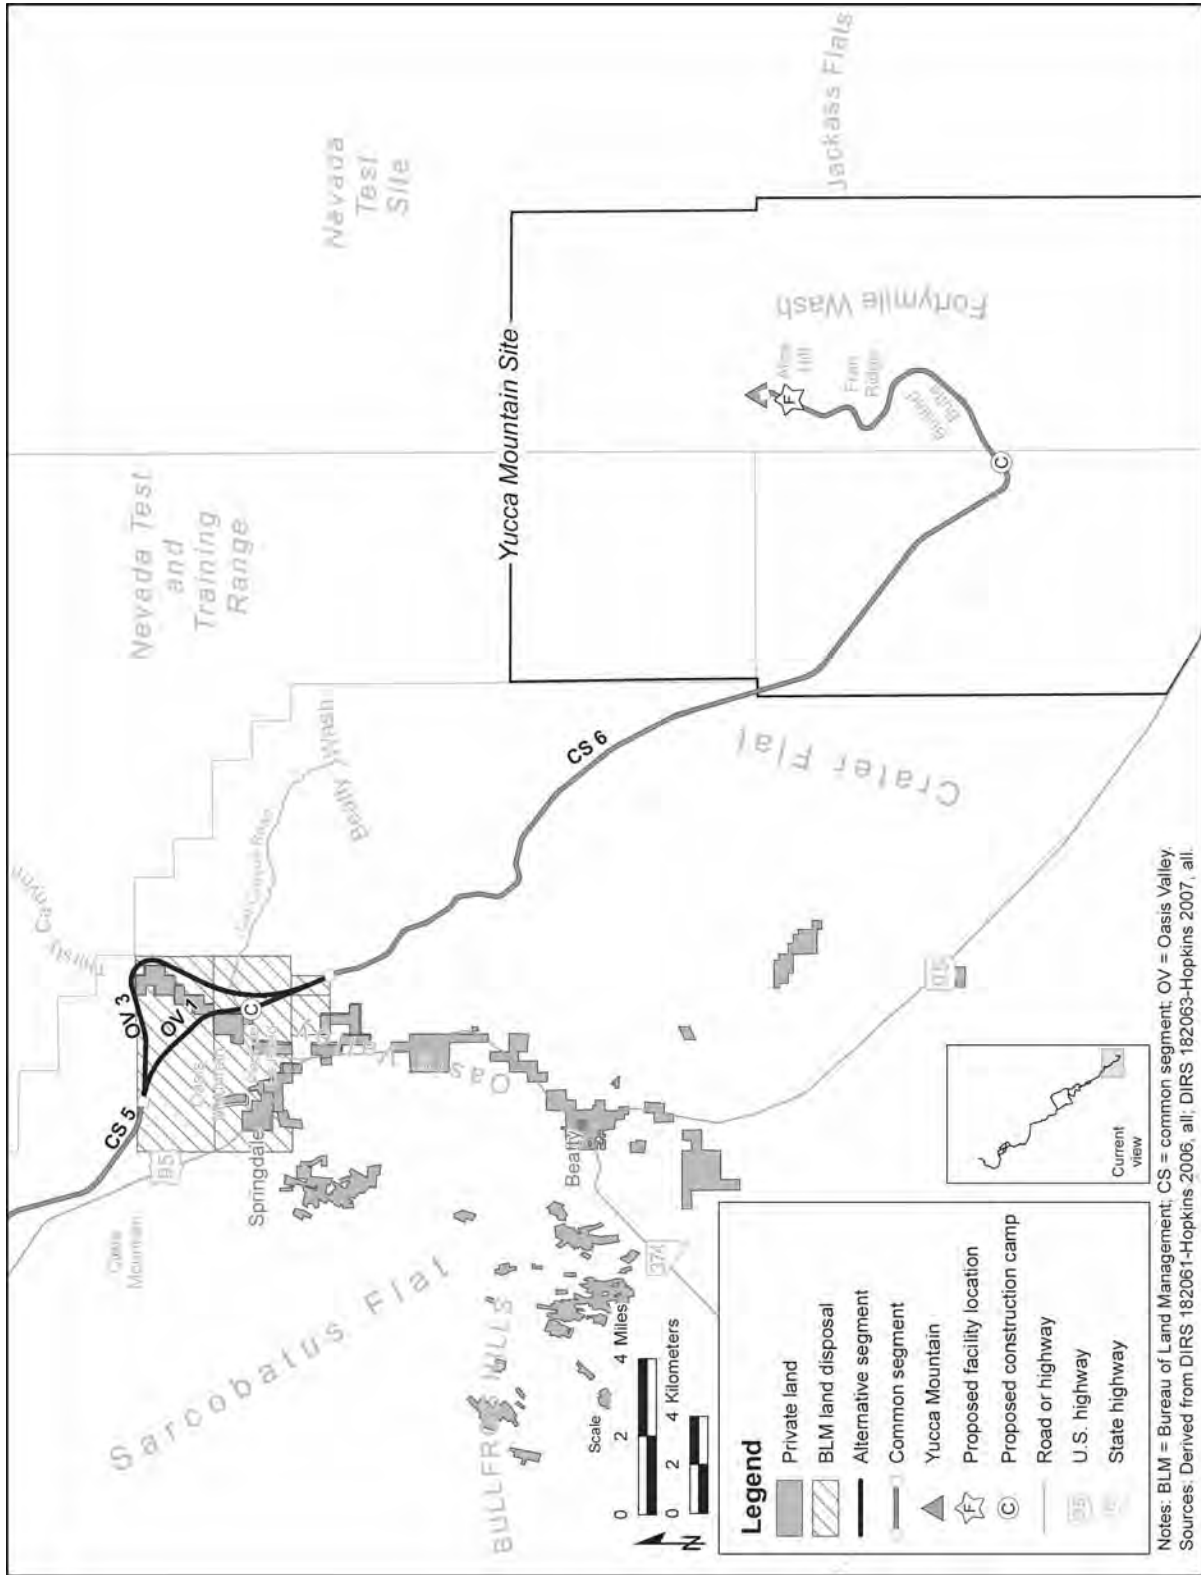


Figure 3-143. Private land within map area 7.

3.3.2.3 American Indian Land

3.3.2.3.1 Walker River Paiute Reservation

The Walker River Paiute Reservation is 68 kilometers (42 miles) south of Fallon and 37 kilometers (23 miles) east of Yerington (DIRS 180447-Emm, Lewis, and Breazeale n.d., p. 1). The Reservation consists of 1,308 square kilometers (323,200 acres) of land across Churchill, Lyon, and Mineral Counties (DIRS 182302-Miller Ecological Consultants 2005, p. 3-50).

The Reservation was established on November 29, 1859, by letter from the Indian Affairs Commissioner to the General Land Office requesting that land from sale or settlement for Indian use in the northeastern part of the Walker River Valley, including the Walker River Reservation, be established. The constitution of the Walker River Paiute Tribe was finalized on March 26, 1937 (DIRS 180447-Emm, Lewis, and Breazeale n.d., p. 1).

At present, 8.5 square kilometers (2,100 acres) of Reservation land is used for agriculture (primarily alfalfa and grass hay) (DIRS 182302-Miller Ecological Consultants 2005, p. 3-50). More than 50 percent of the Reservation is rangeland. Small ranching businesses manage livestock, primarily cattle (DIRS 180447-Emm, Lewis, and Breazeale n.d., p. 2). The town of Schurz, the only town on the Reservation, consists of private property with residential and business uses. The Department of Defense operates a branchline across the Reservation, through Schurz. The Weber Dam and Reservoir are also on Reservation land.

The Walker River Paiute Tribe divides land into 0.08-kilometer (20-acre) allotments (DIRS 180447-Emm, Lewis, and Breazeale n.d., p. 1). Many of the allotments have multiple owners through inheritance (182302-Miller Ecological Consultants 2005, p. 3-49). There is no adopted land-use plan for the Reservation, although the Tribal Council in effect controls land-use decisions (DIRS 182302-Miller Ecological Consultants 2005, p. 3-49).

Table 3-82 summarizes the distances and areas of existing and proposed rail line segments within the Walker River Paiute Reservation.

Table 3-82. Distances of existing and proposed rail line segments through the Walker River Paiute Reservation.

Segment	Approximate distance through the Reservation (kilometers) ^a	Approximate area of Reservation land that would be within the rail line construction right-of-way (square kilometers) ^b
Existing Department of Defense Branchline through Schurz (existing rail to be removed as part of the Proposed Action)	44	Not applicable
Schurz alternative segment 1	51	3.4
Schurz alternative segment 4	65	4.7
Schurz alternative segment 5	66	5.0
Schurz alternative segment 6	64	5.3

a. To convert kilometers to miles, multiply by 0.62137.

b. To convert square kilometers to acres, multiply by 247.10.

3.3.2.3.2 Timbisha Shoshone Trust Land

The Timbisha Homeland Act transferred into trust 31.4 square kilometers (7,754 acres) of land for the Timbisha Shoshone Tribe. The land is not contiguous; it is made up of five separate parcels in California and Nevada. The parcel near Scottys Junction covers approximately 11.3 square kilometers (2,800 acres).

During the public scoping period for this Rail Alignment EIS, the Timbisha Shoshone Tribe requested that DOE alter the rail alignment to avoid their land (DIRS 174558-Sweeney 2004, all). The segment nearest the Timbisha Shoshone Trust Land near Scottys Junction, common segment 5, would be more than 3 kilometers (2 miles) east.

3.3.2.4 Public Land

Several agencies manage public lands near or encompassing the Mina rail alignment, including the BLM, DOE, and the Department of Defense. The Walker River Paiute Tribal Council manages Walker River Paiute Reservation lands.

Based on the construction right-of-way of the longest possible Mina rail alignment, the BLM manages 113.3 square kilometers (28,000 acres) of the land the rail line would cross, the Department of Defense manages 4.6 square kilometers (1,145 acres), the Walker River Paiute Tribe manages 5.3 square kilometers (1,315 acres), DOE manages 4.1 square kilometers (1,020 acres), and up to 0.45 square kilometer (71 acres) is privately owned.

The Mina rail alignment would travel through the Walker River Paiute Reservation. The Reservation does not have a land-use plan. The Mina rail alignment would also travel through the Hawthorne Army Depot. The Depot does not have a master plan but its land use is governed in part by its draft Integrated Natural Resource Management Plan (DIRS 181899-Hawthorne Army Depot, all).

3.3.2.4.1 BLM-Administered Land

Approximately 89 percent of the lands along the Mina rail alignment are BLM-administered public lands. Therefore, the proposed railroad project would in large part be subject to BLM land use plans. The BLM manages public lands under the multiple-use concept, which balances the present and future needs of the American people. The BLM implements this concept through resource management plans, which are long-range, comprehensive land-use plans intended to provide for multiple uses and identify planning objectives and policies for designated areas. Resource management plan objectives are implemented through activity plans, such as allotment management plans and wildlife *habitat* management plans. BLM resource management plans that apply to the Mina rail alignment are included in the following:

- *Carson City Field Office Consolidated Resource Management Plan* (Carson City Consolidated Resource Management Plan (DIRS 179560-BLM 2001, all)
- *Tonopah Resource Management Plan and Record of Decision* (Tonopah Resource Management Plan; DIRS 173224-BLM 1997, all)
- *Record of Decision for the Approved Las Vegas Resource Management Plan and Final Environmental Impact Statement* (Las Vegas Resource Management Plan; DIRS 176043-BLM 1998, all)

The northern segments of the Mina rail alignment would pass through public lands covered by the Carson City Consolidated Resource Management Plan. After the Mina rail alignment would cross from Mineral County into Esmeralda County, the land would be covered by the Tonopah Resource Management Plan. A portion of common segment 6 would pass through lands covered by the Las Vegas Resource Management Plan. Table 3-83 lists the distances each Mina rail alignment segment would pass through lands administered by the various BLM districts.

Table 3-83. Mina rail alignment crossing distances within each BLM resource management plan area.

Rail line segment	Carson City District/ Resource Management Plan area (kilometers) ^{a,b}	Battle Mountain District/Tonopah Resource Management Plan area (kilometers)	Las Vegas District/Resource Management Plan area (kilometers)
Union Pacific Railroad Hazen Branchline and Department of Defense Branchline North ^c	69	0	0
Schurz alternative segment 1	51	0	0
Schurz alternative segment 4	65	0	0
Schurz alternative segment 5	71	0	0
Schurz alternative segment 6	72	0	0
Department of Defense Branchline South	35	0	0
Mina common segment 1	85	35	0
Montezuma alternative segment 1	0	120	0
Montezuma alternative segment 2	0	120	0
Montezuma alternative segment 3	0	140	0
Mina common segment 2	0	3	0
Bonnie Claire alternative segment 2	0	20	0
Bonnie Claire alternative segment 3	0	20	0
Common segment 5	0	40	0
Oasis Valley alternative segment 1	0	10	0
Oasis Valley alternative segment 3	0	14	0
Common segment 6	0	38	13
Total rail alignment distance by BLM district (shortest to longest alignment)	240 to 261	266 to 290	13

a. To convert kilometers to miles, multiply by 0.62137.

b. Individual segment lengths are rounded to two significant figures.

c. Within boundary but not under jurisdiction.

To construct and operate the proposed railroad along the Mina rail alignment, DOE would apply for a BLM *right-of-way grant*. Section 503 of the Federal Land Policy and Management Act (43 United States Code [U.S.C.] 1761) provides for designation of right-of-way corridors and encourages the utilization of common rights-of-way to minimize environmental impacts and the proliferation of separate rights-of-way. BLM policy is to encourage prospective applicants to locate their proposals within existing corridors. Resource management plans describe these corridors and right-of-way avoidance areas – areas for which the BLM would avoid granting new rights-of-way unless there are no other options. *Areas of Critical Environmental Concern* are generally considered right-of-way avoidance areas.

Resource management plans also designate areas of potential land disposal within their management areas. Therefore, BLM in consultation with DOE must assess whether a railroad along the Mina rail alignment would conflict with or adversely affect land disposal plans. Section 203(a) of the Federal Land Policy and Management Act allows for public land to be sold (disposed of) if it meets one of the following criteria:

Areas of Critical Environmental Concern are places within the public lands where special management attention is required to protect and prevent irreparable damage to important historic, cultural, or scenic values, fish and wildlife resources, and other natural systems, or processes or to protect life and safety from natural hazards (DIRS 181386-BLM 2001, p. 2).

- The land is difficult or uneconomic to manage as a part of the public lands.
- The land is not suitable for management by another federal department or agency.
- The land was acquired for a specific purpose and it is no longer required for that, or any other, federal purpose.
- Disposal of the land will serve important public objectives that can be achieved prudently or feasibly only if the land is removed from public ownership and these objectives outweigh other public objectives or values that will be served by maintaining the land in federal ownership.

Sections 3.3.2.4.1.1 through 3.3.2.4.1.3 describe the planning areas and objectives of the applicable Resource Management Plans in relation to lands and realty, corridors, and access and recreation.

3.3.2.4.1.1 Carson City Consolidated Resource Management Plan. The BLM Carson City Field Office administers more than 21,000 square kilometers (5.28 million acres) of federal public land in 11 counties in western Nevada and eastern California. Relevant management objectives related to land tenure adjustments, corridors, and access are listed below (DIRS 179560-BLM 2001, all).

- Lands and realty
 - Designate for potential future disposal approximately 750 square kilometers (180,000 acres) of BLM-administered public lands including lands that are difficult and uneconomic to manage (such as scattered parcels south of Hawthorne and in Smith and Mason Valleys, and checkerboard lands near Fernley, Silver Springs, and the Carson Sink [a large playa in northwestern Nevada, formerly the terminus of the Carson River]); land that would support community expansion (such as land west of Yerington; land surrounding Luning, Mina, Sodaville, Fallon, Gabbs, Reno, and Verdi; lands east of Montgomery Pass, near Honey Lake Valley and Dixie Valley); lands with possible agricultural potential (such as Smith Valley, Mason Valley, Honey Lake Valley, and Edwards Creek); and lands along the East Walker River identified for exchange to benefit BLM programs (DIRS 179560-BLM 2001, p. LND-3). The Mina common segment 1 construction right-of-way would overlap the eastern edge of disposal areas near Mina and Sodaville.
 - Transfer of land from federal ownership is subject to the following provision: mineral rights will be reserved to the United States unless there are no known mineral values in the land or the proposed non-mining development of the land is of more value than the minerals and the reservation of mineral rights interferes with such proposed non-mining development (DIRS 179560-BLM 2001, p. LND-7).
 - Rights-of-way will be reserved where appropriate to provide public access prior to disposal of public lands (DIRS 179560-BLM 2001, p. LND-7).
 - When public lands are disposed of or devoted to a public purpose that precludes livestock grazing, the permittee and lessee will be given 2 years prior notification, except in the cases of emergency (for example, military defense requirements in time of war, natural disasters, and

national emergency needs) before their grazing permit and grazing lease and grazing preference may be cancelled in whole (DIRS 179560-BLM 2001, pp. LND-7 and 8).

- Livestock permits would be adjusted, if necessary, to reflect decreases in public land forage available for livestock grazing use within an allotment as a result of land tenure adjustments (DIRS 179560-BLM 2001, p. LND-8).
- Applicants for major rights-of-way shall submit a plan of development prior to issuance of a land-use authorization that addresses specific construction, operation, maintenance, or termination features that will satisfactorily mitigate the impacts (DIRS 179560-BLM 2001, p. LND-8).

- Corridors

- Provide for an east-west and north-south network of right-of-way corridors in the Field Office area of jurisdiction (DIRS 179560-BLM 2001, p. ROW-1).
- Designate 1,104 kilometers (686 miles) of rights-of-way, which include existing transmission lines, and identify 351 kilometers (218 miles) of planning corridors. All corridors are 3 kilometers (2 miles) wide and private lands are not included in these corridors (DIRS 179560-BLM 2001, p. ROW-1).
- Within the Walker Resource Area, designate a corridor (C-F) following the existing major powerline from the Fort Churchill Power Plant to southern Nevada. Portions of this route also contain U.S. Highway 95, a railroad, telephone, and other power lines (DIRS 179560-BLM 2001, p. ROW-2).
- Future right-of-way corridors will be evaluated on a case-by-case basis, but should be as consistent as possible with the Western Regional Corridor Study (DIRS 179560-BLM 2001, p. ROW-3).
- Existing roads and trails will be used whenever possible during construction (DIRS 179560-BLM 2001, p. ROW-4).

- Access and recreation

- All public lands under Carson City Field Office jurisdiction are designated open to off-highway vehicle use unless they are specifically restricted or closed. Off-highway vehicle use will be eliminated through or in the immediate vicinity of any surface-water source, such as a spring or seep; in any *riparian* area associated with meadows, marshes, springs, seeps, ponds, lakes, reservoirs or streams; in any channel bank or streambed of a *perennial stream*; or in a threatened or endangered plant location (DIRS 179560-BLM 2001, p. REC-7).
- Off-highway vehicle access is restricted to designated trails and roads on the west side of Walker Lake (DIRS 179560-BLM 2001, p. REC-3).
- Special Recreation Management Area designation will be maintained for Walker Lake (DIRS 179560-BLM 2001, p. REC-5).
- The following plans will be followed for recreation activities and planning: Walker Lake Recreation Management Plan (December 1979); and Recreation Project Plan for Walker Lake (April 1992) (DIRS 179560-BLM 2001, p. REC-8).

- Minerals and energy

Public lands in the area of jurisdiction are open to mineral and energy development activity, although within the Walker Planning Area, about 45 square kilometers (11,000 acres) are either segregated against mineral entry under the Classification and Multiple Use Act or withdrawn from mineral entry by the formal withdrawal process (DIRS 179560-BLM 2001, p. MIN-1).

3.3.2.4.1.2 Tonopah Resource Management Plan. Located in south-central Nevada in Nye and Esmeralda Counties, the Tonopah Planning Area encompasses approximately 25,000 square kilometers (6.1 million acres) of public land and approximately 670 square kilometers (165,000 acres) of private land. Significant resources and program emphases include locatable minerals, livestock grazing, wild horses and burros, realty, cultural resources, and wildlife (DIRS 173224-BLM 1997, p. 1). Relevant land-use management objectives related to land and realty, corridors, and access are summarized below.

- Lands and realty
 - Discretionary disposal of approximately 274 square kilometers (68,000 acres) of public land (DIRS 173224-BLM 1997, p. 2). Approximately 91 square kilometers (230,000 acres) have been identified for potential disposal in the vicinity of the Goldfield, about 2 square kilometers (5,800 acres) have been identified for potential disposal near Scottys Junction, and approximately 160 square kilometers (39,000 acres) have been identified for potential disposal near Beatty (acreage based on GIS data) (DIRS 181617-Hopkins 2007, all).

Mina common segment 1 would intersect two parcels designated for disposal at Coaldale Junction and one parcel at Blair Junction. Montezuma alternative segment 1 would intersect nine parcels designated for disposal near Silver Peak. Montezuma alternative segments 2 and 3 would intersect four parcels at Millers, and Montezuma alternative segment 2 would intersect six parcels at Goldfield.

- Corridors
 - Approximately 1,100 kilometers (670 miles) designated for transportation and utility corridors in the planning area (DIRS 173224-BLM 1997, p. 2).
 - Rights-of-way allowed (if compatible with values) on approximately 600 square kilometers (149,000 acres) (DIRS 173224-BLM 1997, p. 2). (There are no right-of-way exclusion areas within the Mina rail alignment region of influence.)
 - Designated right-of-way corridors within the planning area will be 5 kilometers (3 miles) wide except where there are topographic constraints. Grants for rights-of-way are still required for facilities placed within designated corridors. Designation of a corridor does not mean that future rights-of-way are restricted to corridors, nor does it mean that the BLM has committed to approving all right-of-way applications within corridors (DIRS 173224-BLM 1997, p. A-38).
- Access and recreation
 - Vehicles unrestricted on 77 percent of the planning area.
 - Vehicles limited to existing roads and trails in primitive and semi-primitive non-motorized and semi-primitive motorized areas.
 - Designates seven Special Recreation Management Areas (DIRS 173224-BLM 1997, p.2)

3.3.2.4.1.3 Las Vegas Resource Management Plan. The Las Vegas Resource Management Plan provides a comprehensive framework for managing approximately 13,000 square kilometers (3.3 million acres) of public lands in Clark County and the southern portion of Nye County administered by the BLM Las Vegas Field Office. Significant resources and program emphases in the plan include threatened and *endangered species*; land disposal actions; wilderness management; wildlife habitat; special status species; riparian areas; forestry and vegetative products; livestock grazing; wild horses and burros; land acquisition priorities; rights-of-way; cultural resources; hazardous materials management; recreation; utility corridors; and minerals (DIRS 176043-BLM 1998, p. 2). Relevant land-use management objectives related to land and realty, corridors, and access are summarized below (DIRS 176043-BLM 1998, Appendix A, pp. 16-18).

- Land and realty
 - Dispose of approximately 710 square kilometers (175,000 acres) of public lands through sale, exchange or recreation and public-purpose patent to provide for the orderly expansion and development of southern Nevada.
 - All public lands within the planning area, unless otherwise classified, segregated or withdrawn, and with the exception of Areas of Critical Environmental Concern and *Wilderness Study Areas*, are available for land-use leases and permits at the discretion of the BLM.
 - Terminate or modify any unused, outdated, or unnecessary classifications/segregations and withdrawals on public lands to reduce the area of segregation in the plan area.
 - Acquire private lands to enhance the recovery of special status species, protect valuable resources, and facilitate the management of adjacent BLM lands.
- Corridors

All Areas of Critical Environmental Concern and all lands within 0.4 kilometer (0.25 mile) of significant caves, exclusive of any designated corridors, are designated as right-of-way avoidance areas. (There are no Areas of Critical Environmental Concern within the Mina rail alignment region of influence; the closest area is 135 kilometers [84 miles] south of common segment 6.)
- Access and recreation
 - Ensure that a wide range of recreation opportunities are available for recreation users in concert with protecting the natural resources on public lands that attract users.
 - Provide opportunities for off-road vehicle use while protecting wildlife habitat, cultural resources, hydrological and soil resources, non-motorized recreation opportunities, natural and aesthetic values, and other uses of the public land.

The Las Vegas Proposed Resource Management Plan/Final Environmental Impact Statement briefly mentions the Yucca Mountain Project in sections titled “Income and Employment” and “Social Setting, Attitudes, and Values.” In the Income and Employment section the document notes that there could be population growth in Amargosa Valley as a result of construction and operation of the Yucca Mountain Project. In the Social Setting, Attitudes, and Values section the document notes that people residing in Las Vegas (urbanites) expressed a higher concern than people residing in rural locations about wildlife and *ecosystem* values when recording their *risk* assessment for the proposed Yucca Mountain Project in a 1995 social research survey conducted by the University of Nevada Las Vegas (DIRS 176043-BLM 1998, pp. 3-81 and 3-82).

3.3.2.4.1.4 Project-Related Public Land Withdrawals. The BLM announced Public Land Order 7653 on December 28, 2005 (70 *Federal Register* [FR] 76854). The Order withdrew 1,249 square kilometers (308,600 acres) of public lands within the Caliente rail corridor from surface and mining entry for 10 years to allow DOE to evaluate the lands for the potential construction, operation, and maintenance of the proposed railroad to Yucca Mountain. The withdrawal applies only to BLM-administered public lands. The withdrawal area extends approximately 0.8 kilometer (0.5 mile) from either side of the centerline of the proposed rail alignment. The actions covered by this withdrawal meet the BLM definition of *casual use* as set forth in 43 Code of Federal Regulations (CFR) 2801.5. On January 10, 2007, the BLM announced that DOE had filed an application requesting a second land withdrawal (72 *FR* 1235). The Department filed the application to cover post-scoping changes in the Caliente rail alignment and to address the addition of the Mina rail alignment. The application requested the withdrawal of an additional 842 square kilometers (208,037 acres) of public lands from surface and mineral entry and the location of new mining claims through December 27, 2015, so DOE could evaluate the lands for the

potential construction, operation, and maintenance of a railroad to Yucca Mountain. Chapter 6 of this EIS includes detailed information about the land withdrawal process.

The BLM granted DOE a right-of-way reservation (N-47748) for Yucca Mountain *site characterization* activities (DIRS 102218-BLM 1988, all). This reservation comprises 210 square kilometers (52,000 acres). The land in this reservation is open to public use, with the exception of about 20 square kilometers (5,000 acres) near the site of the proposed repository that were withdrawn in 1990 from the mining and mineral leasing laws to protect the physical integrity of the repository block. The lands in this reservation not withdrawn from the mining and mineral leasing laws contain a number of *unpatented mining claims* (DIRS 155970-DOE 2002, p. 3-9). This existing right-of-way reservation would be the basis for the planned land withdrawal for the Yucca Mountain Site, as described in the *Supplemental Environmental Impact Statement for a Geologic Repository for the Disposal of Spent Nuclear Fuel and High Level Radioactive Waste at Yucca Mountain, Nye County, Nevada* (DOE/EIS-0250F-S1), where the land would transfer from BLM administrative responsibility to DOE control.

3.3.2.4.2 Department of Defense-Managed Land

3.3.2.4.2.1 Nevada Test and Training Range. The U.S. Department of Defense administers the Nevada Test and Training Range, which the U.S. Air Force uses for training. The Mina rail alignment would not cross onto the Nevada Test and Training Range. Detailed information about current and future uses of the Nevada Test and Training Range is available in the *Proposed Nevada Test and Training Range Resource and Management Plan and Final Environmental Impact Statement* (DIRS 178103-BLM 2003, all).

Most of the airspace above the Nevada Test and Training Range is “restricted” (DIRS 103472-USAF 1999, 3.1-2). Restricted airspace consists of areas where nonparticipating aircraft are subject to restriction during scheduled periods when hazardous activities are being performed. Restricted areas designated as joint use by the Federal Aviation Administration allow air traffic control to route nonparticipating aircraft through this airspace when it is not in use or when appropriate separation can be provided. Those areas not designated as joint use cannot be accessed by either non-participating civil or military aircraft at any time (DIRS 103472-USAF 1999, p. 3.1-3).

Restricted area R-4807A is designated joint use and land beneath it is comprised of an electronic battlefield with numerous tactical targets and manned electronic combat threat simulators. Portions of the Mina rail alignment that would be on land below R-4807A include portions of common segment 5; the

Withdrawal: Withholding an area of federal land from settlement, sale, location, or surface entry under some or all of the general land laws, for the purpose of limiting activities under those laws to maintain other public values in the area or reserving the area for a particular public purpose or program.

Casual use: Activities ordinarily resulting in no or negligible disturbance of the public lands, resources, or improvements. Examples of casual use include surveying, marking routes, and collecting data to use to prepare grant applications.

Right-of-way: The public lands the BLM authorizes a holder to use or occupy under a grant.

Grant: Any authorization or instrument (for example, easement, lease, license, or permit) the BLM issues under Title V of the Federal Land Policy and Management Act (43 U.S.C. 1761 *et seq.*).

Mineral Entry: The land is not available for the location of mining claims because the land has been withdrawn from the operation of the General Mining Law.

Surface Entry Closure: An action that would lead to the title of the land leaving the United States, including appropriation of any non-federal interest or claim (other than mining claims), land sales, any public land disposal action.

Sources: DIRS 176452-DOE 2005; 43 CFR 3809.5.

Oasis Valley alternative segments 1 and 2; and a portion of common segment 6 (DIRS 103472-USAF 1999, pp. 3.1-3, 3.1-4, and 3.1-6).

Restricted area R-4808S is controlled by DOE for Nevada Test Site activities and is designated joint use. The Federal Aviation Administration Los Angeles Air Route Traffic Control Center also uses R-4808S for civil aircraft overflights (DIRS 103472-USAF 1999, pp. 3.1-3, 3.1-4, and 3.1-6). A portion of common segment 6 would be on land below R-4808S as it approached the Yucca Mountain Site.

3.3.2.4.2 Hawthorne Army Depot. The Depot extends over approximately 600 square kilometers (150,000 acres). The northwest land area consists of approximately 180 square kilometers (45,000 acres) used primarily for military training. The industrial, administration, and housing area is centrally located and consists of about 1.3 square kilometers (330 acres). The remaining acreage (approximately 400 square kilometers [102,000 acres]) consists of active military storage and ordnance demilitarization areas (DIRS 181899-Hawthorne Army Depot, p. v). The active military areas consist of unimproved areas that service the magazine and warehouse, and areas used for rifle ranges, test ranges, and open burn/open detonation areas. These areas are surrounded by a large buffer zone of unimproved land, and on the northeast side, by Walker Lake.

There are two mining claims within the Depot. Mining activities are highly regulated, and claim holders are required to provide advance coordination of work on the claims and must be escorted at all times. The mines are not being mined and claim holders obtain access only to make minimal improvements required to continue the claims' active status (DIRS 181899-Hawthorne Army Depot, pp. vi and vii).

At present, there are no agricultural outleases and livestock grazing is prohibited because of mission security issues, environmental considerations, and the need for strict water-quality controls (DIRS 181899-Hawthorne Army Depot, p. 2-8). There are recreational areas on Mount Grant and at Walker Lake. The Depot maintains a line of security buoys across the lake to restrict access from the lake to the south shore (DIRS 181899-Hawthorne Army Depot, pp. 2-7 and 2-16).

The Union Pacific Railroad has a trackage rights agreement with the Department of Defense to operate trains from the Fort Churchill Siding across the Walker River Paiute Reservation to the Thorne Siding at the Depot on Department of Defense track. The Thorne Siding receives approximately one train a month (DIRS 180222-BSC 2006, p. 28).

DOE would construct approximately 11.5 kilometers (7 miles) of new rail line (Mina common segment 1) within the active military area of the Depot. The Department would also construct a Staging Yard, which would occupy 0.20 square kilometer (50 acres) of land on the Depot, north of the existing rail line.

3.3.2.4.3 DOE-Managed Land, Nevada Test Site

Portions of common segment 6 and some railroad operations facilities would be on Nevada Test Site land (see Figure 3-142), which DOE administers. Detailed information about current and future uses of the Nevada Test Site is available in *Final Environmental Impact Statement for the Nevada Test Site and Off-Site Locations in the State of Nevada* (DIRS 101811-DOE 1996, all). As discussed previously, land that makes up the proposed Yucca Mountain Site would be withdrawn and transferred to DOE control. Currently, a Memorandum of Agreement between the DOE National Nuclear Security Administration and the Office of Civilian Radioactive Waste Management allows the use of about 235 square kilometers (58,000 acres) on the Nevada Test Site for Yucca Mountain Project activities.

3.3.2.5 General Environmental Setting and Land-Use Characteristics

Major public land uses along the Mina rail alignment include grazing, mineral and energy extraction, and recreation. The rail alignment would cross numerous public roads and trails that provide access to public and private land and would cross BLM-authorized rights-of-way for utilities.

3.3.2.5.1 BLM Grazing Allotments

The Taylor Grazing Act of 1934 (43 U.S.C. 315-3160), as amended, authorizes the Federal Government to issue permits for grazing livestock in grazing districts to settlers, residents, and other livestock owners for an annual payment of reasonable fees. An applicant who owns a base property or controls a water source may apply to the BLM for a lease or permit to use public lands for the grazing of livestock. The BLM grazing administration regulations (43 U.S.C. 4100.0-5) define a base property as land that has the capability to produce crops or forage that can be used to support authorized livestock for a specified period of the year, or water that is suitable for consumption by livestock and is available and accessible to livestock when the public lands are used for livestock grazing. The grazing allotments are leased or permitted for 10 years and may be renewed under specific circumstances.

Livestock permitted on grazing allotments include cattle, sheep, goats, horses, and burros. Cattle and sheep are the typical livestock grazed within the Mina rail alignment region of influence. The grazing lease or permit specifies the types and numbers of livestock based on the property acreage, the period of use, and the amount of use in *animal unit months*. The intent of assigning animal unit months is to allow grazing on public lands without exceeding the capacity of the allotment to sustain livestock (43 CFR Part 4100).

Animal unit month: A standardized unit of measurement of the amount of forage necessary for the complete sustenance of one animal for 1 month; also, a unit of measurement of grazing privileges that represents the privilege of grazing one animal for 1 month (43 CFR Part 4100).

Depending on the combination of common segments and alternative segments, the Mina rail alignment and its support facilities would cross up to 12 active grazing allotments, and 3 inactive allotments (Columbus Salt Marsh, Montezuma, and one labeled Unused) (Figures 3-144 through 3-151). Tables 3-84 and 3-85 list information about grazing allotments within the Mina rail alignment region of influence. Access to a water source is an essential requirement for livestock grazing in the high *desert* of Nevada. In accordance with the Nevada State Water Law, the State Engineer in the Nevada Division of Water Resources may issue permits for water rights to applicants who can demonstrate a beneficial use for the water. Once permitted, water rights are treated as property rights and can be bought and sold (DIRS 178301-State of Nevada n.d., all). Because water rights greatly influence the uses and value of land in this generally *arid* region, any impacts to water rights could directly impact land use. (See Section 3.3.6 for a description of *groundwater* resources.)

It is essential to provide adequate water for livestock within reasonable distances of grazing areas. Stockwater is water that is physically diverted from the natural water course or storage of water for use by livestock or wildlife. There are several methods for developing stockwater, including spring developments; wells, ponds, or dugouts; and pipelines with a trough or tank for storage. Table 3-85 lists stockwater features within the Mina rail alignment region of influence.

3.3.2.5.2 Mineral and Energy Resources

3.3.2.5.2.1 Mineral Resources. Commercial prospecting for minerals of value began in southern Nevada in the mid-1800s and continues to the present. Minerals currently mined include metallic and nonmetallic minerals. Gold and silver are the most important metallic minerals.

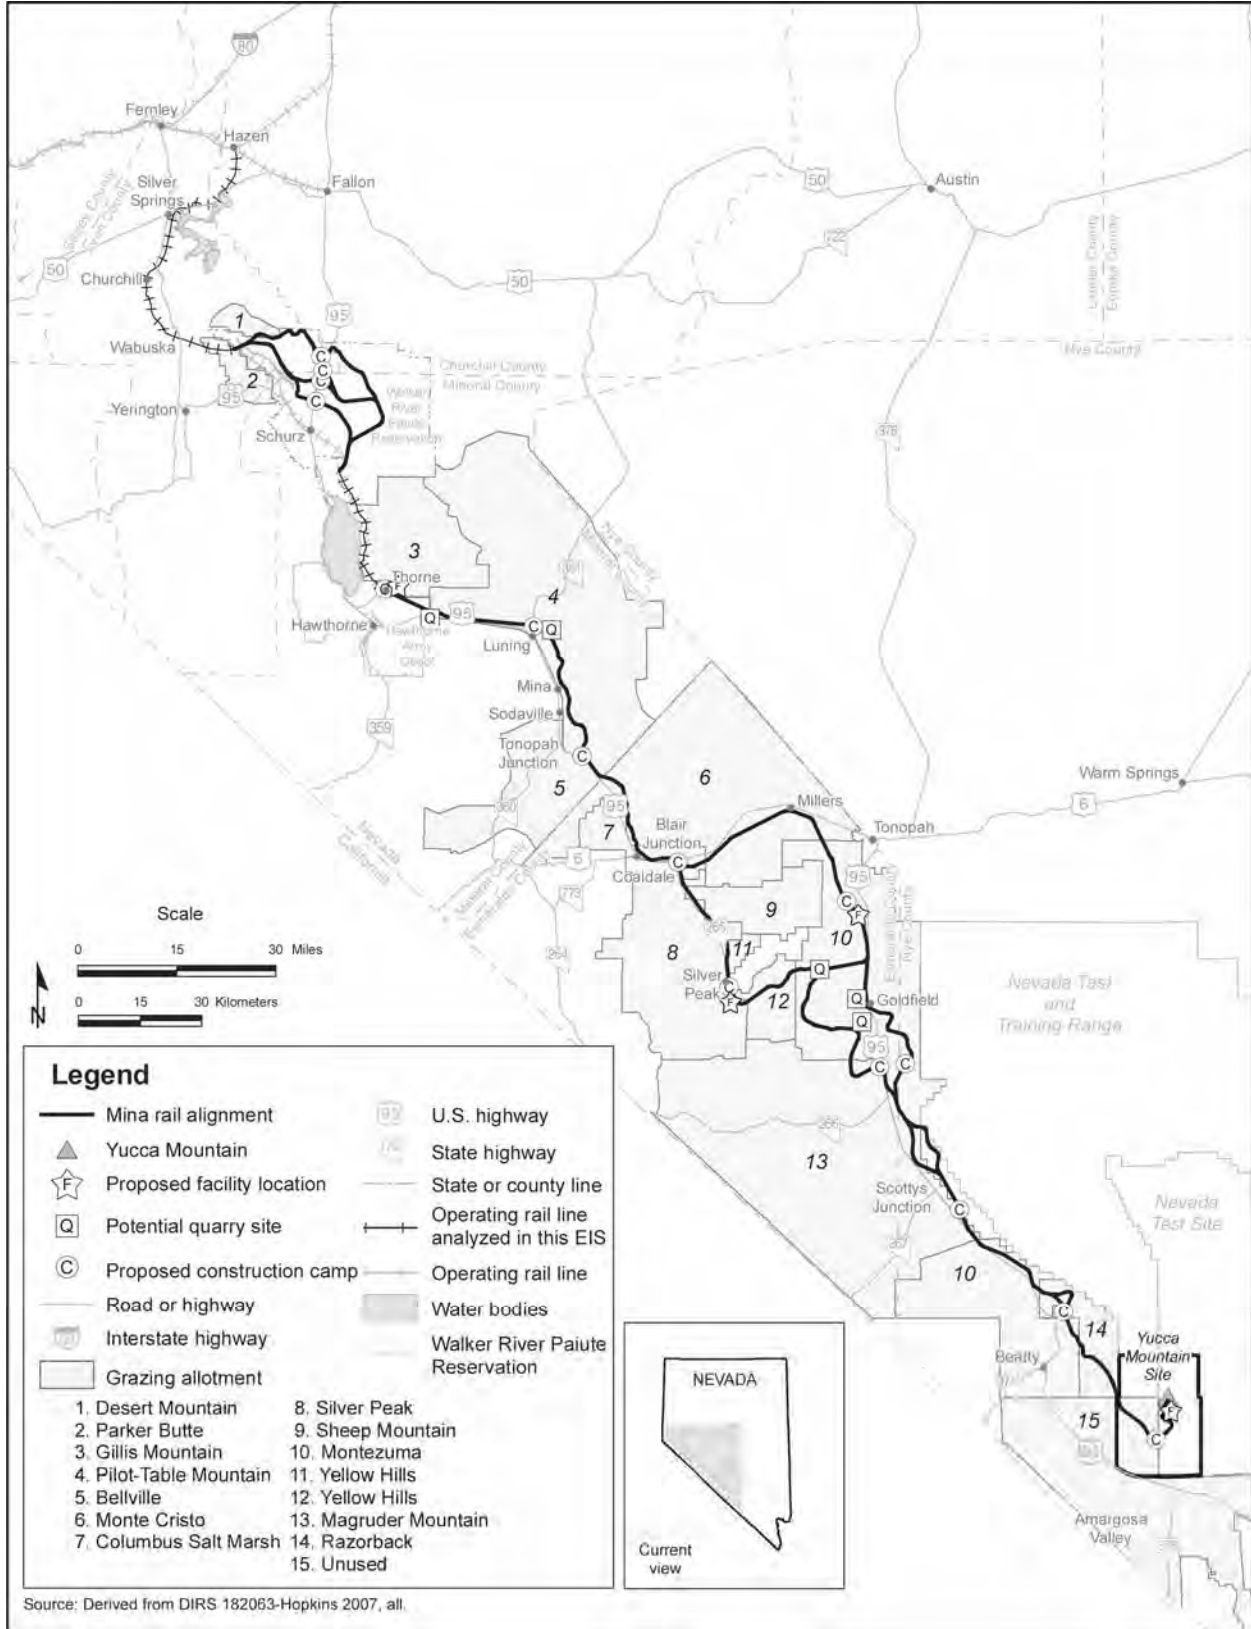


Figure 3-144. Grazing allotments along the Mina rail alignment.

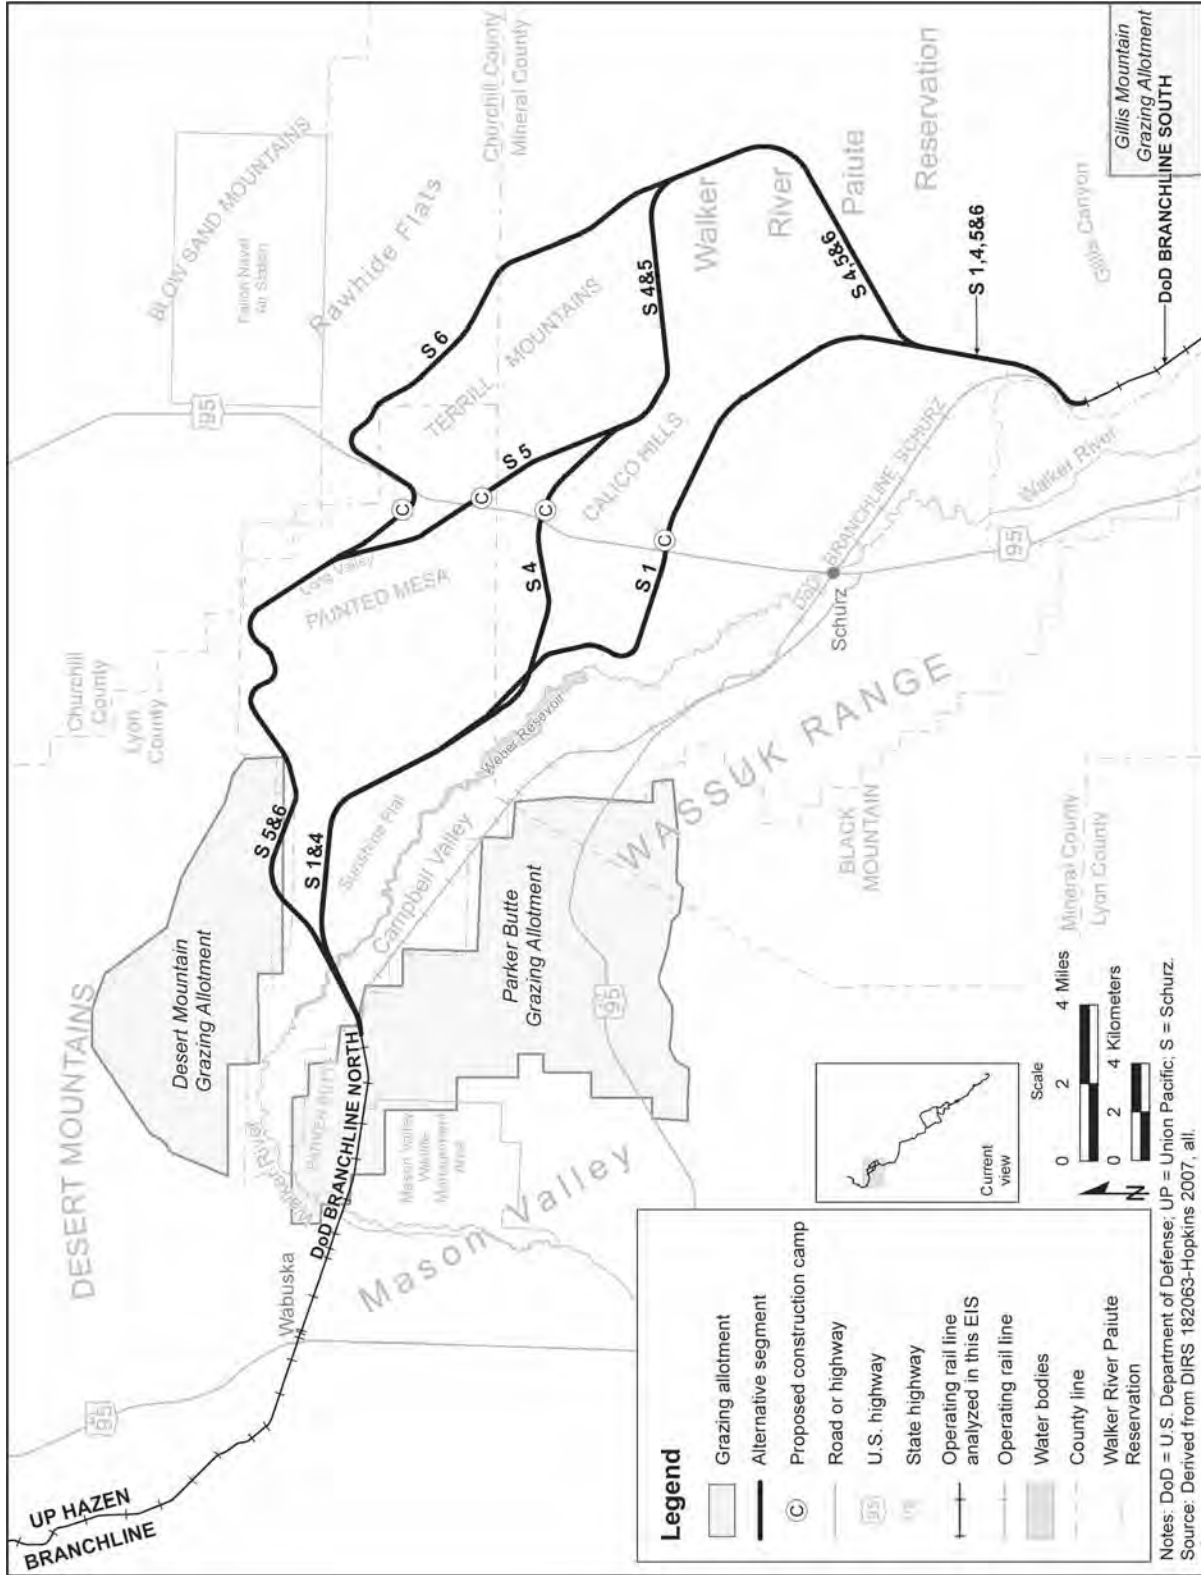


Figure 3-145. Grazing allotments with stockwater features within map area 1.

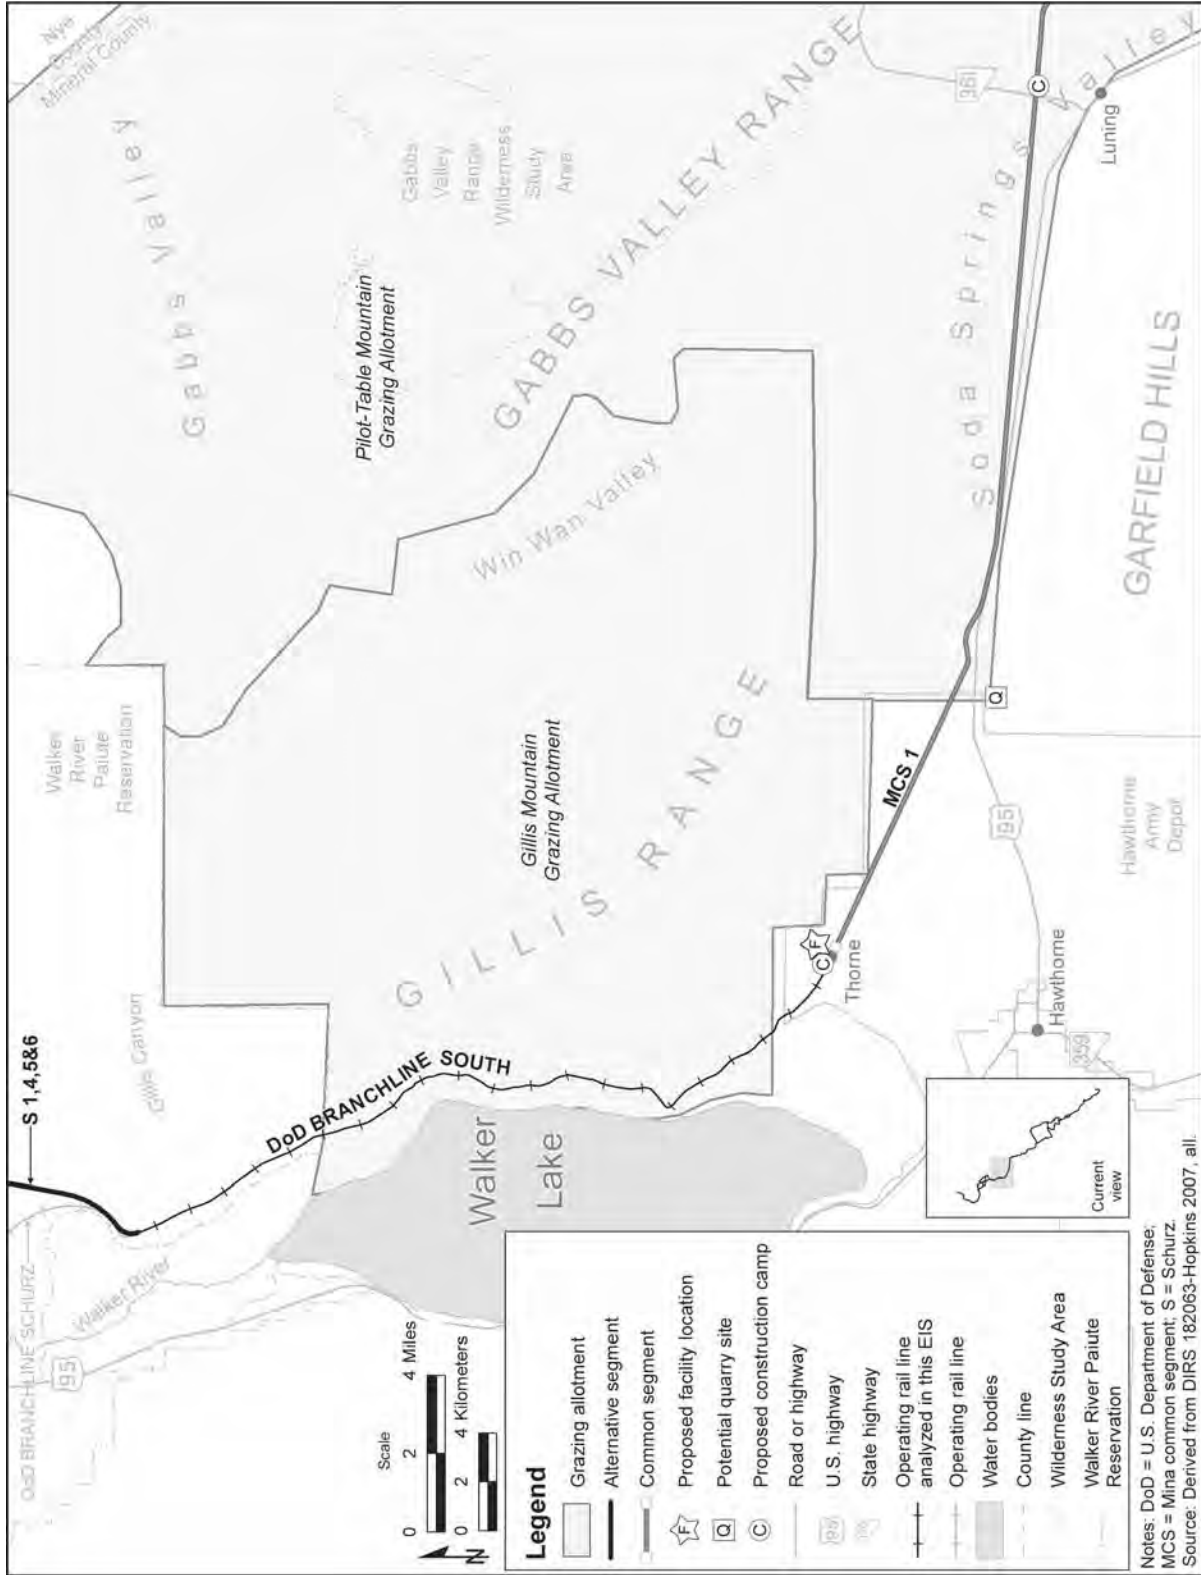


Figure 3-146. Grazing allotments with stockwater features within map area 2.

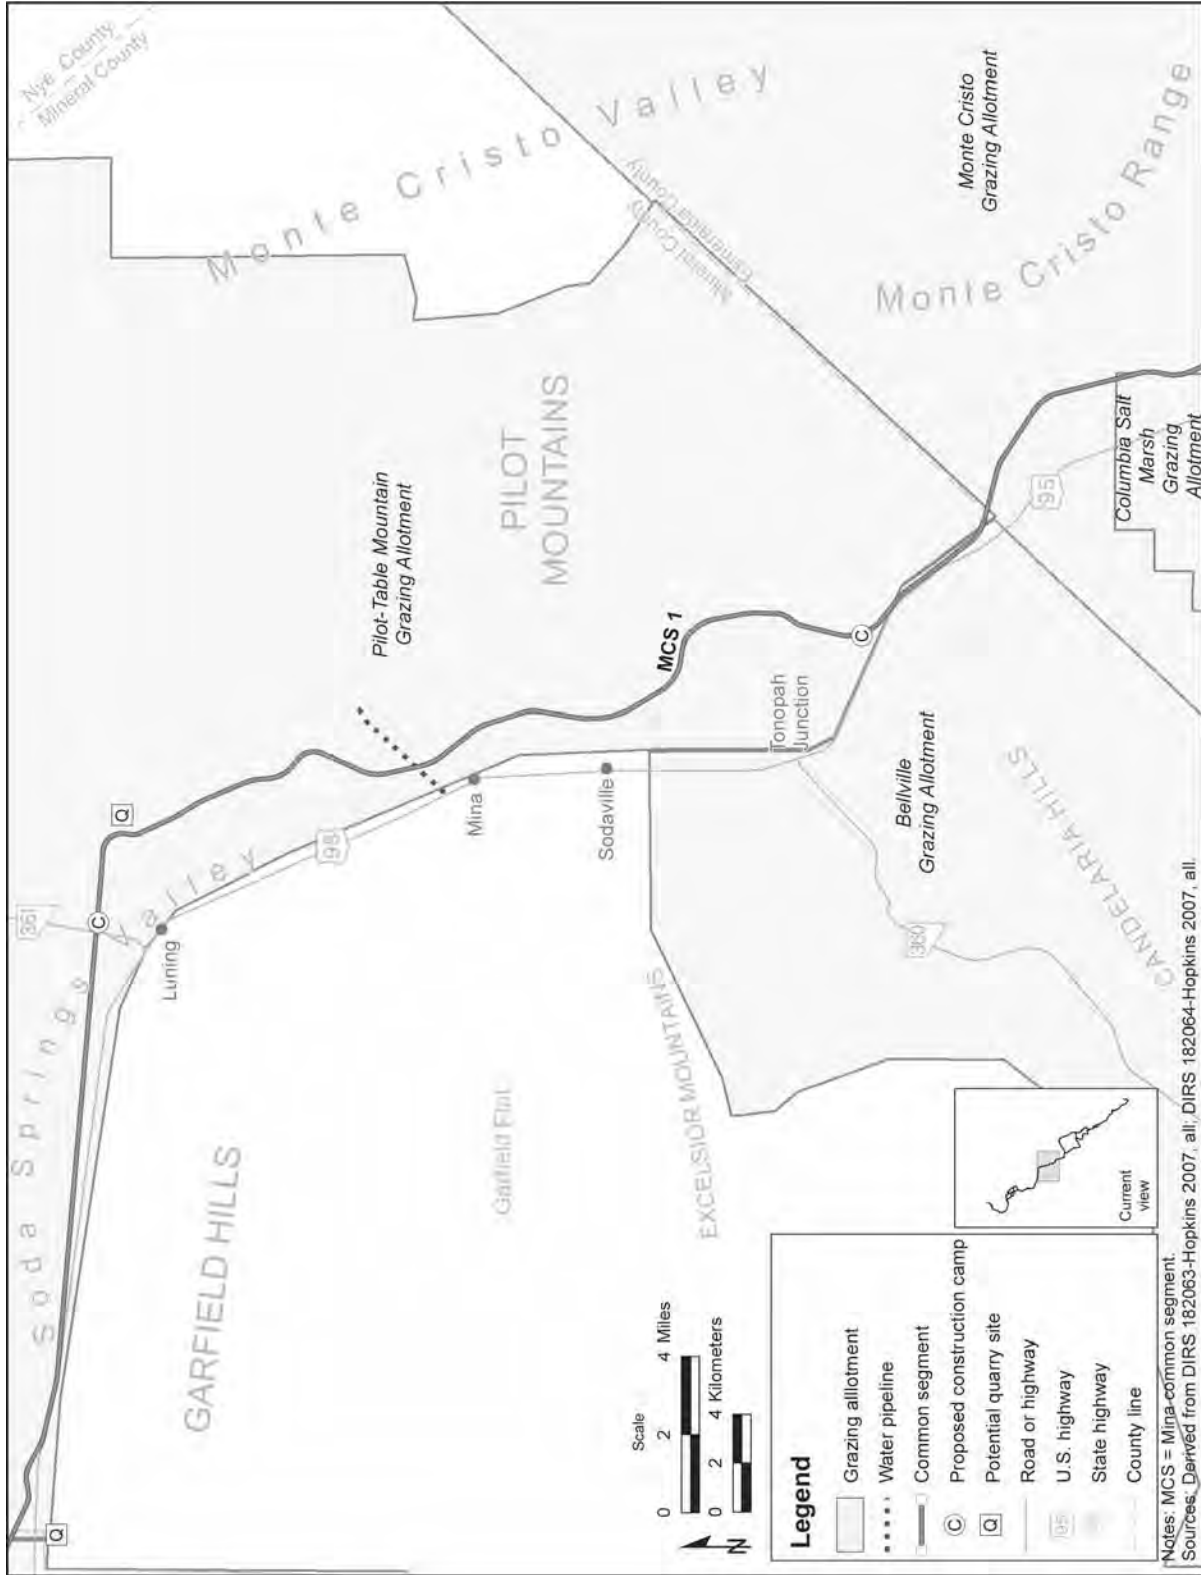


Figure 3-147. Grazing allotments with stockwater features within map area 3.

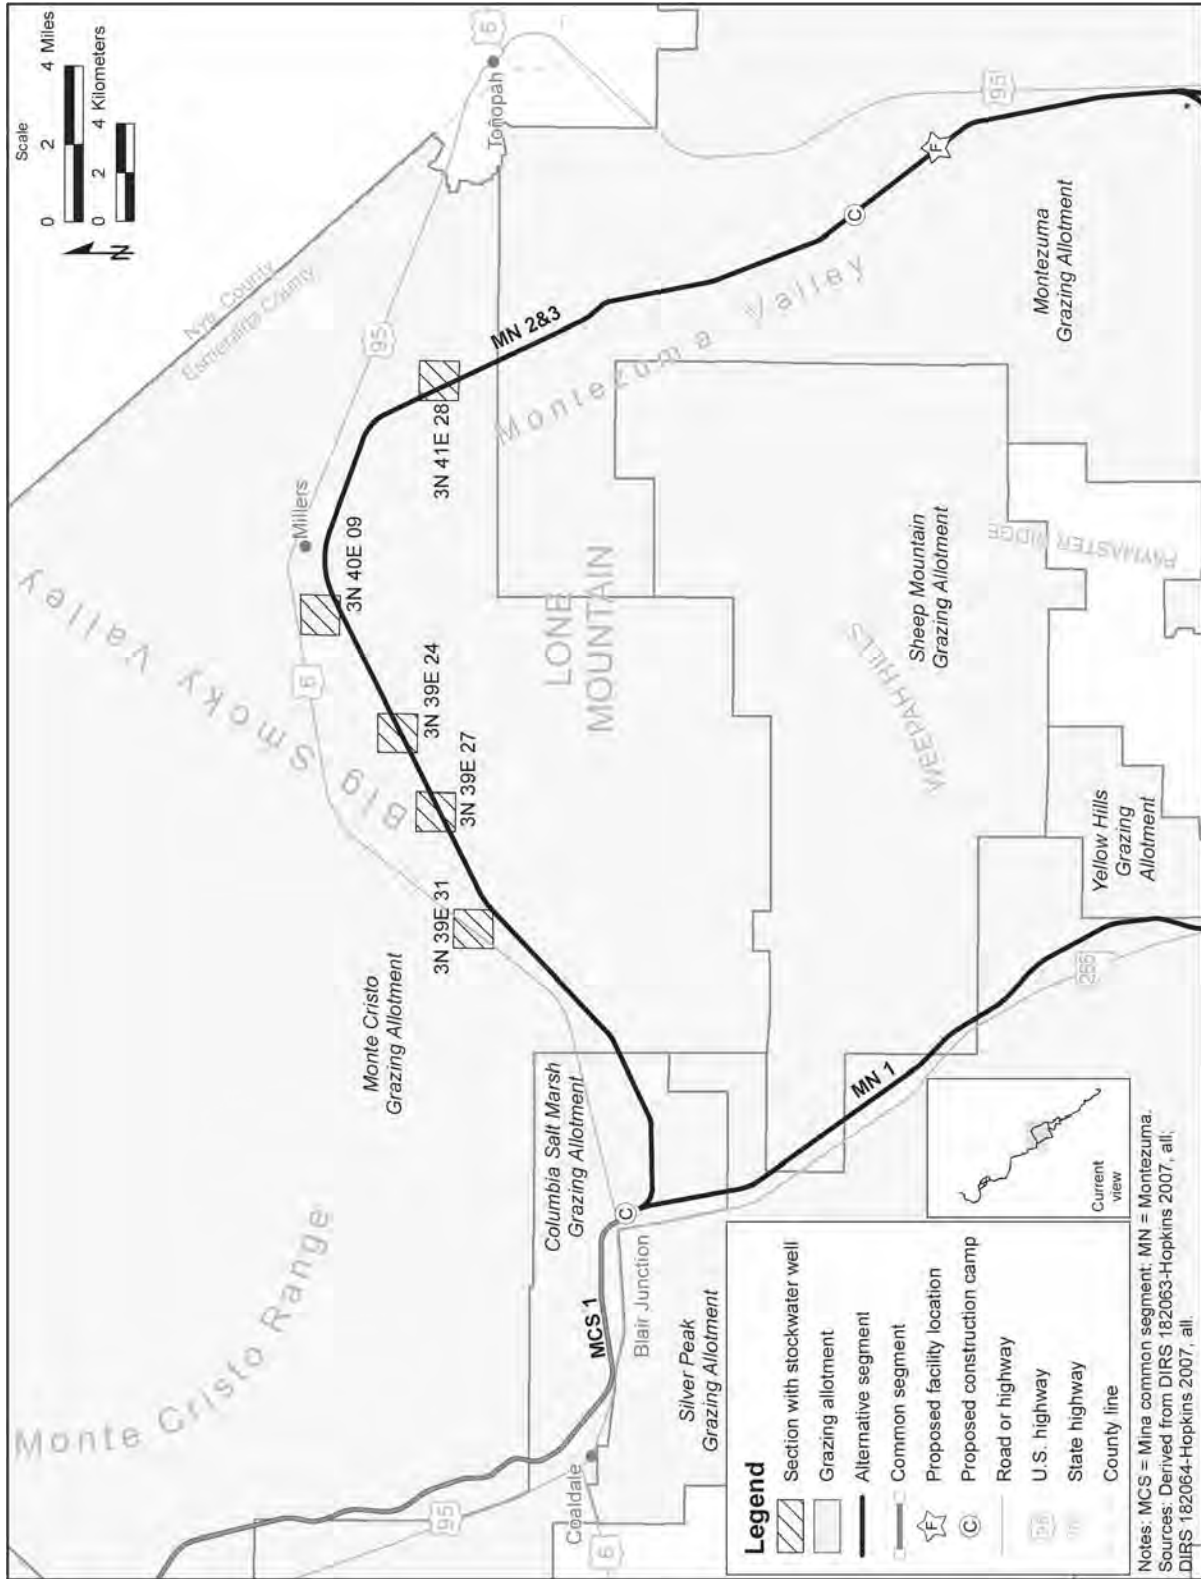


Figure 3-148. Grazing allotments with stockwater features within map area 4.

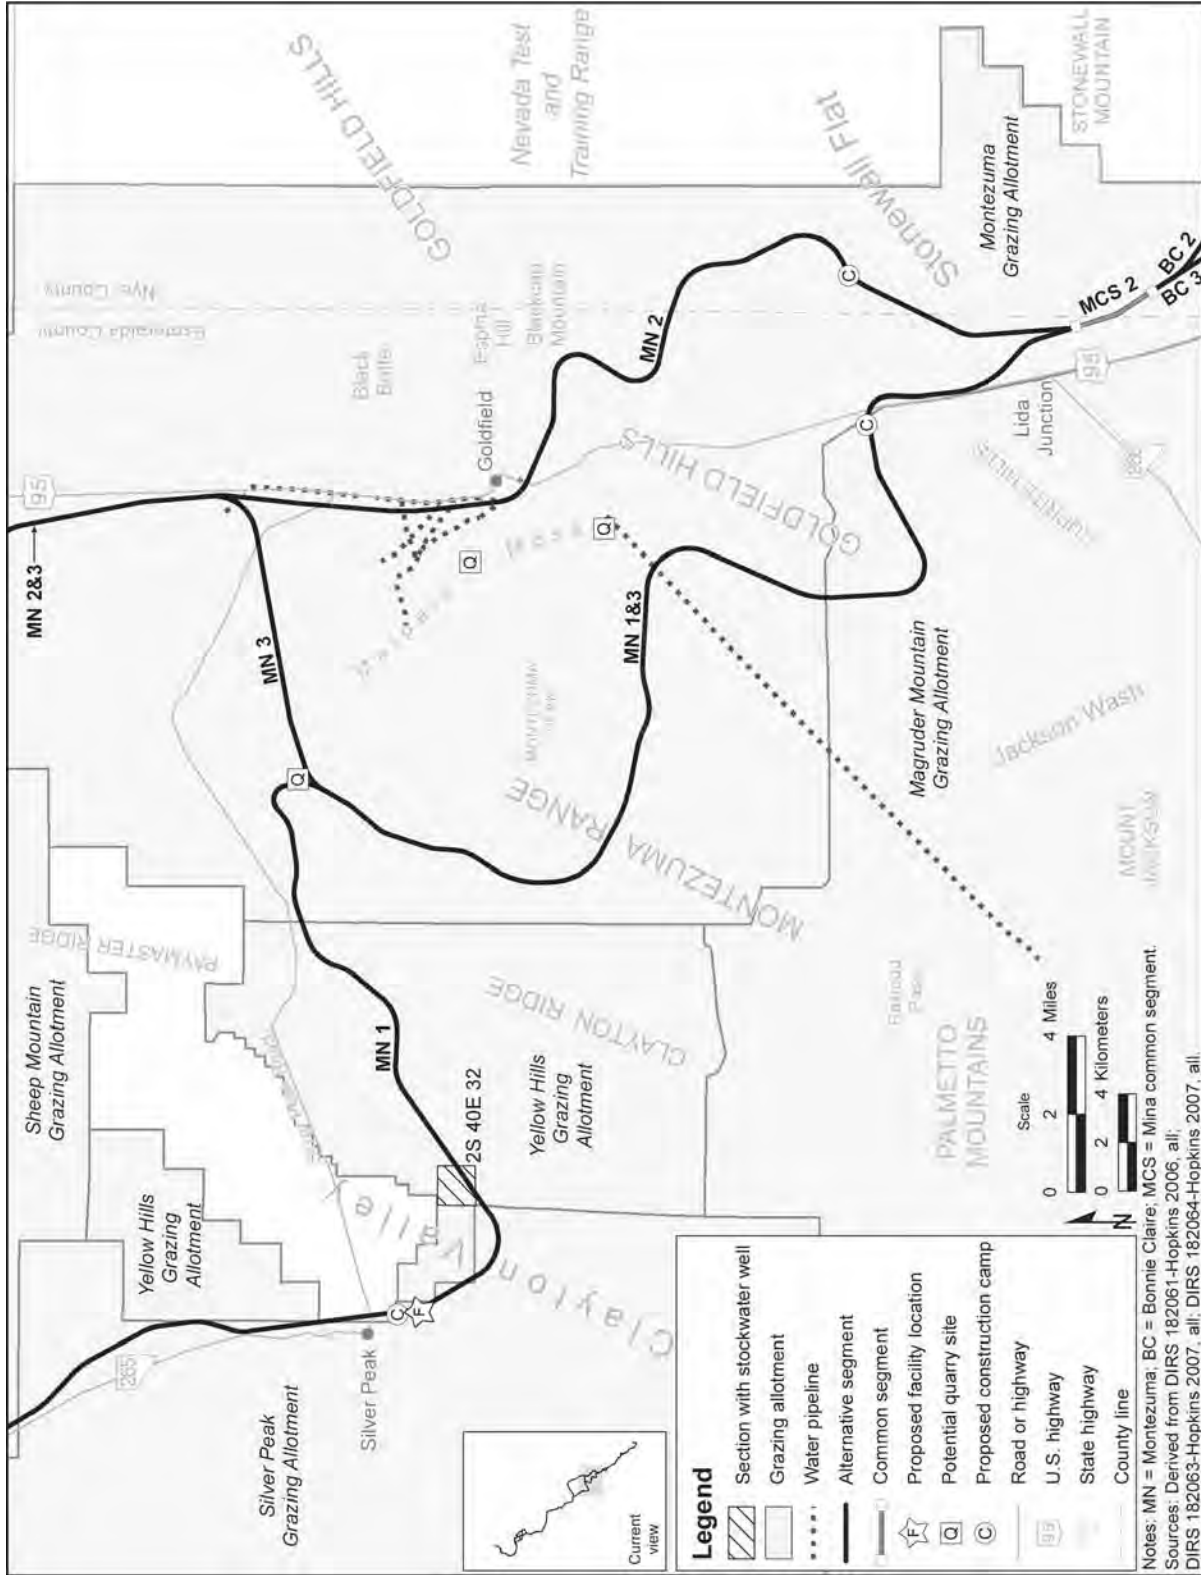


Figure 3-149. Grazing allotments with stockwater features within map area 5.

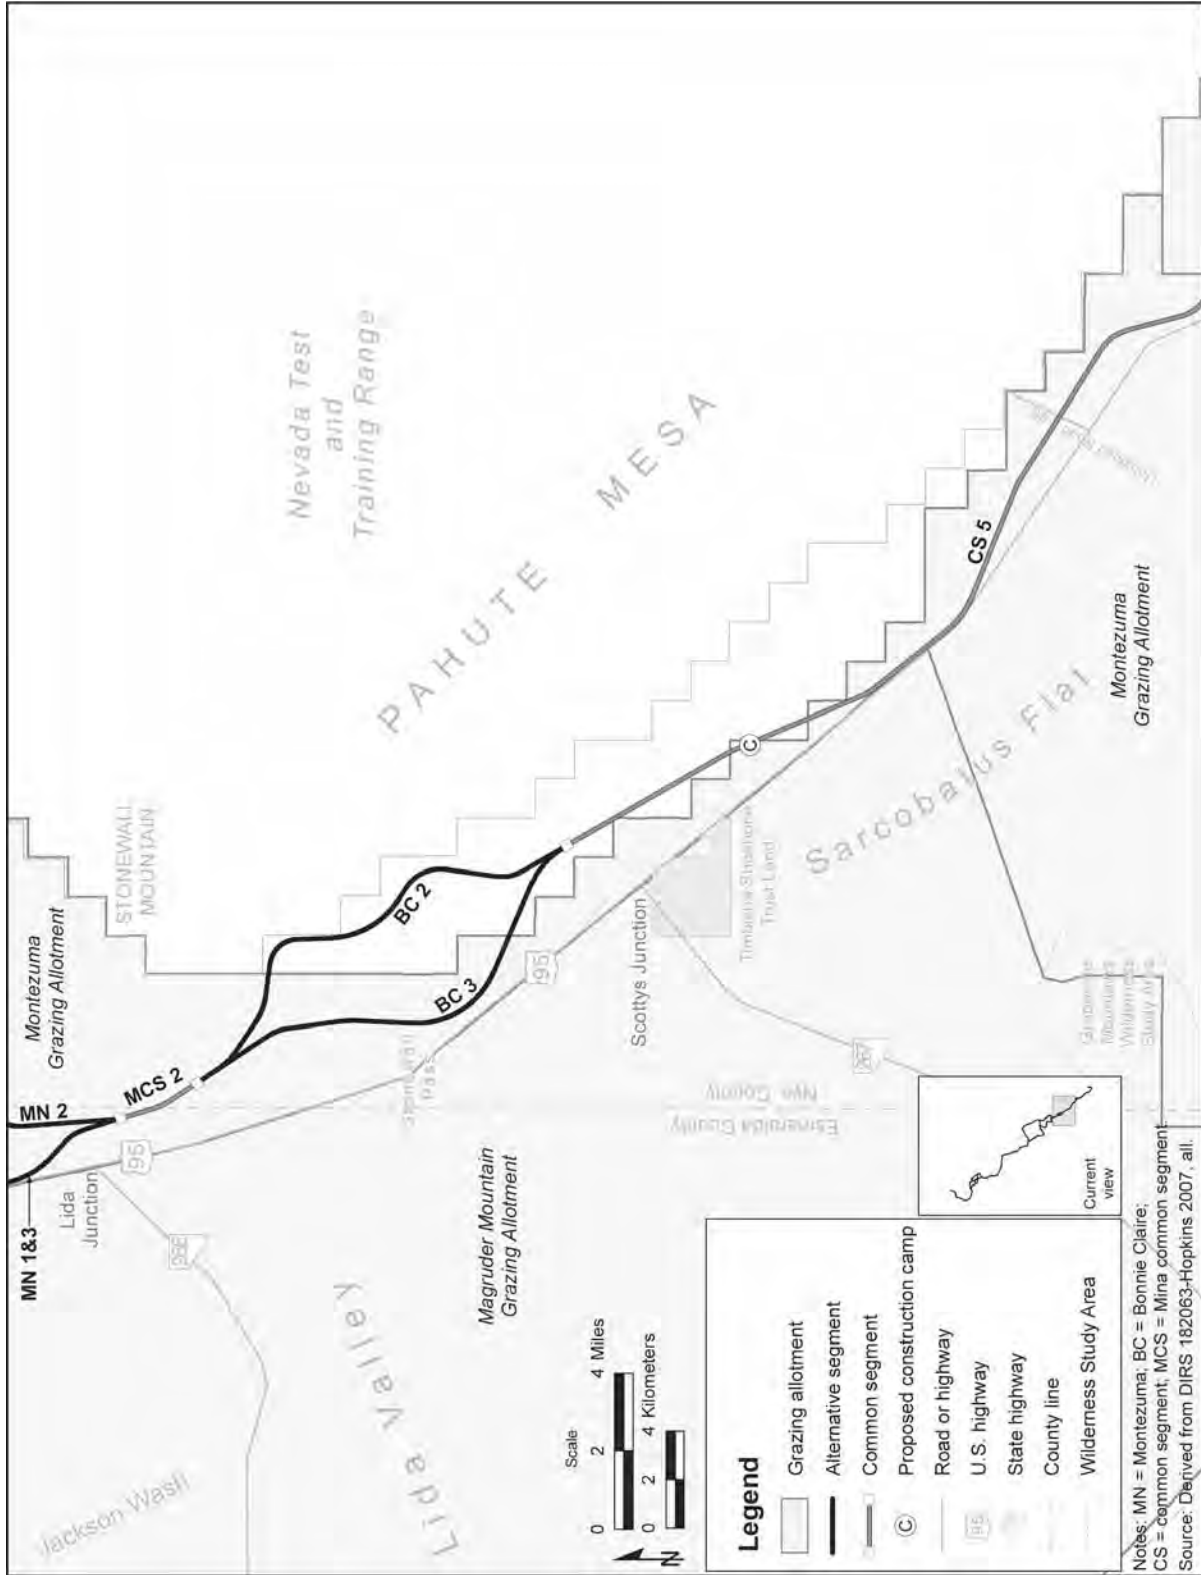


Figure 3-150. Grazing allotments with stockwater features within map area 6.

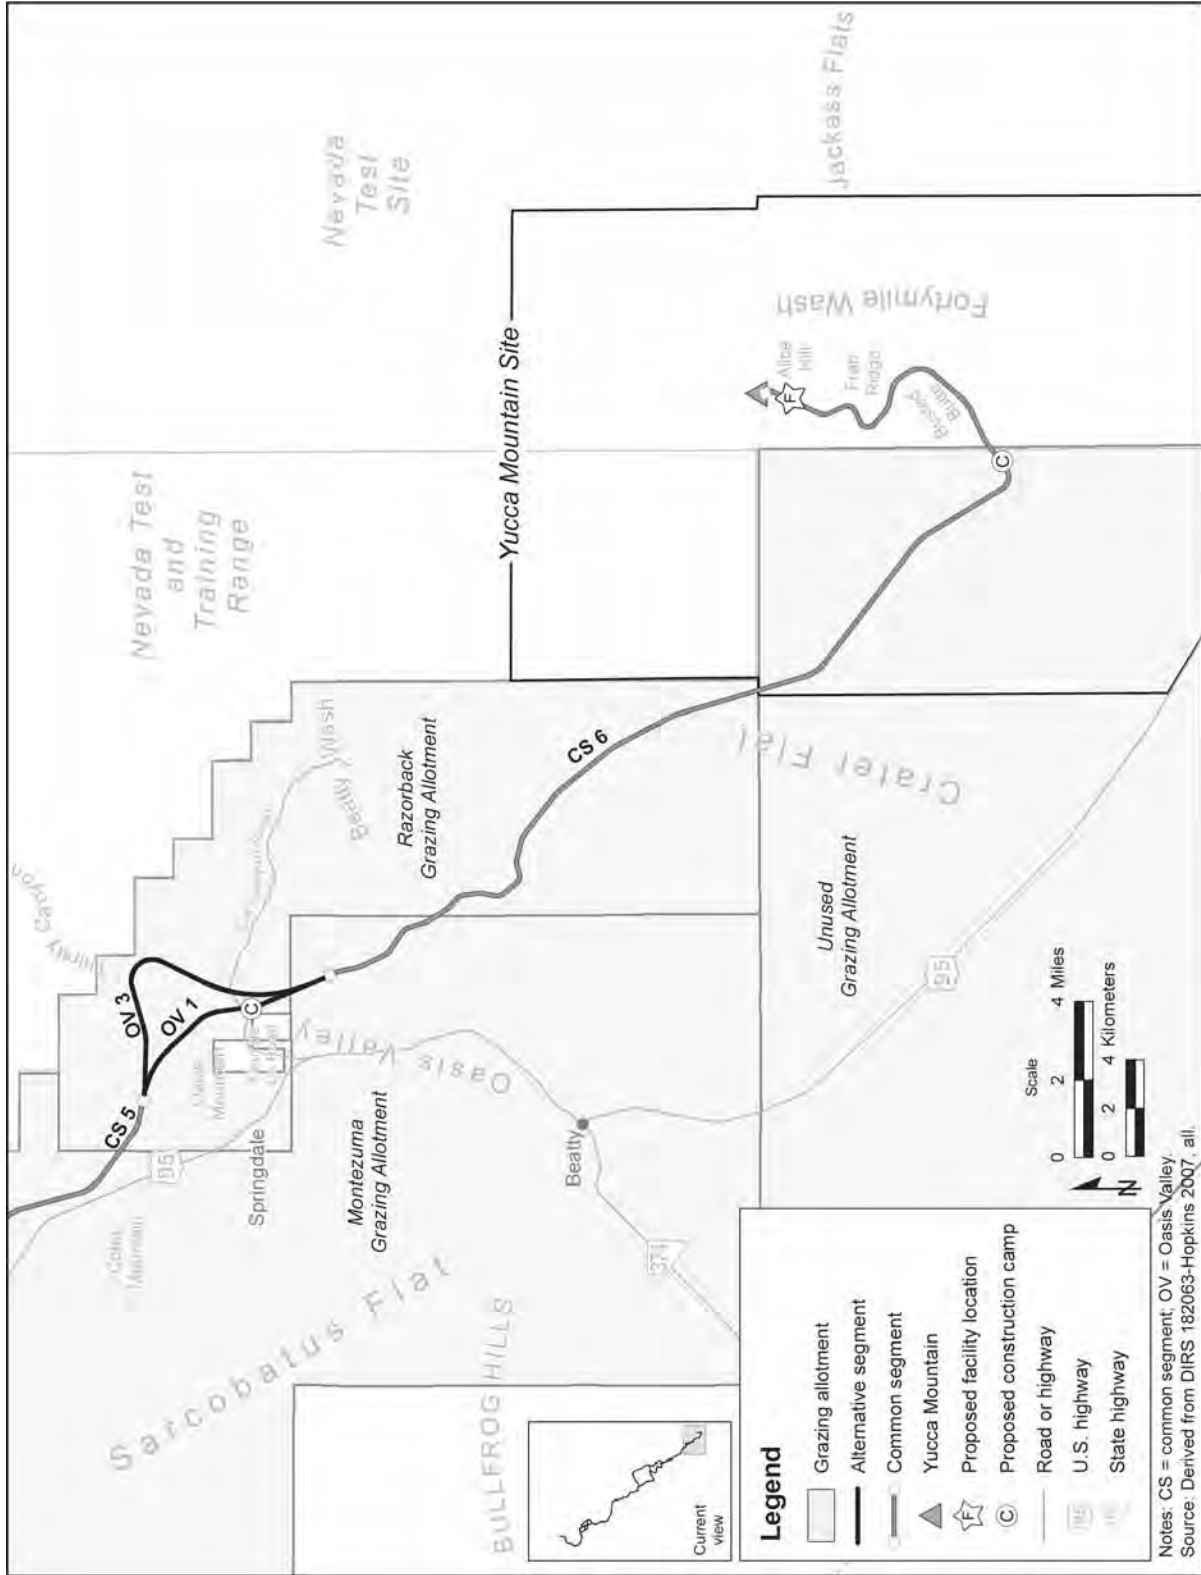


Figure 3-151. Grazing allotments with stockwater features within map area 7.

Table 3-84. Grazing allotment lands within the Mina rail alignment construction right-of-way (page 1 of 2).

Rail line segment/facility	Grazing allotment	Rail alignment crossing distance (kilometers) ^a	Area that would be within the construction right-of-way or disturbed (square kilometers) ^b
Union Pacific Railroad Hazen Branchline ^c	Not applicable		
Department of Defense Branchline North ^d	Not applicable		
Schurz alternative segment 1 ^e	Parker Butte	0.6	0.2
Schurz alternative segment 4	Parker Butte	0.6	0.2
Schurz alternative segment 5	Parker Butte	0.6	0.2
Schurz alternative segment 5	Desert Mountain	3	0.74
Schurz alternative segment 6	Parker Butte	0.6	0.2
Schurz alternative segment 6	Desert Mountain	3	0.74
Department of Defense Branchline South ^d	Not applicable		
Staging Yard at Hawthorne	Gillis Mountain	f	0.25
Mina common segment 1	Pilot-Table Mountain	62	15
Mina common segment 1	Gillis Mountain	0.4	0.04
Mina common segment 1	Bellville	3.5	0.9
Mina common segment 1	Monte Cristo	14	6.3
Mina common segment 1	Columbus Salt Marsh	16	4.3
Potential Garfield Hills quarry	Garfield Flat	c	0.99
Potential Garfield Hills quarry	Pilot-Table Mountain	c	0.09
Potential Gabbs Range quarry	Pilot-Table Mountain	c	0.97
Montezuma alternative segment 1	Columbus Salt Marsh	3.9	23
Montezuma alternative segment 1	Silver Peak	28	8.1
Montezuma alternative segment 1	Sheep Mountain	6.2	1.9
Montezuma alternative segment 1	Yellow Hills	17	4.8
Montezuma alternative segment 1	Montezuma	51	14
Montezuma alternative segment 1	Magruder Mountain	12	3.5
Potential North Clayton quarry	Montezuma	c	1.8
Potential Malpais Mesa quarry	Montezuma	c	2.7
Potential Goldfield ES-7 quarry	Montezuma	c	1.5

Table 3-84. Grazing allotment lands within the Mina rail alignment construction right-of-way (page 2 of 2).

Rail line segment/facility	Grazing allotment	Rail alignment crossing distance (kilometers) ^a	Area that would be within the construction right-of-way or disturbed (square kilometers) ^b
Montezuma alternative segment 2	Columbus Salt Marsh	7.9	2.2
Montezuma alternative segment 2	Monte Cristo	34	10
Montezuma alternative segment 2	Montezuma	77	14
Montezuma alternative segment 3	Columbus Salt Marsh	7.9	2.2
Montezuma alternative segment 3	Monte Cristo	34	10
Montezuma alternative segment 3	Montezuma	87.8	26
Montezuma alternative segment 3	Magruder Mountain	12	3.5
Mina common segment 2	Montezuma	3.4	1.1
Bonnie Claire alternative segment 2	Montezuma	4.4	1.7
Bonnie Claire alternative segment 3	Montezuma	14	4.1
Common segment 5	Montezuma	28	7.9
Common segment 5	Razorback	2.3	0.71
Common segment 5	Magruder Mountain	2.9	0.24
Oasis Valley alternative segment 1	Razorback	7.9	1.9
Oasis Valley alternative segments 1 and 3	Razorback	1.3	0.4
Oasis Valley alternative segment 3	Razorback	12	3.4
Common segment 6	Razorback	18	5.4
Common segment 6	Montezuma	6.4	2.1
Common segment 6	Unused	15	4.7

a. To convert kilometers to miles, multiply by 0.62137.

b. To convert square kilometers to acres, multiply by 247.10.

c. Use of the Union Pacific Hazen Branchline would not require new construction.

d. DOE would construct new sidings along Department of Defense Branchlines North and South within the existing rail line right-of-way; therefore DOE did not analyze these portions of the rail alignment. No other new construction would be required.

e. The Walker Paiute Reservation does not have BLM-administered grazing allotments.

f. Facility would not cross allotment; it would occupy the area listed in the next column.

Table 3-85. Features of grazing allotments within the Mina rail alignment region of influence.

Grazing allotment	Area (square kilometers) ^a	Animal unit months	Stockwater features that would be within the construction right-of-way
Parker Butte ^b	122	1,669	None
Desert Mountain ^c	91	840	None
Gillis Mountain ^d	650	1,924	None
Garfield Flat ^e	890	3,516	None
Pilot-Table Mountain ^f	2,070	7,900	Mina common segment 1 would cross one pipeline
Bellville ^g	630	303	None
Columbus Salt Marsh ^h	21		None
Monte Cristo ^h	2,010	9,352	Two stockwater wells along Montezuma alternative segments 2 and 3
Silver Peak ⁱ	1,430	436	None
Sheep Mountain ^j	360	1,740	None
Yellow Hills ^k	250	1,212	None
Magruder Mountain ^l	270	6,300	None
Montezuma ^m	2,180	--	Montezuma alternative segment 1 would cross one pipeline; Montezuma 2 would cross seven; Montezuma 3 would cross two
Razorback ^m	294.9	959	None
Unused ^m	2,130	---	None

a. To convert square kilometers to acres, multiply by 247.10.

b. Source: DIRS 181020-BLM 2007, all.

c. Source: DIRS 181023-BLM 2007, all.

d. Source: DIRS 180699-BLM 2007, all.

e. Source: DIRS 181024-BLM 2007, all.

f. Source: DIRS 181025-BLM 2007, all.

g. Source: DIRS 181026-BLM 2007, all.

h. Source: DIRS 182338-BLM 2007, all.

i. Source: DIRS 181027-BLM 2007, all.

j. Source: DIRS 181152-BLM 2007, all.

k. Source: DIRS 181029-BLM 2007, all.

l. Source: DIRS 181021-BLM 2007, all.

m. Source: DIRS 173224-BLM 1997, Appendix A (area of allotment might include private land).

Nonmetallic minerals include turquoise, decorative rock, perlite, opal, borate, limestone, clay, building stones, silica, aggregates, gypsum and salt used in industrial processes and building materials (DIRS 150524-Tingley 1998, all).

There is potential mining activity on private land (patented mining claims) and public land (unpatented mining claims). Figure 3-152 shows mining districts and areas near the Mina rail alignment. Figures 3-153 through 3-159 show the locations of sections with unpatented mining claims in relation to the construction right-of-way.

The Mina rail alignment would cross some *mining areas* and mining districts, as discussed below.

The Schurz alternative segment 1 construction right-of-way would pass through the very southern portion of the Calico Hills Mining District. Schurz alternative segment 4 would pass through the Calico Hills, Double Springs Marsh, and Buckley Mining Districts. Schurz alternative segment 5 would pass through the Benway, Calico Hills, Double Springs Marsh, and Buckley Mining Districts. Schurz alternative segment 6 would pass through the Holy Cross, Double Springs Marsh, and Buckley Mining Districts (see Table 3-86). These districts are described below.

- **Calico Hills:** This mining district coincides with the Calico Hills, which are 5 to 8 kilometers (3 to 5 miles) north and east of the Walker River on the Walker River Paiute Reservation, about 10 kilometers (6 miles) north of Schurz, Nevada. Prospecting began after 1956 and outlined a deposit, called the Hottentot prospect, estimated to contain 570,000 metric tons (625,000 tons) of iron and copper ore. However, this prospect has not been developed (DIRS 180882-Shannon & Wilson 2007, pp. 27 and 28).
- **Double Springs Marsh:** This mining district coincides with an elliptical playa about 13 kilometers (8 miles) east of Schurz, Nevada. The only mining activity on the playa occurred around 1898 when the Occidental Alkali Company produced considerable amounts of high-grade soda from saline crust on the playa surface (DIRS 180882-Shannon & Wilson 2007, pp. 31 and 32).
- **Buckley:** Very little is known about this mining district. Activity in the district dates from around 1906 and there was no mining activity reported in the district as of the late 1990s. Deposits in the district typically contain small amounts of gold, silver, and copper minerals (DIRS 180882-Shannon and Wilson 2007, pp. 33 and 34).
- **Benway:** This district is about 16 kilometers (10 miles) north of Schurz and 2 kilometers (1 mile) west of U.S. Highway 95 and lies entirely within the Walker River Paiute Reservation. Two types of ore deposits have been explored in this district – copper-silver-gold bearing quartz and calcite veins, and disseminated sulfide deposits. There are at least 10 veins containing gold, silver, and copper minerals that are as much as 6 meters (20 feet) wide and 2 kilometers long. Drilling at the disseminated sulfide deposits revealed extensive amounts of disseminated pyrite and only minor amounts of disseminated copper, lead, and zinc sulfides that were too deep or too low-grade to be of economic interest (DIRS 180882-Shannon & Wilson 2007, pp. 21 and 22).
- **Holy Cross:** Silver and gold were first discovered in the Holy Cross Mining District in 1910, on the Silver Star claim near what is now Camp Terrell. From 1911 to 1965, there was intermittent production of silver, gold, and other metals from mines in the southwest Holy Cross Mining District, and the Pyramid Mine in the Camp Terrell area operated for a short period in the 1980s. Although production was high in the past, the veins are narrow and the zones with ore grade are small and sparsely distributed. Therefore, it is doubtful if any of the small mines were profitable in the past and unlikely that enough ore remains undiscovered to make any of them profitable enough to reopen in the future (DIRS 180882-Shannon & Wilson 2007, pp. 18 and 19).

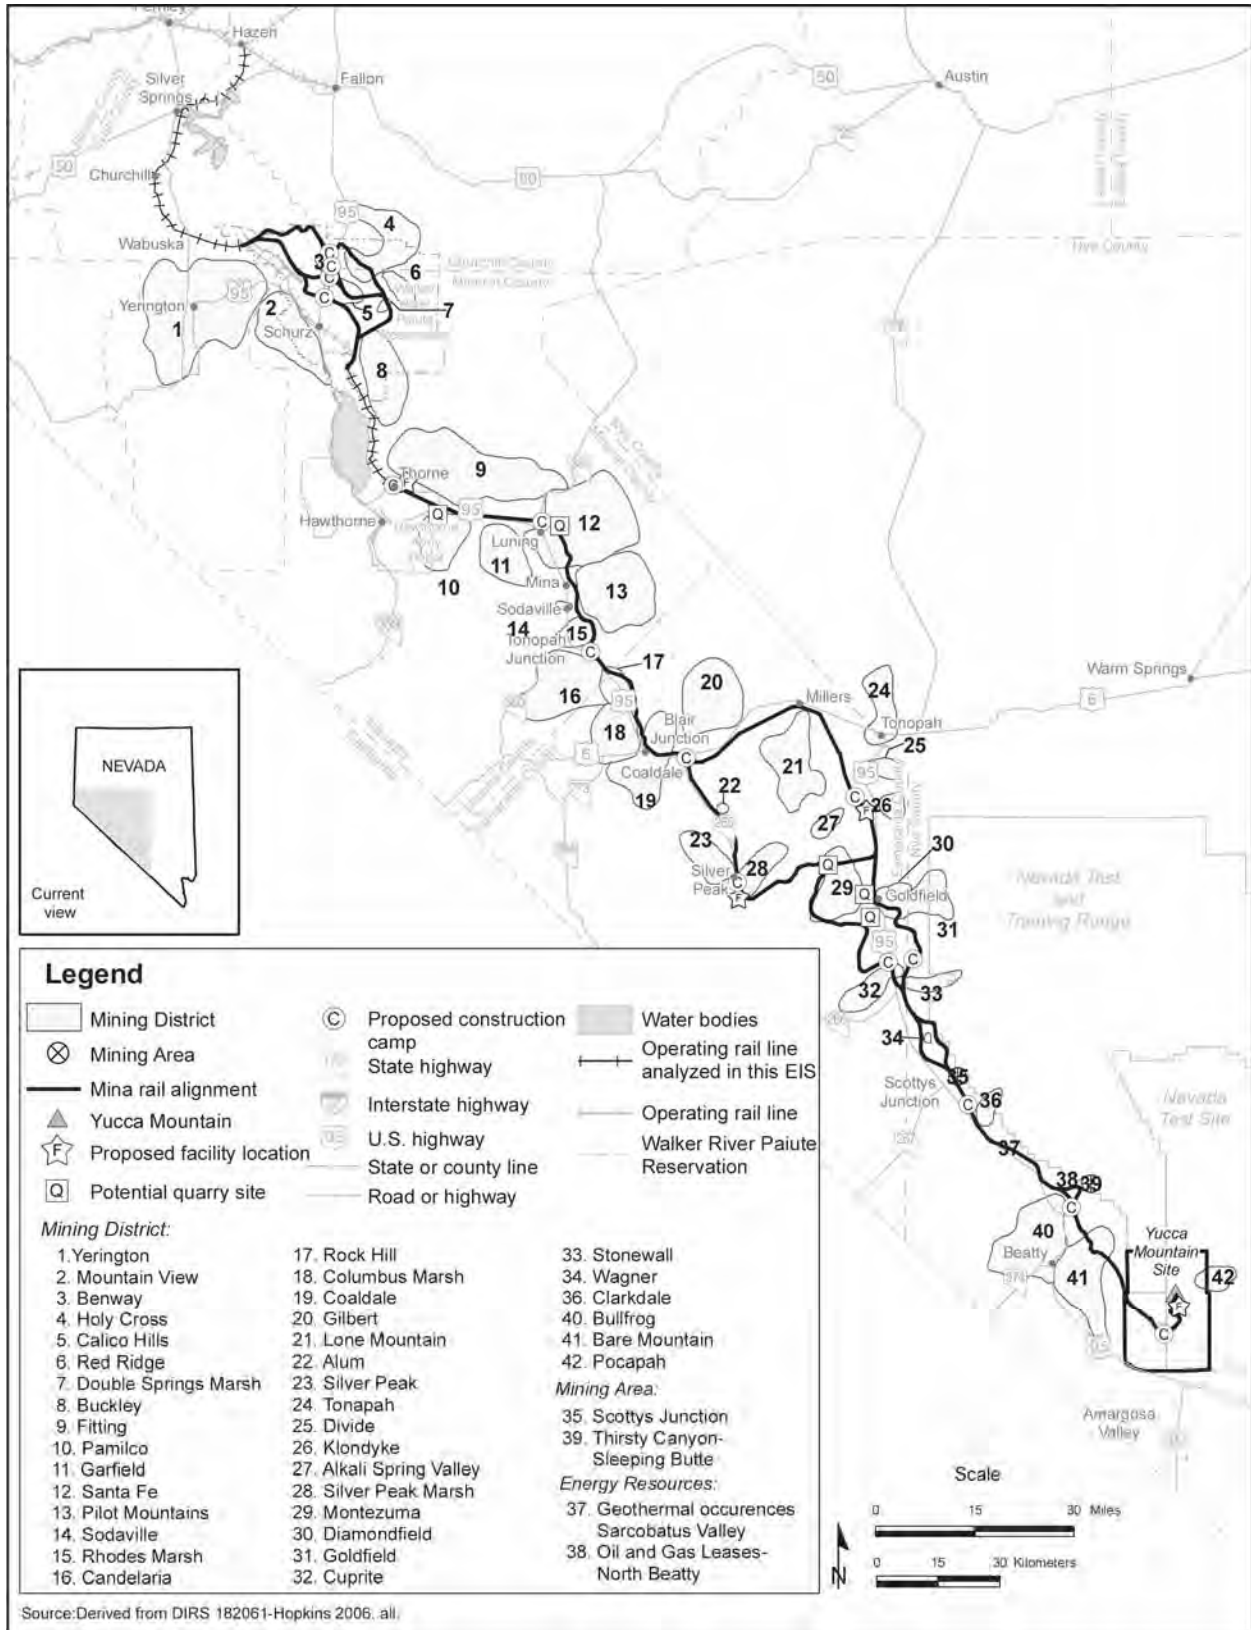


Figure 3-152. Mineral and energy resources along the Mina rail alignment.

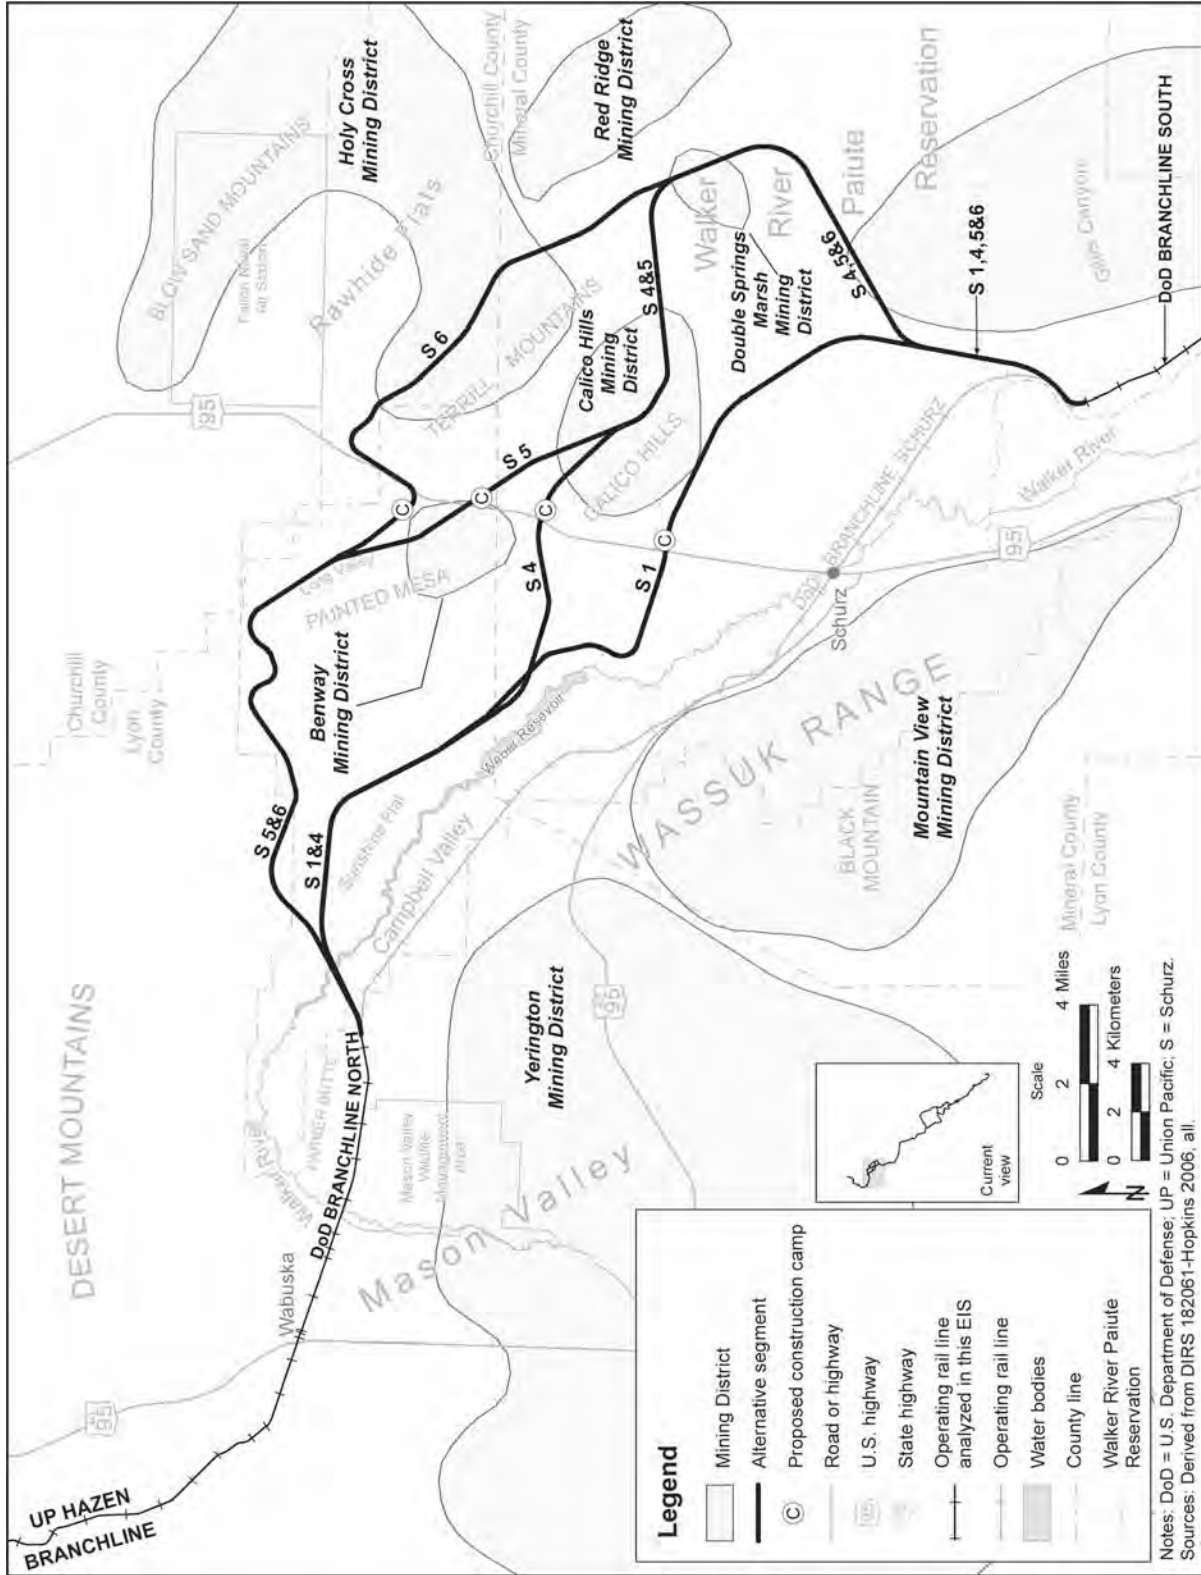


Figure 3-153. Mineral and energy resources within map area 1.

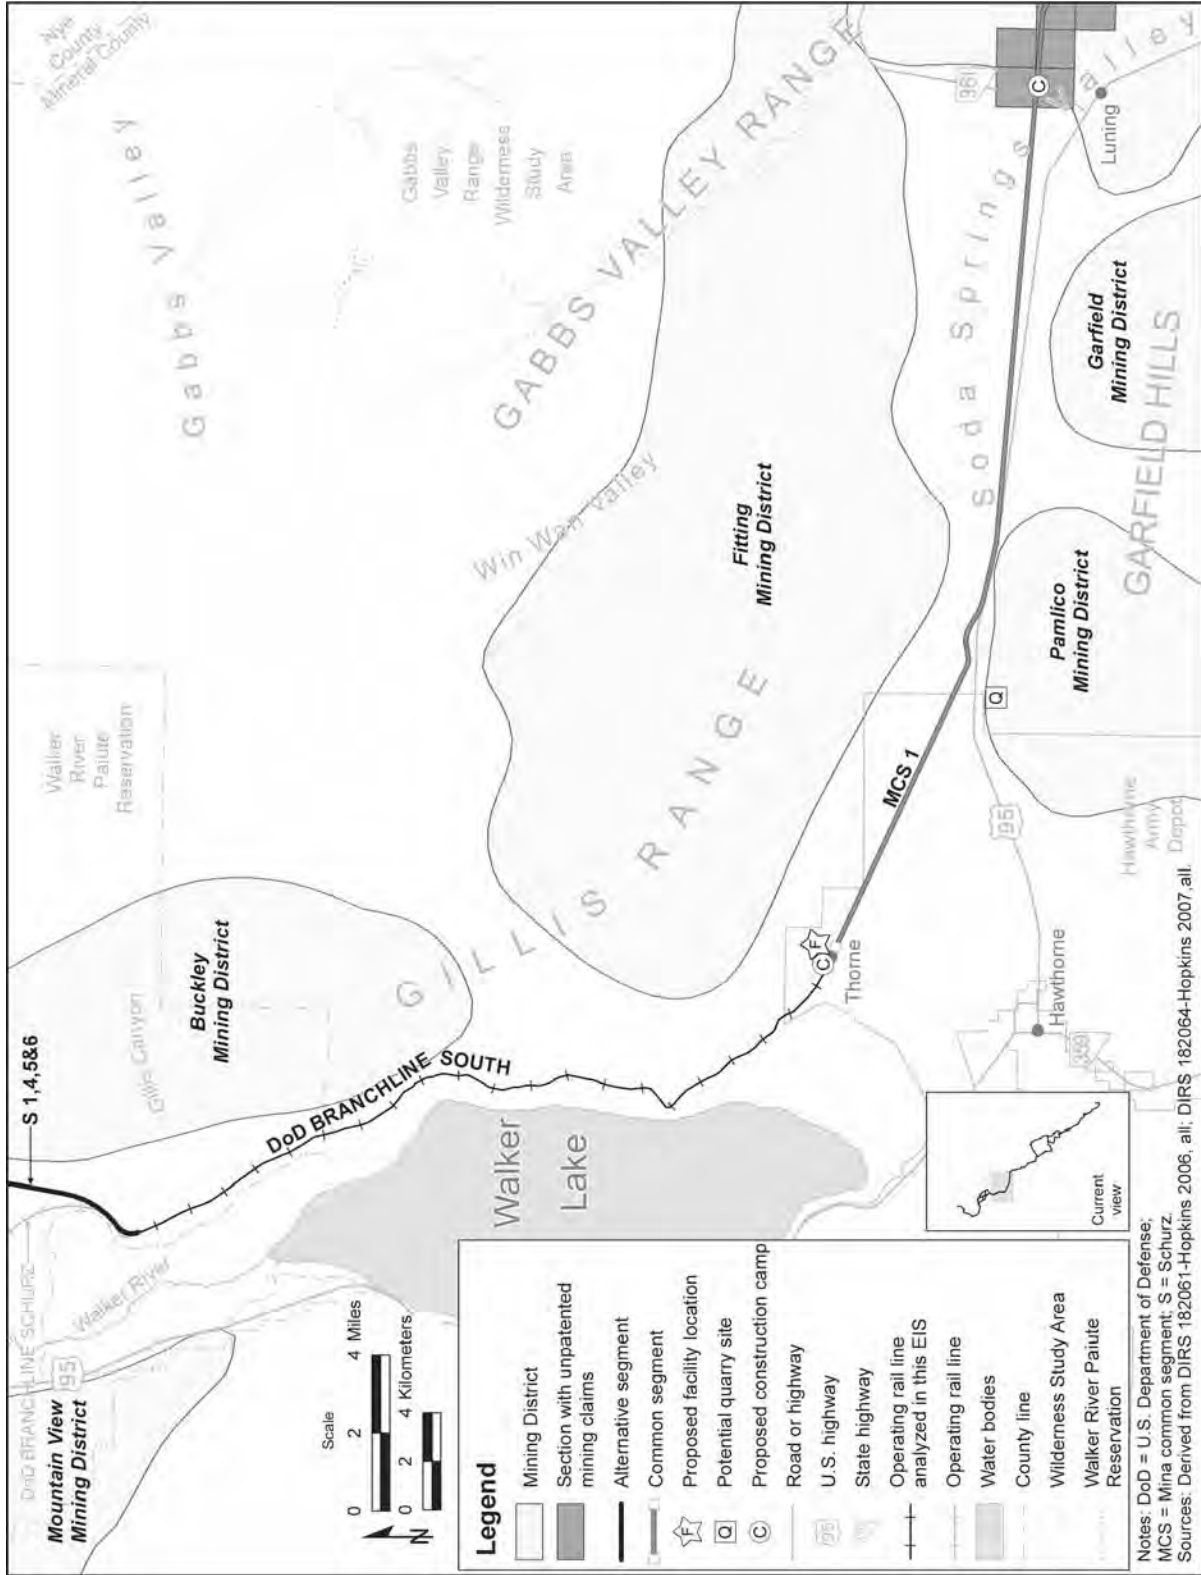


Figure 3-154. Mineral and energy resources within map area 2.

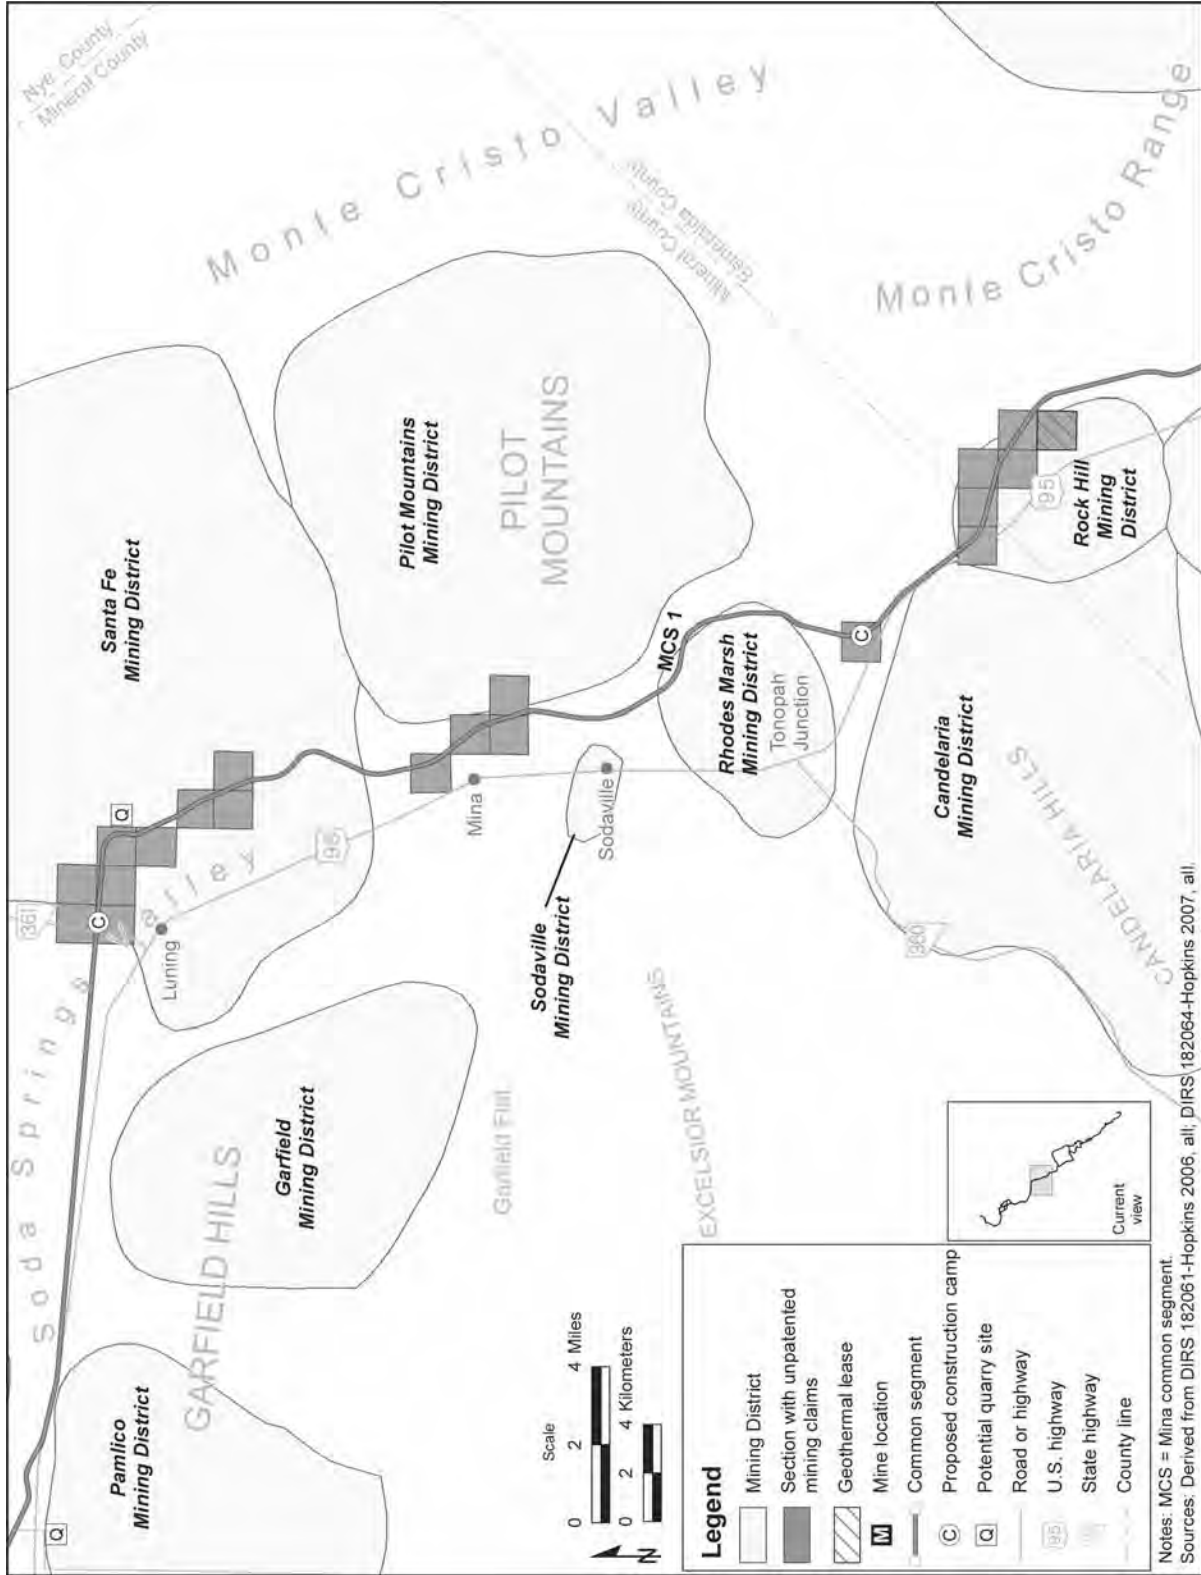


Figure 3-155. Mineral and energy resources within map area 3.

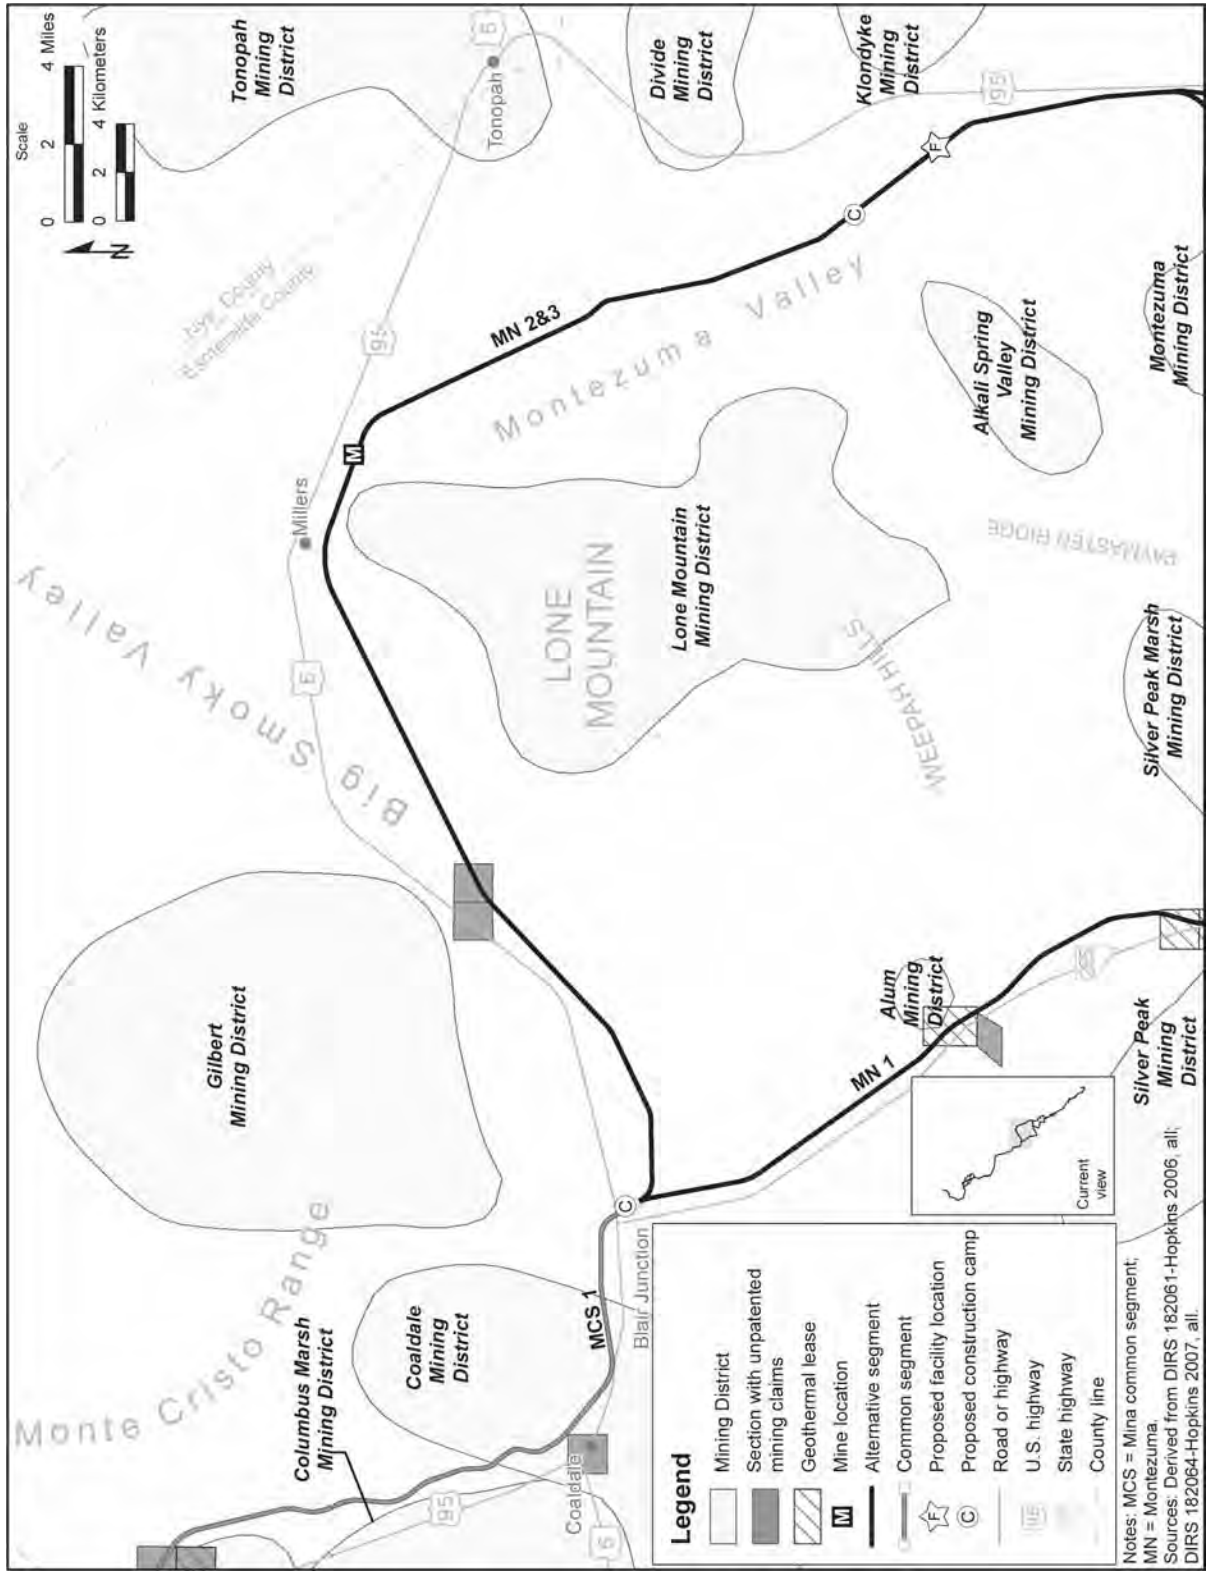


Figure 3-156. Mineral and energy resources within map area 4.

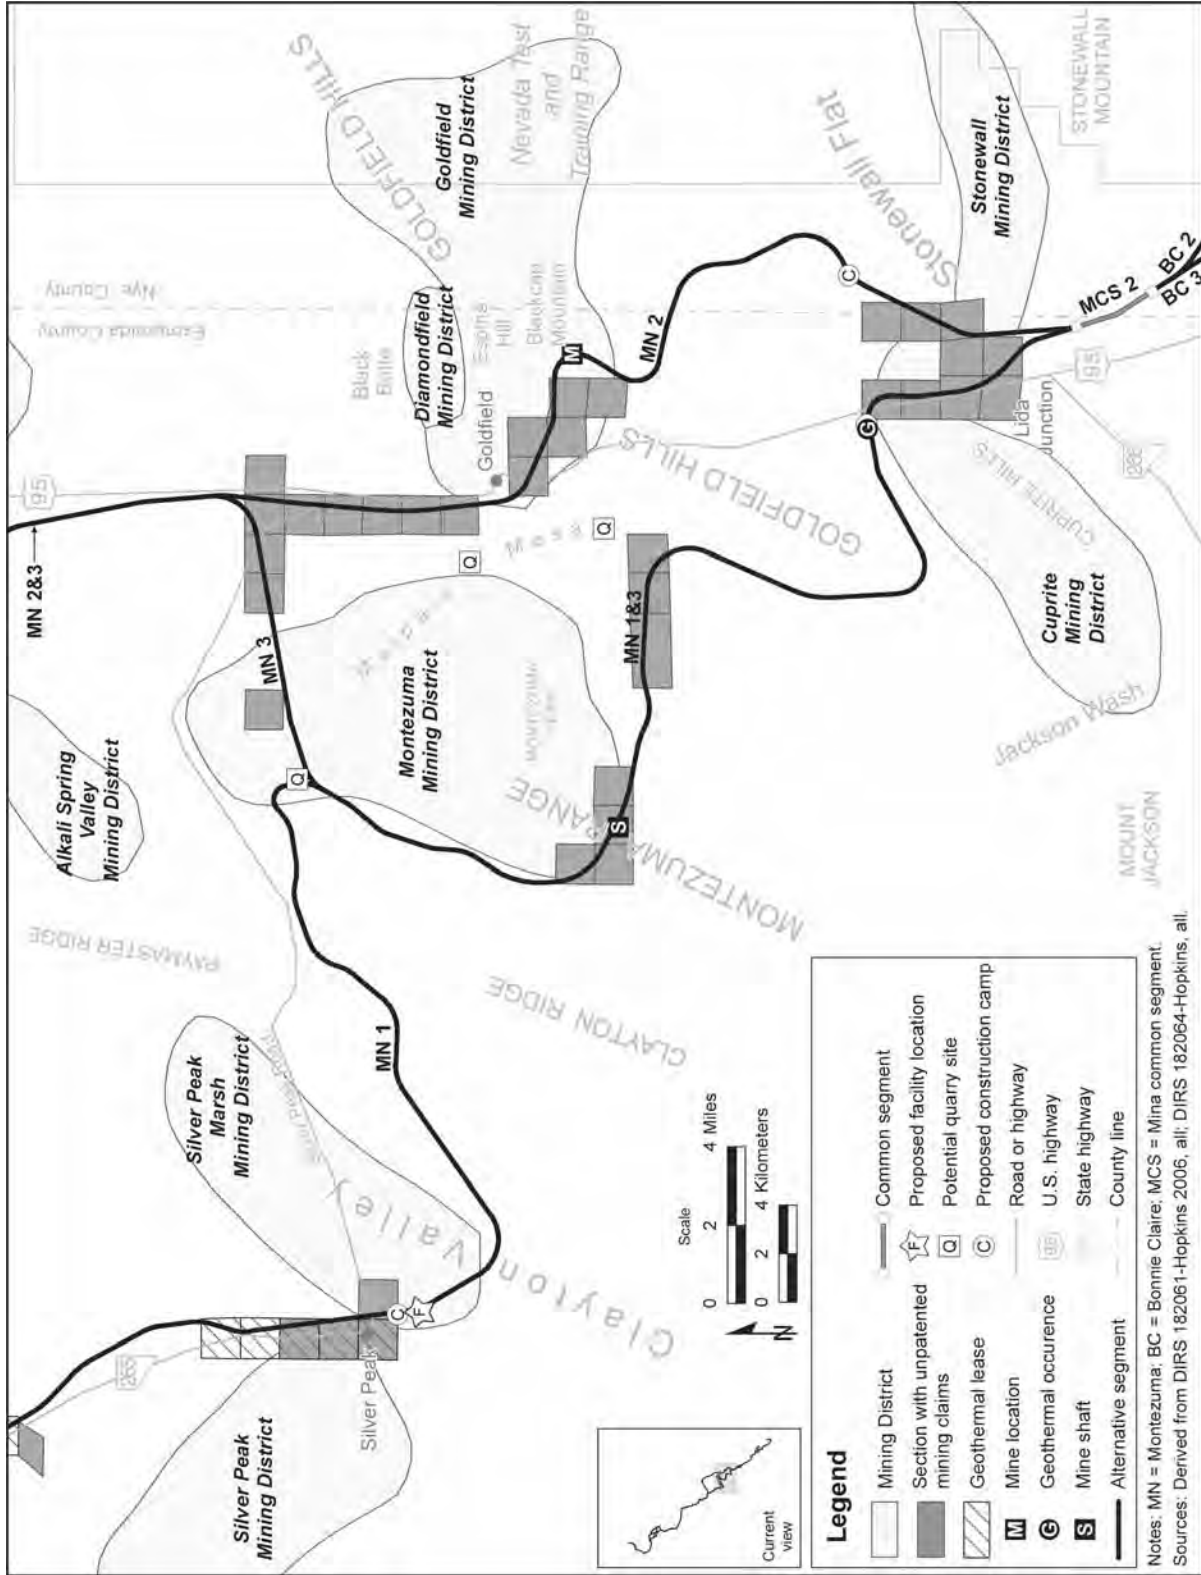


Figure 3-157. Mineral and energy resources within map area 5.

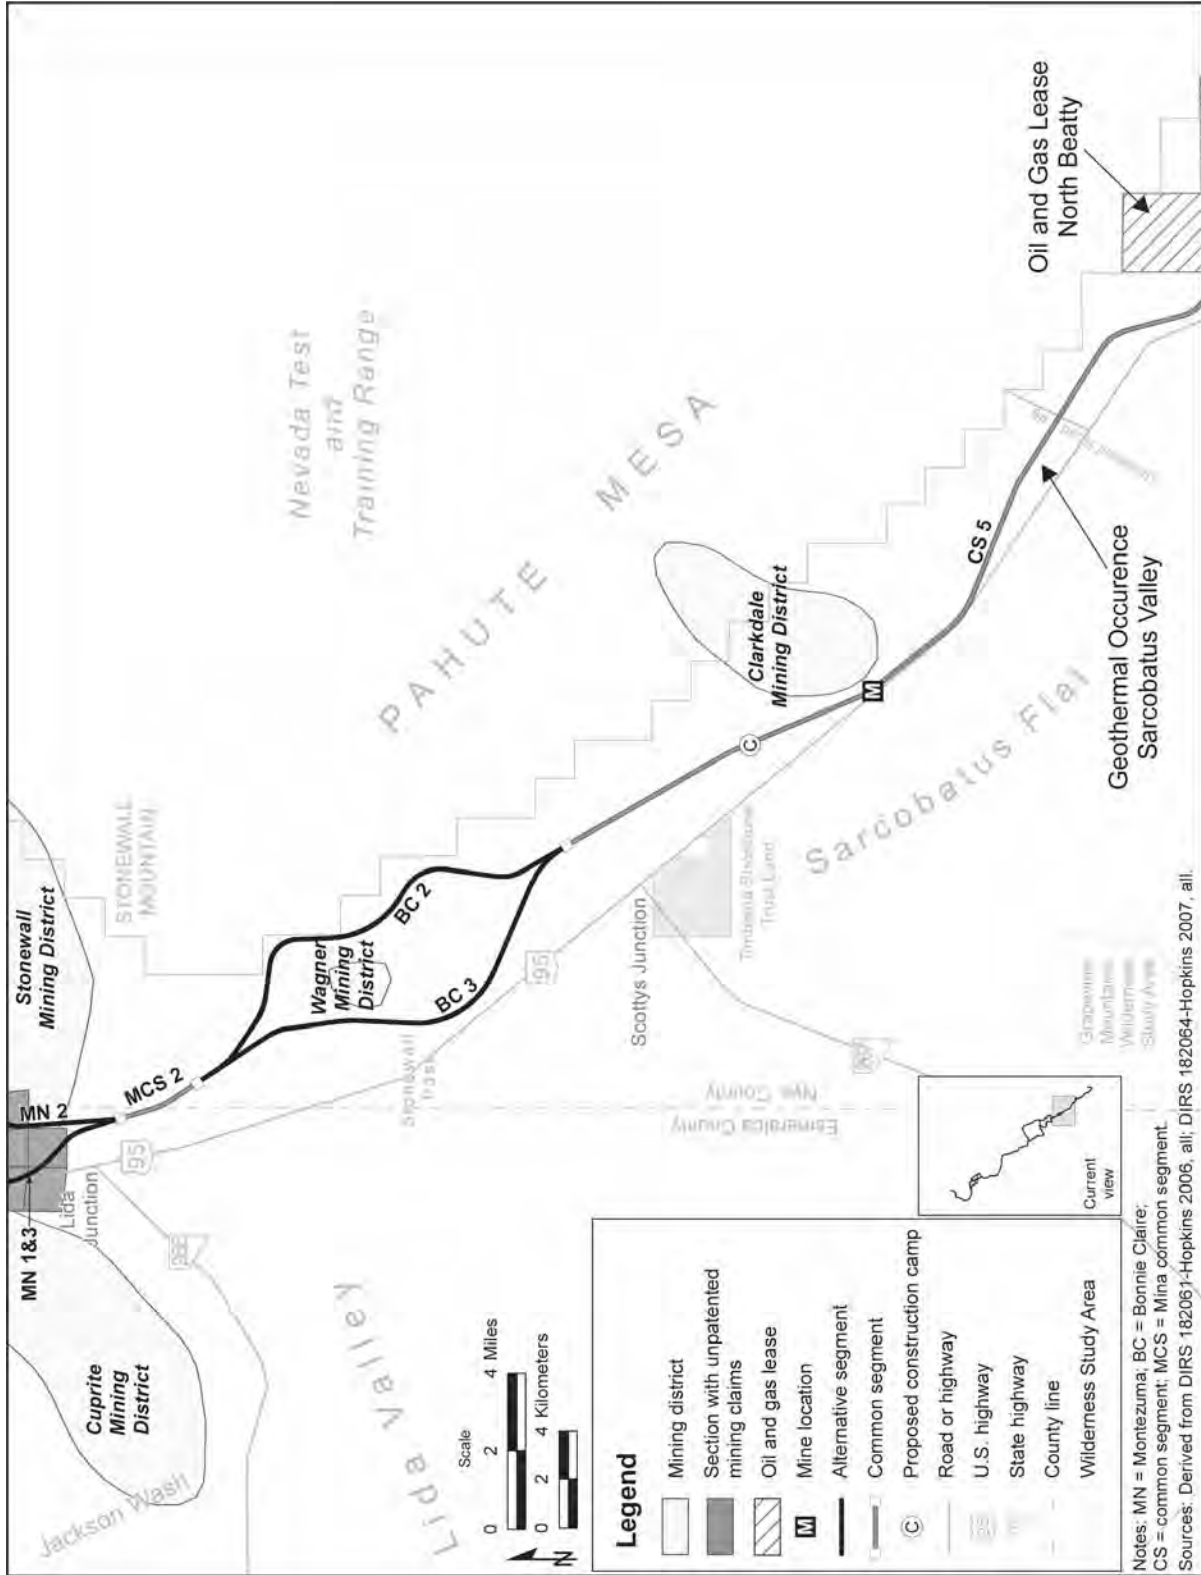


Figure 3-158. Mineral and energy resources within map area 6.

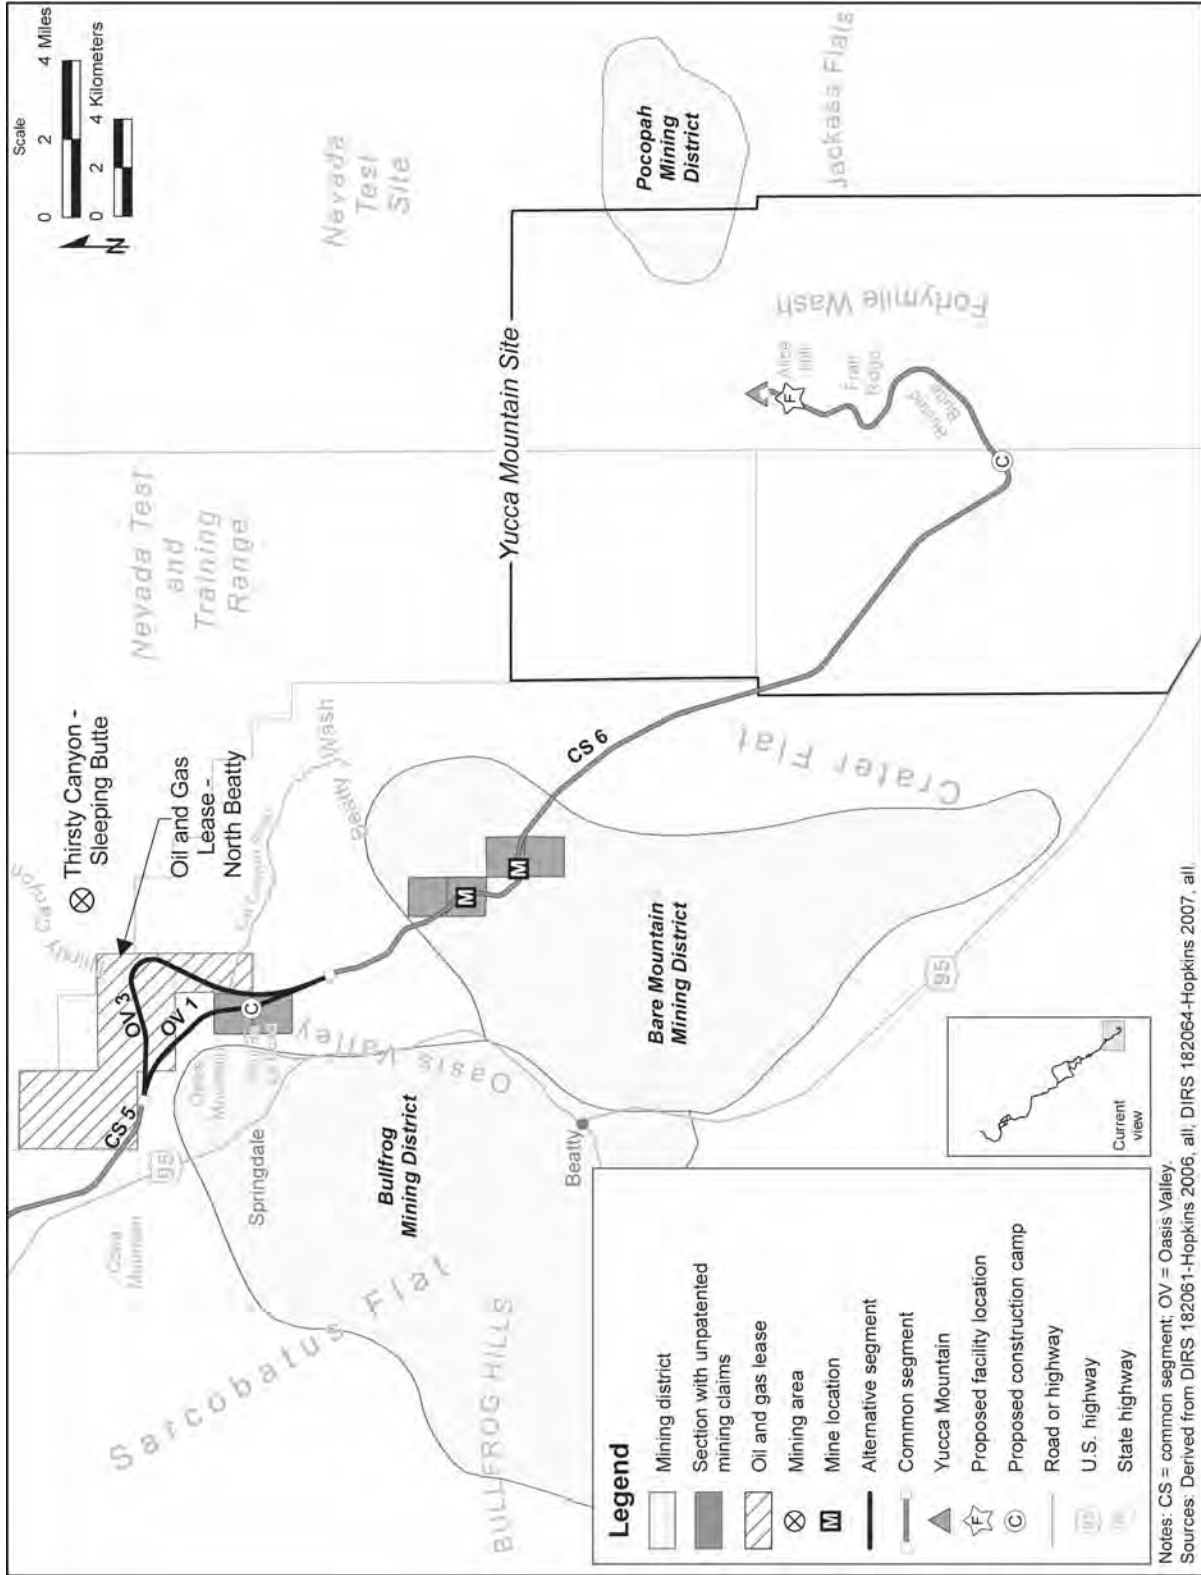


Figure -159. Mineral and energy resources within map area 7.

Table 3-86. Mining districts the Schurz alternative segments would cross.

Mining district	Schurz alternative segment 1	Schurz alternative segment 4	Schurz alternative segment 5	Schurz alternative segment 6
Calico Hills	X	X	X	
Double Springs Marsh		X	X	X
Buckley		X	X	X
Benway			X	
Holy Cross				X

Mina common segment 1 would pass through the Santa Fe, Rhodes Marsh, Rock Hill, and Coaldale Mining Districts. The construction right-of-way would also intersect the outermost boundaries of the Pilot Mountains and Candelaria Mining Districts. These districts are described below.

- **Santa Fe:** The Santa Fe Mining District is large and diverse geologically and mineralogically. From 1883 to 1894, the Santa Fe Mine produced primarily silver. From 1900 to 1929, copper-lead deposits containing silver were mined. From 1988 to 1995, the Santa Fe-Calavada mine produced over 10 million metric tons (12 million tons) of ore containing 10 million grams (356,700 ounces) of gold, 20 million grams (721,523 ounces) of silver, and an unknown amount of mercury. The New York Canyon area has major copper deposits. The Canyon Copper Company recently staked 550 mining claims and now controls 1,003 claims encompassing more than 81 square kilometers (20,000 acres) in the New York Canyon area, and the company reports that it is planning more exploration of the area in 2007. Nevada Sunrise LLC currently holds claims to the New Boston and Blue Ribbon mines, reported to contain scheelite, molybdenite, chalcopyrite, pyrite and fluorite, but the company's exploration plans are unknown (DIRS 180882-Shannon & Wilson 2007, pp. 40 to 43). Mina common segment 1 would bisect active mining claims and authorized or pending notice(s) of intent in the New York Canyon area east of Luning (DIRS 180882-Shannon & Wilson 2007, Table 1).
- **Rock Hill:** This mining district is 13 to 23 kilometers (8 to 14 miles) northwest of Coaldale. Mina common segment 1 would cross through the Redlich claim block in the northern part of the Rock Hill Mining District. The Miranda Gold Corporation is actively exploring this claim. Current exploration is focused on 122 lode claims near Redlich Summit that have geologic indicators for gold (DIRS 180882-Shannon & Wilson 2007, pp. 71 to 73).
- **Coaldale:** This district includes a clay mine (Blanco Mine) that is worked intermittently approximately 11 kilometers (6.7 miles) south-southwest of Mina common segment 1 (DIRS 180882-Shannon & Wilson 2007, pp. 75 and 76).
- **Pilot Mountains:** The Pilot Mountains Mining District covers the entirety of the Pilot Mountains and has been referred to alternatively as the Pilot or Sodaville Mining District. It includes all of the Telephone Canyon and Graham Springs Mining Districts. The primary commodities produced from this district are mercury and tungsten, with minor production or reported occurrences of gold, copper, silver, molybdenum, antimony, turquoise and montmorillonite. It appears that there has been no significant mining in this district since 1956 (DIRS 180882-Shannon & Wilson 2007, pp. 52 and 53).
- **Rhodes Marsh:** This district is 8 kilometers (5 miles) south of Mina, Nevada, and coincides with Rhodes Salt Marsh. This area has been known as a source of saline minerals since the 1860s and part of the area is covered by patented mining claims. Mina common segment 1 would follow the eastern edge of the district. There are no production records after 1934 for any minerals at Rhodes Marsh. Neither active mining nor evidence of recent exploratory activity was observed on the marsh during an October 2006 site visit (DIRS 180882-Shannon & Wilson 2007, pp. 58 and 59).

- Candelaria: This district is in the Candelaria Hills and is bordered on the north by Rhodes Marsh and on the east by Rock Hill. From 1873 to 1996, the district produced 4 million grams (167,200 ounces) of gold, 18.1 million grams (63 million ounces) of silver, 32 million grams (72,000 pounds) of copper, 18.9 million grams (4.16 million pounds) of lead, and 10.2 million grams (2.26 million pounds) of zinc. Mina common segment 1 would pass more than 8 kilometers (5 miles) from major historic and recent mining areas in the district and would be generally separated from the district by U.S. Highway 95 (DIRS 180882-Shannon & Wilson 2007, pp. 61 and 62, and Table 1).

Montezuma alternative segment 1 would pass through the Silver Peak Marsh, Montezuma, and Cuprite Mining Districts. Montezuma alternative segment 2 would pass through the Goldfield and Stonewall Mining Districts. Montezuma alternative segment 3 would pass through Montezuma and Cuprite Mining Districts (see Table 3-87). These districts are described below:

- Silver Peak Marsh: This district is entirely in Esmeralda County and is alternatively known as the Clayton Valley Mining District. Lithium, sylvite, and halite are the only commodities the district produces, but there are reported occurrences of halite, borates, and potash. At present, this district is the only domestic source of lithium. The Chemetall Foote Corporation and its predecessor companies have produced lithium, sylvite, and halite from this district since 1966 and production is ongoing (DIRS 180882-Shannon & Wilson 2007, pp. 94 to 96).
- Montezuma: This district covers the northern part of the Montezuma Range on and around Montezuma Peak in eastern Esmeralda County. Montezuma is primarily a silver-lead district, with minor production of gold and copper, and occurrences of mercury and bismuth. Historically, productive deposits have generally occurred in the western part of the district near the Montezuma townsite. The district was discovered in 1867 and the last production was reported as late as 1931 (DIRS 180882-Shannon & Wilson 2007, pp. 96 and 97).
- Cuprite: Coal was discovered in this district in 1893, which led to a series of unsuccessful attempts to mine coal and market it in the 1890s and early 1900s. During World War II, coal mining was revisited, but the coal was found to be too impure for commercial use and no production has been recorded since. Uranium and turquoise have also been discovered in the district, although there is no current production. Copper ore was discovered in this district in 1905. The Cuprite district is about 19 to 24 kilometers (12 to 15 miles) south of Goldfield, Nevada. There is evidence of recent mining claims and recent trenching and drilling at the northeastern portion of the district, west of U.S. Highway 95. There appears to be a relatively large geothermal system in the area. There is also a silica quarry in the district (DIRS 180882-Shannon & Wilson 2007, pp. 105 to 107). Goldfield: Goldfield is the largest center of mining in the region of influence. This mining district consists of the Goldfield Main, McMahon Ridge, and Gemfield areas, and is in the Goldfield Hills that lie to the northeast and southwest of Goldfield, Nevada. An additional area (referred to as the Tom Keane area) has been the subject of recent (2003) exploration efforts. The Goldfield Project consists of 385 patented and 849 unpatented claims covering more than 83 square kilometers (20,600 acres) in Esmeralda and Nye Counties. At present, one company has a large and active exploration program and is consolidating mining lands in and near Goldfield (DIRS 173841-Shannon & Wilson 2005, pp. 60, 62, and 72).
- Stonewall: Most of the past mining activity in this district is approximately 5 kilometers (3 miles) east of Montezuma alternative segment 2. This district was reportedly prospected for gold and silver as early as 1905 (DIRS 173841-Shannon & Wilson 2005, p. 56). Veins of gold and silver currently under exploration in this district are prominent at areas mined in the past and continue easterly away from the rail alignment.

Table 3-87. Mining districts the Montezuma alternative segments would cross.

Mining district	Montezuma alternative segment 1	Montezuma alternative segment 2	Montezuma alternative segment 3
Silver Peak Marsh	X		
Montezuma	X		X
Cuprite	X		X
Goldfield		X	
Stonewall		X	

Mina common segment 2 would not cross any mining districts.

The Bonnie Claire alternative segments would be west of the Scottys Junction Mining Area and the Wagner Mining District would lie between these segments. Neither segment's construction right-of-way would cross these mining locations. The Wagner Mining District has a number of patented mining claims, although none would fall within the construction right-of-way for either Bonnie Claire alternative segment. The main rock types within the Wagner Mining District are shale, quartzite, and intercalated limestone. There have been recent exploration efforts in this district by several companies (DIRS 173841-Shannon & Wilson 2005, p. 55).

The closest mining districts to common segment 5 would be Clarkdale Mining District to its east and Bullfrog Mining District to its south where it would meet the Oasis Valley alternative segments. The Oasis Valley alternative segments are between the Bullfrog Mining District and the Thirsty Canyon-Sleeping Butte Mining Area. The Clarkdale Mining District contains discontinuous, narrow zones containing some gold and silver mineralization (DIRS 173841-Shannon & Wilson 2005, p. 52). The Bullfrog Mining District contains small, localized areas of gold, silver, and lesser copper mineralization (DIRS 173841-Shannon & Wilson 2005, p. 46). The Thirsty Canyon-Sleeping Butte Mining Area has been historically quarried for decorative rock and building stone (DIRS 173841-Shannon & Wilson 2005, p. 49).

Common segment 6 would cross the northeastern portion of the Bare Mountain Mining District, although the vast majority of past mining activity occurred more than 3 kilometers (2 miles) south of this common segment. The district contains gold-bearing veins, and some veins contain silver. The district also contains a variety of minerals and semi-precious stones, including opal, chalcopyrite, malachite, azurite, galena, pyrite, limonite, hematite, fluorite, and gypsum (DIRS 173841-Shannon & Wilson 2005, pp. 38, 41, and 42).

The only patented mining claims that would fall within or intersect the Mina rail alignment construction right-of-way would be along the Montezuma alternative segment 2. Table 3-88 lists the number of sections containing unpatented mining the rail line construction right-of-way would cross.

The existence of abandoned or active mining tunnels and shafts near the rail alignment would also be a concern for safety reasons. There is one underground mine that would be within the Montezuma alternative segment 1 or 3 construction right-of-way, approximately 3 kilometers (2 miles) east of private land at Millers. There would be one tunnel/shaft within the Montezuma alternative segment 1 or 3 construction right-of-way and one tunnel/shaft within the Montezuma alternative segment 2 construction right-of-way in the Goldfield area, as shown in Figure 3-157. DOE obtained the data on locations of tunnels and caves, mining shafts, and underground mines from the Nevada Bureau of Mines and Geology (DIRS 180882-Shannon & Wilson 2007).

Table 3-88. Numbers of unpatented mining claims that may intersect the Mina rail alignment construction right-of-way.^a

Rail line segment	Number of sections with unpatented mining claims ^a	Unpatented mining claims across all sections ^b
Mina common segment 1	20	388
Montezuma alternative segment 1	17	202
Montezuma alternative segment 2	24	655
Montezuma alternative segment 3	19	249

a. Source: DIRS 181617-Hopkins 2007.

b. Data are provided by Township, Range, and Section and might not fall within the rail line construction right-of-way. DOE would need to verify the actual numbers and locations of unpatented mining claims before applying for a right-of-way grant.

However, none of the tunnels, shafts, and underground mines in this dataset is identified as having been field verified by the Division of Mines. Furthermore, this dataset might not include very old tunnels, shafts, and underground mines that were not recorded.

3.3.2.5.2.2 Energy Resources. The Basin and Range Province is considered a favorable area for geothermal resources because it has higher-than-average heat flow and is an area of crustal expansion, where faults can provide permeable reservoirs and conduits for deep circulation of water, and the crust is so thin it has a higher-than-average heat flux. Several hundred wells have been drilled in Nevada to discover high-temperature geothermal steam resources (DIRS 173841-Shannon & Wilson 2005, p. 32).

Geothermal resources are present as hot springs and thermal waters near Hazen, Hawthorne, Mina, Redlich, Silver Peak, Sarcobatus Flat, Scottys Junction, Panaca (Owl Warm Springs), Cedar Spring, Stonewall Flat, and Beatty Warm Springs.

The following paragraphs describe energy leases, the geographic locations of which are identified based on the township-range system, the method by which public land in Nevada and many other states was surveyed before being made available for purchase or homesteading. The township is the major subdivision of land; it is numbered north to south and measures 36 square miles; range is the east/west location identifier; sections are 1-square-mile areas within townships. Township, range, and section are abbreviated T, R, and S; directional information is abbreviated N, S, E, and W. Thus, E/2 T2S R39E refers to the east half of Township 2 South, Range 39 East).

The following Mina rail alignment segments would cross geothermal leases:

- Mina common segment 1 (Warm Wells north of Columbus Marsh) – The BLM issued a block of leases (all but one are still active) located in T3N and T4N, R36E. Mina common segment 1 would cross the northeastern-most leased section of the lease block (Section 26, T4N, R36E). Figure 3-155 shows these leases (DIRS 180882-Shannon & Wilson 2007, pp. 122 and 123).
- Montezuma alternative segment 1 (Alum District – Warm Wells) – A block of current and expired BLM geothermal leases are present in the southern Big Smoky Valley. Montezuma alternative segment 1 would cross several leases with an effective date of March 1, 2003, in S/2 T1N, R38.5. Figure 3-156 shows these leases (DIRS 180882-Shannon & Wilson 2007, p. 122).
- Montezuma alternative segment 1 (Silver Peak Marsh District – Silver Peak Hot Springs) – would cross several geothermal leases obtained by Western Geothermal Partners LLC in Section 34, T1S, R39E and several sections in E/2 T2S, R39E. Figure 3-157 shows these leases (DIRS 180882-Shannon & Wilson 2007, pp. 120 and 121).

There are geothermal occurrences (springs and wells) in Sarcobatus Valley along U.S. Highway 95 south of Scottys Junction (DIRS 173842-Shannon & Wilson 2005, p. 50).

There are no producing oil or gas wells within 16 kilometers (10 miles) of the Mina rail alignment north of common segment 5 (DIRS 180882-Shannon & Wilson 2007, p. 116). The rail alignment would cross several areas of expired or relinquished (closed) oil and gas leases. The closest oil and gas lease is approximately 3 kilometers (2 miles) northeast of Mina, Nevada, which is approximately 1.6 kilometers (1 mile) east of Mina common segment 1. The BLM authorized this lease in September 2006 (DIRS 180882-Shannon & Wilson 2007, pp. 117 and 118). The BLM also authorized an oil and gas lease on the north slope of the Pilot Mountains in July 2006; however, Mina common segment 1, the rail line segment that would be closest to this lease, would pass approximately 6 kilometers (4 miles) west of this area (DIRS 180882-Shannon & Wilson 2007, p. 117).

Fourteen sections of land constitute a single oil and gas lease (one permittee) 19 kilometers (12 miles) north of Beatty, Nevada, along the southwest flank of Pahute Mesa in southern Nye County (DIRS 179587-Wilson 2007, all). Oasis Valley alternative segment 3 would cross 7 of the 14 sections and Oasis Valley alternative segment 1 would cross 2 sections of this oil and gas lease block.

As of January 2007, no BLM coal leases (active or closed) have been identified within 16 kilometers (10 miles) of the Mina rail alignment (DIRS 180882-Shannon & Wilson 2007, p. 118).

3.3.2.5.3 Recreation and Access

This section describes the recreational areas within the Mina rail alignment region of influence and the secondary roads and trails the rail alignment would cross. Figures 3-160 through 3-167 show recreational areas in the region of influence.

3.3.2.5.3.1 Churchill County. Outdoor recreation in Churchill County includes a mixture of dispersed and location-specific activities (DIRS 180482-Churchill County 2005, p. 9-1). There are no developed BLM recreation sites within 1.6 kilometers (1 mile) of the Mina rail alignment. U.S. Highway 50 intersects and parallels the Union Pacific Railroad Hazen Branchline for approximately 11 kilometers (7 miles) in Churchill and Lyon Counties. U.S. Highway 50, which traces the routes of the historic transcontinental Lincoln Highway, has recently been marketed as the “Loneliest Road in America” for its extreme remoteness (DIRS 180483-NPS 2004, p. 21).

The Union Pacific Railroad Hazen Branchline abuts the Lahontan State Recreation Area, tracing the area’s northern boundary for approximately 6.5 kilometers (4.0 miles). The site, managed by the Nevada Division of State Parks, Department of Conservation and Natural Resources, is primarily focused on the Lahontan Reservoir and associated water-based activities (fishing, boating, waterskiing) as well as recreational vehicle and tent camping (DIRS 180481-Nevada Division of State Parks [n.d.], all).

3.3.2.5.3.2 Lyon County. Recreation on BLM lands in Lyon County is managed primarily for dispersed recreation, with developed recreation only at certain high-use sites. There are no developed BLM recreation areas along the portions of Union Pacific Railroad Hazen Branchline, Department of Defense Branchline North, or Schurz alternative segments in Lyon County.

In addition to Lahontan State Recreation Area, the State of Nevada manages two recreation areas in the region of influence of existing rail segments, Fort Churchill State Historic Park and the Mason Valley Wildlife Management Area.

Fort Churchill State Historic Park preserves the ruins of a Civil War-era U.S. Army fort and Pony Express station (DIRS 180459-Nevada Division of State Parks [n.d.], all). Department of Defense Branchline North crosses about 1 kilometer (0.6 mile) of this park.

The 54 square-kilometer (13,375-acre) Mason Valley Wildlife Management Area, administered by the Nevada Department of Wildlife, provides a mosaic of game habitats from open water to wetlands and upland areas (DIRS 180480-NDOW [n.d.], all). Department of Defense Branchline North runs adjacent to the northern boundary of the Wildlife Management Area for more than 5 kilometers (3 miles).

Schurz alternative segments 1 and 4 would come within 1 kilometer (0.6 mile) of Weber Reservoir, a recreational water body straddling the boundary of Lyon and Mineral Counties and managed by the Walker River Paiute Tribe.

The Fort Churchill to Wellington **Back Country Byway** begins on Nevada State Highway 2B at Fort Churchill State Historic Park and runs 80 kilometers (50 miles) west to Wellington, Nevada (DIRS 180461-BLM 2006, all). This unimproved road parallels the existing rail line at a distance of approximately 460 meters (1,500 feet) at its closest for 0.8 kilometer (0.5 mile) before the two diverge.

A **Back Country Byway** is a vehicle route that traverses scenic corridors utilizing secondary or back country road systems (DIRS 181598-BLM 2007).

3.3.2.5.3.3 Mineral County. BLM lands in Mineral County are managed primarily for dispersed recreation, with developed recreation opportunities available only at a few sites. The BLM and Nevada Division of State Parks manage facilities at Walker Lake and the Walker River Paiute Tribe operates facilities at Weber Reservoir. Only one Wilderness Study Area, the Gabbs Valley Range Wilderness Study Area, is near any proposed or existing rail lines in the county, but at approximately 7.5 kilometers (4.6 miles) from Mina common segment 1, it would be outside the region of influence.

Existing Department of Defense Branchline South follows the periphery of Walker Lake, at a distance of no closer than 0.7 kilometer (0.44 mile), for approximately 20 kilometers (12 miles) of the lake's eastern shore. Walker Lake serves as a regional focal point for water-based recreational activities, and is a designated recreation area for the State of Nevada and the BLM (DIRS 180702-Mineral County Nuclear Projects Office 2005, pp. 15 and 30).

Mina common segment 1 would cross a BLM-designated recreation area south of Mina, Nevada, for approximately 19 kilometers (12 miles).

Organized, reoccurring recreation events near the proposed Mina rail alignment typically involve off-highway vehicle based recreation. These events have historically been of both a competitive (speed-based races) and non-competitive (road-rallies, scenic/*historic tourism*, etc.) nature and range widely in the number of participants and communication with BLM managers). The BLM requires that the organizers of these events submit applications for a Special Recreation Permits that describe the details and logistics of each event, such as course and operations plans (DIRS 181599-BLM Special Recreation Permit requirements). Because part of the draw of these events is the wide open spaces and large distances participants are able to traverse, courses often cross several BLM administrative districts or counties. One of the largest of these annual off-highway vehicle events near the Mina rail corridor is the "Las Vegas to Reno" race, which crosses the Battle Mountain, Carson City, and Ely BLM districts (DIRS 181600-BLM 2005, all).

There are very few BLM-permitted off-highway vehicle races and special recreation events in the Mina rail alignment region of influence in Mineral County. Mina common segment 1 would cross approved race routes in several locations. Permitted off-highway vehicle events in the area have included the Las Vegas to Reno Race and Dual Sport Tour (DIRS 182283-Callan 2007). All approved race routes that the rail line would cross are on existing roads and trails.

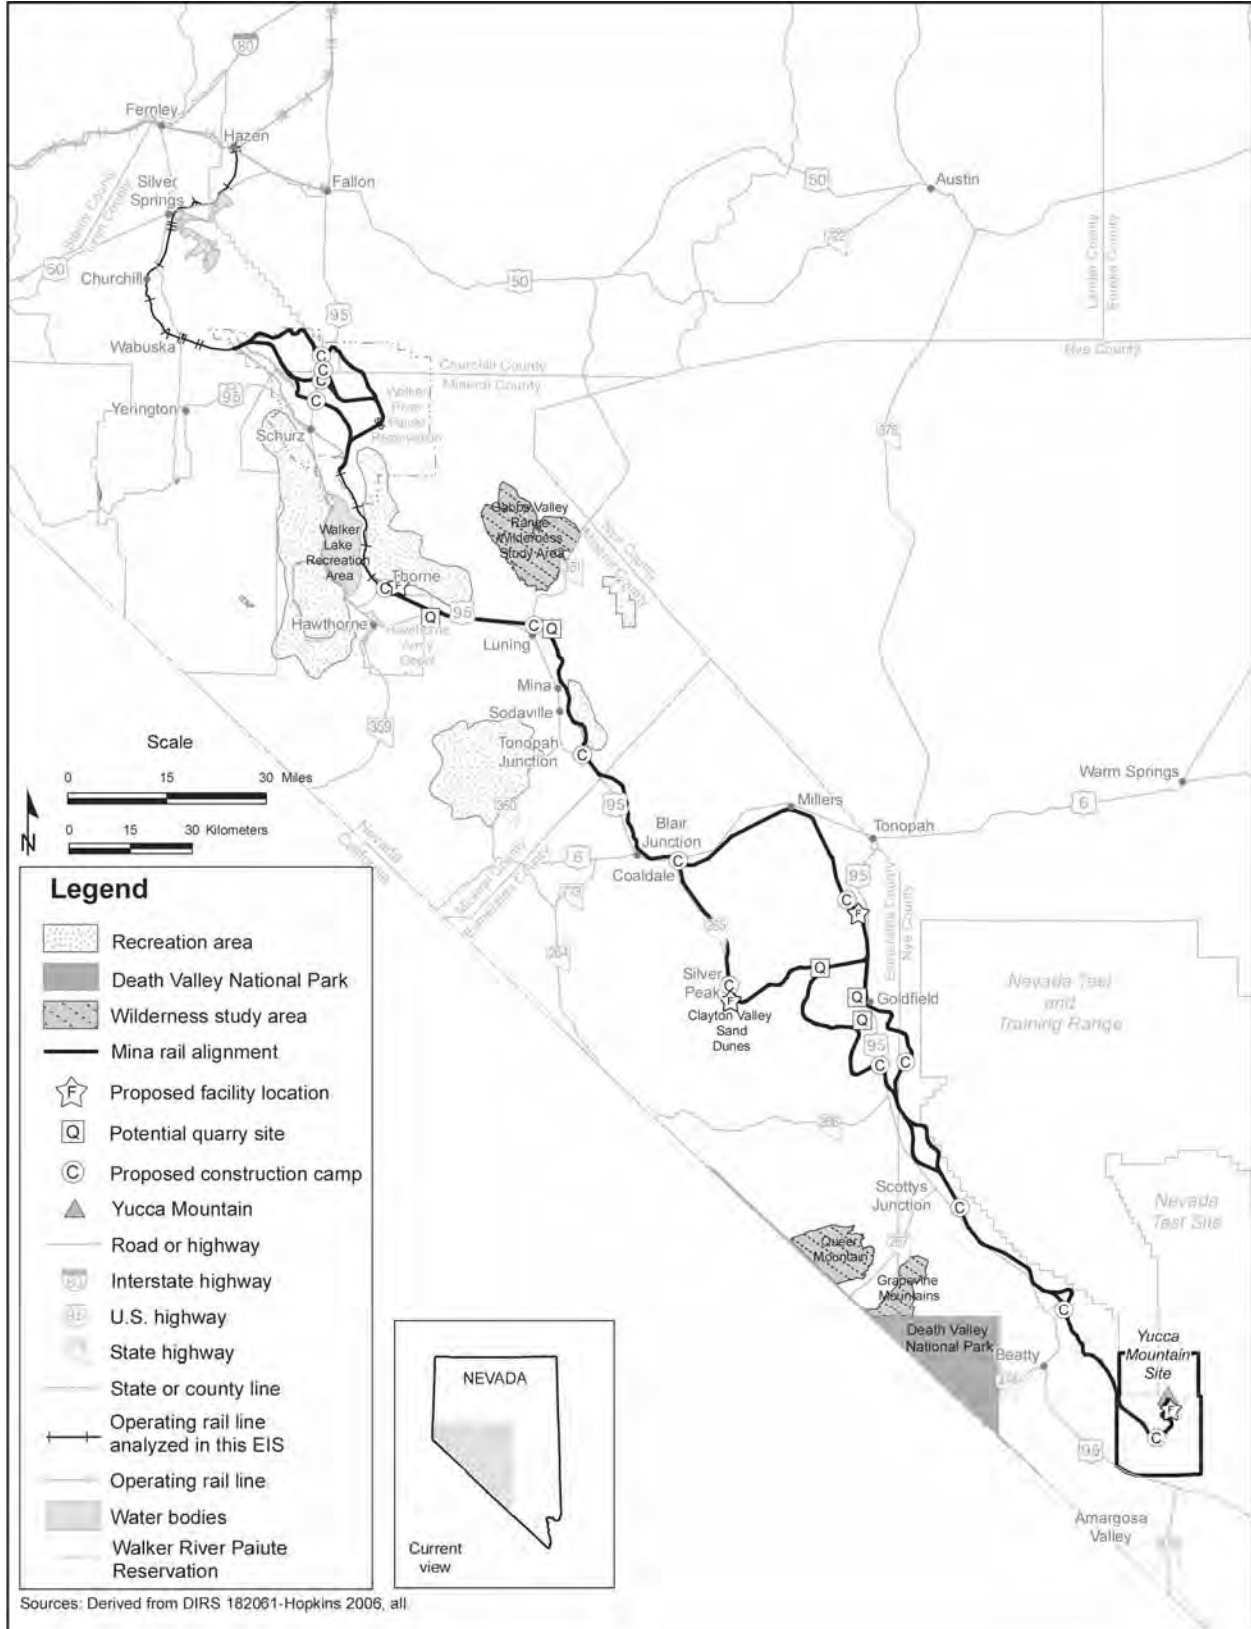


Figure 3-160. Recreation areas and roads along the Mina rail alignment.

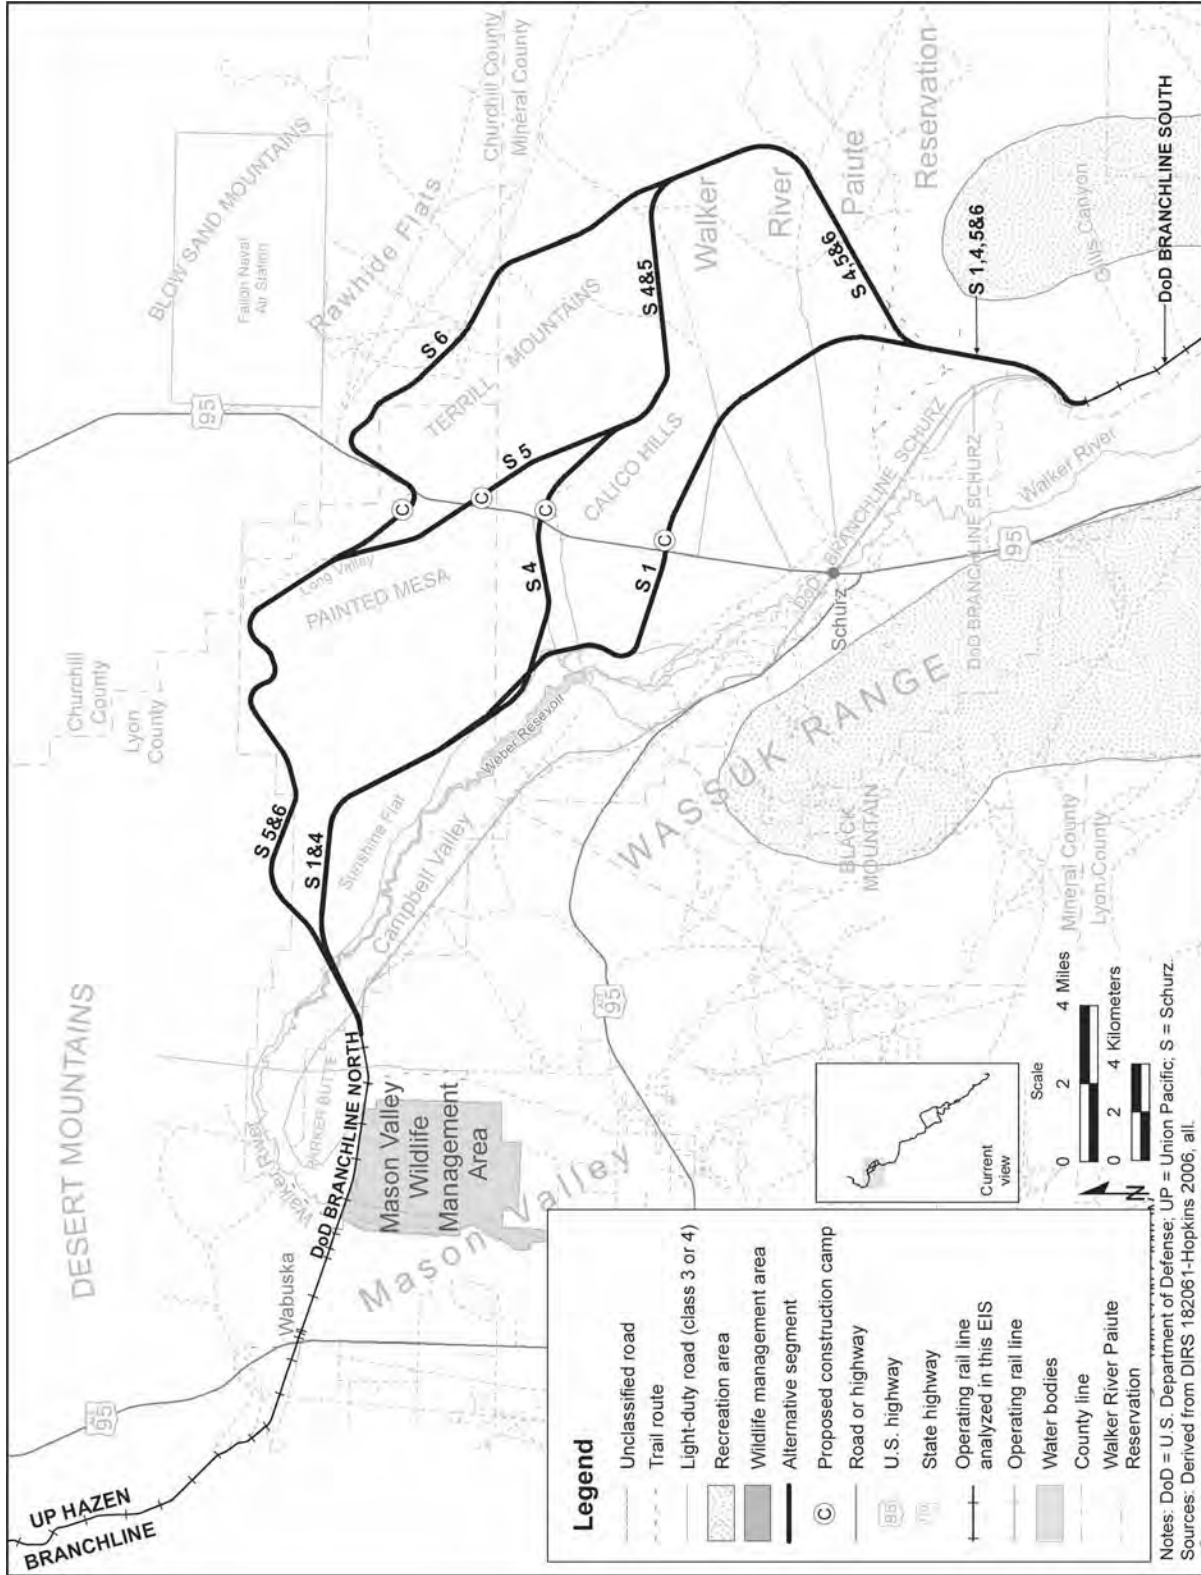


Figure 3-161. Recreation areas and roads within map area 1.

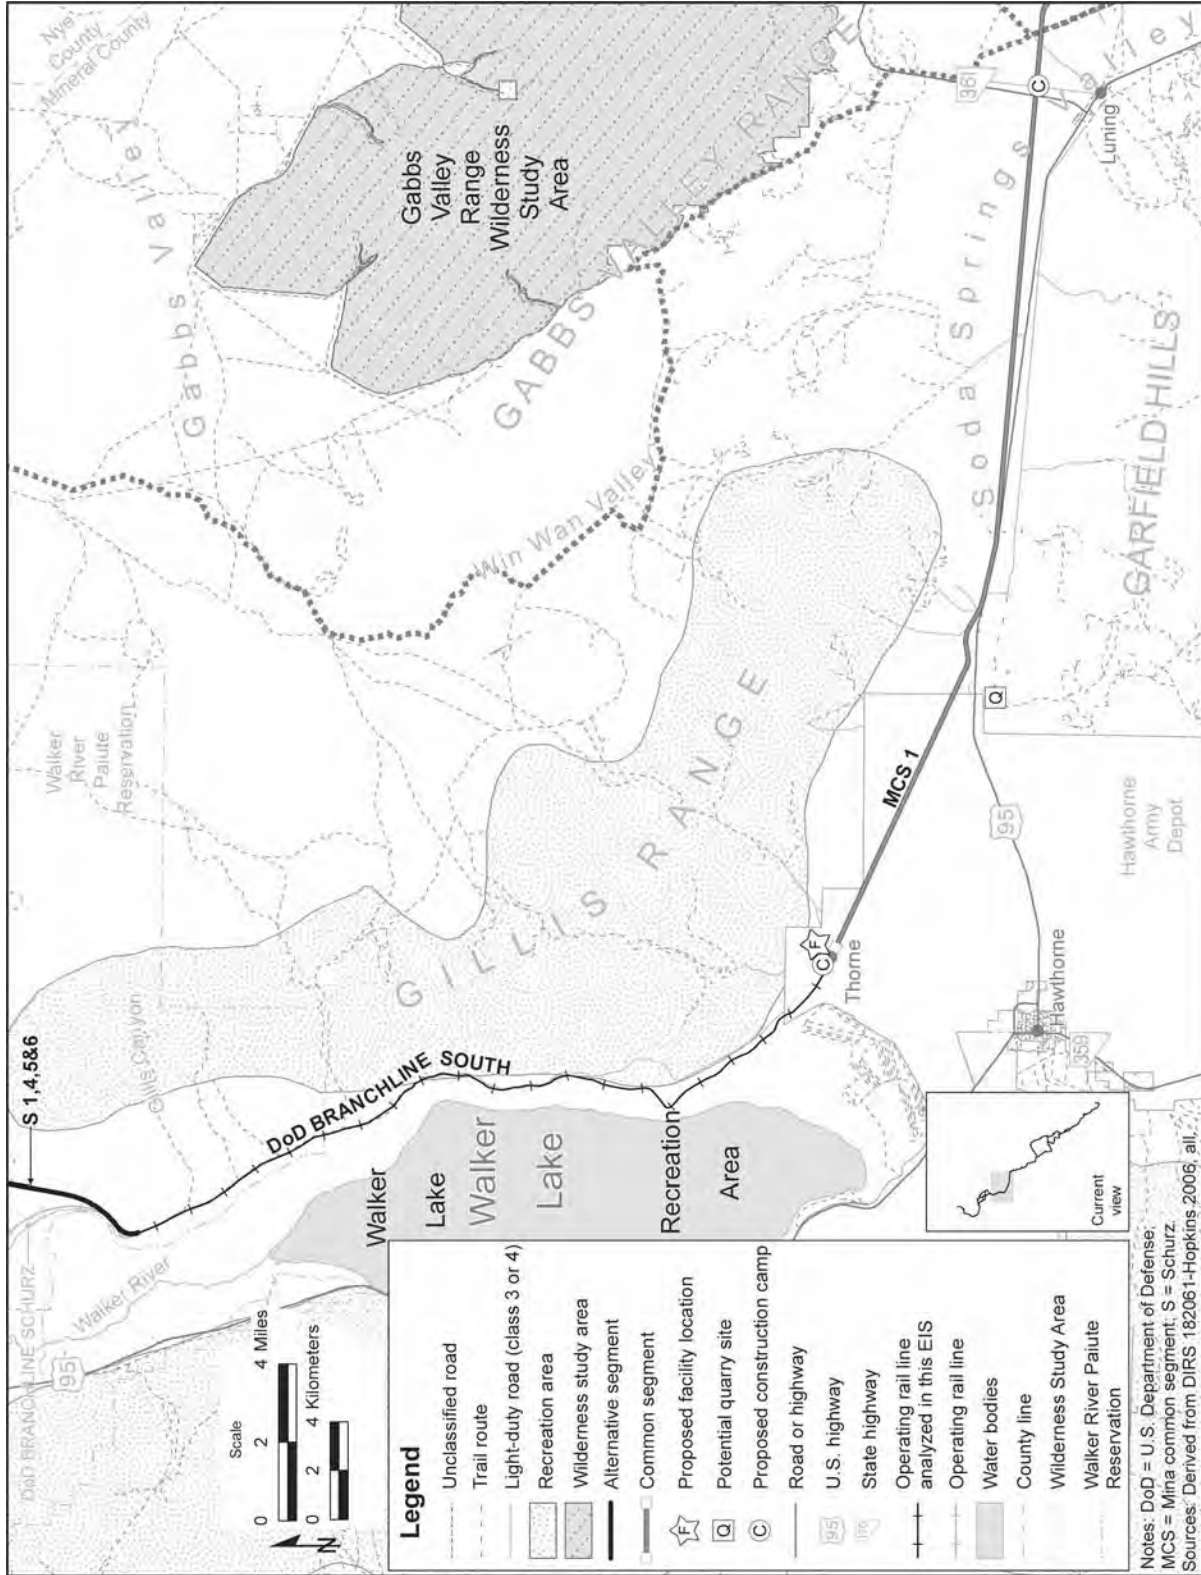


Figure 3-162. Recreation areas and roads within map area 2.

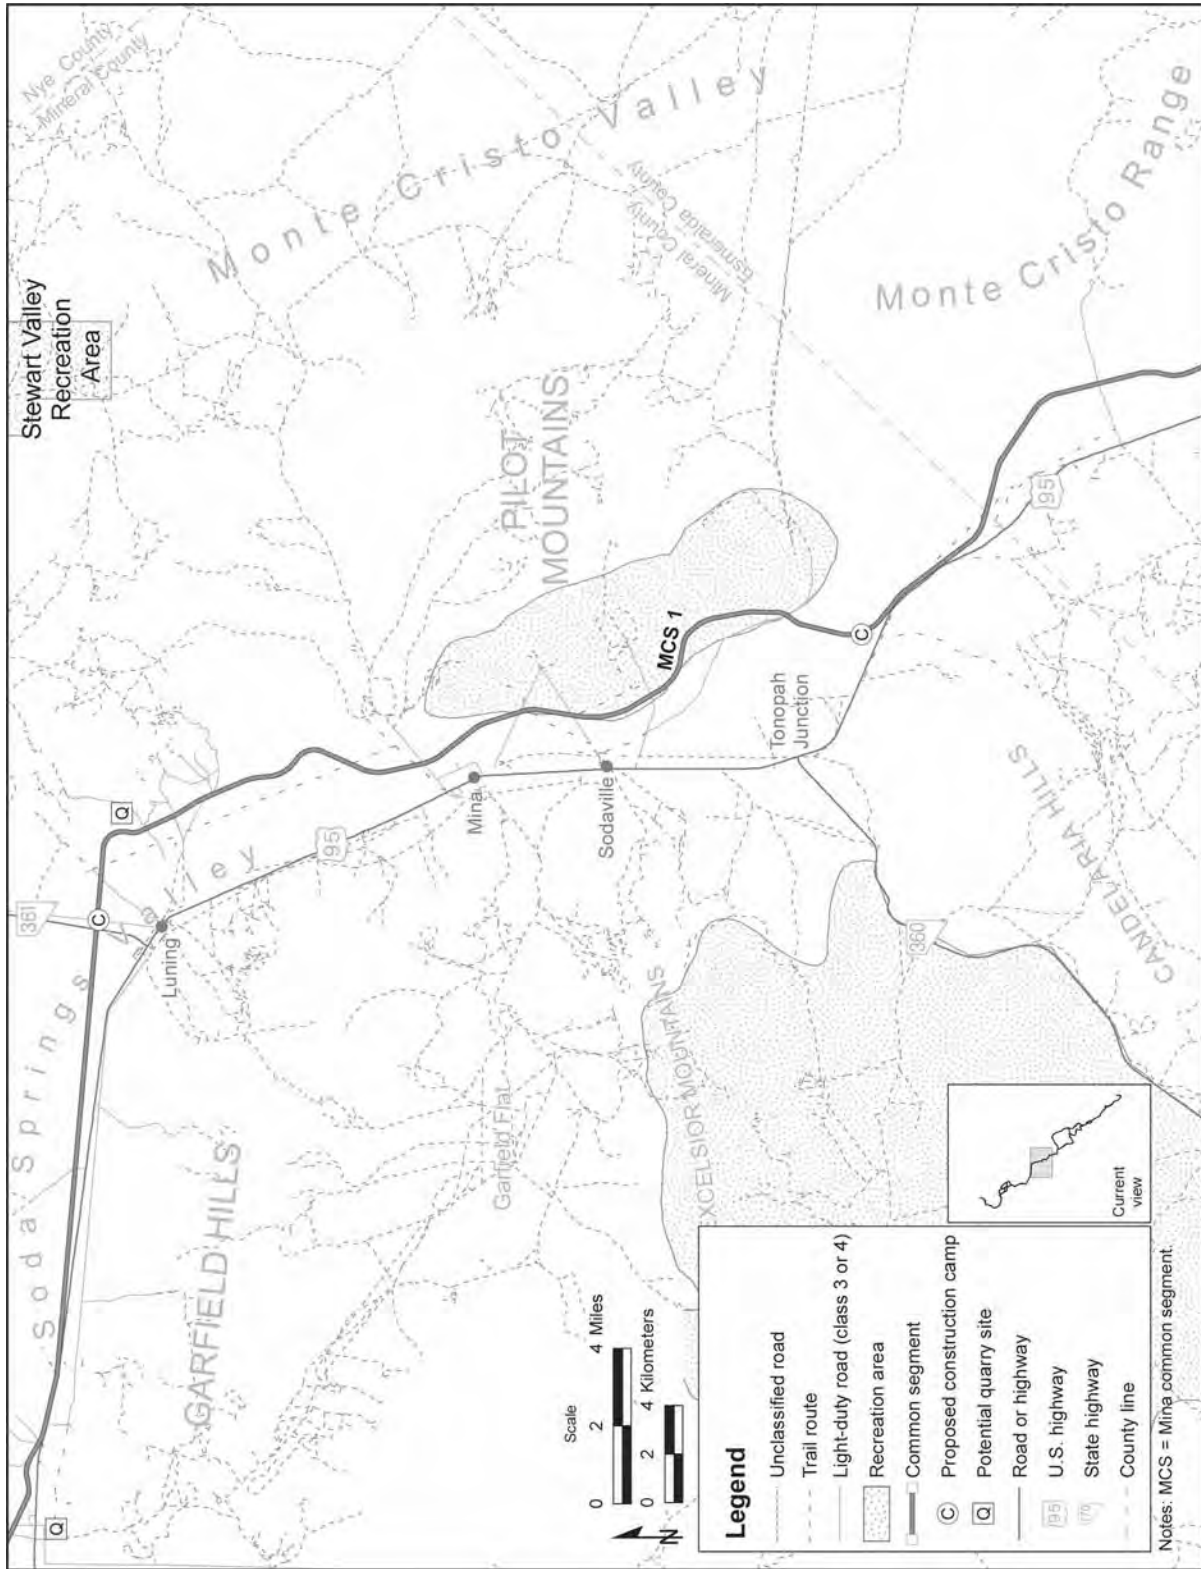


Figure 3-163. Recreation areas and roads within map area 3.

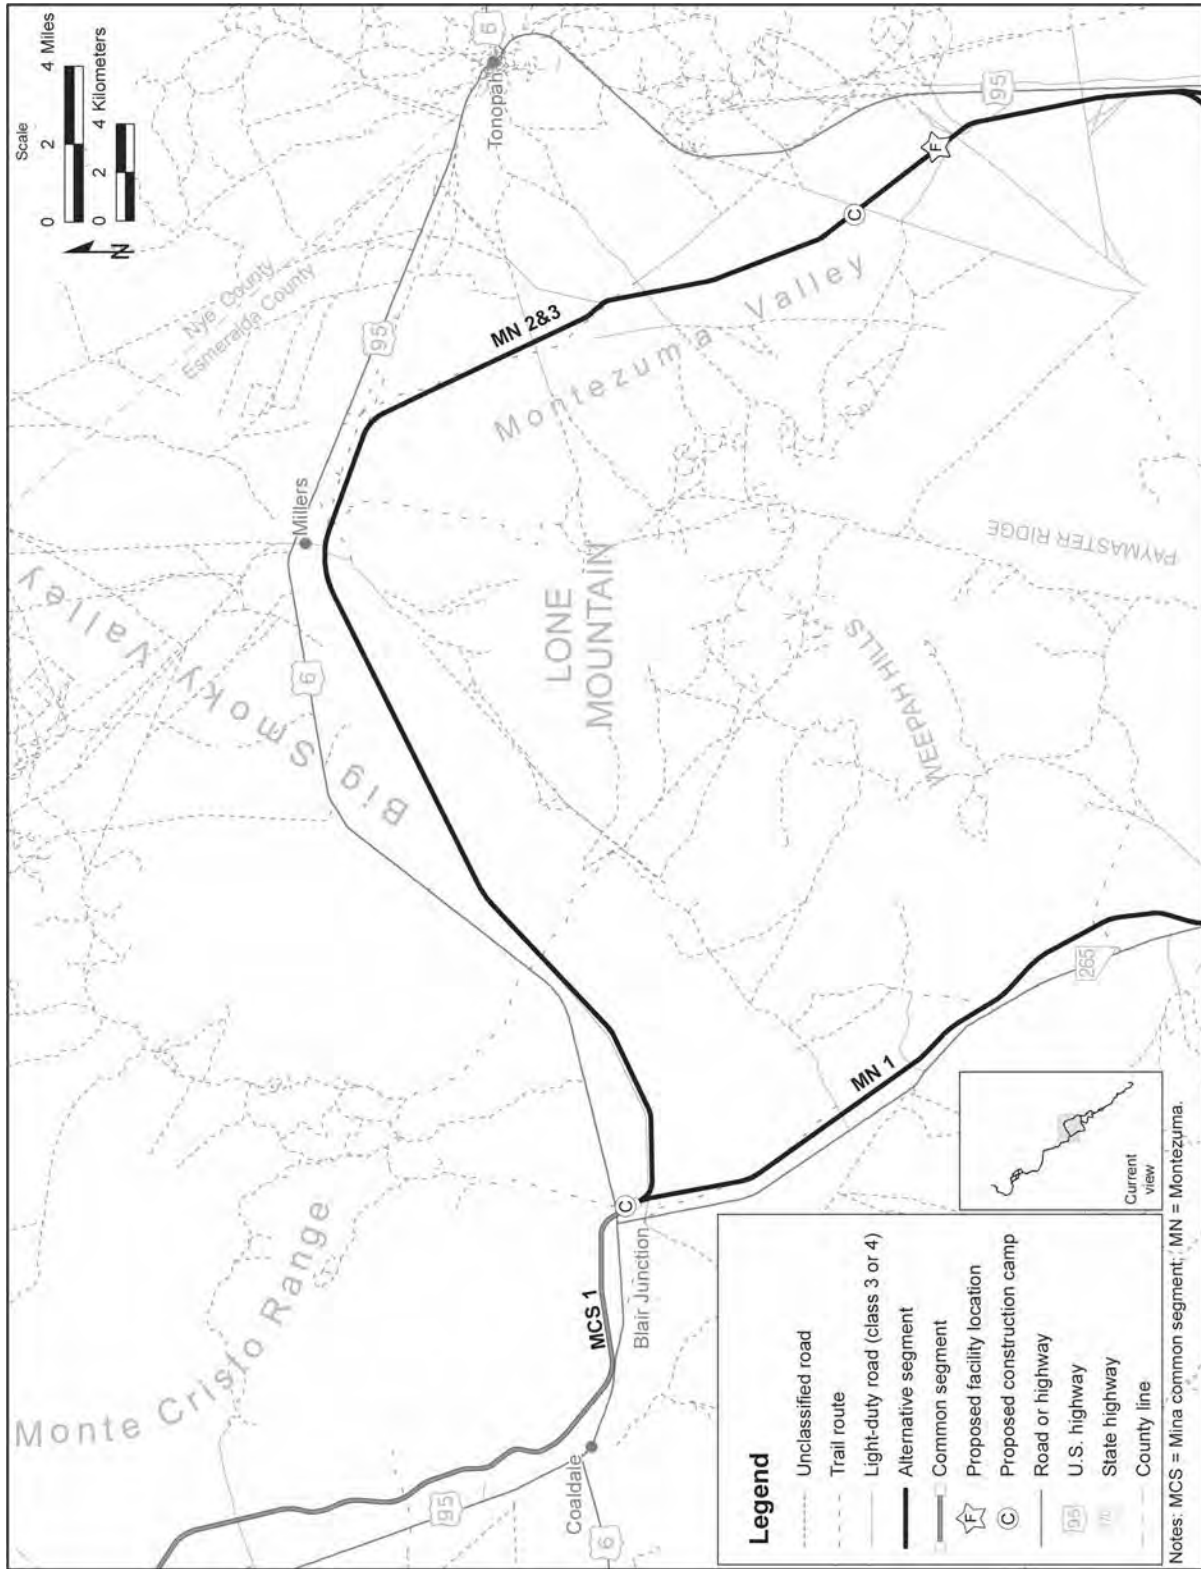


Figure 3-164. Recreation areas and roads within map area 4.

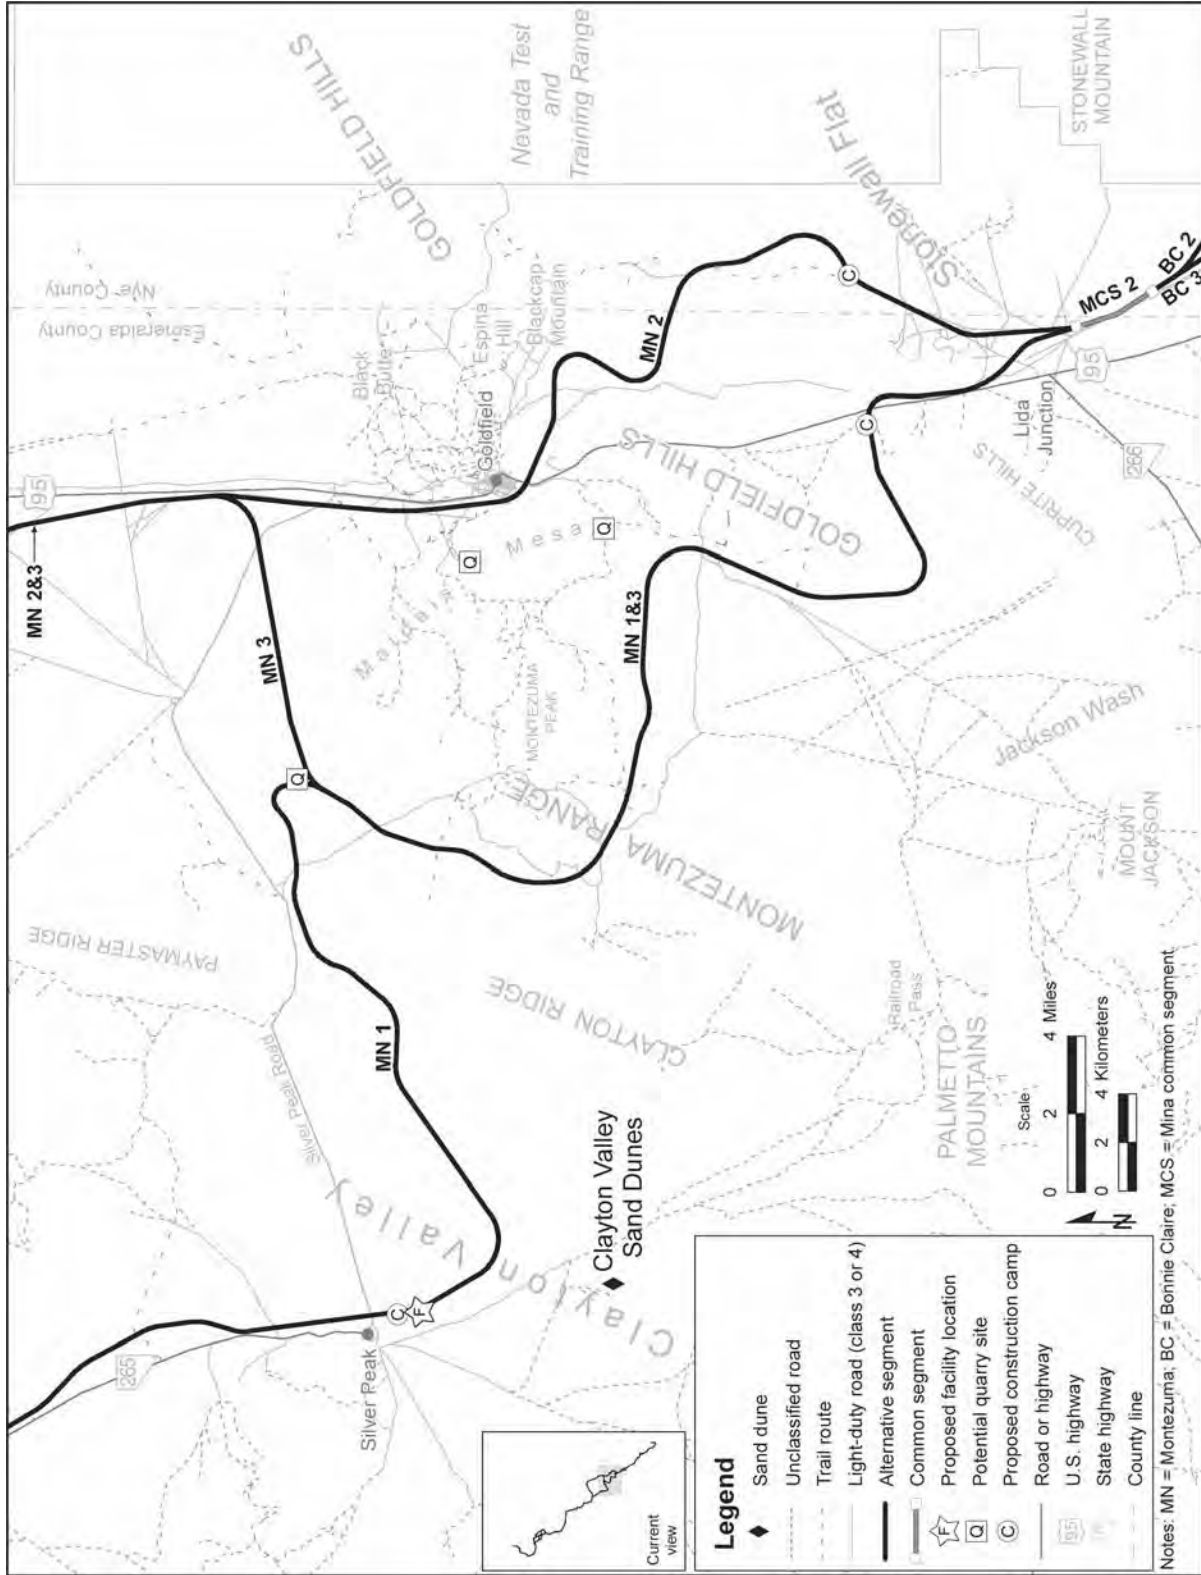


Figure 3-165. Recreation areas and roads within map area 5.

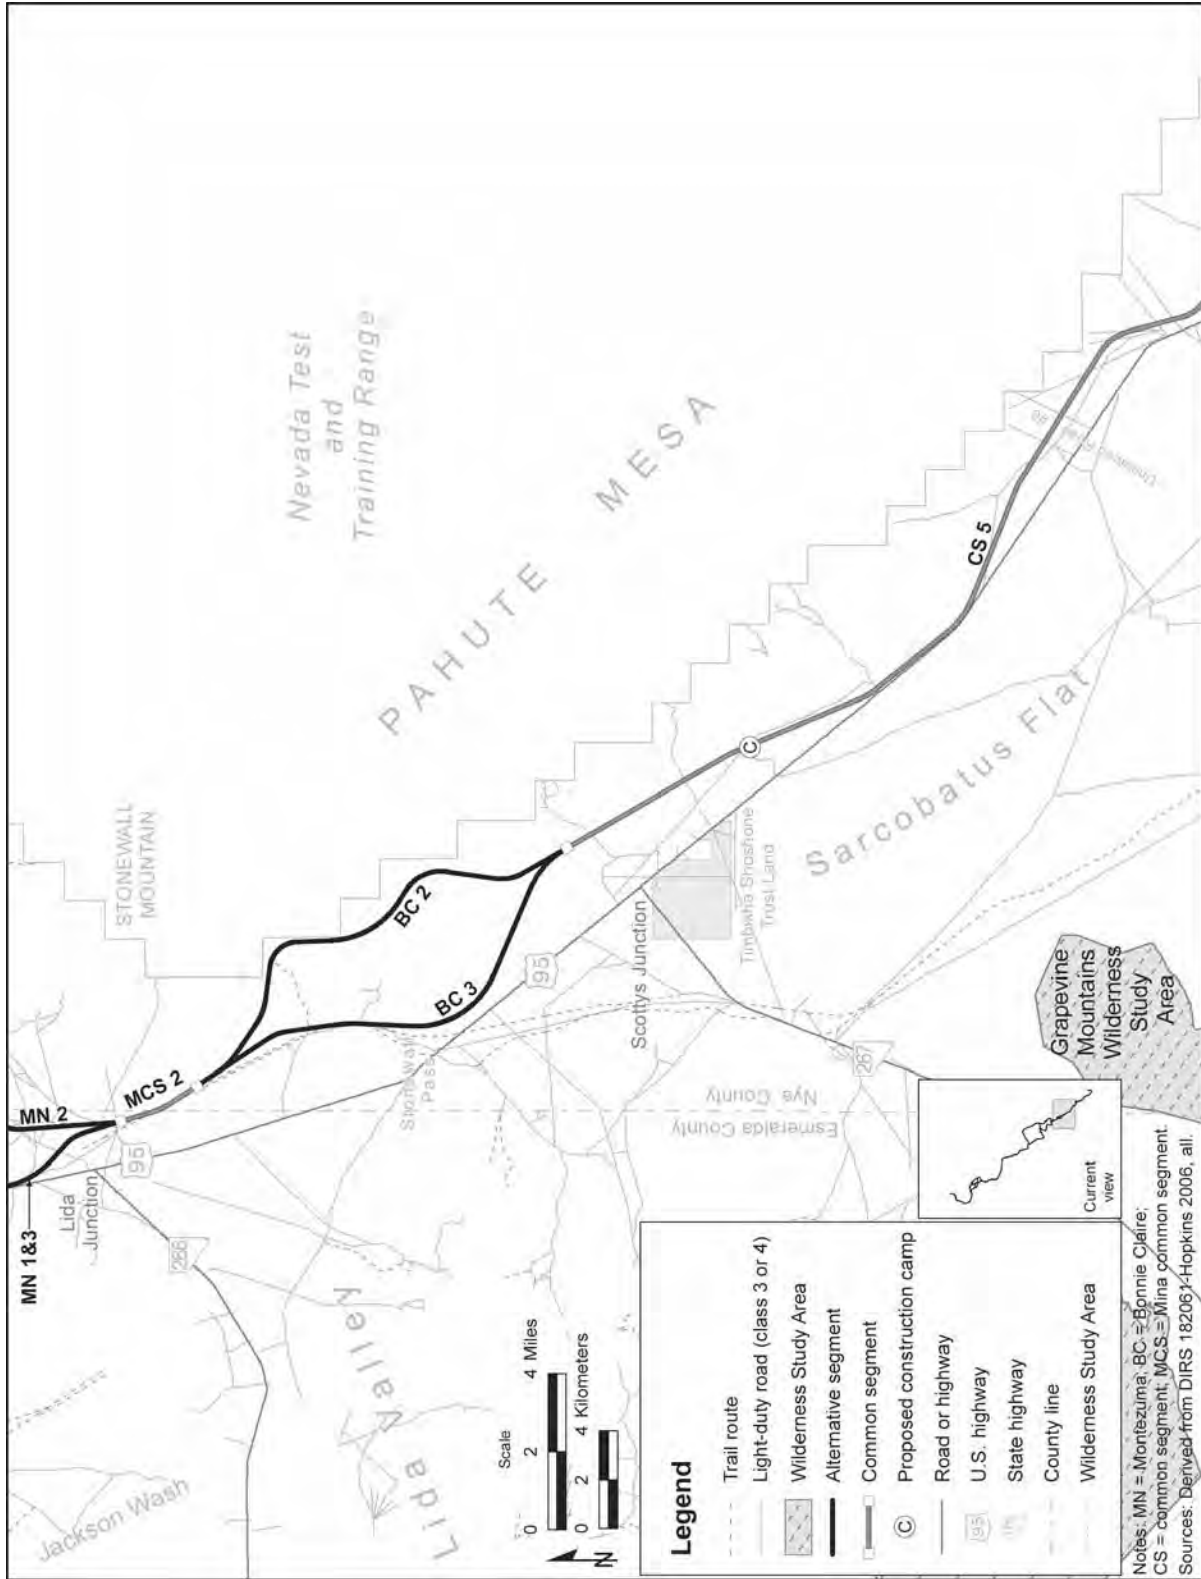


Figure 3-166. Recreation areas and roads within map area 6.

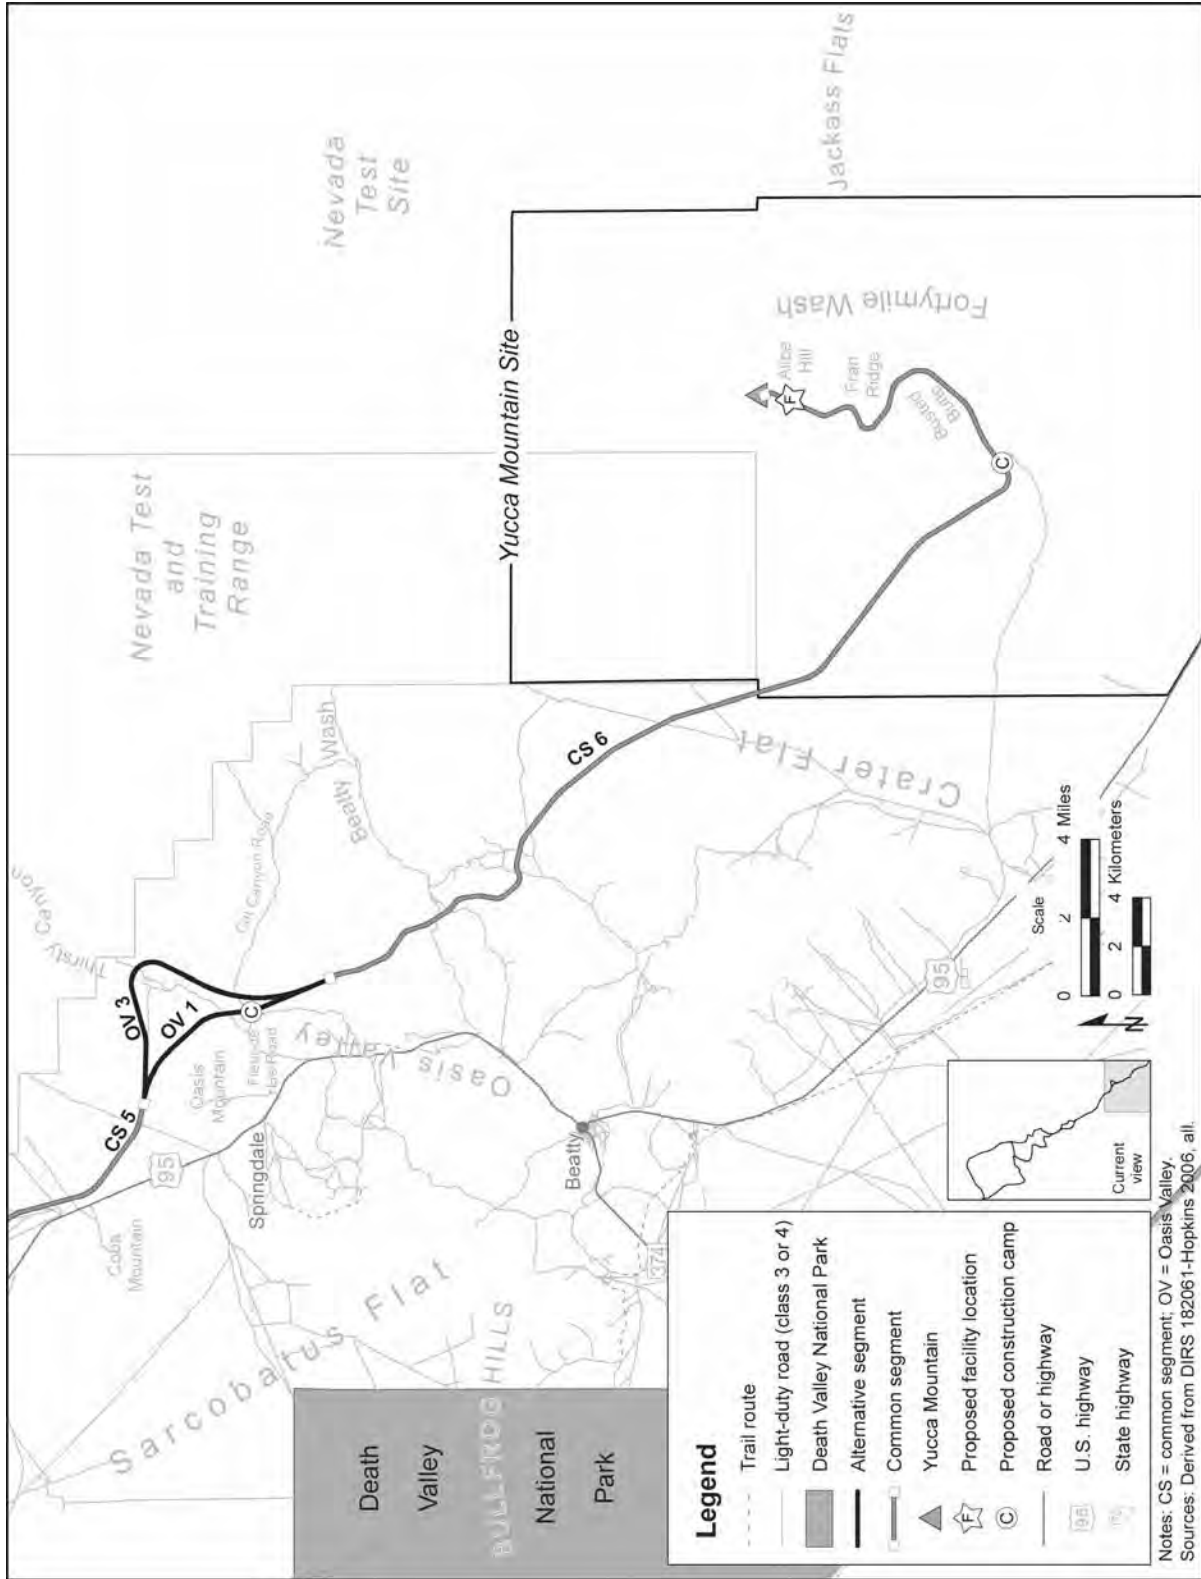


Figure 3-167. Recreation areas and roads within map area 7.

3.3.2.5.3.4 Esmeralda County. Recreation in Esmeralda County is generally dispersed and includes off-highway vehicle events, sometimes near the Mina rail alignment. The county is home to numerous largely abandoned towns and historical sites, many of which are in old mining districts and areas for hunting and fishing (DIRS 176770-Duval et al. 1976, p. 28). The closest Wilderness Area or Wilderness Study Area to the rail alignment in Esmeralda County would be Silver Peak Wilderness Study Area, which would be approximately 21 kilometers (13 miles) away from Montezuma alternative segment 1, outside the region of influence. The closest BLM-designated Special Recreation Management Areas, the Clayton Valley Sand Dunes Special Recreation Management Areas and the Crescent Sand Dunes Special Recreation Management Area, are also outside the Mina rail alignment region of influence, approximately 4.5 kilometers (2.8 miles) and 14 kilometers (8.8 miles) away, respectively.

Mina common segment 1 would cross near the southwestern edge of the Monte Cristo Range, an area under consideration by the Nevada Legislature as a Nevada State Park. Proponents of the proposed state park cite the area's unique geology as its major appeal and justification for park designation (DIRS 180460-Robb-Bradick et al. 2006, all). At present, the BLM manages the area as open to all individual, commercial, or competitive recreational uses (DIRS 173224-BLM 1997, p. 34).

A number of BLM-permitted off-highway vehicle races and permitted special recreation events take place annually in areas around the Mina rail alignment common segments and alternative segments in Esmeralda County. Montezuma alternative segment 2 would cross previously used race routes approximately 10 times, with most crossings occurring as the alternative segment neared Goldfield. Montezuma alternative segment 3 would cross previously used race routes approximately 15 times, while Montezuma alternative segment 1 would cross race routes approximately five times, principally in areas south of the Silver Peak. Most approved race routes are on existing roads and trails.

3.3.2.5.3.5 Nye County. Recreation on BLM-administered lands in Nye County is generally dispersed, and there would be no developed recreation sites within 1.6 kilometers (1 mile) of the Mina rail alignment. Dispersed recreation opportunities in Nye County include hunting, camping, exploration and sightseeing, and off-highway vehicle recreation and events.

There are very few off-highway vehicle events in the Mina rail alignment region of influence in Nye County. Common segment 6 would cross race routes several times. All approved race routes the rail line would cross are on existing roads and trails.

3.3.2.5.3.6 Land Access. The Mina rail alignment would cross a number of class 3 or 4 roads and unpaved trail routes (see Table 3-89).

3.3.2.5.4 Utility and Transportation Corridors

3.3.2.5.4.1 Utility Rights-of-Way. Figures 3-168 through 3-175 show the major utilities and utility corridor networks in the Mina rail alignment region of influence. The figures do not identify smaller, local electric distribution lines, typically in the 14- to 25-kilovolt range, with linear right-of-way reservations along major roads, or local water, sewer, power, or telephone lines serving individual residences or businesses, or their corresponding rights-of-way.

3.3.2.5.4.2 Utility Corridors. As stated in Section 3.3.2.4.1, BLM resource management plans designate utility and transportation corridors to consolidate the location of new and existing rights-of-way whenever feasible. Table 3-90 lists the extent to which DOE would construct each Mina rail alignment segment within BLM-designated corridors.

A **class 3 road** is a light-duty, paved or improved road.

A **class 4 road** is an unimproved, unsurfaced road (includes track roads in back country).

Trail routes are trails and roads passable only with a 4-wheel drive vehicle (also called Jeep trails).

Source: DIRS 181598-BLM [n.d.].

Table 3-89. Trails and class 3 or 4 roads the Mina rail alignment alternative segments and common segments would cross.

Segment	Walker River Paiute Reservation roads/trails	Mineral County roads	Mineral County trails	Esmeralda County roads	Esmeralda County trails	Nye County roads	Nye County trails
Union Pacific Railroad Hazen Branchline ^a				Not applicable			
Department of Defense Branchline North ^b				Not applicable			
Schurz alternative segment 1 ^c	2	0	0	0	0	0	0
Schurz alternative segment 4 ^c	2	0	0	0	0	0	0
Schurz alternative segment 5 ^c	3	0	0	0	0	0	0
Schurz alternative segment 6 ^c	2	0	0	0	0	0	0
Department of Defense Branchline South ^b				Not applicable			
Mina common segment 1 ^c	0	3	0	0	0	0	0
Montezuma alternative segment 1 ^c	0	0	0	1	0	0	0
Montezuma alternative segment 2 ^c	0	0	0	5	0	0	0
Montezuma alternative segment 3 ^c	0	0	0	5	0	0	0
Mina common segment 2 ^c	0	0	0	0	0	0	0
Bonnie Claire alternative segment 2	0	0	0	0	0	0	1
Bonnie Claire alternative segment 3	0	0	0	0	0	2	2
Common segment 5	0	0	0	0	0	14	0
Oasis Valley alternative segment 1	0	0	0	0	0	3	0
Oasis Valley alternative segment 3	0	0	0	0	0	3	0
Common segment 6	0	0	0	0	0	7	0

a. Use of the Union Pacific Railroad Hazen Branchline would not require new construction or new road crossings.

b. DOE would construct new sidings along Department of Defense Branchlines North and South within the existing rail line right-of-way; therefore DOE did not analyze these portions of the rail alignment. No other new construction would be required.

c. Source: DIRS 181617-Hopkins 2007, all.

Table 3-90. Rail line segments within designated utility or transportation corridors^a.

Segment	Resource management plan	Distance (kilometers) ^b within BLM-designated corridors	Total distance (kilometers) of segment	Percent within BLM-designated corridor
Union Pacific Railroad Hazen Branchline and Department of Defense Branchline North ^{c,d}	Carson City	Not applicable		
Schurz alternative segment 1 ^e	Carson City	Not applicable	51	Not applicable
Schurz alternative segment 4 ^e	Carson City	Not applicable	65	Not applicable
Schurz alternative segment 5 ^e	Carson City	0 ^f	66	0
Schurz alternative segment 6 ^e	Carson City	0 ^f	67	0
Department of Defense Branchline South ^{c,d}	Carson City	Not applicable		
Mina common segment 1	Carson City	52	85	61
Mina common segment 1	Tonopah	15	35	43
Montezuma alternative segment 1	Tonopah	51	118	43
Montezuma alternative segment 2	Tonopah	35.5	118	30
Montezuma alternative segment 3	Tonopah	49.9	142	35
Mina common segment 2	Tonopah	0	3.4	0
Bonnie Claire alternative segment 2	Tonopah	0	20	0
Bonnie Claire alternative segment 3	Tonopah	1.6	20	8.0
Common segment 5	Tonopah	20	41	49
Oasis Valley alternative segment 1	Tonopah	8.3	10	83
Oasis Valley alternative segment 3	Tonopah	10	14	71
Common segment 6	Tonopah	7.8	24	33
Common segment 6	Las Vegas	4.0	27	15

a. Source: DIRS 181617-Hopkins 2007, all.

b. To convert kilometers to miles, multiply by 0.62137.

c. Use of the Union Pacific Hazen Branchline would not require new construction.

d. DOE would construct new sidings along Department of Defense Branchlines North and South within the existing rail line right-of-way; therefore DOE did not analyze these portions of the rail alignment. No other new construction would be required.

e. While there are BLM-designated corridors shown on the southern portion of the Walker River Paiute Reservation, the BLM does not have jurisdiction to authorize rights-of-way across the Reservation or designate corridors on the Reservation.

f. Schurz alternative segments 5 and 6 would travel 4.8 kilometers outside the Walker River Paiute Reservation and these portions of the segments do not fall within BLM-designated corridors.

Table 3-91 identifies 38 locations of potential utility crossings. Because some of the locations are very close together, some of the individual crossings cannot be shown on the figures. Utility lines listed in Table 3-91 are depicted on the figures by their location number designated in the table. For clarification, see Volume III-B of this Rail Alignment EIS, Map Atlas. Table 3-92 lists utilities in the regions of influence of rail line support facilities. The locations of potential utility crossings shown on figures and listed in tables are approximate. Under the Mina Implementing Alternative, the Department would review and verify their locations during final rail line design.

Table 3-91. Potential Mina rail alignment utility crossings^a (page 1 of 2).

Rail line segment/facility	Identified utilities and utility corridors ^{b,c,d}	Construction right-of-way crossings	Location number
Union Pacific Railroad Hazen Branchline ^e		Not applicable	
Department of Defense Branchline North ^e		Not applicable	
Schurz alternative segment 1	Telephone line	1	1
Schurz alternative segment 1	Unidentified line	1	2
Schurz alternative segment 1	Unidentified line	1	3
Schurz alternative segment 4	Telephone line	1	1
Schurz alternative segment 4	Unidentified line	1	2
Schurz alternative segment 4	Unidentified line	1	3
Schurz alternative segment 5	Telephone line	1	1
Schurz alternative segment 5	Unidentified line	1	2
Schurz alternative segment 5	Unidentified line	1	3
Schurz alternative segment 6	Telephone line	1	1
Schurz alternative segment 6	Unidentified line	1	2
Schurz alternative segment 6	Unidentified line	1	3
Department of Defense Branchline South ^e	Not applicable		
Staging Yard at Hawthorne	Transmission/power line	1	4
Staging Yard at Hawthorne	Transmission/power line	1	5
Mina common segment 1	Transmission/power line	2	5
Mina common segment 1	Transmission/power line	1	9
Mina common segment 1	Transmission/power line	1	10
Mina common segment 1	Transmission/power line	1	11
Mina common segment 1	Transmission/power line	1	12
Mina common segment 1	Transmission/power line	1	13
Mina common segment 1	Transmission/power line	2	14
Mina common segment 1	Transmission/power line	1	15

Table 3-91. Potential Mina rail alignment utility crossings^a (page 2 of 2).

Rail line segment/facility	Identified utilities and utility corridors ^{b,c,d}	Construction right-of-way crossings	Location number
Mina common segment 1	Transmission/power line	4	16
Mina common segment 1	Telephone line	3	17
Mina common segment 1	Transmission/power line	1	18
Mina common segment 1	Transmission/power line	1	19
Mina common segment 1	Transmission/power line	2	20
Mina common segment 1	Transmission/power line	1	21
Mina common segment 1	Transmission/power line	1	22
Montezuma alternative segment 1	Transmission/power line	2	23
Montezuma alternative segment 1	Transmission/power line	1	24
Montezuma alternative segment 1	Telephone line	2	25
Montezuma alternative segment 1	Transmission/power line	2	26
Montezuma alternative segment 2	Transmission/power line	1	27
Montezuma alternative segment 2	Transmission/power line	2	28
Montezuma alternative segment 2	Transmission/power line	1	29
Montezuma alternative segment 2	Transmission/power line	1	30
Montezuma alternative segment 2	Transmission/power line	1	31
Montezuma alternative segment 2	Transmission/power line	2	32
Montezuma alternative segment 2	Transmission/power line	1	33
Montezuma alternative segment 2	Telephone line	1	34
Montezuma alternative segment 2	Transmission/power line	1	35
Montezuma alternative segment 2	Telephone line	1	36
Montezuma alternative segment 3	Telephone line	2	25
Montezuma alternative segment 3	Transmission/power line	2	26
Montezuma alternative segment 3	Transmission/power line	1	27
Montezuma alternative segment 3	Transmission/power line	2	28
Montezuma alternative segment 3	Transmission/power line	1	29
Montezuma alternative segment 3	Transmission/power line	1	30
Montezuma alternative segment 3	Transmission/power line	1	31
Montezuma alternative segment 3	Transmission/power line	1	32
Montezuma alternative segment 3	Transmission/power line	1	33
Montezuma alternative segment 3	Transmission/power line	1	37
Mina common segment 2	None	None	None
Bonnie Claire alternative segments	None	None	None

a. Sources: DIRS 181617-Hopkins 2007, all.

b. Electric distribution lines along major roads may not have been identified. Utilities serving individual residences or businesses have not been identified.

c. Use of the Union Pacific Railroad Hazen Branchline would not require new construction or new utility crossings.

d. Lines listed as “unidentified” are so listed in the Geographic Information System database.

e. DOE would construct new sidings along Department of Defense Branchlines North and South within the existing rail line right-of-way; therefore DOE did not analyze these portions of the rail alignment. No other new construction would be required.

Table 3-92. Potential quarry site utility crossings.^a

Potential quarry site	Identified utilities and utility corridors	Number of crossings
Garfield Hills	Transmission/power line	1
Garfield Hills	Transmission/power line	1
Gabbs Range	None	None
North Clayton	Transmission/power line	1
Malpais Mesa	Pipeline	1
ES-7	Water line	1
ES-7	Water line	1
ES-7	Transmission/power line	1

a. Source: DIRS 181617-Hopkins 2007, all.

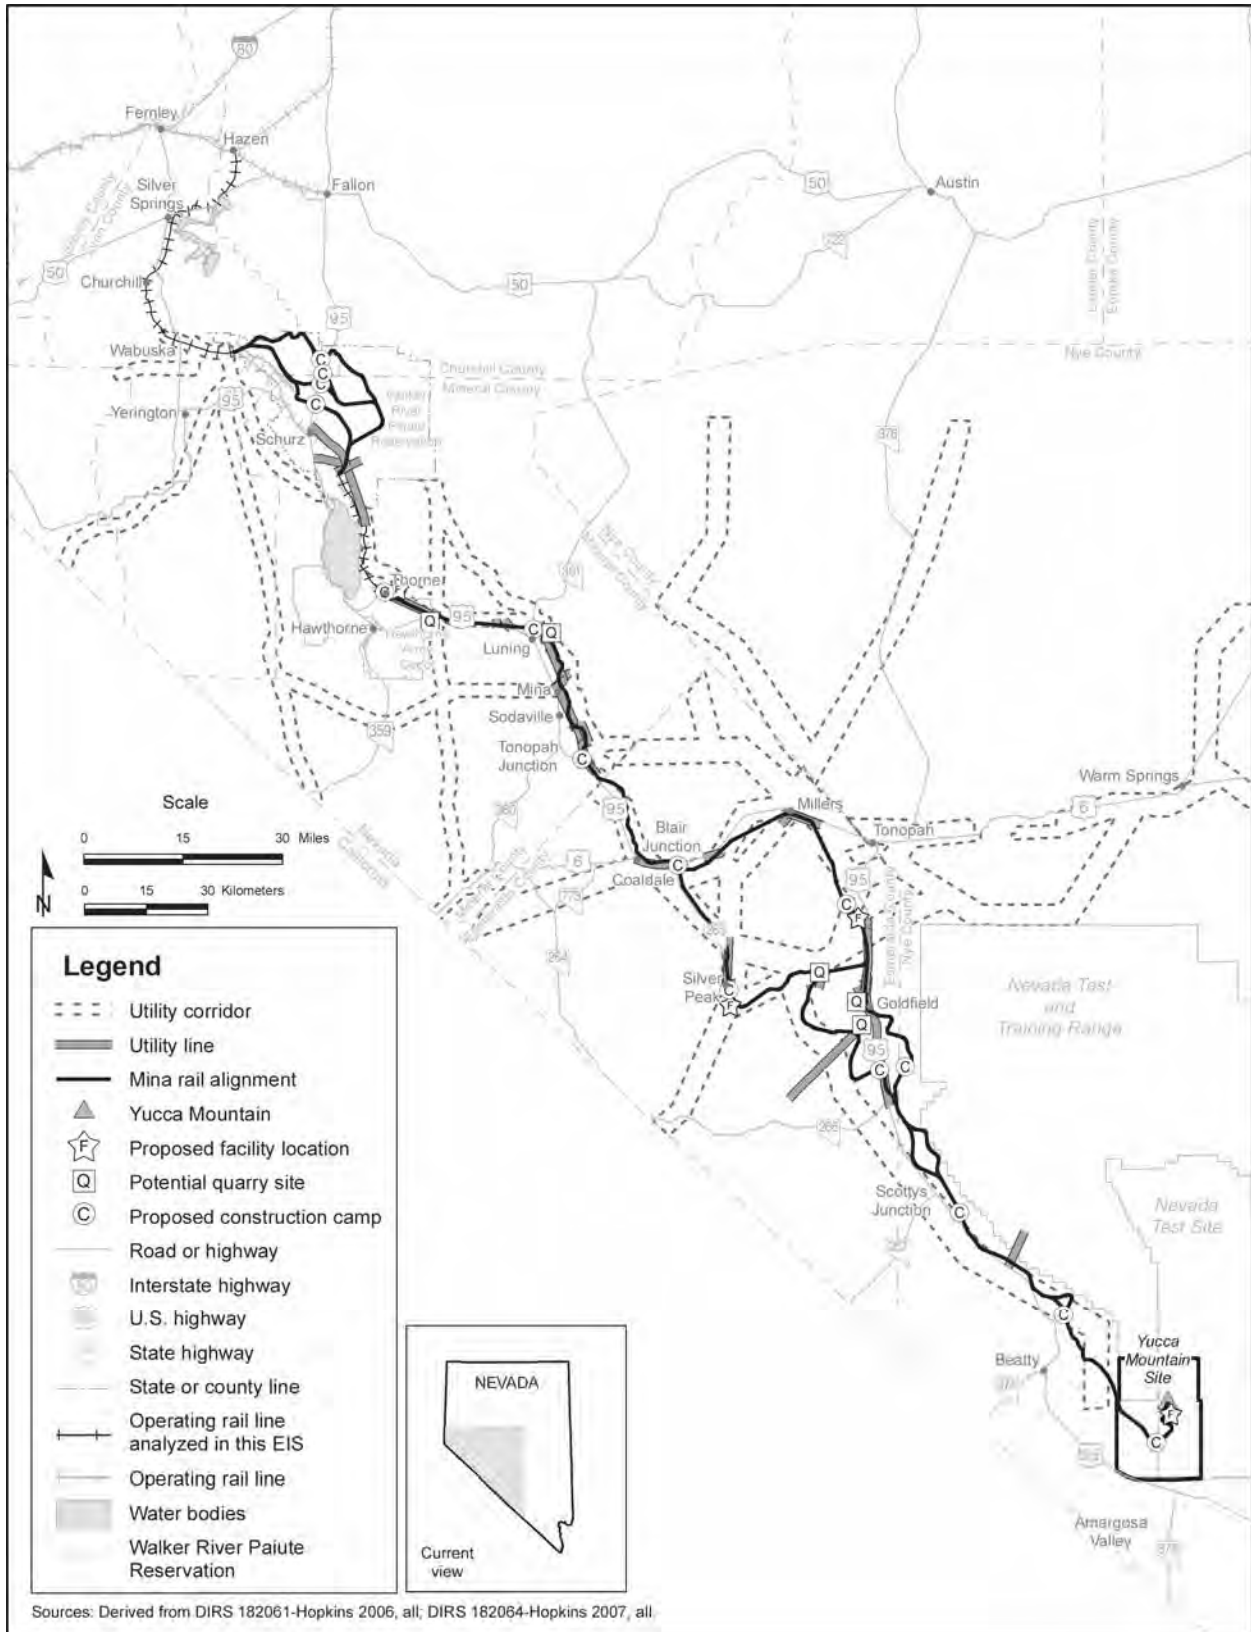


Figure 3-168. Utility corridors along the Mina rail alignment.

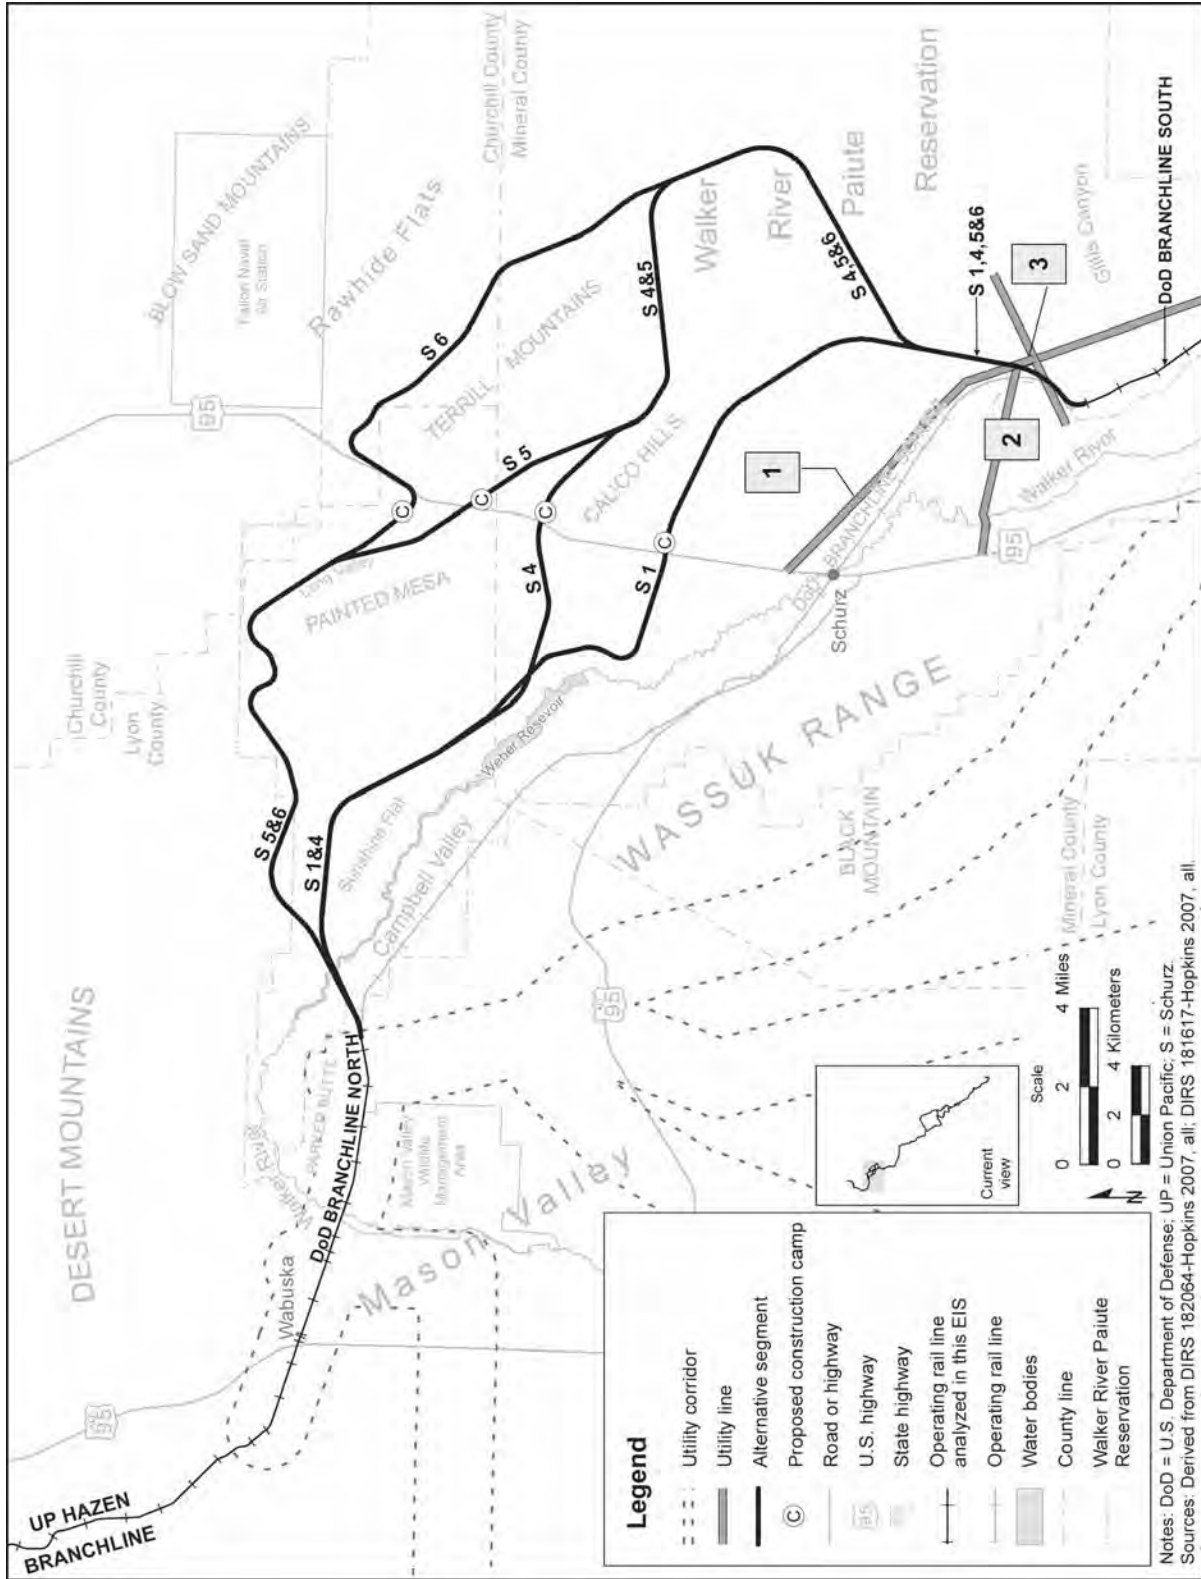


Figure 3-169. Utility corridors within map area 1.

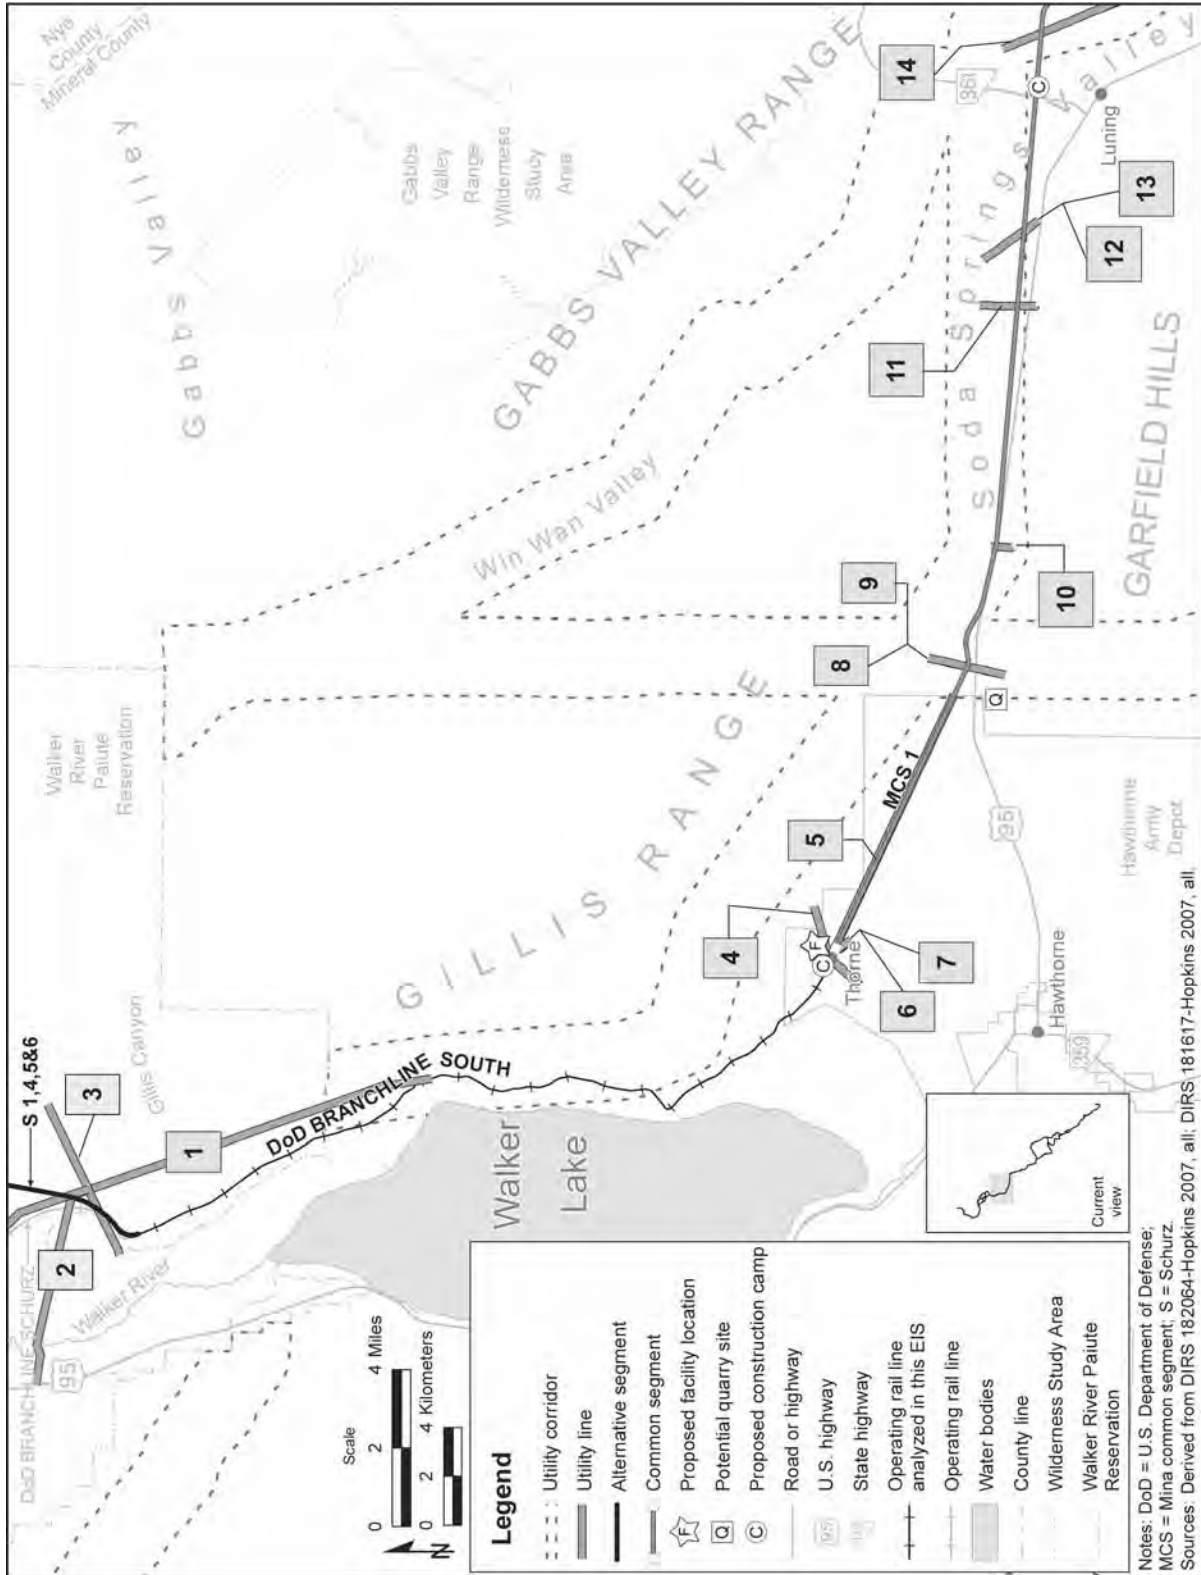


Figure 3-170. Utility corridors within map area 2.

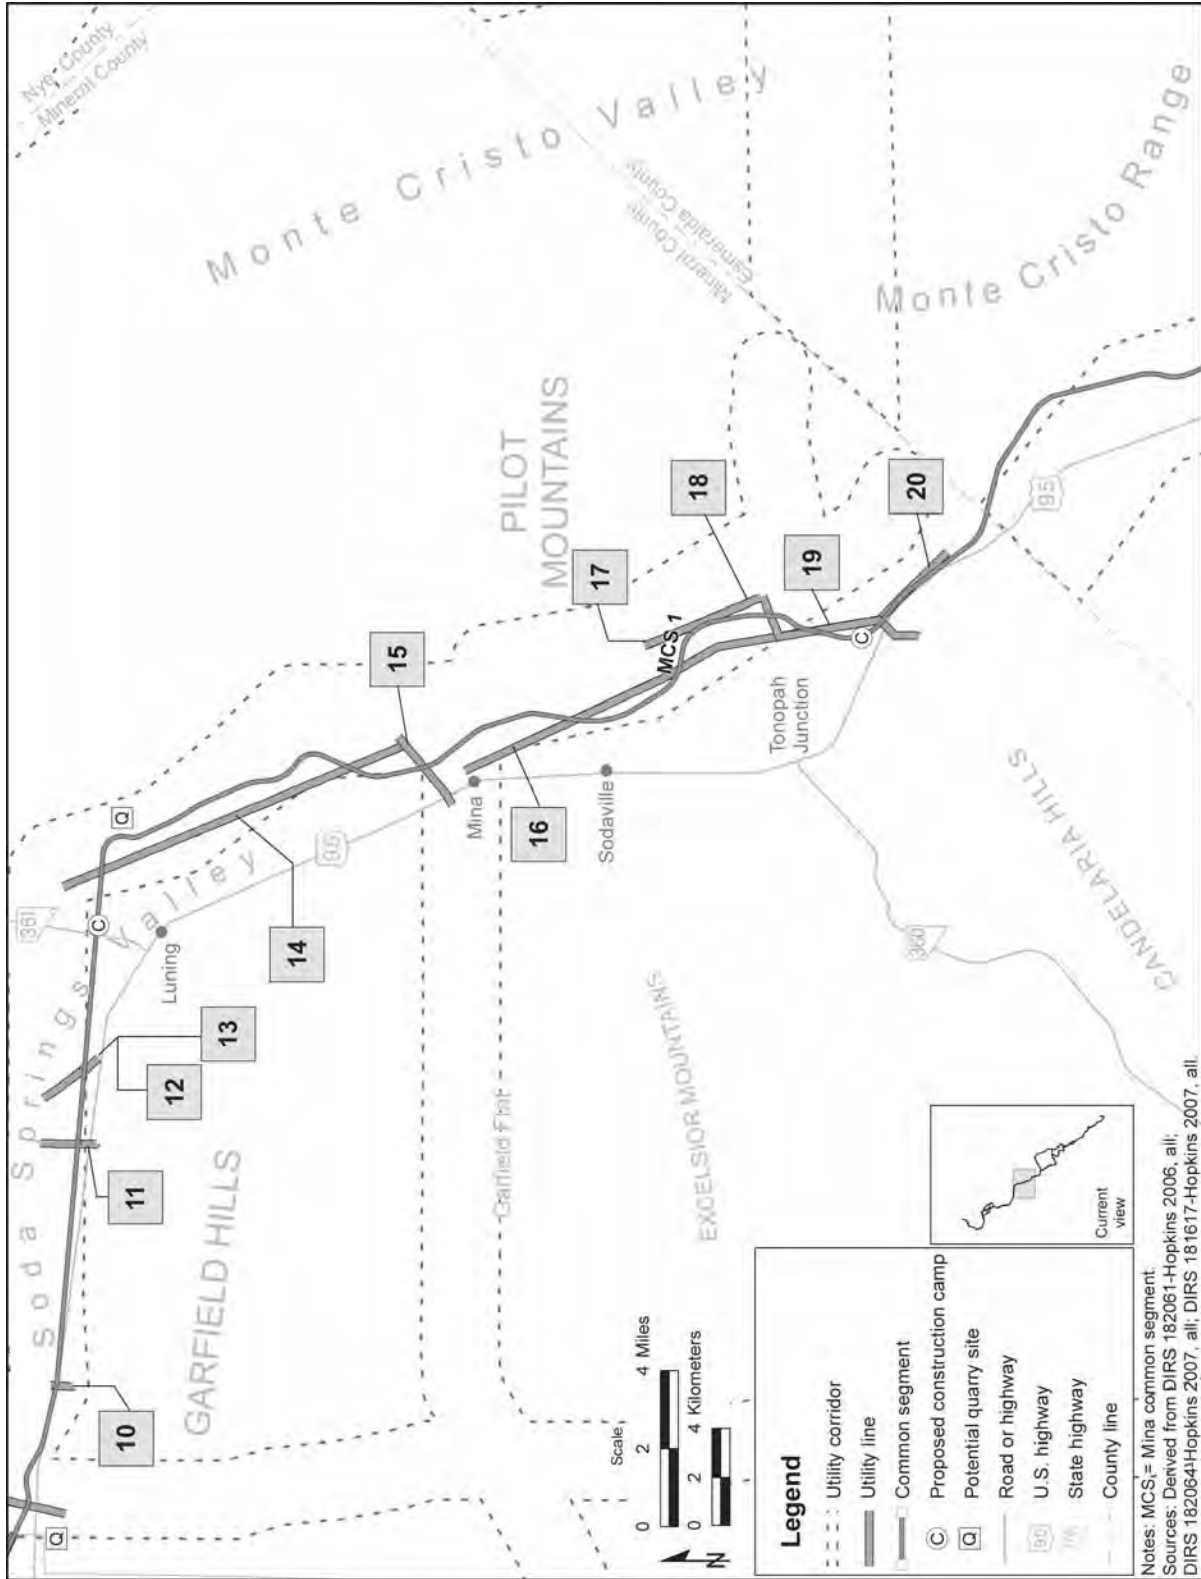


Figure 3-171. Utility corridors within map area 3.

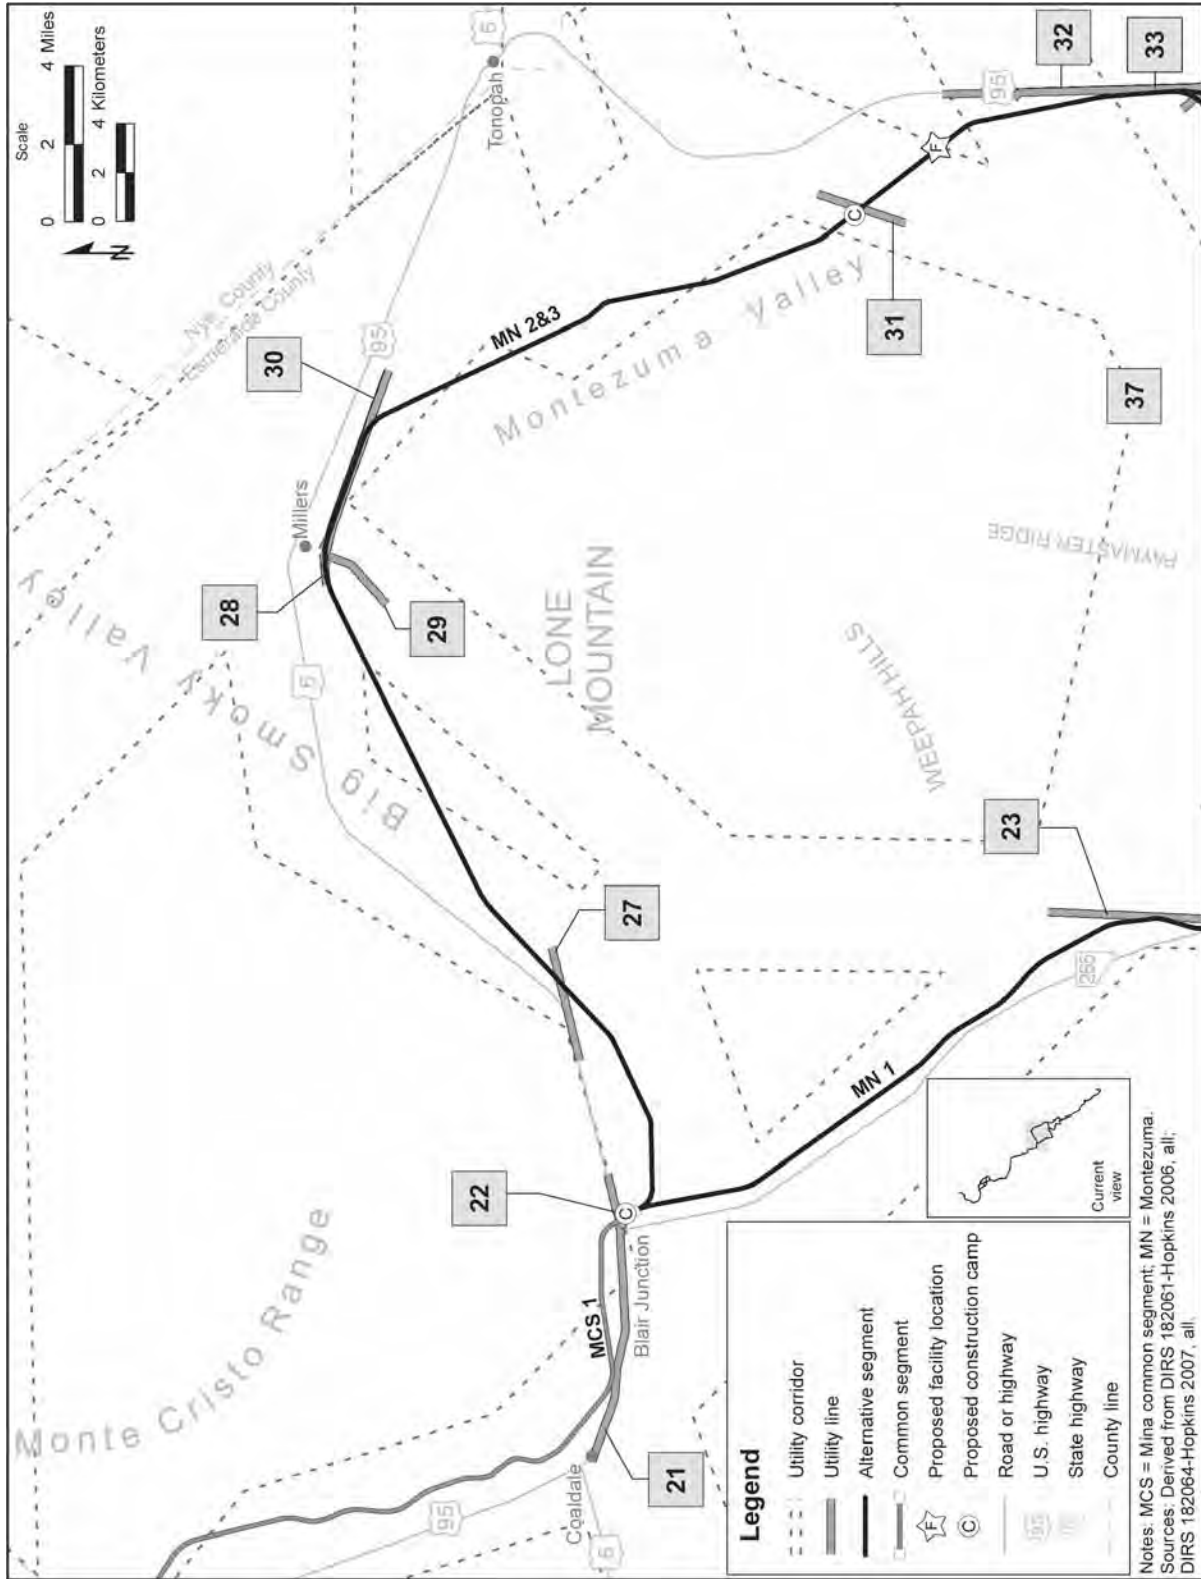


Figure 3-172. Utility corridors within map area 4.


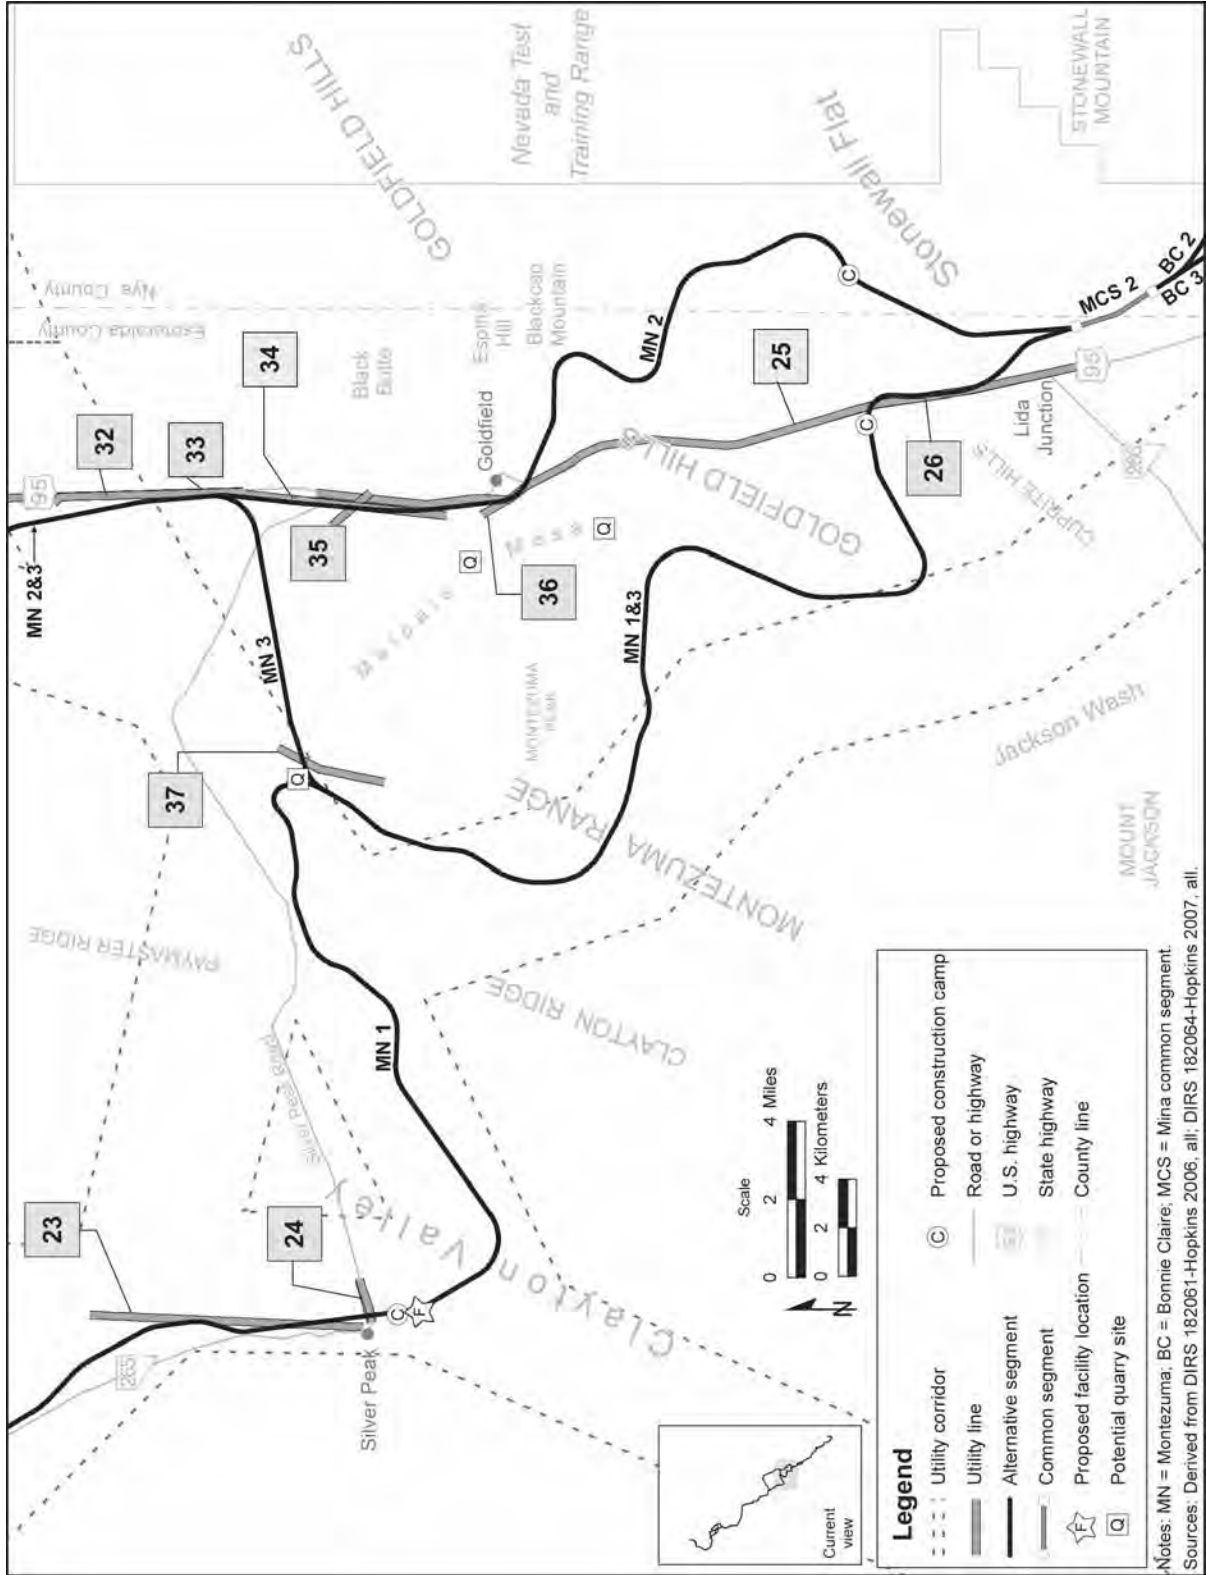


Figure 3.-173. Utility corridors within map area 5.

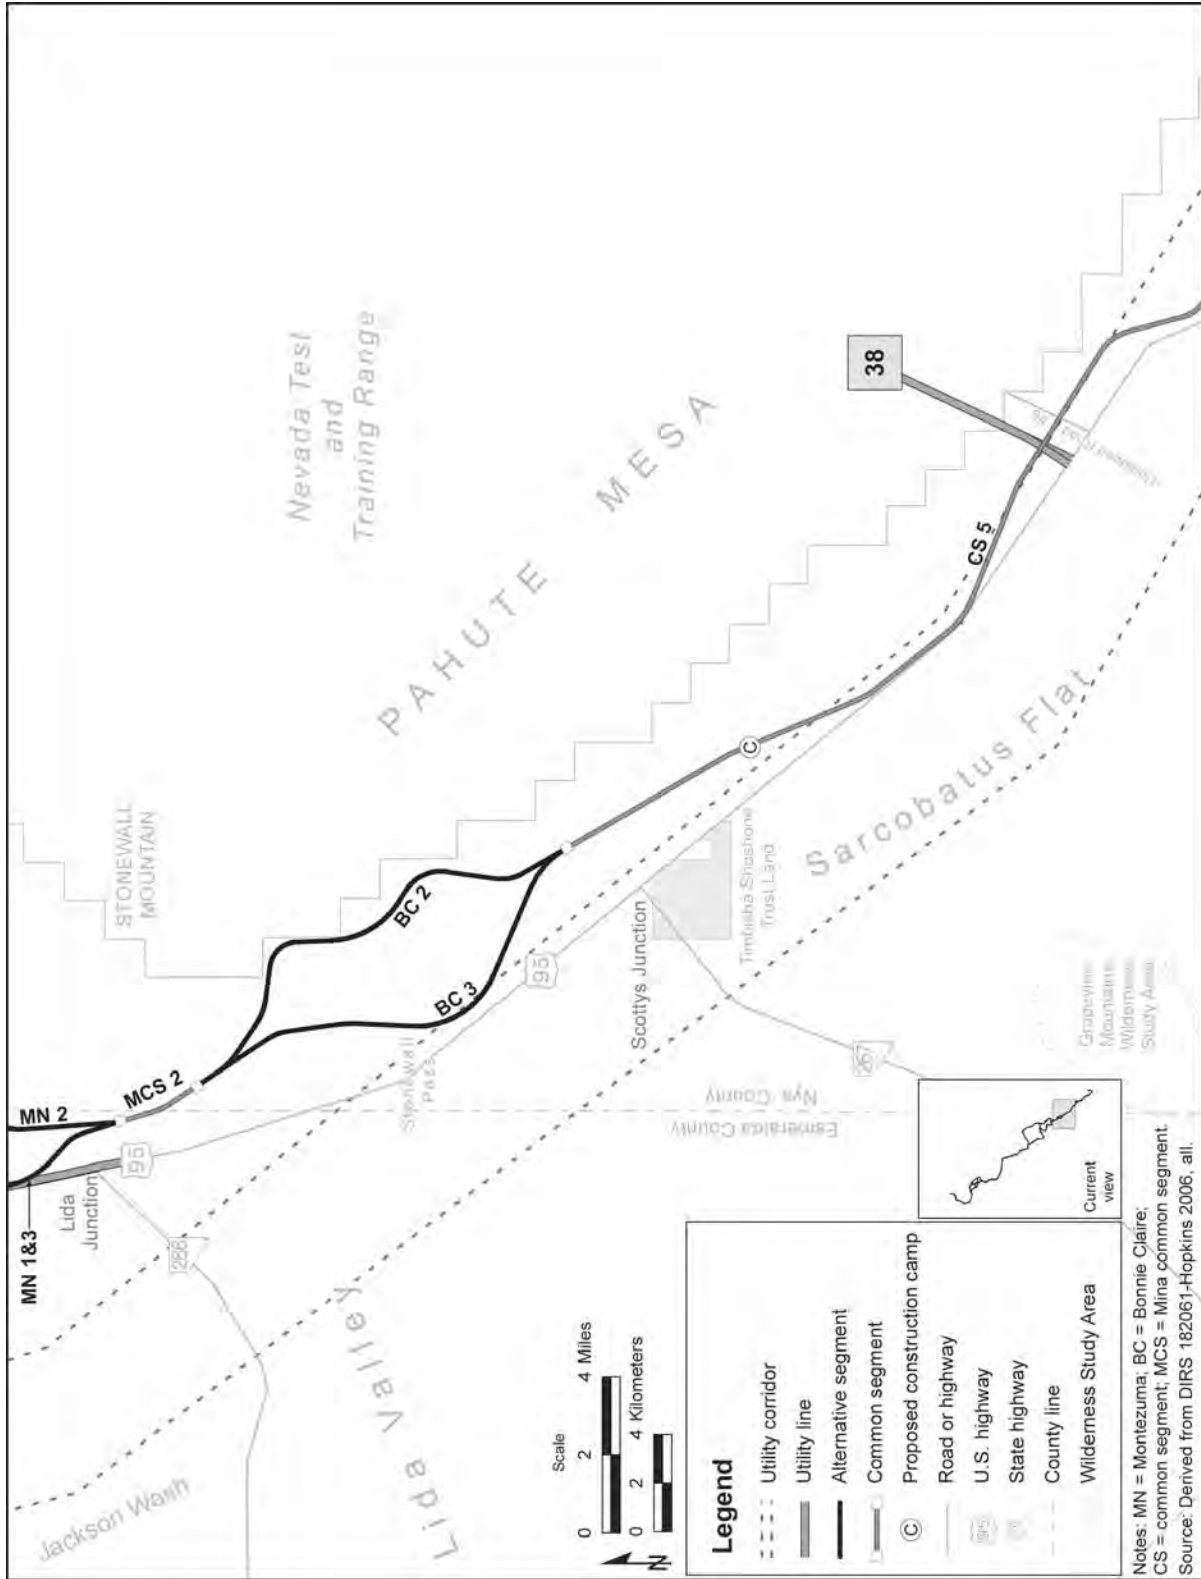

Notes: MN = Montezuma; BC = Bonnie Claire;
 CS = common segment; MCS = Mina common segment
 Source: Derived from DIRS 182061-Hopkins 2006, all.

Figure 3-174. Utility corridors within map area 6.

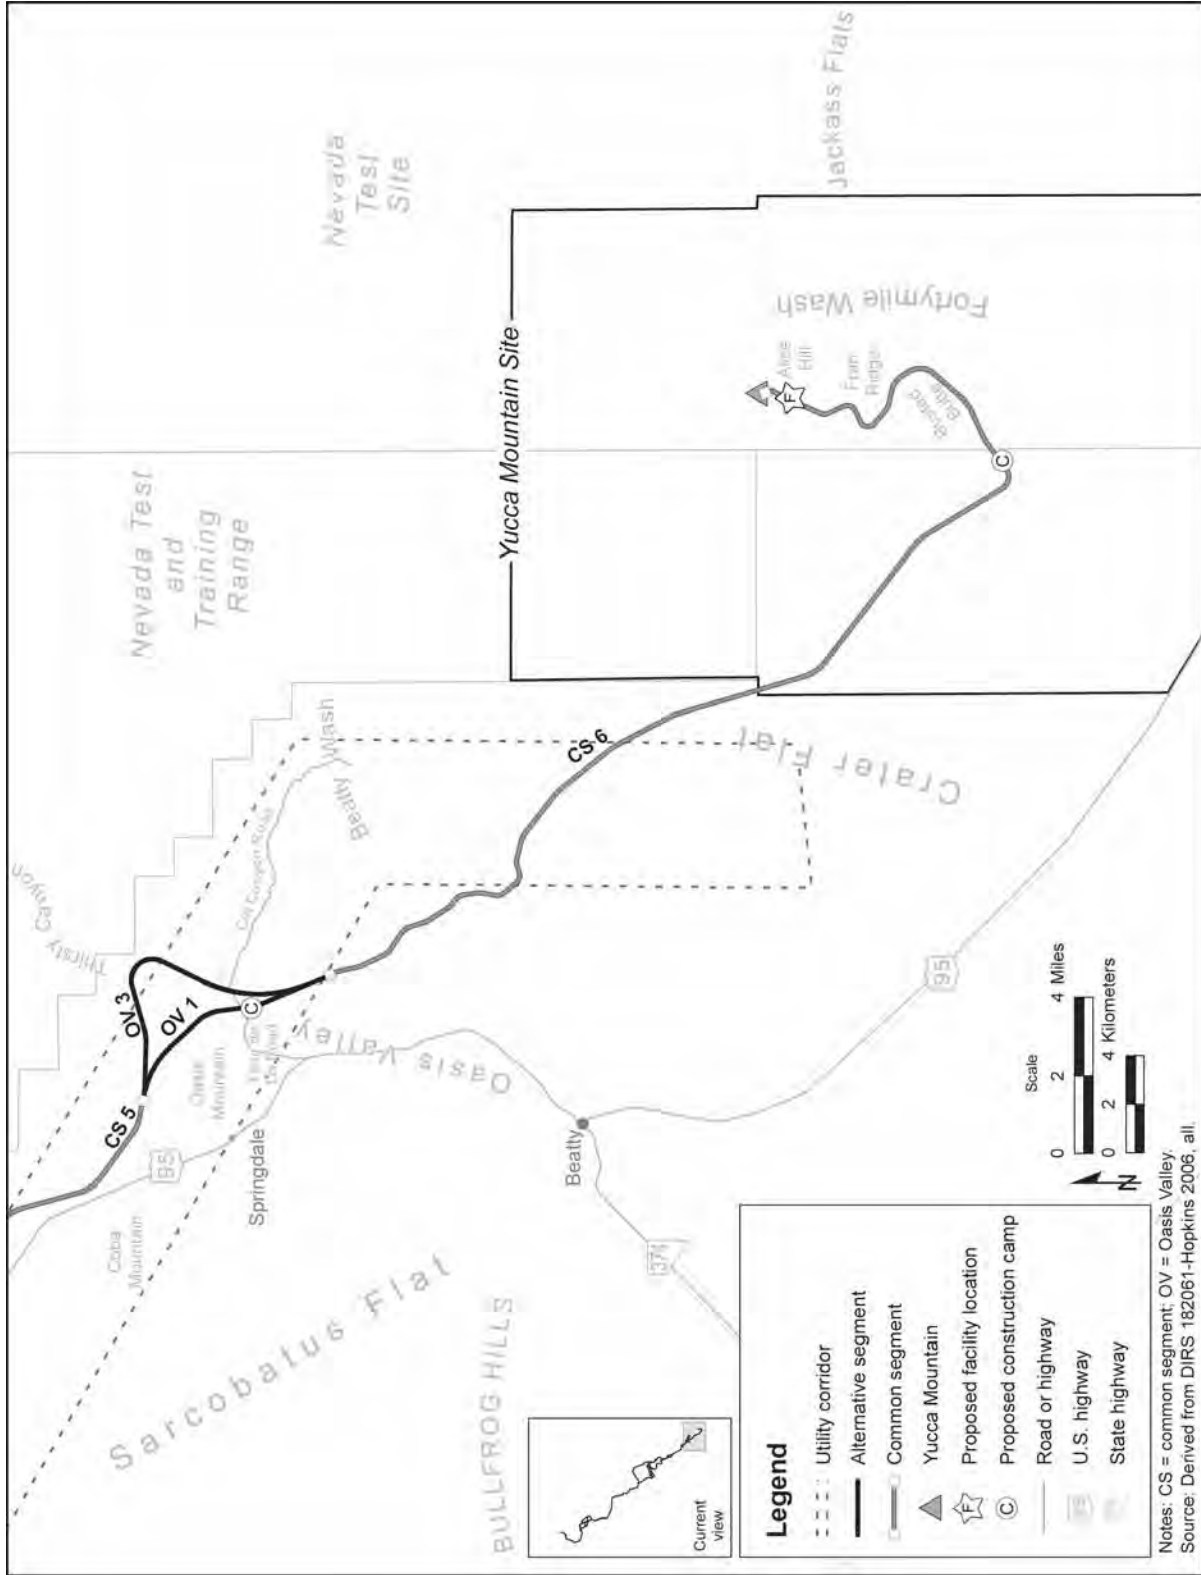


Figure 3-175. Utility corridors within map area 7.

3.3.3 AESTHETIC RESOURCES

This section describes the aesthetic (visual) setting in the region of influence along the Mina rail alignment. Section 3.3.3.1 describes the region of influence for aesthetic resources; Section 3.3.3.2 describes the methods DOE used to classify visual values; Section 3.3.3.3 describes the environmental setting and characteristics for aesthetic resources along the Mina rail alignment.

3.3.3.1 Region of Influence

The region of influence for aesthetic resources is the viewshed around all Mina rail alignment alternative segments, common segments, and proposed locations of *rail line* construction and operations support facilities.

BLM guidance subdivides landscapes into three *distance zones* based on relative visibility from travel routes or observation points. “Foreground-middleground” zone includes areas less than 5 to 8 kilometers (3 to 5 miles) away. “Background” zone includes areas visible beyond the foreground-middleground zone but usually less than 24 kilometers (15 miles) away. Areas not seen as foreground-middleground or background are in the “seldom-seen” zone (DIRS 101505-BLM 1986, Section IV). To ensure that seldom-seen views were included in this analysis, DOE used a conservative region of influence extending 40 kilometers (25 miles) on either side of the centerline of the Mina rail alignment.

Landscapes are divided into three **distance zones** based on their relative location to common viewpoints: foreground to middleground, background, and seldom seen (DIRS 101505-BLM 1986, Section IV).

Scenic quality is a measure of the visual appeal of a tract of land. Areas are rated based on key factors including landform, vegetation, water, color, adjacent scenery, scarcity, and cultural modifications (DIRS 101505-BLM 1986, Section II).

Sensitivity levels are a measure of public concern for scenic quality. Areas are ranked high, medium, or low based on types of users, amount of use, public interest, adjacent land uses, and whether they are special areas (DIRS 101505-BLM 1986, Section III).

3.3.3.2 Methodology for Classifying Visual Values

Most of the lands along the Mina rail alignment are BLM-administered public lands, with the remainder owned or administered by the Walker River Paiute Tribe, the U.S. Army, or private entities. Because of the predominance of BLM-administered land, and because neither the Walker River Paiute Tribe nor the U.S. Army assign visual quality ratings to lands in their jurisdiction, DOE used BLM methodologies for evaluating visual values. The BLM considers visual resources when addressing aesthetic issues during BLM planning. These resources include natural or manmade physical features that give a landscape its character and value as an environmental factor. The BLM uses a visual resource management system to classify the aesthetic value of its lands and to set management objectives (DIRS 173052-BLM 1984, all).

The BLM classification of visual resource value, the visual resource inventory, involves assessing visual resources and assigning them to one of four visual resource management classes based on three factors: *scenic quality*, visual sensitivity (*sensitivity levels*), and distance from travel or observation points (DIRS 101505-BLM 1986, all). The BLM uses a combination of the ratings of these three factors to assign a visual resource inventory class to a piece of land, ranging from Class I to Class IV, with Class I representing the highest visual values. Each visual resource class is subsequently associated with a management objective, defining the way the land may be developed or used. Each BLM district assigns visual resource management classes to its lands during the resource management planning process.

Table 3-93 lists the BLM management objectives for visual resource classes.

Table 3-93. BLM visual resource management classes and objectives.^a

Visual resource class	Objective	Acceptable changes to land
Class I	Preserve the existing character of the landscape.	Provides for natural ecological changes but does not preclude limited management activity. Changes to the land must be small and must not attract attention.
Class II	Retain the existing character of the landscape.	Management activities may be seen but should not attract the attention of the casual observer. Changes must repeat the basic elements of form, line, color, and texture of the predominant natural features of the characteristic landscape.
Class III	Partially retain the existing character of the landscape.	Management activities may attract attention but may not dominate the view of the casual observer. Changes should repeat the basic elements in the predominant natural features of the characteristic landscape.
Class IV	Provides for management activities that require major modifications of the existing character of the landscape.	Management activities may dominate the view and be the major focus of viewer attention. An attempt should be made to minimize the impact of activities through location, minimal disturbance, and repeating the basic elements.

a. Source: DIRS 101505-BLM 1986, Section V.B.

The BLM uses visual resource contrast ratings to assess the visual impacts of proposed projects and activities on the existing landscape (DIRS 173053-BLM 1986, all). The BLM looks at basic elements of design to determine levels of contrast created between a proposed project and the existing viewshed. Depending on the visual resource management objective for a particular location, varying levels of contrast are acceptable.

Contrast ratings are determined from locations called “key observation points,” which are usually along commonly traveled routes such as highways or frequently used county roads or in communities. To identify key observation points along the Mina rail alignment, DOE considered the following factors: angle of observation, number of viewers, how long the project would be in view, relative project size, season of use, and light conditions. BLM guidance (DIRS 173053-BLM 1986, Section IIC) recommends that key observation points for linear projects, such as the proposed railroad, include the following:

- Most-critical viewpoints (for example, views from communities at road crossings)
- Typical views encountered in representative landscapes, if not covered by critical viewpoints
- Any special project or landscape features such as river crossings and substations

3.3.3.3 Visual Setting and Characteristics

3.3.3.3.1 General Setting and Characteristics

The Class IV lands in the region of influence consist of landscapes that are generally flat in form and horizontal in line, with gray and brown colors from soil and rock, and texture ranging from flat to slightly rough, depending on whether the broad flat valleys and alluvial fans include any topographic features such as hills, buttes, or eroded stream channels. Vegetation is usually small, low, and rounded in form (for example, grasses, shrubs, and small trees), horizontal in line, brown or gray-green in color, and light-to-medium in texture with irregular spacing. Structures are rare, but could include transmission towers, ranch buildings, or similar structures. Class III lands generally include more varied forms, lines,

colors, and textures, including vertical lines in topography and vegetation, brighter greens in vegetation, visible blues from water, and dense texture from forested lands or rough texture in eroded rock. Some Class III areas in the Carson City BLM District will not necessarily fit this description, because the district has not inventoried most of the lands adjacent to the Mina rail alignment. The BLM manages uninventoried lands as Class III under district policy (DIRS 179571-Knight 2007, all). Class II lands are mostly in mountains that include forested areas and open rock exposures, with mixed forms including slopes and ridges; rounded lines; a wide range of rock and soil colors, and vegetation that changes color with the seasons; and variable texture that is often dense in forested areas. There are no Class I areas along the Mina rail alignment.

Sections 3.3.3.3.2.1 through 3.3.3.3.2.11 describe visual resources along and near the Mina rail alignment alternative segments and common segments. The discussions highlight resources of high visual value, identify current visual resource management classifications, *special areas*, and key observation points.

Special areas are lands where measures must be taken to protect visual values. Special areas often include designated natural areas, Wilderness Study Areas, scenic rivers, and scenic roads. Special areas are not necessarily unique or picturesque, but the management objective for a special area is to preserve its natural characteristics (DIRS 101505-BLM 1986, Section III.5).

DOE excerpted visual resource management classifications for lands along the Mina rail alignment primarily from BLM resource management plans from districts the alignment would cross (DIRS 173224- BLM 1997, all; DIRS 103079-BLM 1998, all; DIRS 179560-BLM 2001). DOE confirmed these classifications through telephone communications, electronic mail, and meetings with BLM personnel responsible for visual resource management for the Las Vegas, Carson City, and Battle Mountain Districts (DIRS 174631-Quick 2005, all; DIRS 174632-Quick 2005, all; DIRS 176988-Quick 2006, all; DIRS 179571-Knight 2007, all). The BLM Las Vegas and Carson City Districts provided Geographic Information System data from their resource management plans as a source for mapping the visual resource management classes in their districts (DIRS 103079-BLM 1998, Map 2-9). Geographic Information System data provided by the BLM Carson City District were augmented with information on default classifications from the district (DIRS 179571-Knight 2007, all). The Department based visual resource classifications for the Battle Mountain BLM District on the *Tonopah Resource Management Plan and Record of Decision* (DIRS 173224-BLM 1997, all). DOE developed visual resource management classifications for non-BLM lands using BLM methodology (DIRS 173053-BLM 1986, all; DIRS 173052-BLM 1984, all), considering scenic quality ratings reported in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, pp. 3-158 and 3-159) where available. Non-BLM areas adjacent to lands managed by the Carson BLM District were analyzed as Class III unless their scenic qualities warranted more restrictive classifications.

Figure 3-176 is a map of visual resource management classifications for lands surrounding the Mina rail alignment based on the sources identified above. There are no locations where the alternative segments and common segments would cross or be close to Class I lands, and few where the alternative segments would cross or be close to Class II lands. As the figure shows, most of the lands surrounding the alternative segments and common segments are Class IV or Class III lands.

DOE selected 22 key observation points along the Mina rail alignment to evaluate the visual impacts of constructing and operating the proposed railroad. (Note: Key observation points M-1 through M-16 are unique to the Mina rail alignment. Points 31 through 36 are along the portion of the Mina rail alignment that is the same as the Caliente rail alignment and DOE has not renumbered them for the Mina analysis.) Figure 3-176 shows the locations of key observation points.

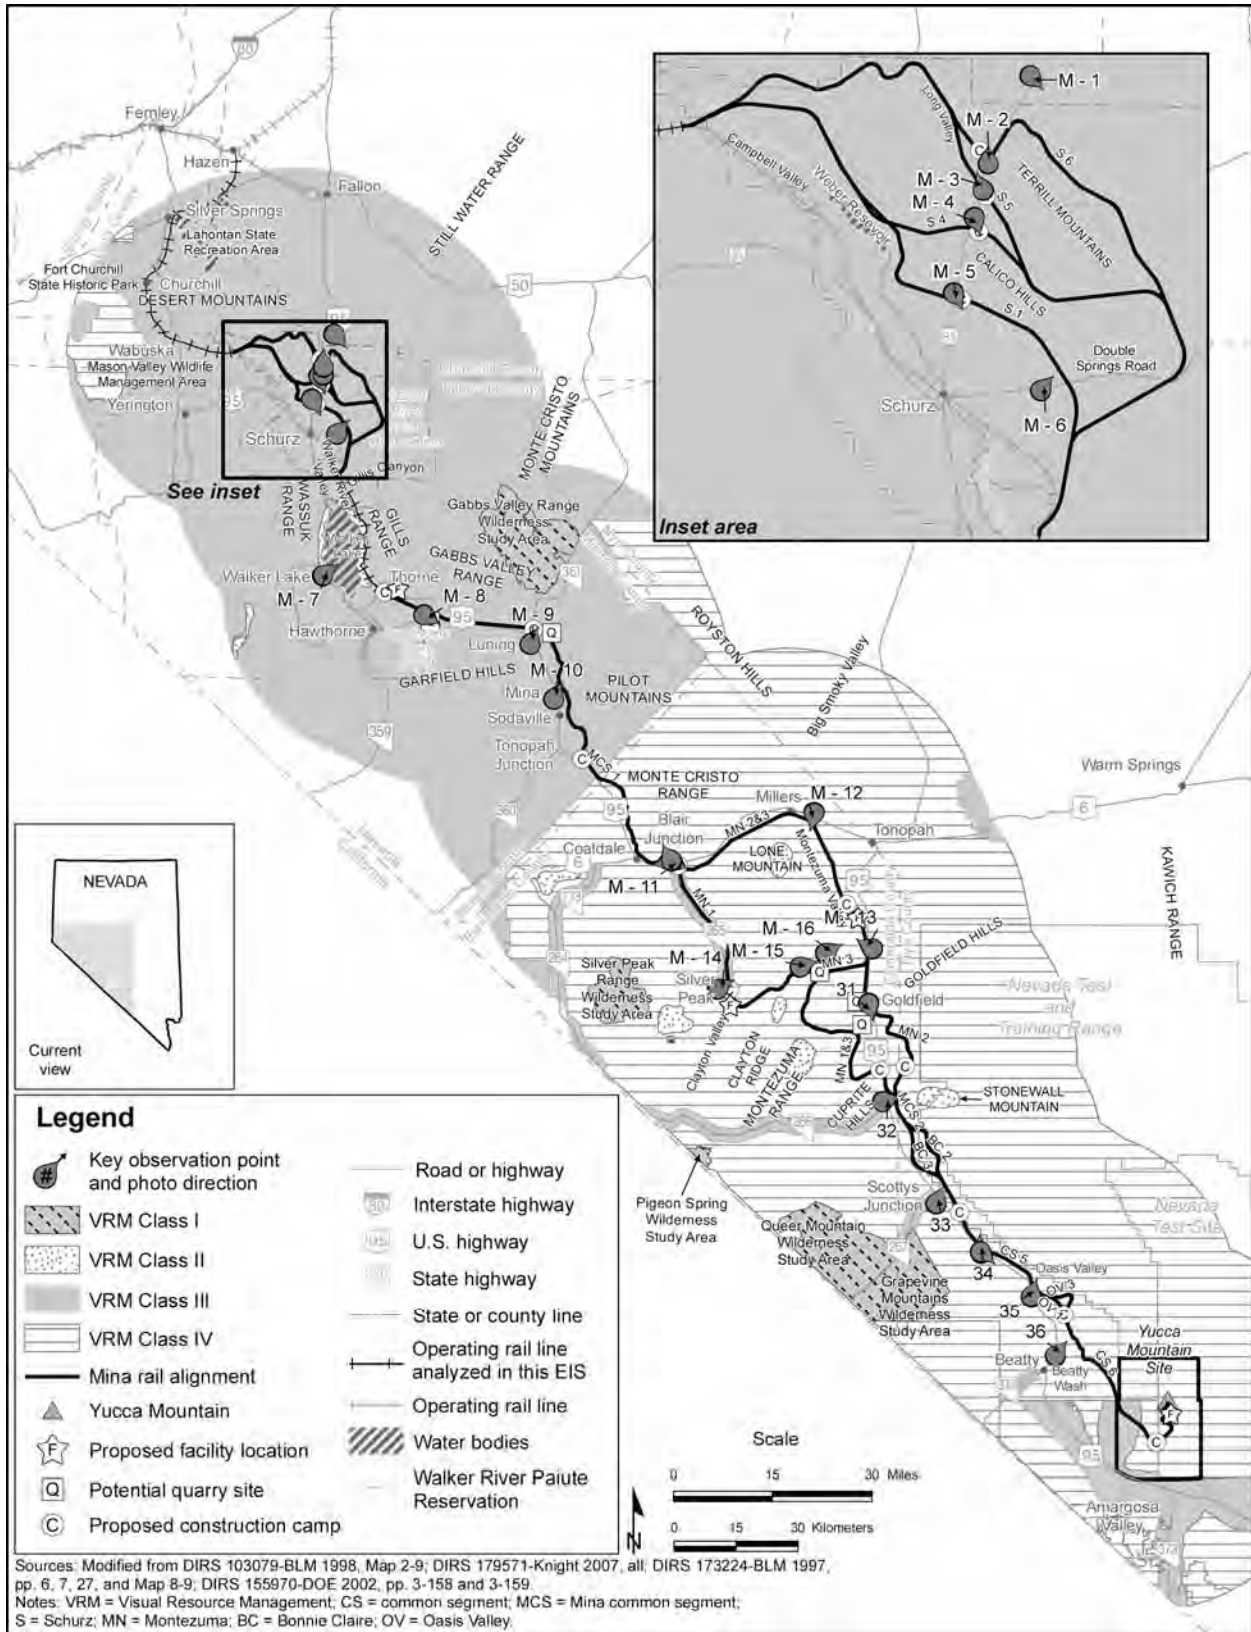


Figure 3-176. Visual resource management classifications and key observation points along the Mina rail alignment.

Appendix D, Aesthetics, contains photos taken at each key observation point. Table 3-94 lists visual resource management classes in the viewshed of each key observation point. Following BLM guidance, DOE selected most key observation points along travel routes or at use areas or potential use areas, and included critical viewpoints and typical views. Section 3.3.3.3.2 highlights areas of high visual value and other special areas, and identifies key observation points from which DOE analyzed impacts to these areas.

Table 3-94. Key observation points and visual resource management classes in the Mina rail alignment viewshed^a (page 1 of 2).

Key observation point ^b	Location	Visual resource management classes ^c
M-1	U.S. Highway 95 looking over Rawhide Flats and the rail alignment against hills	Surrounding lands (III)
M-2 ^d	U.S. Highway 95 at intersection with county/Reservation road to Rawhide Flats, view of Schurz alternative segment 6 rail-over-road crossing	Surrounding lands (III)
M-3 ^d	U.S. Highway 95 in Long Valley, view of road-over-rail crossing of Schurz alternative segment 5	Surrounding lands (III)
M-4 ^d	U.S. Highway 95 at intersection with Weber Dam Road, view of Schurz alternative segment 4 road-over-rail crossing	Surrounding lands (III)
M-5 ^d	U.S. Highway 95, view of Schurz alternative segment 1 road-over-rail crossing	Surrounding lands (III)
M-6 ^d	Double Springs Road, view of Schurz alternative segment 1 at-grade crossing	Surrounding lands (III)
M-7	Town of Walker Lake, view across lake to Department of Defense Branchline South	Surrounding lands (II), western and eastern perimeters of Walker Lake (II)
M-8	U.S. Highway 95 just west of Hawthorne, view of potential Garfield Hills quarry facilities	Surrounding lands (III)
M-9	Town of Luning just off U.S. Highway 95, view of potential Gabbs Valley Range quarry site	Surrounding lands (III)
M-10	Town of Mina, corner of C Street and Hilda, view of Mina common segment 1	Surrounding lands (III)
M-11	Intersection State Route 265 and U.S. Highway 95 (Blair Junction), views of Mina common segment 1 toward Monte Cristo Range; south/southeast over State Route 265 to Montezuma alternative segment 1; west over Mina common segment 1	Surrounding lands (III and IV), State Route 265 (III), Monte Cristo Range (IV)
M-12	U.S. Highway 95 in Montezuma Valley, view south across Montezuma alternative segments 2 and 3 toward Lone Mountain	Surrounding lands (IV)
M-13	U.S. Highway 95, view toward Montezuma alternative segments 2 and 3 and potential Maintenance-of-Way Facility at Klondike	Surrounding lands (IV)
M-14	Main Street in Silver Peak (just past Chemetall Foote Corporation processing plant), view east over Montezuma alternative segment 1	Surrounding lands (III), State Route 265 (III)

Table 3-94. Key observation points and visual resource management classes in the Mina rail alignment viewshed^a (page 2 of 2).

Key observation point ^b	Location	Visual resource management classes ^c
M-15	Silver Peak Road, view toward Montezuma alternative segment 1 and potential North Clayton quarry	Surrounding lands (IV)
M-16	Silver Peak Road intersection with road to Klondike, views over Montezuma alternative segments 2 and 3	Surrounding lands (IV)
31 ^b	Alignment crossing U.S. Highway 95 south of Goldfield, view south-southeast over Montezuma alternative segment 2	Surrounding lands (IV)
32	U.S. Highway 95 at State Route 266, view east over Montezuma alternative segments 1, 2, and 3	Surrounding lands (IV), State Route 266 (III), Stonewall Mountain (II)
33	U.S. Highway 95 at State Route 267, view north-northeast over common segment 5	Surrounding lands (IV), State Route 267 (III)
34	U.S. Highway 95 (typical cut), view toward common segment 5 hill cuts	Surrounding lands (IV)
35	U.S. Highway 95 north of Oasis Valley (typical landscape)	Surrounding lands (IV)
36	U.S. Highway 95 and Beatty Wash access road, view northeast to construction access road	Surrounding lands (IV)

a. Appendix D contains photographs taken from each key observation point.

b. Key observation points M-1 through M-16 are unique to the Mina rail alignment. Points 31 through 36 are along the portion of the Mina rail alignment that is the same as the Caliente rail alignment and DOE has not renumbered them for the Mina analysis.

c. Sources: DIRS 155970-DOE 2002, pp. 3-158 and 3-159; DIRS 173224-BLM 1997, pp. 6, 7, and 27, and Map 8; DIRS 103079-BLM 1998, Map 2-9; DIRS 101811-DOE 1996, pp. 4-152 to 4-154; DIRS 179571-Knight 2007, all.

d. Key observation point is located on the Walker River Paiute Reservation.

3.3.3.3.2 *Specific Visual Settings and Characteristics along Alternative Segments and Common Segments*

3.3.3.3.2.1 Union Pacific Railroad Hazen Branchline. The Mina rail alignment would begin on an existing Union Pacific Railroad branchline near Hazen, Nevada. This existing rail segment crosses primarily Class III areas between Alternate U.S. Highway 50 and the former town site of Wabuska. The existing Union Pacific Railroad Hazen Branchline borders the boundaries of the Lahontan State Recreation Area and Fort Churchill State Historic Park, both considered Class III areas for this analysis.

Because DOE does not anticipate that it would make any modifications to this existing rail line (except during routine maintenance during the operations phase), DOE did not select key observation points along this portion of the Mina rail alignment. Figure 3-177 shows the existing line south of this segment through the Walker River Paiute Reservation as a point of reference for the appearance of an existing rail line in this general area.

3.3.3.3.2.2 Department of Defense Branchline North (Existing Rail Line from Wabuska to the Boundary of the Walker River Paiute Reservation). This existing rail line extends from the former town site of Wabuska to near the boundary of the Walker River Paiute Reservation. Along its route, the line borders the Mason Valley Wildlife Management Area. Department of Defense Branchline North passes exclusively through Class III areas.



Figure 3-177. View from Alternate U.S. Highway 95 along the existing Department of Defense Branchline through Schurz on the Walker River Paiute Reservation.

Because DOE does not anticipate that it would make any modifications to this existing rail line (except during routine maintenance during the operations phase), DOE did not select key observation points along this portion of the Mina rail alignment. Figure 3-177 shows the existing line south of this segment through the Walker River Paiute Reservation as a point of reference for the appearance of an existing rail line in this general area.

3.3.3.3.2.3 Schurz Alternative Segments (Walker River Paiute Reservation). The Schurz alternative segments would cross exclusively through areas considered Class III by DOE for the purpose of this analysis, primarily on the Walker River Reservation. At present, Department of Defense Branchlines North and South are linked by a rail line that runs near the western bank of the Walker River through the Reservation and the town of Schurz. DOE would remove this existing section of rail line, leaving the railbed and structures such as bridges and culverts in place. Figure 3-177 provides a view of this section of existing rail line from Alternate U.S. Highway 95.

Each Schurz alternative segment would begin in Campbell Valley west of the Walker River and south of the Desert Mountains, but each would take a different route shortly after crossing the Walker River.

Schurz alternative segment 1 would run east of the Walker River, passing within 1 kilometer (0.6 mile) of the Weber Reservoir. The alternative segment would travel through the Walker River Valley along the southeastern edge of the Calico Hills and around the northern end of the Gillis Range.

Schurz alternative segment 4 would run east of the Walker River, passing within 1 kilometer (0.6 mile) of the Weber Reservoir. The alternative segment would pass near the Calico Hills, and would travel east between the Terrill Mountains and the Calico Hills and around the northern end of the Gillis Range.

Schurz alternative segment 5 would skirt the southern edge of the Desert Mountains before crossing into Long Valley. From there, the alternative segment would run south down Long Valley and travel east between the Terrill Mountains and the Calico Hills and around the northern end of the Gillis Range.

Schurz alternative segment 6 would pass the southern edge of the Desert Mountains before crossing into Long Valley. The alternative segment would cross the Terrill Mountains into Rawhide Flats and travel east between the Terrill Mountains and the Calico Hills and around the northern end of the Gillis Range. Each Schurz alternative segment would connect to Department of Defense Branchline South near the northern edge of the Gillis Range.

Key observation points from U.S. Highway 95 include views toward the road-over-rail crossing of Schurz alternative segment 2 (M-4), north toward the road-over-rail crossing of Schurz alternative segment 5 in Long Valley (M-3), north toward the rail-over-road crossing of Schurz alternative segment 6 in the Terrill Mountains (M-2), southeast over Schurz alternative segment 6 crossing Rawhide Flats along the base of the Terrill Mountains (M-1), and south toward the road-over-rail crossing of Schurz alternative segment 1 in the Walker River Valley (M-5). A final point, east of the town of Schurz, looks northeast from Double Springs Road toward the *at-grade crossing* of Schurz alternative segment 1 (M-6).

3.3.3.3.2.4 Department of Defense Branchline South (Existing Rail Line, Walker Lake Area).

Department of Defense Branchline South is an existing rail line extending south toward Walker Lake east of the Walker River. It comes no closer than 0.40 kilometer (.25 mile) from the shore as it traces the eastern edge of Walker Lake and proceeds southeast toward the Hawthorne Army Depot on the outskirts of the town of Hawthorne. The area around the Walker River north of the lake and the area around the Hawthorne Army Depot south of the lake are considered Class III areas. The eastern and western shores of Walker Lake are Class II areas. The existing rail line crosses the Class II lands on the eastern shore of the lake for 18 kilometers (11 miles).

A key observation point, in the town of Walker Lake on the western shore of Walker Lake, provides a view east over the lake toward the existing line (M-7). DOE chose this point to show the appearance of the existing rail line from the more heavily traveled western shore of Walker Lake and to demonstrate the view of an existing rail line at a distance (approximately 8 kilometers [5 miles]).

3.3.3.3.2.5 Mina Common Segment 1 (Hawthorne Army Depot to Blair Junction). Mina common segment 1 would cross through Class III lands as it heads southeast from Hawthorne between the Gabbs Valley Range and the Garfield Hills, and then south on the western side of the Pilot Mountains toward the Monte Cristo Range. Common segment 1 would then pass through Class IV areas as it passed the west and southwestern sides of the Monte Cristo Range. Key observation points provide views from U.S. Highway 95 looking west toward the potential Garfield Hills quarry site (M-8), from the town of Luning looking east toward Mina common segment 1 and the potential Gabbs Range quarry site (M-9), from a residential area in the town of Mina looking east toward Mina common segment 1 (M-10), and views both west and north across Mina common segment 1 from the intersection of State Route 265 and U.S. Highway 95 (M-11).

3.3.3.3.2.6 Montezuma Alternative Segments. Each Montezuma alternative segment would begin near Blair Junction (at the intersection of State Route 265 and U.S. Highway 95).

The southwestern segment, Montezuma alternative segment 1, would first pass south through a Class III area running the length of State Route 265 to the town of Silver Peak, and then turn east through the Class IV Clayton Valley and Montezuma Range. Parts of the Clayton Ridge and Montezuma Ranges are Class II, and Montezuma alternative segment 1 would come within 2.4 kilometers (1.5 miles) of the Class II Clayton Ridge area as it crossed Clayton Valley and within 2.1 kilometers (1.3 miles) of the Class II areas in the Montezuma Range as it crossed those mountains. Montezuma alternative segment 1 would continue in Class IV areas as it traveled through the hills near the town of Goldfield to a location just south of the intersection of U.S. Highway 95 and State Route 266. The BLM manages State Route 266 west of U.S. Highway 95 as a Class III area.

Montezuma alternative segment 2 would proceed northeast through Class IV areas along the Monte Cristo Range, and would come within 4 kilometers (2.5 miles) of the Class II Lone Mountain area. Montezuma alternative segment 2 would then cross exclusively through Class IV lands as it traveled south through the Montezuma Valley west of Tonopah to the hills near the town of Goldfield, then through Stonewall Flats near the border of the Nevada Test and Training Range, and finally west of Stonewall Mountain to just south of the intersection of U.S. Highway 95 and State Route 266. Montezuma alternative segment 2 would come no closer than 6.9 kilometers (4.3 miles) to the Class II Stonewall Mountain area.

Montezuma alternative segment 3 would proceed northeast through Class IV areas along the Monte Cristo Range, and would come within 4 kilometers (2.5 miles) of the Class II Lone Mountain area. Montezuma alternative segment 2 would then cross exclusively through Class IV lands as it traveled south through the Montezuma Valley west of Tonopah. Before leaving Montezuma Valley, the alternative segment would turn west into the Class IV Montezuma Valley area and south between Clayton Ridge and the Montezuma Range. Montezuma alternative segment 3 would come within 2.1 kilometers (1.3 miles) of the Class II areas in the Montezuma Range as it crossed those mountains. Montezuma alternative segment 3 would continue in Class IV areas as it traveled through the hills near the town of Goldfield to a location just south of the intersection of U.S. Highway 95 and State Route 266. The BLM manages State Route 266 west of U.S. Highway 95 as a Class III area.

Key observation points with views over Montezuma alternative segment 1 include the intersection of U.S. 95 and State Route 265 looking south (M-11), the main street in the town of Silver Peak looking east (M-14), and Silver Peak Road looking east (M-15). Key observation points with views over Montezuma alternative segments 2 and 3 are on U.S. Highway 95 looking west toward the proposed rail segment and

Lone Mountain (M-12), U.S. Highway 95 west toward the proposed rail segment and the Maintenance-of-way Facility (M-13), and Silver Peak Road east toward the proposed rail segment (M-16). A key observation point shows where Montezuma alternative segment 2 would cross U.S. Highway 95 at the south end of the town of Goldfield (31). A key observation point provides a view from the intersection of U.S. Highway 95 and State Route 266 over Montezuma alternative segments 1, 2, and 3 toward Stonewall Mountain (32).

3.3.3.3.2.7 Mina Common Segment 2 (Stonewall Flat Area). Common segment 2 would begin west of Stonewall Mountain and south of the intersection of U.S. Highway 95 and State Route 266. Mina common segment 2 would be in Class IV land and would never pass closer than 6.9 kilometers (4.3 miles) to the Class II Stonewall Mountain area.

Note: At this point, the Mina rail alignment becomes the same as the Caliente rail alignment. Although descriptions of the remaining alternative segments and common segments are the same as for the Caliente rail alignment, DOE has repeated them here for continuity. There are no Mina common segments numbered 3 and 4; instead, DOE has retained the numbering (common segments 5 and 6) used in the description of the Caliente alternative segment.

3.3.3.3.2.8 Bonnie Claire Alternative Segments. The Bonnie Claire alternative segments would cross Class IV lands to the southwest of the Nevada Test and Training Range and past Scotty's Junction at the intersection of U.S. Highway 95 and State Route 267, which the BLM manages as a Class III area west of U.S. Highway 95. A key observation point at Scottys Junction provides a view northeast toward the alternative segments (33).

3.3.3.3.2.9 Common Segment 5 (Sarcobatus Flat Area). Common segment 5 would cross Class IV land between the Bonnie Claire area and the Oasis Valley area. There are no visual resources of concern along this common segment and, therefore, no key observation points.

3.3.3.3.2.10 Oasis Valley Alternative Segments. The Oasis Valley alternative segments would cross Class IV areas through Oasis Valley. A key observation point (35) is located north of Springdale, looking east over the Oasis Valley, showing a typical landscape. A key observation point (34) provides a view of a typical cut.

3.3.3.3.2.11 Common Segment 6 (Yucca Mountain Approach). Common segment 6 would pass from the Oasis Valley area, near Beatty and across Beatty Wash, through the Nevada Test Site to the Yucca Mountain Site. State Route 374, entering Beatty, is a Class III area. Common segment 6 would cross approximately 10 kilometers (6.2 miles) of Class III lands before it entered the Nevada Test Site, but the segment is more than 15 kilometers (9.3 miles) from U.S. Highway 95 in this section. Land on the Nevada Test Site is not under BLM jurisdiction. Land on the Nevada Test Site that is visible from U.S. Highway 95 and which the rail alignment would cross is considered Class IV in this evaluation. A key observation point (36) is located north of Beatty, with views from U.S. Highway 95 over the Class IV lands surrounding the access road to Beatty Wash. The viewshed within the wash is considered a contributing element to cultural resources within the wash that are important to American Indians (DIRS 174205-Kane et al. 2005, p. 17). Beatty Wash and the rail alignment through it would not be visible from the highway. Therefore, DOE did not select key observation points in this area.

3.3.4 AIR QUALITY AND CLIMATE

This section describes the present air quality and climate characteristics along the Mina rail alignment and summarizes information from *ambient air* monitoring and meteorological data collection in the region. Section 3.3.4.1 describes the region of influence for air quality and climate; Section 3.3.4.2 describes general air quality characteristics in the Mina rail alignment region of influence; and Section 3.3.4.3 describes the climate characteristics in the Mina rail alignment region of influence.

3.3.4.1 Region of Influence

The region of influence of air quality and climate along the Mina rail alignment includes a small portion of Churchill County near Hazen, Lyon, Mineral (including the Walker River Paiute Reservation), Esmeralda, and Nye Counties. Historic data on pollutant emissions inventories and compliance status for the State of Nevada are calculated at the county level, and these data provide a basis for determining existing air quality in the region of influence and for use in analyzing potential impacts to air quality (see Section 4.3.4).

However, air-emissions fixed-point sources such as quarries and linear sources such as operating railroads can subject certain locations (known as receptors; for example, population centers) to higher localized levels of pollutants than a regional analysis would suggest. Therefore, DOE also selected more focused study locations within the region of influence in which to assess air quality impacts on specific receptors. These locations are the population centers near the Mina rail alignment (Schurz, Hawthorne, Mina, and Silver Peak) and two potential quarry sites northeast of Luning (Gabbs Valley Range) and southwest of Goldfield (Malpais Mesa).

3.3.4.2 Existing Air Quality

Air quality is determined by measuring concentrations of certain pollutants in the atmosphere. The U.S. Environmental Protection Agency designates an area as being *in attainment* for a particular pollutant if *ambient* concentrations of that pollutant are below the National *Ambient Air Quality Standards*. The pollutants regulated under the State of Nevada and National Ambient Air Quality Standards are *ozone*, *carbon monoxide*, *nitrogen dioxide*, *sulfur dioxide*, *particulate matter* (PM_{10} and $PM_{2.5}$), and lead. Collectively, these pollutants are referred to as *criteria air pollutants*. Table 3-95 lists the National Ambient Air Quality Standards for both the primary public health standard and the secondary public welfare standards in comparison to State of Nevada Ambient Air Quality Standards.

Areas in violation of one or more of these standards are classified as *nonattainment areas*. If there is not enough air quality data to determine the status of a remote or sparsely populated area, then the U.S. Environmental Protection Agency lists the area as unclassifiable. However, for regulatory purposes, unclassifiable areas are considered to be in attainment. All portions of the Mina rail alignment would be within areas classified as in attainment for all National Ambient Air Quality Standards.

The most representative air quality data for the northern portion of the Mina rail alignment (Churchill, Lyon, and Mineral Counties and the Walker River Paiute Reservation) consists of historical monitoring data collected at three locations: Schurz for particulate matter; the Fort Churchill Power Plant (near Wabuska) for carbon monoxide, nitrogen dioxide, and sulfur dioxide (DIRS 182287-Hoelscher 2007, all); and Fallon for ozone (DIRS 179933-State of Nevada 2007, all). The Schurz data are recent ambient air quality data collected and reported on the Tribal Environmental Exchange Network; the Fort Churchill Power Plant data was collected in preparation for a Prevention of Significant Deterioration

Table 3-95. State of Nevada and National Ambient Air Quality Standards^a (page 1 of 2).

Pollutant ^b	Averaging time over which pollutant is measured	Nevada standards concentration ^b	National primary standards ^b	National secondary standards ^b	Notes regarding the air quality standard
Ozone	1 hour	0.12 ppm (235 µg/m ³)	None	None	Not to be exceeded where the general public has access.
	8 hours	None	0.08 ppm (195 µg/m ³)	Same as primary	The 3-year average of the fourth-highest daily maximum 8-hour average ozone concentrations must not be exceeded.
Ozone, Lake Tahoe Basin	1 hour	0.10 ppm (195 µg/m ³)	None	None	Not to be exceeded where the general public has access.
Carbon monoxide	8 hours	9 ppm (10,500 µg/m ³) for elevations less than 1,500 meters ^c above mean sea level	9 ppm (10,500 µg/m ³) at any elevation	None	Not to be exceeded more than once per year.
		6 ppm (7,000 µg/m ³) for elevations greater than 1,500 meters above mean sea level			
Carbon monoxide (at any elevation)	1 hour	35 ppm (40,500 µg/m ³)	35 ppm (40,500 µg/m ³)		
Nitrogen dioxide	Annual arithmetic mean	0.053 ppm (100 µg/m ³)	0.053 ppm (100 µg/m ³)	Same as primary	Not to be exceeded.
Sulfur dioxide	Annual arithmetic mean	0.03 ppm (80 µg/m ³)	0.03 ppm (80 µg/m ³)	None	Not to be exceeded.
	24 hours	0.14 ppm (365 µg/m ³)	0.14 ppm (365 µg/m ³)		Not to be exceeded more than once per year.
	3 hours	0.5 ppm (1,300 µg/m ³)	None	0.5 ppm (1,300 µg/m ³)	
Particulate matter as PM ₁₀	Annual arithmetic mean	50 µg/m ³	None ^d	None ^d	The 3-year average of the weighted annual mean concentration at each monitor within an area.
	24 hours	150 µg/m ³	150 µg/m ³		Not to be exceeded more than once per year. ^e

Table 3-95. State of Nevada and National Ambient Air Quality Standards^a (page 2 of 2).

Pollutant ^b	Averaging time over which pollutant is measured	Nevada standards concentration ^b	National primary standards ^b	National secondary standards ^b	Notes regarding the air quality standard
Particulate matter as PM _{2.5}	Annual arithmetic mean	None	15 µg/m ³	Same as primary	The 3-year average of the weighted annual mean concentration from single or multiple community-oriented monitors.
	24 hours	35 µg/m ³	35 µg/m ³		The 3-year average of the 98th percentile of 24-hr concentrations at each population-oriented monitor within an area. ^f
Lead ^g	Quarterly arithmetic mean	1.5 µg/m ³	1.5 µg/m ³	Same as primary	Not to be exceeded.
Hydrogen sulfide ^g	1 hour	0.08 ppm (112 µg/m ³)	None	None	Not to be exceeded.

a. Sources: Nevada Administrative Code Section 445B.22097 and 40 CFR 50.4 through 50.11.

b. PM₁₀ = particulate matter with an aerodynamic diameter less than or equal to 10 micrometers; PM_{2.5} = particulate matter with an aerodynamic diameter less than or equal to 2.5 micrometers; ppm = parts per million; µg/m³ = micrograms per cubic meter.

c. To convert meters to feet, multiply by 3.2808.

d. The U.S. Environmental Protection Agency revoked the annual PM₁₀ standard effective December 18, 2006 (71 FR 60853, October 17, 2006).

e. The 24-hour state standard is attained when the expected number of days per calendar year with a 24-hour average concentration above the standard is equal to or less than 1. The expected number of days per calendar year is based on an average of the number of exceedances per year for the last 3 years.

f. The 24-hour state standard is attained when the second highest of a 3-year rolling average of the 24-hour concentration at each monitor is less than the standard.

g. The proposed railroad would not emit lead or hydrogen; they are included here for completeness.

Permit Application for the Sierra Pacific Power Company during the late 1990s; and the nearest representative ozone data were data collected from Fallon by the Nevada Department of Environmental Protection. While the Fort Churchill air quality data are somewhat outdated, the little development or population growth in the region since that time strongly suggests that the Fort Churchill air quality data remains representative of the region in the vicinity of the Mina rail alignment. Additional air quality data are available, such as carbon monoxide from Minden and particulate matter from Fernley and Gardnerville, but these locations are more than 50 kilometers (30 miles), 18 kilometers (11 miles), and 50 kilometers, respectively, from the Mina rail alignment at its closest and are influenced by local emissions sources not representative of the region near the rail alignment.

The only gas-phase monitoring study made in the southern portion (Esmeralda and Nye Counties) of the Mina rail alignment is a special study at Yucca Mountain covering a 4-year period from October 1991 to September 1995 (DIRS 102877-CRWMS M&O 1999, all). The limited amount of air quality data reflects choices made by national and state agencies to focus monitoring resources either on population centers or pristine areas such as national parks. Additional data on particulate matter are available based on monitoring in the vicinity of Yucca Mountain from 1989 to 1997 (DIRS 102877-CRWMS M&O 1999, all; DIRS 102876-CRWMS M&O 1997, all; DIRS 147777-SAIC 1992, all; DIRS 147780-SAIC 1992, all), from three sites from 1998 to 2001 (DIRS 173738-DOE 2002, p. 42), and from two sites

from 2002 through 2005 (DIRS 168842-DOE 2003, p. 42; DIRS 173740-DOE 2004, p. 36; DIRS 176801-Wills 2005, p. 38; DIRS 179948-DOE 2006, p. 40). While these data sets pertain to locations more than 110 kilometers (70 miles) from the Goldfield area, DOE believes they are representative of the ambient air quality along the southern portion of the Mina rail alignment, because no large emission sources or metropolitan areas are located in the region that would otherwise affect air quality. However, local natural sources of particulate matter, such as barren land or dry lake beds (such as Sarcobatus Flat), could generate higher localized concentrations of particulate matter.

In the vicinity of the southern portion of the Mina rail alignment, the closest location (other than the Yucca Mountain Site) for which there are recent air quality data is Pahrump, Nevada. However, Pahrump, which is in the extreme southern tip of Nye County, is 65 kilometers (40 miles) southeast of the Mina rail alignment and only monitors particulate matter. In recent years there have been exceedances of the National Ambient Air Quality Standards for particulate matter in Pahrump because there has been substantial construction activity and population growth in the Pahrump Valley. In September 2003, Pahrump entered into a Memorandum of Understanding (DIRS 178128-Nevada Division of Environmental Protection 2003, p. 5) with the U.S. Environmental Protection Agency, the State of Nevada, and Nye County to develop an air quality improvement plan, with quantified emission-reduction measures so that the emission reduction strategies will be adequate to ensure the area stays in attainment of the particulate matter standards and with the objective that the area would be in attainment by 2009. Pahrump has a background monitoring site intended to represent natural background concentrations of the northern Mojave Desert; however, some disturbed land in the vicinity of the monitor makes the site only representative of the local background in the Pahrump Valley. Because of Pahrump's distance from the Mina rail alignment and heavy construction activity and population growth, its air quality is not representative of the area of the Mina rail alignment.

Along the northern portion of the Mina rail alignment (Churchill, Lyon, and Mineral Counties, and the Walker River Paiute Reservation), the most representative air quality data was collected at three locations depending on the air pollutant. Particulate matter data for Schurz are available for the period 2004 to 2006 (DIRS 180073-Tribal Environmental Exchange Network 2007, all). Sierra Pacific Power Company collected data at the Fort Churchill Power Plant from January 1996 through May 1998; these data contain information on sulfur dioxide, nitrogen dioxide, and carbon monoxide (DIRS 182287-Hoelscher 2007, all). The nearest representative ozone information is data the Nevada Department of Environmental Protection collected at Fallon, Nevada, from 2000 through 2003 (DIRS 179933-State of Nevada 2007). Figure 3-178 shows meteorological and air quality monitoring station locations along the Mina rail alignment.

The Fort Churchill Power Plant data and the Nevada Bureau of Air Quality Planning data were designed to comply with the U.S. Environmental Protection Agency's *On-Site Meteorological Program Guidance for Regulatory Modeling Applications* (DIRS 101822-EPA 1987, all) and *Ambient Monitoring Guidelines for Prevention of Significant Deterioration (PSD)* (DIRS 108989-EPA 1987, all).

DOE collected data from the Tribal Environmental Exchange Network. The data includes hourly meteorological and air quality monitoring data that starts in May 2003. Hourly air quality monitoring data includes PM₁₀ and PM_{2.5}, using a method equivalent to the U.S. Environmental Protection Agency's integrated filter reference method, for continuous monitoring of PM₁₀ and PM_{2.5}. DOE collected, processed, and conducted some limited quality assurance reviews on the meteorological and hourly air quality values to characterize the background PM₁₀ and PM_{2.5} concentration for the Walker River Paiute Reservation. To verify and assure the quality of the monitoring values, DOE performed statistical checks for reasonableness in the monitored values. Additionally, DOE prepared statistics on the rate of change to identify periods with possible equipment malfunction and remove data with extreme change in hourly concentrations.

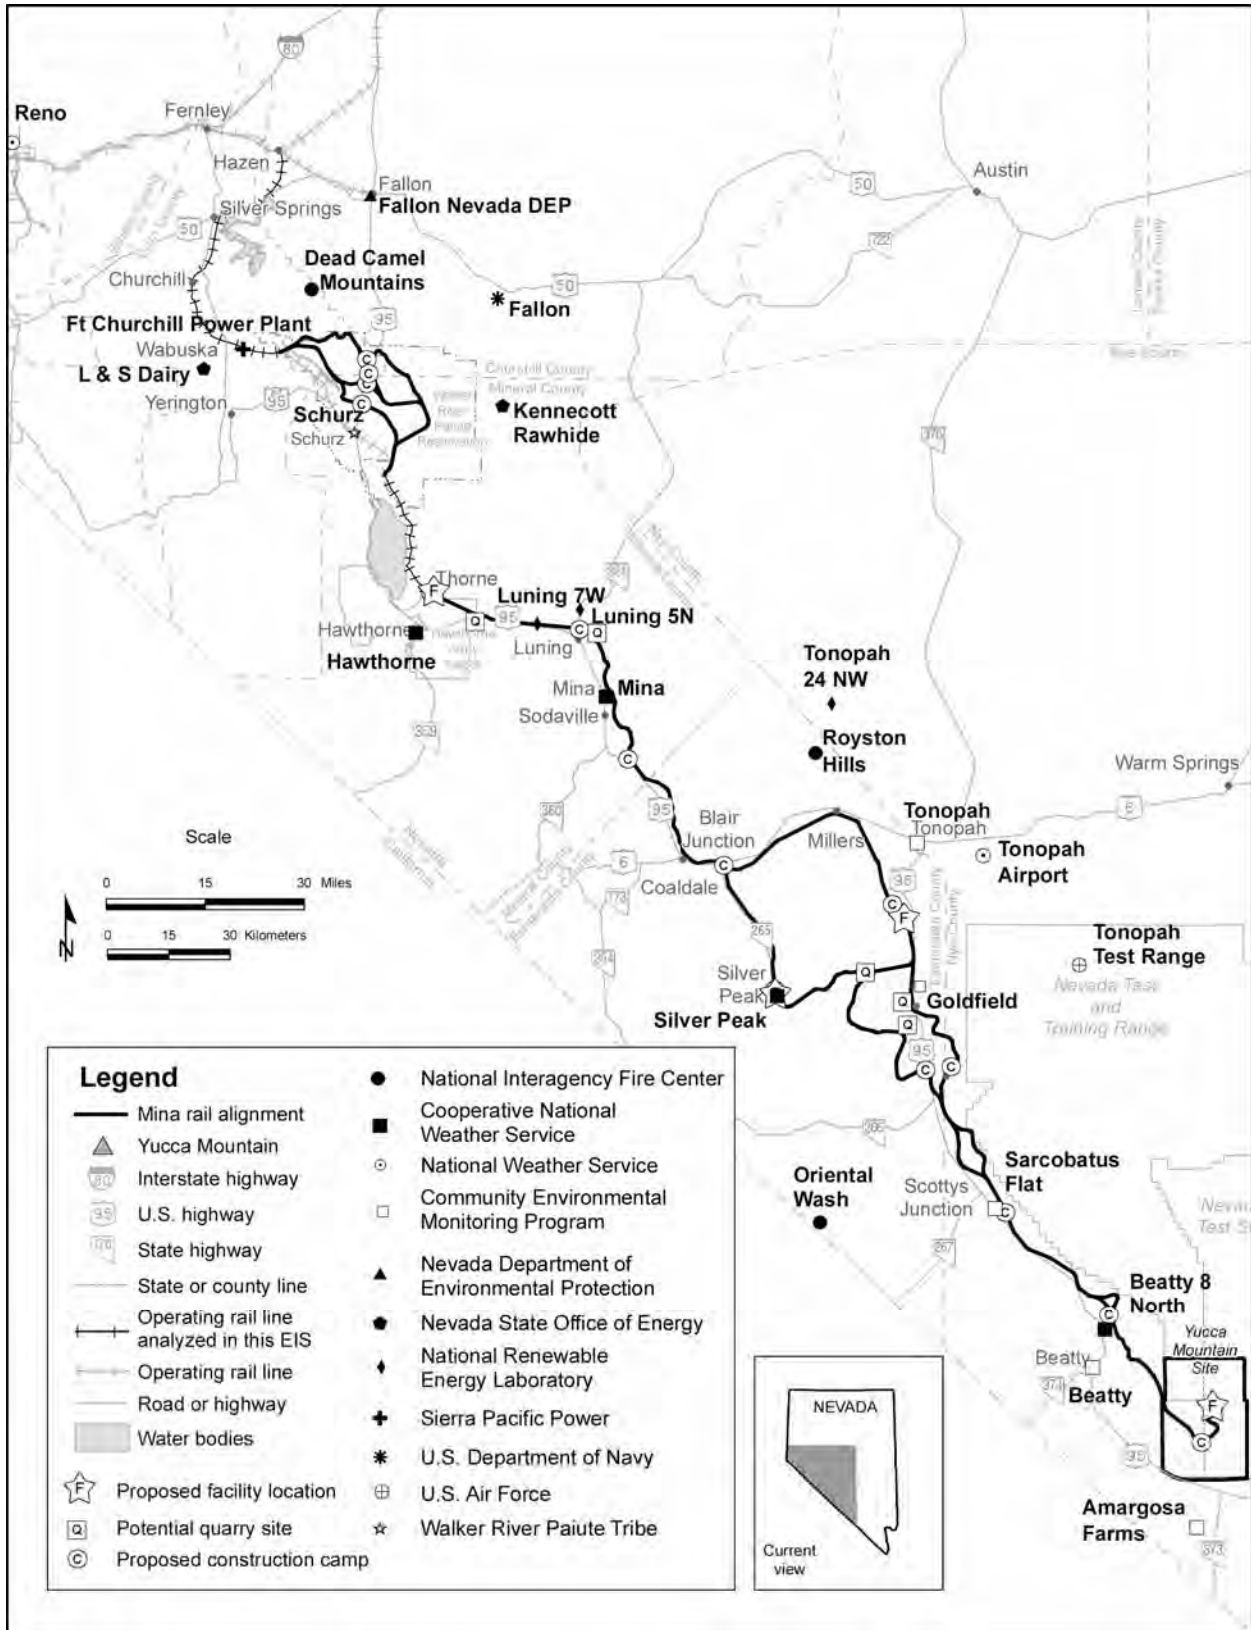


Figure 3-178. Meteorological and air monitoring stations along the Mina rail alignment.

DOE then screened the PM₁₀ and PM_{2.5} data for cases when the PM_{2.5} was reported to be higher than the PM₁₀ concentration. If the PM₁₀ concentration was within three standard deviations of the mean hourly PM₁₀ concentration, then the PM₁₀ concentration was assumed correct and the PM_{2.5} concentration set to missing; otherwise the PM₁₀ was set to missing. After screening, DOE summarized both the PM₁₀ and PM_{2.5} concentrations for the daily and annual averages from the available dataset. To determine annual values, the Department determined quarterly averages of PM₁₀ and PM_{2.5} for those periods in which the hourly PM₁₀ and PM_{2.5} measurements, respectively, met a completeness criterion of at least 75 percent (DIRS 179932-EPA 1999, pp. 5 to 16).

Tables 3-96 through 3-98 summarize the particulate-matter air quality monitoring at Schurz, the air quality monitoring at Fort Churchill Power Plant, and the ambient ozone monitoring at Fallon, Nevada, respectively. These represent the best available information on the air quality along the northern portion of the Mina rail alignment. The second highest 24-hour and annual PM₁₀ measurements were 99 and 23 micrograms per cubic meter, respectively. These measurements, made at Schurz in 2005, are approximately 66 and 46 percent of the national and state regulatory standard of 150 and 50 micrograms per cubic meter. Ambient concentrations of carbon monoxide, nitrogen dioxide, and sulfur dioxide measured at Fort Churchill were also well below the ambient air quality standards with their maximum percentages at 16, 8, and 18 percent of their respective national and state regulatory standards. For ozone there has been no exceedance of the 1- or 8-hour standard. The highest percentage was for the 8-hour ozone standard (0.08 parts per million), at 88 percent.

No ambient monitoring data were available for lead. However, DOE expects concentrations of lead to be far below the regulatory standard because there are no industrial sources in the region of influence (or near enough to transport this *contaminant* into the region of influence), and lead-based gasoline, previously the principal source of lead in the air, has been phased out.

Along the southern portion of the Mina rail alignment, the most representative data are from the DOE Environmental Safety and Health Department, which began air quality monitoring in the Yucca Mountain vicinity in 1989. The air quality network originally consisted of Sites YMP1 and YMP5; DOE added sites YMP6 and YMP9 in 1992.

Table 3-96. Maximum observed ambient air quality concentration at Schurz, Nevada (2004 to 2006) compared to the Nevada and National Ambient Air Quality Standards for particulate matter.^{a,b}

Pollutant ^c	Averaging time	2004	2005	2006	High	Nevada and National Ambient Air Quality Standards
PM ₁₀	24-hour highest	NA ^d	136	73	136	None
	24-hour second highest	NA	99	70	99	150
	Annual average	NA	23	11	23	50 ^e
PM _{2.5}	24-hour 98 th percentile	12	24	11	24 ^f	35
	Annual average	3.4	3.9	5.4	5.4	15

a. Source: DIRS 180073-Tribal Environmental Exchange Network 2007, all.

b. Concentrations are shown in micrograms per standard cubic meter.

c. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; PM_{2.5} = particulate matter with an aerodynamic diameter equal to or less than 2.5 micrometers.

d. NA = not applicable.

e. The U.S. Environmental Protection Agency revoked the annual PM₁₀ standard effective December 18, 2006 (71 Federal FR 60853, October 17, 2006). The Nevada state standard remains in effect and is reported here.

f. For comparison to the air quality standard, the three-year average is 16 micrograms per cubic meter.

Table 3-97. Fort Churchill maximum observed ambient gaseous air quality concentration in comparison to the Nevada Standards for Air Quality and the National Ambient Air Quality Standards (in parts per million by volume).^a

Pollutant	Nevada and NAAQS ^b (1/10/96 to 12/31/96)	(1/1/97 to 12/31/97)	(1/1/98 to 03/1/98)	(4/1/98 to 5/11/98)	
Carbon monoxide	35 (1 hour)	1.1	1.8	0.8	0.5
	9 ^c (8 hour)	1.0	1.4	0.7	0.4
Nitrogen dioxide	0.053 (annual)	0.004	0.004	0.002	NA ^d
Sulfur dioxide	0.50 (3 hour)	0.072	0.020	0.005	0.004
	0.14 (24 hour)	0.025	0.019	0.003	0.003
	0.03 (annual)	0.002	0.002	0.002	NA

a. Source: DIRS 182287-Hoelscher 2007, all.

b. NAAQS = National Ambient Air Quality Standards.

c. Nevada Standards for Air Quality: less than 5,000 feet above mean sea level.

d. NA = not applicable.

Table 3-98. Fallon, Nevada, highest 1-hour and fourth highest 8-hour observed ozone concentration in comparison to the Nevada Standards for Air Quality and the National Ambient Air Quality Standards (in parts per million by volume).^a

Pollutant	Nevada and NAAQS ^b	2000	2001	2002	2003
Ozone	0.12 (1 hour)	0.080	0.070	0.070	0.080
	0.08 (8 hour)	0.070	0.059	0.058	0.067

a. Source: DIRS 179933-State of Nevada 2007.

b. NAAQS = National Ambient Air Quality Standards; Nevada, federal standard is for 8-hour; state standard is for 1-hour.

DOE designed the air quality and meteorological monitoring program to comply with the U.S. Environmental Protection Agency's *On-Site Meteorological Program Guidance for Regulatory Modeling Applications* (DIRS 101822-EPA 1987, all) and *Ambient Monitoring Guidelines for Prevention of Significant Deterioration (PSD)* (DIRS 108989-EPA 1987, all), and with U.S. Nuclear Regulatory Commission meteorological monitoring guidance (ANSI/ANS-2.5-1984, *Standard for Determining Meteorological Information at Nuclear Power Sites* and Regulatory Guide 1.23, Rev. 0, *Onsite Meteorological Programs*).

DOE monitored the criteria gaseous pollutants of carbon monoxide, nitrogen dioxide, ozone, and sulfur dioxide at YMP1 from October 1991 through September 1995. DOE also monitored the concentration of PM₁₀ at YMP1; the ambient air quality monitoring program included sampling of PM₁₀ every sixth day, based on the U.S. Environmental Protection Agency's representative schedule of sampling.

YMP5, the second site measuring PM₁₀, represented background conditions away from site activities at Yucca Mountain. Measurements at YMP5 began in April 1989 and continued until 2002.

In October 1992, DOE added two sites to measure PM₁₀:

- YMP6, along the western border of the Nevada Test Site where the Test Site meets the U.S. Air Force land in upper Yucca Wash, measured particulate matter that might be transported from Midway Valley toward the northwest through Yucca Wash (discontinued in September 1999)
- YMP9, at Gate 510 on the southern border of the Nevada Test Site, north of Amargosa Valley

Tables 3-99 and 3-100 summarize the results of the particulate-matter air quality monitoring programs. More information on the results of the sampling program is available in *Environmental Baseline File for Meteorology and Air Quality* (DIRS 102877-CRWMS M&O 1999, all); *Meteorological Monitoring Program Particulate Matter Ambient Air Quality Monitoring Report January through December 1996* (DIRS 102876-CRWMS M&O 1997, all); *Particulate Matter Ambient Air Quality Data Report for 1989 and 1990* (DIRS 147777-SAIC 1992, all); and *Particulate Matter Ambient Air Quality Data Report for 1991* (DIRS 147780-SAIC 1992, all).

Between 1989 and 1997, the highest 24-hour PM₁₀ measurement was 67 micrograms per cubic meter. This measurement, made at Site YMP5 in 1995, is approximately 45 percent of the regulatory standard of 150 micrograms per cubic meter (40 CFR 50.4 through 50.11). The second-highest value at any site, which is the regulatory level for an exceedance of the air quality standard, was 49 micrograms per cubic meter at Site YMP1 in 1990, which is 33 percent of the standard (the second-highest value would be used to determine whether there was a violation of the PM₁₀ standard).

The annual averages were between 6 and 13 micrograms per cubic meter (Site YMP9 [1998] and Site YMP5 [1989], respectively), which is less than 30 percent of the Nevada annual standard (50 micrograms per cubic meter).

Table 3-100 lists the annual highest and second-highest 24-hour concentrations, and the annual average PM₁₀ concentration for the period 1998 to 2005 for YMP1, YMP5, and YMP9, and shows the measured levels of ambient particulate matter were well below the federal and Nevada particulate-matter standards.

Table 3-101 lists YMP1 results for monitoring of gaseous criteria pollutants (carbon monoxide, nitrogen dioxide, ozone, and sulfur dioxide) for each year of the 4-year monitoring period (1991 to 1995); for comparison, the National Ambient Air Quality Standards are also shown.

Ambient concentrations of carbon monoxide and sulfur dioxide were below the threshold of reliable detection of the instrument. Nitrogen dioxide occasionally registered values of a few hundredths of parts per million by volume, typically associated with nearby vehicle activity. The number of hours per operating quarter with measurements above the threshold was between 1 hour and 161 hours, which occurred from October through December 1993. The results listed in Table 3-101 are expressed in the units of the applicable standard (annual average of nitrogen dioxide), and the listed values are based on the threshold of reliable detection for that instrument.

DOE believes these measurements of particulate matter, carbon monoxide, nitrogen dioxide, and sulfur dioxide are representative of the air quality along the southern portion of the Mina rail alignment (Esmeralda County and south) because the region of influence has no large emission sources or metropolitan areas that would otherwise affect its air quality. However, in areas close to barren land or dry lake beds, there could be higher particulate-matter concentrations.

Ozone was the only gaseous criteria pollutant to routinely register ambient levels above the instrument threshold. Ozone levels never exceeded the regulatory limit for the 1-hour average standard (0.12 parts per million by volume). The highest 1-hour average was 0.096 parts per million. Note that the 1-hour average standard was withdrawn in 2005, and has now been replaced with an 8-hour average standard (0.08 parts per million). Ozone is formed in the atmosphere under the presence of sunlight, nitrogen oxides, and *volatile organic compounds*. Ozone typically has the highest concentrations during warm weather because strong sunlight and high temperatures are more conducive to higher ambient concentrations. Approximately 90 percent of the warm-season hours had concentrations between 0.020 and 0.060 parts per million; only 44 hours had concentrations in excess of 0.080 parts per million.

Table 3-99. Summary of PM₁₀ concentrations at sites in the vicinity of Yucca Mountain (1989 to 1997).^{a,b,c}

Sampler	Averaging time	1989	1990	1991	1992	1993	1994	1995	1996	1997	High
Site YMP1	24-hour highest	41	62	33	30	30	39	21	60	31	62
	Second highest	27	49	25	24	22	26	20	23	21	49
	Annual average	12	12	10	12	10	10	10	10	9	12
Site YMP5	24-hour highest	40	51	45	49	21	42	67	57	26	67
	Second highest	38	43	33	27	20	23	21	35	19	43
	Annual average	13	10	10	12	9	9	10	10	9	13
Site YMP6	24-hour highest	NA	NA	NA	NA	21	25	14	32	59	59
	Second highest	NA	NA	NA	NA	21	20	13	21	18	21
	Annual average	NA	NA	NA	NA	9	7	7	9	8	9
Site YMP9	24-hour highest	NA	NA	NA	31	21	39	15	57	29	57
	Second highest	NA	NA	NA	31	21	19	14	28	19	31
	Annual average	NA	NA	NA	NA	9	8	7	10	8	10

a. Sources: DIRS 102877-CRWMS M&O 1999, p.13; DIRS 102876-CRWMS M&O 1997, p.13; DIRS 147777-SAIC 1992, p.13; DIRS 147780-SAIC 1992, p.13.

b. Concentrations are shown in micrograms per standard cubic meter (µg/m³).

c. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; NA = samples were not taken during the corresponding monitoring period.

Table 3-100. Summary of PM₁₀ concentrations at sites in the vicinity of Yucca Mountain (1998 to 2005).^{a,b,c}

Sampler	Averaging time	1998	1999	2000	2001	2002	2003	2004	2005	High
Site YMP1	24-hour highest	30	18	38	23	52	33	24	32	52
	Second highest	17	34	34	19	37	17	19	29	37
	Annual average	8	8	11	8	10	8	8	9	11
Site YMP5	24-hour highest	26	24	45	27	NA	NA	NA	NA	45
	Second highest	18	21	39	25	NA	NA	NA	NA	39
	Annual average	7	8	12	10	NA	NA	NA	NA	12
Site YMP9	24-hour highest	22	18	36	22	43	39	27	26	43
	Second highest	20	17	33	19	39	38	21	26	39
	Annual average	6	8	11	9	10	11	9	9	11

a. Sources: DIRS 173738-DOE 2002, p. 42; DIRS 168842-DOE 2003, p. 44; DIRS 173740-DOE 2004, p. 36; DIRS 176996-DOE, 2005, p. 38; DIRS 179948-DOE 2006, p. 40.

b. Concentrations are shown in micrograms per standard cubic meter (µg/m³).

c. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; NA = samples were not taken during the corresponding monitoring period.

Table 3-101. Site YMP1 maximum observed ambient gaseous air quality concentration in comparison to the Nevada Standards for Air Quality and the National Ambient Air Quality Standards (in parts per million by volume).^a

Pollutant	Nevada and NAAQS ^b	Year 1 (10/91 to 9/92)	Year 2 (10/92 to 9/93)	Year 3 (10/93 to 9/94)	Year 4 (10/94 to 9/95)
Carbon monoxide	35 (1 hour)	0.2	0.2	0.2	0.2
	9 ^c (8 hour)	0.2	0.2	0.2	0.2
Nitrogen dioxide	0.053 (annual)	0.0020	0.0020	0.0021	0.0021
Ozone ^d (for Nevada ambient air quality only)	0.12 (1 hour)	0.096	0.093	0.081 (1 hour)	0.083 (1 hour)
	0.08 (8 hour)	(1 hour)	(1 hour)		
Sulfur dioxide	0.50 (3 hour)	0.002	0.002	0.002	0.002
	0.14 (24 hour)	0.002	0.002	0.002	0.002
	0.03 (annual)	0.002	0.002	0.002	0.002

a. Source: DIRS 102877-CRWMS M&O 1999, p.14; 40 CFR 50.4 through 50.11.

b. NAAQS = National Ambient Air Quality Standards.

c. Nevada Standards for Air Quality: less than 5,000 feet above mean sea level.

d. The 1-hour ozone standard of 0.12 parts per million, in place during the listed years, was phased out in 2005 and replaced with an 8-hour ozone standard of 0.08 parts per million.

Available data for Death Valley National Park (for 1995 to 2004), 50 kilometers (30 miles) to the west of the southern portion of the Mina rail alignment, reported a highest 1-hour average concentration of 0.095 parts per million (DIRS 176115-EPA 2005, all), which is similar to the ozone values measured at Yucca Mountain. Ozone concentrations to the east are anticipated to be even lower because of their greater distance from emission sources.

Again, no ambient monitoring data were available along the southern portion of the rail alignment for lead. However, DOE expects concentrations of lead to be far below the regulatory standard because there are no industrial sources in the region of influence (or near enough to transport this contaminant into the region of influence), and lead-based gasoline, previously the principal source of lead in the air, has been phased out.

No ambient monitoring data were available for PM_{2.5} and PM₁₀, but PM_{2.5} can be estimated from measurements of ambient PM₁₀. In the region of influence, nearly all PM₁₀ would be generated from the resuspension of surface-level soil and mineral materials. A U.S. Department of Agriculture study on wind erosion in the western United States found that over all soils, the fraction of PM₁₀ as PM_{2.5} was about 15 percent, ranging from 10 to 30 percent (DIRS 173838-Hagen 2001, p. 1). To be conservative, DOE applied the upper end of this range (30 percent) to the ambient PM₁₀ data collected at Yucca Mountain (Sites YMP1, YMP5, and YMP9), and the resulting data indicated the highest expected 24-hour concentration of PM_{2.5} would be 16 micrograms per cubic meter, and the highest expected annual average concentration would be 4 micrograms per cubic meter. These figures are 46 and 26 percent of the standards for PM_{2.5}. Table 3-102 summarizes these results and indicates that PM_{2.5} would be well below the National Ambient Air Quality Standards at all locations along the Mina rail alignment.

3.3.4.3 Climate

The Mina rail alignment would cross desert and *semi-desert* areas that generally have abundant hours of cloud-free days, low annual precipitation, and large daily ranges in temperature.

Table 3-102. Maximum observed ambient air quality concentration at sites in the vicinity of Yucca Mountain (1998 to 2003) compared to the National Ambient Air Quality Standards for particulate matter.^{a,b,c}

Sampler	Nevada and NAAQS ^d	1998	1999	2000	2001	2002	2003	2004	2005	High
PM ₁₀	24 hour: 150	30	24	45	27	52	39	27	32	52
	Annual: 50 ^e	8	8	12	10	10	11	9	9	12
Estimated ^f PM _{2.5}	24 hour: 35	9	7	14	8	16	12	8	10	16
	Annual: 15	2	2	4	3	3	3	3	3	4

a. Sources: DIRS 173738-DOE 2002, p. 42; DIRS 168842-DOE 2003, p. 44; DIRS 173740-DOE 2004, p. 36; DIRS 176996-DOE, 2005, p. 38; DIRS 179948-DOE 2006, p. 40; and 40 CFR 50.4 through 50.11.

b. PM₁₀ = particulate matter with an aerodynamic diameter equal to or less than 10 micrometers; PM_{2.5} = particulate matter with an aerodynamic diameter equal to or less than 2.5 micrometers.

c. Concentrations are shown in micrograms per standard cubic meter.

d. NAAQS = National Ambient Air Quality Standards.

e. The U.S. Environmental Protection Agency revoked the annual PM₁₀ standard effective December 18th, 2006 (71 Federal FR 60853, October 17, 2006).

f. Estimated based on upper-end range of PM₁₀ data assuming 30 percent of PM₁₀ is PM_{2.5} (DIRS 173838-Hagen 2001, p 1).

To characterize the existing climate, DOE collected meteorological data from 41 meteorological monitoring stations within the Mina rail alignment region of influence (see Figure 3-178 and Table 3-103).

The following eight groups operated these stations:

- National Oceanic and Atmospheric Administration
- Community Environmental Monitoring Program
- DOE Environment, Safety and Health Programs Department Network
- Tribal Environmental Exchange Network
- National Renewable Energy Laboratories
- Nevada State Office of Energy
- National Interagency Fire Center - Remote Automated Weather Station
- U.S. Air Force

The Meteorological Data Acquisition Network is a network of meteorological stations operated by the National Oceanic and Atmospheric Administration, Air Resources Laboratory/Special Operations and Research Division. The Community Environmental Monitoring Program is a joint effort between the DOE Nevada Operations Office, the University of Nevada Desert Research Institute, and the Community College System of Nevada, and is a network of monitoring stations in communities surrounding the Nevada Test Site that check the *environment* for *radioactivity* and check a variety of meteorological parameters. The Walker River Paiute Reservation station is part of a national network of meteorological stations operated by each tribe and is reported through the Tribal Environmental Exchange Network. The National Renewable Energy Laboratories supports the collection of wind data operated by the Desert Research Institute for potential site locations for wind energy development. The Nevada State Office of Energy operates a similar program for the collection of wind monitoring data on potential site locations for wind energy development. The Remote Automated Weather Station operated by the National Interagency Fire Center is a network of meteorological stations that monitor weather data that assists land management agencies with a variety of efforts primarily directed at rating fire danger. The U.S. Air Force has historically operated a meteorological station from time to time on the Nevada Test and Training Range at the Tonopah Test Range and archives this data with the Air Force Combat Climatology Center.

Table 3-103. Meteorological stations in the Mina rail alignment air quality and climate region of influence^{a,b} (page 1 of 2).

Station name	Elevation (in meters) ^c	Source	Wind data
Reno	1,341	WRCC	Yes
Fallon	1,199	WRCC	Yes
Dead Camel Mtn	1,369	RAWS	Yes
L & S Dairy	1,323	NSOE	Yes
Kennecott Rawhide	1,555	NSOE	Yes
Schurz	1,280	TREX	Yes
Hawthorne	1,286	WRCC	NA
Luning 7W	1,355	NREL	Yes
Luning 5N	1,524	NREL	Yes
Mina	1,386	WRCC	NA
Tonopah 24NW	1,535	NREL	Yes
Royston Hills	1,555	RAWS	Yes
Tonopah	1,836	CEMP	Yes
Tonopah Airport	1,655	WRCC	NA
Silverpeak	1,298	WRCC	NA
Goldfield	1,734	CEMP	Yes
Tonopah Test Range	1,691	Air Force	Yes
Sarcobatus Flat	1,226	CEMP	Yes
Oriental Wash	1,250	RAWS	Yes
Beatty 8 North	1,082	WRCC	NA
Beatty	1,007	CEMP	Yes
Amargosa Farms	746	CEMP	Yes
Mercury	1,009	WRCC	Yes
07	1,663	MEDA	NA
14	1,432	MEDA	NA
18	1,533	MEDA	NA
21	1,512	MEDA	NA
24	1,505	MEDA	NA
25	835	MEDA	NA
26	1,133	MEDA	NA
27	1,370	MEDA	NA
42	880	MEDA	NA
NTS 60 (YMP1)	1,136	DOE	NA
Gate 510 (YMP9)	838	DOE	NA
Fortymile Wash (YMP5)	952	DOE	NA
Knothead Gap (YMP8)	1,130	DOE	NA
Sever Wash (YMP7)	1,080	DOE	NA
Yucca Mountain (YMP2)	1,478	DOE	NA
Coyote Wash (YMP3)	1,278	DOE	NA

Table 3-103. Meteorological stations in the Mina rail alignment air quality and climate region of influence^{a,b} (page 2 of 2).

Station Name	Elevation (in meters) ^c	Source	Wind data
Alice Hill (YMP4)	1,234	DOE	NA
WT-6 (YMP6)	1,315	DOE	NA

a. Sources: DIRS 165987-WRCC 2002; DIRS 180073-Tribal Council Exchange Network 2007, all.

b. CEMP = Community Environmental Monitoring Program; DOE = DOE Environment, Safety and Health Programs Department Network; MEDA = Meteorological Data Acquisition Network; NREL = National Renewable Energy Laboratory; RAWS = Remote Automated Weather Station, NSOE = Nevada State Office of Energy; NA = not available; NTS = Nevada Test Site; WRCC = Western Regional Climate Center; YMP = Yucca Mountain Project, TREX = Tribal Environmental Exchange Network.

c. To convert meters to feet, multiply by 3.2808.

DOE acquired data not directly available through these programs through the Western Regional Climate Center (DIRS 165987-WRCC 2002, all), which maintains historical climate databases for most of the climate stations and operational National and Military Weather Service stations throughout the western United States, including a network of stations that collect daily climate observations.

Table 3-103 lists the stations and their respective elevations in the Mina rail alignment air quality and climate region of influence. All stations collected temperature and precipitation data, and Table 3-103 also identifies those stations that collected wind speed and direction data. The range of elevations over which weather data were collected is approximately the same as the elevation range of the Mina rail alignment – from 747 meters (2,450 feet) at the Amargosa Farms Station to 1,836 meters (6,023 feet) at Tonopah.

The Mina rail alignment would cross a variety of topographic features, ranging from mountain passes to sage-covered deserts. The alignment elevations range from 1,280 meters (4,200 feet) near Schurz in Mineral County to 1,860 meters (6,090 feet) at Goldfield Summit in Esmeralda County and back down to 1,080 meters (3,540 feet) near the end of the Mina Rail Alignment at Yucca Mountain. These elevation changes drive a wide variation in temperature and precipitation.

From north to south, the Mina rail alignment would lie within and be exposed to the climatic conditions of Churchill, Lyon, Mineral (including the Walker River Paiute Reservation, the bulk of which lies within Mineral County), Esmeralda, and Nye Counties, as described in Sections 3.3.4.3.1 through 3.3.4.3.5. The climate discussion that follows is based on the climatic data collected from the sites listed in Table 3-103.

3.3.4.3.1 Churchill County

A small portion of the Mina rail alignment would cross through western Churchill County, at an elevation of approximately 1,200 meters (4,000 feet). Annual average temperature in this portion of Churchill County is approximately 13° Celsius (55° Fahrenheit). Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer. Daily temperature variations are smaller during the winter. Summertime mean maximum temperatures are approximately 33° Celsius (92° Fahrenheit), and are accompanied by low relative humidity (commonly less than 10 percent). Winter mean minimum temperatures are approximately minus 5° Celsius (23° Fahrenheit) in December and January.

Precipitation occurs about equally throughout the year although slightly more occurs during the winter (November through March). Average annual precipitation is less than 130 millimeters (5 inches), but daily precipitation levels can be as high as 25 millimeters (1 inch), and historical maximums have exceeded 50 millimeters (2 inches) per day. Occasional summer thunderstorms can produce heavy rains that can cause flash floods. From November through April, precipitation might fall as snow. Mean average total snowfall is about 150 millimeters (6 inches).

Local topography influences winds in western Churchill County along the Mina rail alignment. Wind speeds are highest in the spring and occasionally generate dust storms. Annual average wind speed is 2.8 meters per second (6.3 miles per hour), with calm conditions (wind speeds of less than 0.58 meter per second [1.3 miles per hour]) occurring about 20 percent of the time.

3.3.4.3.2 Lyon County

The Mina rail alignment would cross through Lyon County from just west of the Lahontan Dam around Silver Springs and then past Wabuska and the Fort Churchill siding. The area lies to the east of the moisture-trapping Sierra Nevada Mountains. Mina rail alignment elevations through the county would range from about 1,200 meters (3,900 feet) to about 1,300 meters (4,300 feet). This area experiences abundant hours of cloud-free days, low annual precipitation (less than 150 millimeters [6 inches] per year), and large diurnal ranges in temperature.

Within Lyon County, the mean annual temperature along the Mina rail alignment is approximately 13° Celsius (55° Fahrenheit) north of Wabuska; south of Wabuska, temperatures are moderated due to cold air drainage along the Walker River, with a mean annual air temperature of 10° Celsius (50° Fahrenheit). Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer. Summertime mean maximum temperatures are approximately 41° Celsius (105° Fahrenheit); while in the vicinity of the Walker River they average approximately 34° Celsius (93° Fahrenheit). Winter mean minimum temperatures are approximately minus 12° Celsius (10° Fahrenheit) north of Wabuska, while in the vicinity of the Walker River they average approximately minus 8.9° Celsius (16° Fahrenheit). Annual precipitation in Lyon County averages less than 150 millimeters (6 inches) per year, with higher amounts found at higher elevations and lower amounts at lower elevations. During the summer, occasional thunderstorms can produce heavy rains and cause flash floods. Daily precipitation levels have occasionally exceeded 25 millimeters (1 inch), but generally are much less. Precipitation from November through April might fall as snow, particularly at higher elevations. Snowfall averages are around 76 to 180 millimeters (3 to 7 inches).

Local topography in Lyon County strongly influences winds along the Mina rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Highest wind speeds occur in the spring, and occasionally generate dust storms. Annual average wind speeds are around 2.3 meters per second (5.1 miles per hour), with calm conditions occurring more than 30 percent of the time, mostly during the night.

3.3.4.3.3 Mineral County and the Walker River Paiute Reservation

The Mina rail alignment would cross through Mineral County and the Walker River Paiute Reservation from just east of the Ft. Churchill Siding and then around Schurz and Walker Lake to Redlich Summit. The area lies to the east of the moisture-trapping Sierra Nevada Mountains. Elevations of the alignment through the county and reservation would range from about 1,300 meters (4,300 feet) to about 1,500 meters (5,000 feet). This area experiences abundant hours of cloud-free days, low annual precipitation (less than 250 millimeters [10 inches] per year), and large diurnal ranges in temperature.

Within Mineral County and the Walker River Paiute Reservation, the mean annual temperature along the Mina rail alignment in the vicinity of the Walker River is approximately 11° Celsius (52° Fahrenheit); south of Walker Lake the mean air temperature is slightly warmer at 13° Celsius (55° Fahrenheit). This is due to the absence of the nighttime cold air drainage winds along the Walker River. Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer. Summertime mean maximum temperatures are approximately 34° Celsius (93° Fahrenheit) at northerly locations and around 36° Celsius (96° Fahrenheit)

at southerly locations, and are accompanied by low relative humidity (commonly less than 10 percent). Winter mean minimum temperatures are approximately minus 8° Celsius (17° Fahrenheit) in the vicinity of Walker River and minus 6° Celsius (22° Fahrenheit) in the southern portion of the county.

Annual precipitation in Mineral County and the Walker River Paiute Reservation averages less than 130 millimeters (5 inches) per year, with higher amounts at higher elevations and lower amounts at lower elevations. During the summer, occasional thunderstorms can produce heavy rains and cause flash floods. Daily precipitation levels have occasionally exceeded 50 millimeters (2 inches), but generally are much less than 25 millimeters (1 inch) of rain. Precipitation from November through April might fall as snow, particularly at higher elevations. Snowfall averages are around 76 to 180 millimeters (3 to 7 inches).

Local topography in Mineral County and the Walker River Paiute Reservation strongly influences winds along the Mina rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Highest wind speeds occur in the spring and occasionally generate dust storms. Annual average wind speeds at the Schurz station on the Walker River Paiute Reservation, which are representative of the Mina rail alignment in the vicinity of Walker River, are around 1.7 meters per second (3.9 miles per hour); slightly more than 20 percent of the time the area experiences calm conditions. Farther south wind speeds are higher, with an annual average wind speed of 3.6 meters per second (8.1 miles per hour); slightly more than 4 percent of the time the area experiences calm conditions.

3.3.4.3.4 Esmeralda County

The Mina rail alignment would cross through Esmeralda County from Redlich Pass to Lida Junction and would be east of the highest peaks of the Sierra Nevada and White Mountain ranges. Elevations of the alignment through the county would range from about 1,300 meters (4,300 feet) to around 1,700 meters (5,500 feet). This area experiences abundant hours of cloud-free days, low annual precipitation (less than 250 millimeters [10 inches] per year), and large daily ranges in temperature.

Within Esmeralda County, the mean annual temperature along the Mina rail alignment is approximately 10° Celsius (50° Fahrenheit). Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer months. Summertime mean maximum temperatures are approximately 32° Celsius (90° Fahrenheit) at higher elevations and around 37° Celsius (98° Fahrenheit) at lower elevations, and are accompanied by low relative humidity (commonly less than 10 percent). Winter mean minimum temperatures are approximately minus 7° Celsius (20° Fahrenheit) in December and January.

Annual precipitation in Esmeralda County averages less than 180 millimeters (7 inches) per year, with higher amounts found at higher elevations and lower amounts at lower elevations. During the summer, occasional thunderstorms can produce heavy rains and cause flash floods. Daily precipitation levels have occasionally exceeded 50 millimeters (2 inches), but generally are less than 25 millimeters (1 inch) of rain. Precipitation from October through April might fall as snow, particularly at higher elevations. Snowfall averages are around 380 millimeters (15 inches) at higher elevations.

Local topography in Esmeralda County strongly influences winds along the Mina rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Highest wind speeds occur in the spring, and occasionally generate dust storms. Annual average wind speeds at the Goldfield station are around 2.7 meters per second (6 miles per hour); slightly more than 5 percent of the time the area experiences calm conditions.

3.3.4.3.5 Nye County

Through southern Nye County, the Mina rail alignment would lie to the east of the Grapevine and Funeral Mountains as well as the southern Sierra Nevada Mountains, a large mountain *barrier* that prevents much of the moist Pacific Ocean air from reaching the area. The result is that most of the area is largely desert. The Mina rail alignment through Nye County principally drops in elevation starting from approximately 1,400 meters (4,700 feet) at Stonewall Pass to 1,100 meters (3,500 feet) near the end of the Mina rail alignment at Yucca Mountain, and presents a wide variation in temperature and precipitation. In general, the climatic features can be described as abundant hours of cloud-free days, low annual precipitation (less than 250 millimeters [10 inches] per year), and large daily ranges in temperature.

In Nye County, the mean annual temperature along the Mina rail alignment ranges from approximately 16° Celsius (61° Fahrenheit) at lower elevations to approximately 13° Celsius (56° Fahrenheit) at the highest elevations. Because of the arid climate, it is common for strong daytime heating and rapid nighttime cooling to result in large variations in temperature, particularly during the summer months. Daily temperature variations are smaller during winter months, and less pronounced at higher elevations. At the lowest elevations along the Mina rail alignment, summertime maximum temperatures frequently exceed 38° Celsius (100° Fahrenheit), and are accompanied by low relative humidity (commonly less than 10 percent).

Annual precipitation averages less than 250 millimeters (10 inches) per year at all locations across southern Nye County, with most precipitation occurring during the winter months. Along the Mina rail alignment, precipitation is lowest from the Sarcobatus Flat station to the Beatty station, averaging just 76 to 100 millimeters (3 to 4 inches) per year because of the *rain shadow* effects from the Sierra Nevada and Amargosa Mountain Ranges. At higher elevations, a secondary peak in rainfall (associated with increased thunderstorm activity) occurs during the late summer months; at lower elevations, this precipitation often evaporates before reaching the ground. The thunderstorms occasionally produce heavy rains that can cause flash floods. Daily precipitation levels can be high, and historical maximums have reached 61 millimeters (2.4 inches) at the Sarcobatus Flat station, with a number of locations exceeding 41 millimeters (1.6 inches).

From November through April, precipitation in southern Nye County along the Mina rail alignment might fall as snow. Mean average snowfall is about 50 to 130 millimeters (2 to 5 inches).

Local topography in southern Nye County strongly influences winds along the Mina rail alignment. Local winds are generally channeled by topography, with prevailing wind direction oriented along valley axes. Wind speeds are highest in the spring, and occasionally generate dust storms at playas. The extreme highest wind speeds are along ridgetops. Winds of more than 40 meters per second (90 miles per hour) have been recorded along ridgetops at the Nevada Test Site station. Annual average wind speeds are much lower, with annual average speeds of 2.4 meters per second (5.4 miles per hour) at Sarcobatus Flat and 2.2 meters per second (4.9 miles per hour) at Beatty. Through southern Nye County, calm conditions are most frequent at Sarcobatus Flat station, and characterize wind conditions in the area about 7 percent of the time.

3.3.5 SURFACE-WATER RESOURCES

This section describes surface-water resources along the Mina rail alignment. Surface-water resources include streams, washes, playas, ponds, wetlands, floodplains, and springs. Section 3.3.5.1 describes the region of influence for surface-water resources along the Mina rail alignment; Section 3.3.5.2 is a general overview of surface-water features along the rail alignment; and Section 3.3.5.3 describes specific surface-water features for the alternative segments and common segments. Section 3.3.5.2.3 and 3.3.5.2.4 describe wetlands and floodplains, respectively, from a regulatory perspective; Section 3.3.7, Biological Resources, describes wetlands from a habitat perspective. Appendix F (Floodplain and Wetlands Assessment) addresses compliance with Executive Orders 11988, *Floodplain Management*, and 11990, *Protection of Wetlands*, in more detail.

3.3.5.1 Region of Influence

The Mina rail alignment region of influence for surface-water resources is limited in most cases to the nominal width of the construction right-of-way. Because of the types of land-disturbing activities that would take place during rail line construction, the construction right-of-way would be susceptible to erosion and changes in surface-water flow patterns. Spills (of, for example, fuel, paint, or lubricants) during railroad construction and operations could also affect this area.

In some cases, the region of influence for surface water extends beyond the construction right-of-way. In places where surface-water flow patterns (including floodwaters) could be modified or surface-water drainage could carry eroded soil, sediment, or spills downstream, the region of influence extends beyond the construction right-of-way. Within the region of influence, there could be impacts to floodwaters such that they would back up on the upstream side of the rail line, while there could be impacts to water quality if potential pollutants travel downstream during a storm event without precipitating out (soils from erosion) or becoming too dilute (petroleum-based lubricants or fuels) to detect. For purposes of analysis, DOE screened the area within 1.6 kilometers (1 mile) of the centerline of the rail alignment for surface-water resources that could be indirectly affected.

3.3.5.2 General Environmental Setting and Characteristics

Important characteristics of hydrologic systems in the region of influence include *ephemeral streams* and playas. Ephemeral surface-water features can be dry over multiple seasons or even years during

Surface-Water Terms

An **ephemeral stream** or ephemeral drainage has a channel bed above the normal water table and only flows in direct response to precipitation or snowmelt within its drainage basin.

An **intermittent stream** or intermittent drainage has a channel bed that fluctuates above or below the normal water table along its length, and might or might not have flow within it during any particular time or at any particular location. The presence of flow within the channel is determined by its channel elevation in relation to the water table, precipitation events, or snowmelt within its drainage basin.

A **wash** or drainage in the western United States generally refers to the dry streambed of an intermittent or ephemeral stream. In this Rail Alignment EIS, wash is used interchangeably with intermittent and ephemeral streams.

A **perennial stream** or perennial drainage receives groundwater into its channel and its stream bed is normally below the water table. During years with normal precipitation, a perennial stream will have constant flow.

A **playa** is normally a dry lake bed that can contain water in response to seasonally high runoff.

Evapotranspiration is a combination of processes through which water is transferred to the atmosphere from evaporation from open water and bare soil, and transpiration from vegetation.

droughts, but can have multiple periods of flow or standing water during wet periods, as during the winter of 2004-2005. Central and southern Nevada are characterized by low precipitation and high annual *evapotranspiration* rates typical of desert climates, as described in Section 3.3.4, Air Quality and Climate. Because of the arid climate and the terrain (that is, north-south trending, parallel mountain ranges with broad, intervening valleys) in this area, surface water generally evaporates before it can flow out of the drainage basin. Typically, surface drainage in this area remains within its topographically defined water basin; that is, surface water generally flows to low areas such as lakes, flats, or playas.

Surface water systems are typically defined in terms of watersheds (or basins). For water planning and management purposes, the State of Nevada is divided into discrete hydrologic units delineated by 14 major hydrographic regions that are subdivided into 256 hydrographic areas (DIRS 103406-Nevada Division of Water Planning 1992, p. all). In this Rail Alignment EIS, watersheds (or basins) are referred to as hydrographic regions. A region is defined as a geographic area drained by a single major stream or an area consisting of a drainage system comprised of streams and often natural or manmade lakes.

Overall, most surface-water features described in this section are *ephemeral drainage* features that intermittently contain flowing water. Walker River and some of its tributaries near the beginning of the Mina rail alignment are the exceptions, where surface-water flow is perennial. This section describes surface-water features in terms of the hydrographic regions in which they are located. Figure 3-179

shows the hydrographic basins within Nevada and the boundaries for the four hydrographic regions the Mina rail alignment would cross. Most of the existing Union Pacific Railroad Hazen Branchline would be within the Carson River Basin, while a small portion of this line, the existing Department of Defense Branchlines (North, through Schurz, and South), and a small portion of Mina common segment 1 would be within the Walker River Basin. The majority of the rail alignment (most of Mina common segment 1, the Montezuma alternative segments,

Mina common segment 2, the Bonnie Claire alternative segments, and Mina common segment 5) would be within the Central Region. The Oasis Valley alternative segments and Mina common segment 6 would be in the Death Valley Basin.

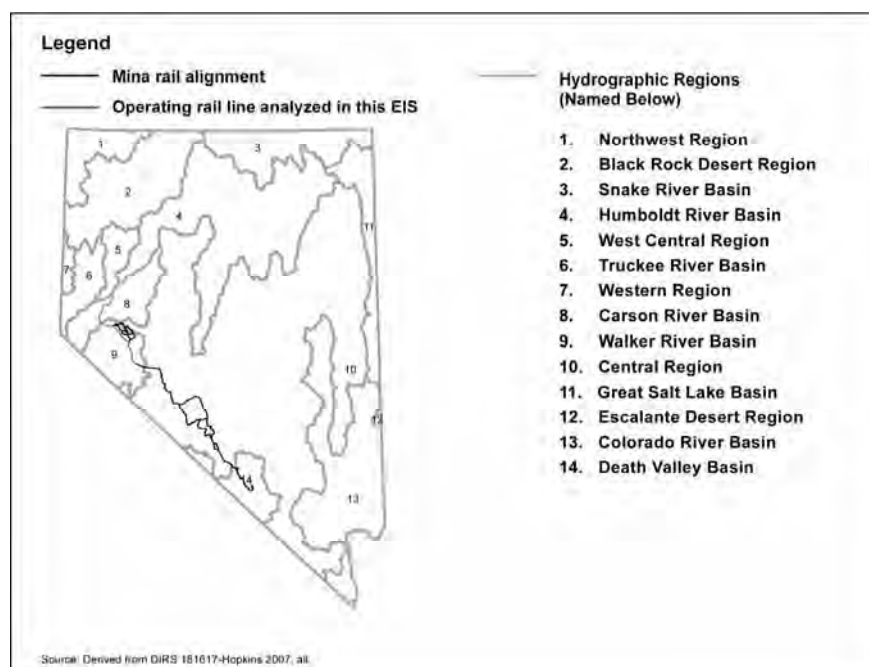


Figure 3-179. Nevada hydrographic areas crossed by the Mina rail alignment.

3.3.5.2.1 Surface Drainage Features (Streams and Playas)

As described in Section 3.3.1, Physical Setting, the Mina rail alignment would pass through numerous valleys and over or around numerous mountain ranges. The need for relatively gentle curves and

gradients sets physical limitations on the design of the rail line that would require the alignment to follow valley floors that go around mountain ranges, or parallel the mountain ranges in transition zones to change elevation gradually (DIRS 176165-Nevada Rail Partners 2006, Appendix B). Within the valley floors, the rail alignment could parallel predominant drainage channels and cross through or near flats and playas. Some streams within low areas are braided channels where stream flow is divided among multiple channels, which the rail alignment could cross in several locations. Near or within mountain ranges, the rail alignment typically would be perpendicular to the predominant drainage direction. Therefore, the Mina rail alignment would encounter a wide variety of surface drainage features.

Notable drainage channels, as referenced in the text and shown on figures in Section 3.3.5.3, were determined by choosing those channels with a stream order of 2 or greater based on Strahler's ordering system, with the National Hydrography Dataset as a base map.

Drainage features have been classified using Strahler's stream order system (DIRS 176728-Goudie et al. 1981, pp. 50 and 51), which is a method of classifying stream segments based on the number of upstream tributaries. Stream order ranks the size and potential power of streams. Orders range from small streams with no branches (1st Order) up to streams the size of the Mississippi River, which is a 10th Order stream. As two 1st Orders come together, they form a 2nd Order stream. Two 2nd Order streams converging form a 3rd Order stream. Streams of lower order joining a higher order stream do not change the order of the higher order stream.

DOE used stream order to define *notable drainage channels* and as a method to select the number of *ephemeral washes* shown on figures in Section 3.3.5.3. To improve the readability of these figures and provide a means to prioritize the drainage features, these figures depict only rivers, streams, and washes the rail alignment would cross that are 2nd Order streams or higher. Figures in Section 3.3.5.3 do not show all the washes and drainages the rail alignment would cross, but provide enough information to support the analysis of potential impacts to surface-water resources. Section 4.3.5 identifies the estimated number of drainage channels the rail alignment would cross by alternative segment and common segment.

3.3.5.2.1.1 Surface-Water Quality. Because of the ephemeral nature of surface water in the southwestern part of Nevada, water-quality data for the region of influence are limited. The State of Nevada does not formally monitor surface water in the Mina rail alignment region of influence.

Water-quality data for the state of Nevada are available through the Nevada District of the U.S. Geological Survey and the Nevada Division of Environmental Protection. Surface water samples are collected from several major river basins in the state and then analyzed for physical and chemical parameters. The routine water-quality monitoring network includes the following river/basin systems: Walker River, Humboldt River, Colorado River, Lake Tahoe Tributaries, Snake River, Truckee River, Carson River, and Steamboat Creek. The Carson River and Walker River Basins are the only basin systems in the Nevada Division of Environmental Protection's monitoring system relevant to the region of influence for the Mina rail alignment (DIRS 176306-NDEP 2005, all).

In accordance with federal regulations, each state is required to submit a report on overall water-quality conditions to the U.S. Environmental Protection Agency every 2 years. According to the Nevada Division of Environmental Protection report for 2005 (DIRS 176306-NDEP 2005, all), agriculture and grazing have the greatest impacts on Nevada's waters, mainly because of *nonpoint source pollution* (such as irrigation, grazing, and flow-regulation practices). Flow reductions have a great impact on streams, limiting dilution of salts, minerals, and pollutants. Temperature, *pH*, dissolved oxygen, nutrients, and suspended solids are the main pollutants of concern in the state. Agricultural sources generate large sediment and nutrient loads. Surface-water quality in Nevada varies greatly from location to location and from month to month with changes in flow. In general, concentrations of dissolved solids

are higher in the southern part of the state than in the northern part, depending largely on water discharge (DIRS 176316-Bostic et al. 2004, all). Because of dilution by precipitation or snowmelt, dissolved solids concentrations are usually highest during periods of low stream flow and lowest during periods of high stream flow.

According to the Nevada Division of Environmental Protection Agency 305(b) report, the Walker River experienced improvement in pH, nitrates, and phosphates during the 2004 reporting cycle (DIRS 176306-NDEP 2005, p. 2). The report cited temperature as a continuing problem in the system and total dissolved solids as a continuing problem for the lower reach, including Walker Lake. Near Wabuska, the Walker River is listed as an impaired stream and the types of pollutants affecting the water vary throughout the stream reach. Typical pollutants consist of total phosphorus, total iron, pH, and suspended solids (DIRS 180120-NDEP 2005, Appendix A and p. A-9). Walker Lake became at-risk because of upstream agricultural diversions; upstream diversions have caused Walker Lake to decline, thereby causing the total dissolved solids concentrations to increase (DIRS 176325-USGS 2004, all). Because of its high salt content, Walker Lake is listed as an impaired waterbody (DIRS 176306-NDEP 2005, p. 99).

No site-specific water chemistry data are available for the rest of the stream channels or washes the Mina rail alignment would cross. No other streams the alignment would cross are known to be impaired. DOE previously collected and analyzed surface-water samples for chemical characteristics in the Yucca Mountain region. These analytical data are provided in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 3-40).

3.3.5.2.1.2 Stream Flow. The U.S. Geological Survey has stream-gaging stations (many of which have been discontinued) throughout Nevada. Stream-flow data from these monitoring stations are available through the Geological Survey Nevada District. Table 3-104 lists the range of peak discharges for typical or major streams along the Mina rail alignment. DOE cross-referenced peak discharge measurements at and near the Nevada Test Site with a Geological Survey fact sheet that discusses significant flooding events in the Amargosa River drainage basin in 1995 and 1998 (DIRS 159895-Tanko and Glancy 2001, Table 2).

Most of the drainage channels the Mina rail alignment would cross typically flow only during significant (heavy) rainfall events, which generally occur only a few times a year. In many years, most of the streams listed in Table 3-104 have little or no flow. From late spring to early fall, precipitation patterns are dominated by convective, short-duration, and high-intensity thunderstorms. From late fall to early spring, precipitation patterns are dominated by long-duration, low-intensity, general storm events with both rain and snow possible throughout the area. These two types of precipitation events result in runoff that differs between smaller watersheds (up to 520 square kilometers [200 square miles]) and larger watersheds (greater than 520 square kilometers). For smaller watersheds, the summer thunderstorm events dominate the peak runoff rates, which occur in the tributary channels and washes. However, as watershed size increases, the general storm events eventually dominate the peak rates of runoff. In addition, for all watersheds, the volume of runoff will generally be greater for the general (winter) storm events than for the thunderstorm (summer) events (DIRS 180885-Parsons Brinckerhoff 2007, p. 12).

Generally, stream discharge in Nevada is low in late summer, and then increases through the autumn and winter until the snow melts in the spring. Maximum discharge for the year normally can be expected in May and June, although rain or snow has caused floods from November through March (DIRS 176308-Stockman et. al. 2003, p. 2). As shown in Table 3-104, the more significant peak-flow scenarios relevant to the Mina rail alignment occur within the Carson River, Walker River, and Upper Amargosa hydrologic units. The highest peak flows for Nevada's hydrographic regions generally occur during late winter due to snowmelt and late summer due to intense precipitation.

Table 3-104. U.S. Geological Survey annual peak flow measurements for selected sites in streams of hydrographic basins and areas along the Mina rail alignment^a (page 1 of 2).

Hydrologic unit (gaging station number)	Drainage area (square kilometers) ^b	Annual peak flow range (cubic meters per second) ^c	Typical peak flow month(s)	Years of record (number of counts)
Areas along the alignment				
<i>Carson River Basin</i> (existing Union Pacific Railroad Hazen Branchline and Department of Defense Branchlines North, through Schurz, and South)				
Carson River Basin near Fort Churchill (10312000)	3,400	1.0 to 31	January through June	1912-2006 (95)
<i>Walker River Basin</i> (Schurz alternative segments)				
Walker River near Wabuska (10301500)	6,700	1.1 to 93	May through June	1903-2005 (86)
Walker River near Mason (10300600)	6,200	9.2 to 79	May through June	1974-1984 (11)
Reese River Canyon near Schurz (10302010)	36	0 to 53	May through June	1963-1991 (22)
Walker River at Schurz (10302000)	7,400	1.7 to 72	May through June	1914-1933 (20)
Walker River above Weber Reservoir near Schurz (10301600)	7,000	2.2 to 57	May through June	1977-2006 (17)
<i>Ralston-Stone Cabin Valleys</i> (Mina common segment 2)				
Ralston Valley tributary near Tonopah (10249140)	0.52	0 to 1.4	July and August	1961-1981 (21)
<i>Cactus-Sarcobatus Flats</i> (Mina common segment 2; Mina common segments 4 and 5)				
Stonewall Flat tributary near Goldfield (10248970)	1.3	0 to 4.3	June through August	1963-1984 (20)
Areas in the Nevada Test Site				
<i>Upper Amargosa</i> (Oasis Valley alternative segments 1 and 3; Mina common segment 6)				
Pah Canyon Wash above Fortymile Wash Confluence (102512495)	16	2.6	February	1998 (1)
Unnamed Tributary to Fortymile Wash north of Delirium Canyon (102512496)	2.9	5.1	February	1998 (1)
Delirium Canyon Wash above Fortymile Wash Confluence (102512497)	6.2	3.4	February	1998 (1)
Unnamed Tributary to Fortymile Wash south of Delirium Canyon (102512499)	2.1	2.0	February	1998 (1)
Fortymile Wash at Narrows (10251250)	670	0 to 85	March	1982-1998 (8)
Yucca Wash near Mouth (10251252)	44	0 to 27	February and March	1982-1998 (10)
Pagany Wash near the Prow (102512531)	1.3	0.57 to 1.7	February and March	1995-1998 (2)
Pagany Wash #1 near Well UZ (4102512533)	2.1	0.48 to 1.7	February and March	1993-1998 (2)
Drillhole Wash above UZ (1102512535)	1.8	0 to 0.85	March	1994-1998 (3)

Table 3-104. U.S. Geological Survey annual peak flow measurements for selected sites in streams of hydrographic basins and areas along the Mina rail alignment^a (page 2 of 2).

Hydrologic unit (gaging station number)	Drainage area (square kilometers) ^b	Annual peak flow range (cubic meters per second) ^c	Typical peak flow month(s)	Years of record (number of counts)
Areas in the Nevada Test Site (continued)				
<i>Upper Amargosa</i> (Oasis Valley alternative segments 1 and 3; Mina common segment 6)				
Wren Wash at Yucca Mountain (1025125356)	0.52	0 to 0.85	March	1994-1998 (3)
Split Wash below Quac Canyon Wash (102512537)	0.78	0 to 0.37	February	1994-1998 (3)
Split Wash at Antler Ridge (1025125372)	6.2	0 to 0.06	February	1994-1998 (3)
Drillhole Wash at Mouth (10251254)	42	0 to 22	July	1982-1998 (10)
Fortymile Wash near Well J (1310251255)	790	0 to 85	March through July	1984-1998 (7)
Dune Wash near Busted Butte (10251256)	18	0 to 0.40	August	1982-1995 (9)
Topopah Wash at Little Skull Mountain (10251260)	270	0 to 42	August	1984-1998 (8)
Beatty Wash near Beatty (10251215)	250	0 to 25	July through March	1989-1998 (5)
Amargosa River at Beatty (10251217)	1,200	0.03 to 28	March through August	1994-2004 (10)
Fortymile Wash near Amargosa Valley (10251258)	820	0 to 94	February through July	1969-2004 (23)
Topopah Wash at Highway 95 near Amargosa Valley (10251261)	390	0.57	February	1998 (1)

a. Sources: DIRS 176325-USGS 2006, all; DIRS 159895-Tanko and Glancy 2001, Table 2.

b. To convert square kilometers to square miles, multiply by 0.3861.

c. To convert cubic meters per second to cubic feet per second, multiply by 35.3.

The Carson River originates from the Sierra Nevada Mountains in California and flows generally northeast into Nevada where it passes through Carson City and terminates in the Carson Sink. Between Carson City and Fallon, the river is impounded by the Lahontan Dam and forms the Lahontan Reservoir, water from which is distributed throughout the Fallon area for agricultural, wildlife, and fisheries purposes (DIRS 103406-Nevada Division of Water Planning 1992, all).

The Walker River, with its headwaters in California, flows into Nevada through the Walker River Paiute Reservation before terminating at Walker Lake. Waters of the Walker River are predominantly used for agricultural purposes (DIRS 103406-Nevada Division of Water Planning 1992, all). Walker Lake is fed by the Walker River from the north and is a perennial, natural terminal lake. The lake became at-risk because of upstream diversions for irrigation purposes; between 1882 and 1994, upstream diversions caused Walker Lake to decline about 40 meters (140 feet) (DIRS 176325-USGS 2004, all), which has resulted in high salt concentration.

The washes that drain the Yucca Mountain Site discharge into the Amargosa River. This ephemeral drainage typically sees very low runoff rates due to minimal precipitation in its basin and, therefore, is

usually dry (DIRS 159895-Tanko and Glancy 2001, p. 1). Precipitation is least along the Mina rail alignment in this area, from Sarcobatus Flat to Beatty, averaging just 75 to 100 millimeters (3.0 to 3.9 inches) per year. Most of the annual precipitation typically occurs in late spring to early fall. Fortymile Wash and Topopah Wash are significant tributaries draining the Nevada Test Site area into the Amargosa River, with maximum peak flows of 94 cubic meters (3,300 cubic feet) per second and 42 cubic meters (1,500 cubic feet) per second, respectively, during late winter to late summer (see Table 3-104). Section 3.3.5.2.4 describes two significant flooding events (March 1995 and February 1998) in the Amargosa River drainage basin on and near the Nevada Test Site.

3.3.5.2.2 Waters of the United States

Some of the surface-water features along the Mina rail alignment, such as ephemeral drainages, streams, ponds, and lakes, are considered waters of the United States, especially if there is an interstate connection to commerce. Section 404 of the Clean Water Act (33 U.S.C 1344) and implementing regulations (33 CFR Part 323) require the U.S. Army Corps of Engineers to regulate discharges of dredge or fill material into waters of the United States. Discharges of dredge or fill material essentially include all land-disturbing activities accomplished via the use of mechanized equipment. The placement of structures, such as bridge embankments, bridge piers and abutments, and culverts, would be activities potentially discharging fill materials into waters of the United States. Chapter 6 of this Rail Alignment EIS discusses compliance with Section 404 of the Clean Water Act in more detail.

DOE surveyed all drainages within 400 meters (0.25 mile) of the Mina rail alignment that are within interstate hydrologic basins to determine if those drainages could be classified as waters of the United States (DIRS 180889-PBS&J 2007, p. 1). This survey also identified and delineated wetlands along the Mina rail alignment. The alignment-specific discussions in Section 3.3.5.3 detail the results of the survey. Subsequent to DOE surveys performed along the rail alignment, the U.S. Environmental Protection Agency and U.S. Army Corps of Engineers released new guidance to be used when making determinations of waters of the United States subject to jurisdiction under the Clean Water Act. This guidance provides criteria for making these determinations for adjacent wetlands and non-navigable tributaries of waters of the United States, particularly in relation to ephemeral waters. As a result of this guidance, it is likely that many of the drainages along the rail alignment would not be considered waters of the United States (see Section 4.2.5.2.1.4 for further discussion).

The U.S. Army Corps of Engineers is ultimately responsible for determining whether drainages and wetlands along the rail alignment are regulated under Section 404; therefore, all conclusions in this analysis about the classification of washes and wetlands as waters of the United States are tentative. If DOE pursued the Mina rail alignment for construction of the proposed railroad, the Department would request that the U.S. Army Corps of Engineers determine the limits of jurisdiction under Section 404 along the alignment before beginning construction.

The term **waters of the United States** is defined in 33 CFR 328.3a. The U.S. Army Corps of Engineers and the Environmental Protection Agency regulate the placement of dredged or fill material into these waters. The definition incorporates channels with ephemeral and intermittent flow that exhibit specific physical features, including channel shape and surrounding vegetation that would provide indications of an **ordinary high water mark**.

Ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas (33 CFR 328.3e).

3.3.5.2.3 Wetlands

Generally, wetlands are lands where saturation with water is the dominant factor that determines how soil develops and the types of plant and animal communities living in the soil and on its surface (DIRS 178724-Cowardin et al. 1979, p. 11). Wetlands can support both aquatic and terrestrial species. The prolonged presence of water creates conditions that favor the growth of specially adapted plants and promote the development of characteristic wetland (*hydric*) soils.

According to the U. S. Environmental Protection Agency and the U. S. Army Corps of Engineers, the regulatory definition of a Section 404 jurisdictional wetland is (33 CFR 328.3b) “those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions.” The U.S. Department of Agriculture Natural Resources Conservation Service and U. S. Fish and Wildlife Service define wetlands somewhat differently, but all four agencies include three basic elements for identifying wetlands: *hydrology*, soils, and vegetation. Wetland communities are recognized as providing many valuable functions that improve the human environment. Wetlands that have surface-water connections to or are adjacent to (bordering, contiguous, neighboring) other waters of the United States are regulated under Section 404 of the Clean Water Act. Wetlands that are isolated – that is, they have no permanent or temporary surface-water connections to interstate water bodies or are not considered adjacent – are not typically regulated under Section 404 unless the use of these isolated wetlands could affect interstate commerce.

Surveys in support of this Rail Alignment EIS have identified wetlands along the Mina rail alignment (DIRS 180889-PBS&J 2007, all). Tables in Section 3.3.5.3 list wetlands identified during these surveys. Appendix F discusses wetlands along the Mina rail alignment in more detail, and Section 3.3.7, Biological Resources, discusses wetlands from a habitat perspective.

3.3.5.2.4 Floodplains

The presence of floodplains in the Mina rail alignment region of influence largely depends on the meteorology and hydrology of the area. Much of the rail alignment would be in areas that are subject to intense rainfall over a short duration (1 to 3 hours), which typically occurs in late spring to early fall. Precipitation in late fall to early spring is dominated by low-intensity rainfall or snow over a long duration (2 to 4 days). In both cases, precipitation has the potential to produce flooding (DIRS 180885-Parsons Brinckerhoff 2007, pp. 12 to 14). Evapotranspiration rates throughout the region of influence are high; therefore, most of the rainfall from summer storms is lost relatively quickly unless a storm is intense enough to produce runoff, or unless there are more storms before the water evaporates (DIRS 180885-Parsons Brinckerhoff 2007, p. 18). Evapotranspiration rates are lower during the winter, and water from precipitation or melting snow has a better chance of resulting in streamflow, thereby increasing the chances of flooding. Much of the runoff quickly infiltrates into rock fractures or into the dry soils, some is carried down alluvial fans in arroyos, and some drains onto dry lakebeds where it might stand for weeks as a lake (DIRS 180885-Parsons Brinckerhoff 2007, p. 17).

Although flow in most washes is rare, the area is subject to flash flooding from intense summer thunderstorms and sustained winter precipitation. When it occurs, intense flooding can include mud and debris flows in addition to water runoff. Thunderstorms in the area can be local and intense, creating runoff in one wash while an adjacent wash receives little or no rain. In rare cases, however, storm and runoff conditions can be extensive enough to result in flow being present throughout the drainage systems. For example, conditions recorded during March 1995 and February 1998 at the Amargosa River and its tributaries indicated that the channels all flowed simultaneously along its primary stream channels to Death Valley. The 1995 event was the first documented case of this flow condition. During the 1995 event, the peak flow near the location where the existing Yucca Mountain access road crosses Fortymile

Wash was approximately 100 cubic meters (3,500 cubic feet) per second (DIRS 180885-Parsons Brinckerhoff 2007, p. 18).

In accordance with the requirements of 10 CFR Part 1022, DOE reviewed available authoritative information to determine whether the Mina rail alignment would be located in wetlands or floodplains. The results of that effort (DIRS 180885-Parsons Brinckerhoff 2007, p. 9) indicated that the only flood map or flood studies available for the areas of the Mina rail alignment were those completed by the Federal Emergency Management Agency in the form of Flood Insurance Rate Maps. Furthermore, and consistent with the remoteness of the project area, DOE found that Federal Emergency Management Agency maps cover only about 20 percent of the rail alignment (see Appendix F, Table F-2). At present, there are no Federal Emergency Management Agency flood maps for areas northeast of Silver Springs, and the Agency has not mapped flood-prone areas east and west of where U.S. Highways 50 and 95 intersect, including a large portion of Lahontan Reservoir. Most of the mapped flood-prone areas are between Carson River and Wabuska. Federal Emergency Management Agency flood maps encompassing Department of Defense Branchline North indicate areas most prone to possible flooding correspond to emergent wetlands shown in the National Wetlands Inventory. The Federal Emergency Management Agency flood map shows no **100-year flood**-prone areas next to the Walker River or any of its tributaries. There are limited flood-map data covering the southern-most section of Walker Lake and most of the area between Mina common segment 2 and the Yucca Mountain Site (DIRS 180119-Parsons Brinckerhoff 2003, all). DOE completed flood studies for several washes on the eastern slope of Yucca Mountain in support of the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Figure 3-12 and pp. 3-37 to 3-39).

In accordance with 10 CFR Part 1022, DOE prepared a floodplain and wetland assessment (see Appendix F) for the Mina rail alignment. Appendix F provides a detailed discussion of the floodplains and wetlands the Mina rail alignment would cross, including figures of the relevant floodplains identified on Federal Emergency Management Agency maps and those identified near the *repository* site.

3.3.5.2.5 Springs

With the exception of surface water bodies such as perennial streams and reservoirs, springs are the only other natural source of perennial surface water throughout the Mina rail alignment region of influence. Typically, these springs flow year round. The springs often infiltrate naturally into the ground or undergo evapotranspiration, or are captured near the source for local use (such as irrigation). DOE used the U.S. Geological Survey Geographic Names Information System, the National Hydrologic Dataset, and several DOE field studies completed in support of this Rail Alignment EIS to identify springs along the Mina rail alignment (DIRS 180889-PBS&J 2007, all; DIRS 180885-Parsons Brinckerhoff 2007, all).

3.3.5.3 Surface-Water Features along Alternative Segments and Common Segments

DOE compiled this information using the National Wetland Inventory database, a U.S. Geological Survey dataset of hydrologic features known as the National Hydrological Dataset, a dataset from the U.S. Environmental Protection Agency Geographic Names Information System (DIRS 176979-MO0605GISGNISN.000), and DOE wetland surveys conducted in support of this Rail Alignment EIS (DIRS 180889-PBS&J 2007, all). Specific hydrologic features are divided into two categories: those within 150 meters (500 feet) of the rail alignment centerline and those between 150 meters and 1.6 kilometers (1 mile) from the rail alignment centerline. Both of these categories fall within the region of influence for surface-water resources. The first category is also within the nominal width of the rail line construction right-of-way.

Sections 3.3.5.3.1 through 3.3.5.3.12 describe surface water-resources for each Mina rail alignment alternative segment and common segment moving along the rail line from north to south (from Hazen, Nevada, to Yucca Mountain). Tables in these sections provide summaries of surface-water features identified along the Mina rail alignment region of influence. Figures in these sections show the proposed rail line location as it crosses Nevada's physiographic features. A key for these map areas is provided in Chapter 2, Figure 2-12.

3.3.5.3.1 Union Pacific Railroad Hazen Branchline (Hazen to Wabuska)

There would be no new construction and therefore no new land disturbance within or near the region of influence along this portion of the Mina rail alignment. Therefore, DOE has not characterized the surface-water features in this area.

3.3.5.3.2 Department of Defense Branchline North (Wabuska to the boundary of the Walker River Paiute Reservation)

Except for a new siding inside the existing rail line right-of-way, there would be no new construction or land disturbance along Department of Defense Branchline North within the region of influence (see Figure 3-180). Construction of this siding would not affect current drainage patterns. Therefore, DOE has not characterized surface-water features along this portion of the Mina rail alignment.

3.3.5.3.3 Department of Defense Branchline through Schurz

As part of the Mina Implementing Alternative, DOE would remove track, timber ties, and ballast, and grade the ballast section to a smooth surface along this branchline. This removal activity would not involve land disturbance outside the existing rail line right-of-way because these actions would be performed using equipment designed to move along the track. Therefore, DOE has not characterized surface-water features in this area.

3.3.5.3.4 Schurz Alternative Segments

3.3.5.3.4.1 Schurz Alternative Segment 1. From the northern end of Campbell Valley, Schurz alternative segment 1 would cross Walker River and two tributaries of the Walker River as it enters Sunshine Flat. The alternative segment would pass to the west of Painted Mesa, and east of Weber Reservoir and the northern end of the Wassuk Range before crossing U.S. Highway 95. It would then pass south of Calico Hills, enter an unnamed valley, and travel west of the Agai Pah Hills and the Gillis Range before ending near Gillis Canyon (see Table 3-105 and Figure 3-180). Construction camp 18A would be adjacent to Schurz alternative segment 1 approximately 75 meters (250 feet) east of its junction with U.S. Highway 95 (DIRS 180875-Nevada Rail Partners 2007, p. F-4). The construction camp would not overlie any surface-water features. There are no potential quarry sites along Schurz alternative segment 1.

Schurz alternative segment 1 would run northeast from Campbell Valley, where it would cross the Walker River and two tributaries to Walker River that receive their drainage from the Desert Mountains and later combine into one stream. The Walker River is a perennial stream that flows through Weber Reservoir and conveys surface water to a terminal basin called Walker Lake. Schurz alternative segment 1 would lie entirely within the Walker Hydrographic sub-basin, which has a total drainage area of approximately 2,600 square kilometers (1,000 square miles) (DIRS 180885-Parsons Brinckerhoff 2007, p. 20). The U.S. Geological Survey gaging station closest to Schurz alternative segment 1 is at the Walker River above Weber Reservoir near the community of Schurz. At this station, the river has a drainage area of approximately 7,000 square kilometers (2,700 square miles) (see Table 3-104). Schurz alternative segment 1 would continue eastward and then head south into Sunshine Flat, which receives drainage from the Desert Mountains and Painted Mesa.

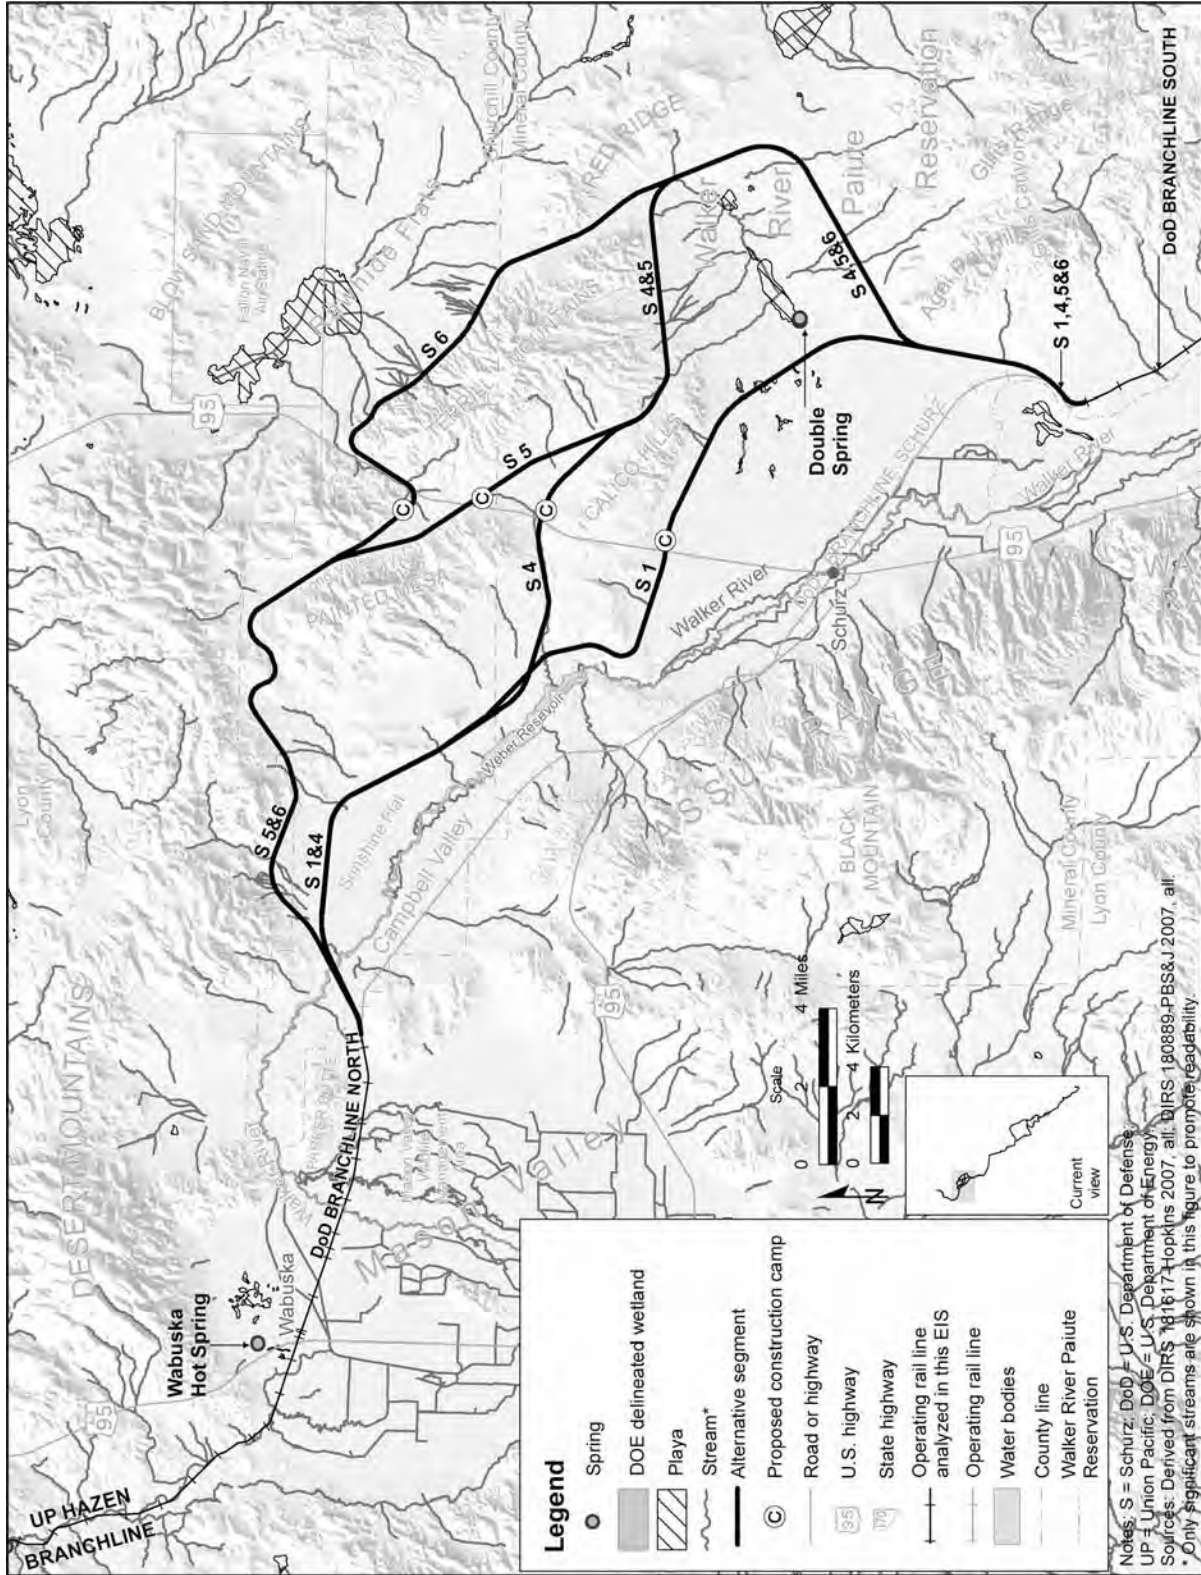


Figure 3-180. Surface drainage within map area 1.

Table 3-105. Hydrologic features potentially relevant to the Schurz alternative segments^a (page 1 of 2).

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^b of the centerline of the rail alignment
<i>Schurz alternative segment 1</i>		
Drainage from the Desert Mountain Range, Painted Mesa, and Calico Hills to Sunshine Flat.	Segment would cross Walker River and 20 unnamed washes (some of these washes are tributaries to Walker River). Segment would enter Sunshine Flat.	Weber Reservoir 1 kilometer west. Set of unnamed playas, within 1.6 kilometers west and 1.4 kilometers east of the alignment in the unnamed valley.
Drainage from Calico Hills, Terrill Mountains, and Red Ridge into an unnamed valley.	Segment would cross through two unnamed playas and pass within 80 meters west of two other unnamed playas.	Set of unnamed playas, west of the alignment and adjacent to Walker River (identified as wetlands in the National Wetland Inventory).
Drainage from the Agai Pah Hills into the Schurz 1 region of influence. Surface runoff would generally drain west and toward the Walker River.	Segment would cross over two DOE-delineated wetlands and pass within two other wetlands 110 meters north and 40 meters south of the alignment, respectively.	Double Spring 1.5 kilometers east. Unnamed spring 1.4 kilometers east.
<i>Schurz alternative segment 4</i>		
Drainage from the Desert Mountain Range, Painted Mesa, and Calico Hills to Sunshine Flat.	Segment would cross Walker River and 41 unnamed washes (some of these washes are tributaries to Walker River). Segment would enter Sunshine Flat.	Weber Reservoir 0.85 kilometer west. Two unnamed playas, within 1.3 kilometers west and 1.5 kilometers west of the alignment in the unnamed valley.
Drainage from Calico Hills, Terrill Mountains, and Red Ridge into an unnamed valley.	Segment would cross through two unnamed playas and pass within 80 meters west of two other unnamed playas.	Set of unnamed playas, west of the alignment and adjacent to Walker River (identified as wetlands in the National Wetland Inventory).
Drainage from the Agai Pah Hills west toward Schurz 4.	Segment would cross over two DOE-delineated wetlands and pass within two other wetlands 110 meters north and 40 meters south of the alignment, respectively.	
<i>Schurz alternative segment 5</i>		
Drainage from the Desert Mountain Range, Painted Mesa, and Terrill Mountains to Long Valley. The alignment would include the entire drainage basin of Long Valley.	Segment would cross Walker River and 60 unnamed washes (some of these washes are tributaries to Walker River). Segment would cross over two DOE-delineated wetlands and pass within two other wetlands 7 meters north and 150 meters south of the alignment, respectively.	Two unnamed playas, within 1.3 kilometers west and 1.5 kilometers west of the alignment in the unnamed valley. Set of unnamed playas, west of the alignment and adjacent to Walker River (identified as wetlands in the National Wetland Inventory).
Drainage from Calico Hills, Terrill Mountains, and Red Ridge into an unnamed valley.		
Drainage from the Agai Pah Hills west towards the rail alignment.		

Table 3-105. Hydrologic features potentially relevant to the Schurz alternative segments^a (page 2 of 2).

General hydrographic features/drainage	Hydrologic features within 150 meters of the centerline of the rail alignment ^b	Hydrologic features between 150 meters and 1.6 kilometers ^b of the centerline of the rail alignment
<i>Schurz alternative segment 6</i>		
<p>Drainage from the Desert Mountain Range, Painted Mesa, and Terrill Mountains to Long Valley. The alignment would include the entire drainage basin of Long Valley.</p> <p>Drainage from Terrill Mountains to Rawhide Flat.</p> <p>Drainage from Calico Hills, Terrill Mountains, and Red Ridge into an unnamed valley.</p> <p>Drainage from the Agai Pah Hills west towards the rail alignment.</p>	<p>Segment would cross Walker River and 66 unnamed washes (some of these washes are tributaries to Walker River).</p> <p>Segment would enter Rawhide Flat.</p> <p>Segment would cross over two DOE-delineated wetlands and pass within two other wetlands 7 meters north and 150 meters south of the alignment, respectively.</p>	<p>Two unnamed playas, within 1.3 kilometers west and 1.5 kilometers west of the alignment in the unnamed valley.</p> <p>Set of unnamed playas, west of the alignment and adjacent to Walker River (identified as wetlands in the National Wetland Inventory).</p>

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 51-53, and 58-59.

b. To convert meters to feet, multiply by 3.2808; to convert kilometers to miles, multiply by 0.62137.

The segment would pass within 1 kilometer (0.6 mile) to the east of Weber Reservoir and cross numerous tributaries to the Walker River. There are no water-quality data available for this area; however, there are regional data for the Walker River Basin (DIRS 180064-USGS 2005, all). Schurz alternative segment 1 would then turn southeast along the southwest edge of the Calico Hills and enter an unnamed valley that receives its drainage from the Calico Hills, Terrill Mountains, Red Ridge, and Gillis Range. After passing the Calico Hills, Schurz alternative segment 1 would cross through two unnamed playas and bypass several other unnamed playas situated east and west of the segment in the unnamed valley. For most of the year, these playas and ponds would be dry; however, runoff from ephemeral washes draining the Calico Hills, Terrill Mountains, and Gillis Range would be conveyed into and toward these low-lying areas. During periods of intense precipitation, the size of the watershed and the number of ephemeral washes could provide enough runoff to create localized flooding. There is another set of playas at the southern end of Schurz alternative segment 1 adjacent to the Walker River. Additional surface runoff from ephemeral washes would drain from the Agai Pah Hills into the Schurz alternative segment 1 region of influence. Surface runoff would generally drain west toward Walker River.

The Walker River Basin is considered an interstate basin because it receives drainage from outside Nevada. During a survey of the washes along the Mina rail alignment in support of this Rail Alignment EIS, DOE identified the Walker River and three other washes that Schurz alternative segment 1 would cross as waters of the United States, as regulated under Section 404 of the Clean Water Act. There are another four washes, also classified as waters of the United States, within 0.40 kilometer (0.25 mile) of the Schurz alternative segment 1, but the segment would not cross those washes (DIRS 180889-PBS&J 2007, p. 7, Table 2, and Figure 3A).

The National Wetland Inventory dataset indicates that wetlands border the Walker River. During field investigations in support of this Rail Alignment EIS, DOE confirmed the presence of these wetlands along the Walker River. Schurz alternative segment 1 would cross the Walker River and two DOE-delineated wetlands. There are two other wetlands (one north and one south of the alternative segment) adjacent to the Walker River (DIRS 180889-PBS&J 2007, Figure 4). Additionally, as the alternative

segment continued south past Weber Reservoir, it would pass within approximately 1.6 kilometers (1 mile) of a small group of wetlands along the Walker River. The National Wetlands Inventory dataset identifies the playas at the southern end of Schurz alternative segment 1 and adjacent to

the Walker River as wetlands; however, DOE field surveys in support of this Rail Alignment EIS confirmed that there are no wetlands in this area. Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Schurz alternative segment 1; however, the segment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with Schurz alternative segment 1.

There are two springs within the Schurz alternative segment 1 region of influence – Double Spring and an unnamed spring. Double Spring and the unnamed spring are approximately 1.5 kilometers (0.93 mile) and 1.4 kilometers (0.88 mile) east of the alternative segment, respectively.

3.3.5.3.4.2 Schurz Alternative Segment 4. From the northern end of Campbell Valley, Schurz alternative segment 4 would cross Walker River and two tributaries of the Walker River as it enters Sunshine Flat. The alternative segment would pass to the west of Painted Mesa, and east of Weber Reservoir and the northern end of the Wassuk Range before crossing U.S. Highway 95. It would then pass south of Calico Hills, enter an unnamed valley, and travel west of the Agai Pah Hills and the Gillis Range before ending near Gillis Canyon (see Table 3-105 and Figure 3-180). Construction camp 18A would be adjacent to Schurz alternative segment 4 approximately 75 meters (250 feet) east of its junction with U.S. Highway 95 (DIRS 180875-Nevada Rail Partners 2007, p. F-4). The construction camp would not overlie any surface-water features. There are no potential quarry sites along Schurz alternative segment 4.

Schurz alternative segment 4 would run northeast from Campbell Valley, where it would cross the Walker River and two tributaries to Walker River that receive their drainage from the Desert Mountains and later combine into one stream. The Walker River is a perennial stream that flows through Weber Reservoir and conveys surface water to a terminal basin called Walker Lake. Schurz alternative segment 4 would lie entirely within the Walker Hydrographic sub-basin, which has a total drainage area of approximately 2,600 square kilometers (1,000 square miles) (DIRS 180885-Parsons Brinckerhoff 2007, p. 20). The U.S. Geological Survey gaging station closest to Schurz alternative segment 4 is at the Walker River above Weber Reservoir near the community of Schurz. At this station, the river has a drainage area of approximately 7,000 square kilometers (2,700 square miles) (see Table 3-104). Schurz alternative segment 4 would continue eastward and then head south into Sunshine Flat, which receives drainage from the Desert Mountains and Painted Mesa. The segment would pass within 0.85 kilometer (0.53 mile) to the east of Weber Reservoir and cross numerous tributaries to the Walker River. There are no water-quality data available for this area; however, there are regional data for the Walker River Basin (DIRS 180064-USGS 2005, all). Schurz alternative segment 4 would proceed east and follow along a tributary to the Walker River, crossing it several times. After passing through a valley between Painted Mesa and Calico Hills and then turning southeast, the alternative segment would turn toward the east and pass the southern edge of the Terrill Mountains and proceed into an unnamed valley that receives its drainage from the Calico Hills, Terrill Mountains, Red Ridge, and Gillis Range. In this valley, Schurz alternative segment 4 would pass two unnamed playas that would be west of the segment. For most of the year, these playas would be dry; however, runoff from unnamed ephemeral washes draining the Terrill Mountains, Red Ridge, and Gillis Range would be conveyed toward these low-lying areas. During periods of intense precipitation, the size of the watershed and the number of ephemeral washes could provide enough runoff to create localized flooding. There is another set of playas at the southern end of Schurz alternative segment 4 adjacent to the Walker River. Additional surface runoff from ephemeral

washes would drain from the Agai Pah Hills into the Schurz alternative segment 4 region of influence. Surface runoff would generally drain west toward Walker River.

The Walker River Basin is considered an interstate basin because it receives drainage from outside Nevada. During a survey of the washes along the Mina rail alignment in support of this Rail Alignment EIS, DOE identified the Walker River and five washes that Schurz alternative segment 4 would cross as waters of the United States, as regulated under Section 404 of the Clean Water Act. There are another two washes, also classified as waters of the United States, within 0.40 kilometer (0.25 mile) of the Schurz alternative segment 4, but the segment would not cross those washes (DIRS 180889-PBS&J 2007, p. 3, Table 2, and Figure 3A). The National Wetland Inventory dataset indicates that emergent wetlands border the Walker River. During field investigations in support of this Rail Alignment EIS, DOE confirmed the presence of emergent wetlands along the Walker River. Schurz alternative segment 4 would cross the Walker River and two DOE-delineated wetlands. There are two other wetlands (one north and one south of the alternative segment) adjacent to the Walker River (DIRS 180889-PBS&J 2007, Figure 4). Additionally, as the alternative segment continued south past Weber Reservoir, it would pass within approximately 1.6 kilometers (1 mile) of a small group of wetlands along the Walker River. The National Wetlands Inventory dataset identifies the playas at the southern end of Schurz alternative segment 4 and adjacent to the Walker River as wetlands; however, DOE field surveys in support of this Rail Alignment EIS confirmed that there are no wetlands in this area. Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Schurz alternative segment 4; however, the segment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with Schurz alternative segment 4.

There are no springs identified within 1.6 kilometers (1 mile) of Schurz alternative segment 4.

3.3.5.3.4.3 Schurz Alternative Segment 5. From the northern end of Campbell Valley, Schurz alternative segment 5 would cross the Walker River, travel along the southern edge of the Desert Mountains, and then travel southeast through Long Valley between Painted Mesa and the Terrill Mountains. The segment would then cross U.S. Highway 95 as it continued around the southern edge of the Terrill Mountains, past the western edge of Red Ridge, through an unnamed valley, and past the western edge of the Agai Pah Hills before ending near Gillis Canyon (see Table 3-105 and Figure 3-180). Construction camp 18C would be adjacent to Schurz alternative segment 5 approximately 295 meters (970 feet) southeast of its junction with U.S. Highway 95 (DIRS 180875-Nevada Rail Partners 2007, p. F-4). The construction camp would not overlie any surface-water features. There are no potential quarry sites along Schurz alternative segment 5.

Schurz alternative segment 5 would run northeast from Campbell Valley, where it would cross the Walker River and several tributaries to Walker River that receive their drainage from the Desert Mountains and later combine into one stream. The Walker River is a perennial stream that flows through Weber Reservoir and conveys surface water to a terminal basin called Walker Lake. Schurz alternative segment 5 would lie entirely within the Walker Hydrographic sub-basin, which has a total drainage area of approximately 2,600 square kilometers (1,000 square miles) (DIRS 180885-Parsons Brinckerhoff 2007, p. 20). The U.S. Geological Survey gaging station closest to Schurz alternative segment 5 is at the Walker River above Weber Reservoir near the community of Schurz. At this station, the river has a drainage area of approximately 7,000 square kilometers (2,700 square miles) (see Table 3-104). As the alternative segment continued east, it would travel along the southern edge of the Desert Mountains, crossing several ephemeral washes draining the Desert Mountains and flowing toward Sunshine Flat. After rounding the northern edge of Painted Mesa, Schurz alternative segment 5 would travel southeast

through Long Valley and over U.S. Highway 95. Long Valley receives its drainage from Painted Mesa, the Terrill Mountains, and Calico Hills. As the segment turned toward the east and passed the southern edge of the Terrill Mountains, it would proceed into an unnamed valley which receives its drainage from the Calico Hills, Terrill Mountains, Red Ridge, and Gillis Range. In this valley, Schurz 5 would pass two unnamed playas situated west of the rail alignment. For most of the year, these playas would be dry; however, runoff from unnamed ephemeral washes draining the Terrill Mountains, Red Ridge, and Gillis Range would be conveyed toward these low-lying areas. During periods of intense precipitation, the size of the watershed and the number of ephemeral washes could provide enough runoff to create localized flooding. There is another set of playas at the southern end of Schurz alternative segment 5 adjacent to the Walker River. Additional surface runoff from ephemeral washes would drain from the Agai Pah Hills into the Schurz alternative segment 5 region of influence. Surface runoff would generally drain west toward Walker River.

The Walker River Basin is considered an interstate basin because it receives drainage from outside Nevada. During a survey of the washes along the Mina rail alignment in support of this Rail Alignment EIS, DOE identified the Walker River as the only water of the United States, as regulated under Section 404 of the Clean Water Act, crossed by this alternative segment (DIRS 180889-PBS&J 2007, p. 3, Table 2, and Figure 3A).

The National Wetland Inventory dataset indicates that emergent wetlands border the Walker River. During field investigations in support of this Rail Alignment EIS, DOE confirmed the presence of emergent wetlands along the Walker River. Schurz alternative segment 5 would cross the Walker River and two DOE-delineated wetlands. There are two other wetlands (one north and one south of the alternative segment) adjacent to the Walker River (DIRS 180889-PBS&J 2007, Figure 4). Additionally, as the alternative segment continued south past Weber Reservoir, it would pass within approximately 1.6 kilometers (1 mile) of a small group of wetlands along the Walker River. The National Wetlands Inventory dataset identifies the playas at the southern end of Schurz alternative segment 5 and adjacent to Walker River as wetlands; however, DOE field surveys in support of this Rail Alignment EIS confirmed that there are no wetlands in this area. Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Schurz alternative segment 5; however, the segment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with Schurz alternative segment 5.

There are no springs identified within 1.6 kilometers (1 mile) of Schurz alternative segment 5.

3.3.5.3.4.4 Schurz Alternative Segment 6. From the northern end of Campbell Valley, Schurz alternative segment 6 would cross the Walker River, travel along the southern edge of the Desert Mountains, and then travel southeast through Long Valley between Painted Mesa and the Terrill Mountains. The segment would then cross U.S. Highway 95 as it continued around the southern edge of the Terrill Mountains, past the western edge of Red Ridge, through an unnamed valley, and past the western edge of the Agai Pah Hills before ending near Gillis Canyon (see Table 3-105 and Figure 3-180). Construction camp 18D would be adjacent to Schurz alternative segment 6 approximately 640 meters (2,100 feet) west of its junction with U.S. Highway 95 (DIRS 180875-Nevada Rail Partners 2007, p. F-1). A small ephemeral stream would run through the footprint for construction camp 18D. There are no potential quarry sites along Schurz alternative segment 6.

Schurz alternative segment 6 would run northeast from Campbell Valley, where it would cross the Walker River and several tributaries to Walker River that receive their drainage from the Desert Mountains and later combine into one stream. The Walker River is a perennial stream that flows through Weber Reservoir and conveys surface water to a terminal basin called Walker Lake. Schurz alternative segment

6 would lie entirely within the Walker Hydrographic sub-basin, which has a total drainage area of approximately 2,600 square kilometers (1,000 square miles) (DIRS 180885-Parsons Brinckerhoff 2007, p. 20). The U.S. Geological Survey gaging station closest to Schurz alternative segment 6 is at the Walker River above Weber Reservoir near the community of Schurz. At this station, the river has a drainage area of approximately 7,000 square kilometers (2,700 square miles) (see Table 3-104). As the alternative segment continued east, it would travel along the southern edge of the Desert Mountains, crossing several ephemeral washes draining the Desert Mountains and flowing toward Sunshine Flat. After rounding the northern edge of Painted Mesa, Schurz 6 would travel southeast through Long Valley and over U.S. Highway 95. Long Valley receives its drainage from Painted Mesa, the Terrill Mountains, and Calico Hills. After crossing U.S. Highway 95, the alternative segment 6 would turn to the northeast and pass through a gap in the Terrill Mountains, round the northern edge of the Terrill Mountains, and enter Rawhide Flats. Near the area of the alternative segment, Rawhide Flats receives its drainage from numerous ephemeral washes from the Terrill Mountains. After passing between the Terrill Mountains and Red Ridge, Schurz alternative segment 6 would enter an unnamed valley that receives its drainage from the Calico Hills, Terrill Mountains, Red Ridge, and Gillis Range. In this valley, Schurz alternative segment 6 would pass two unnamed playas west of the rail alignment. For most of the year, these playas would be dry; however, runoff from unnamed ephemeral washes draining the Terrill Mountains, Red Ridge, and Gillis Range would be conveyed toward these low-lying areas. During periods of intense precipitation, the size of the watershed and the number of ephemeral washes could provide enough runoff to create localized flooding. There is another set of playas at the southern end of Schurz alternative segment 6 adjacent to the Walker River. Additional surface runoff from ephemeral washes would drain from the Agai Pah Hills into the Schurz alternative segment 6 region of influence. Surface runoff would generally drain west toward Walker River.

The Walker River Basin is considered an interstate basin because it receives drainage from outside Nevada. During a survey of the washes along the Mina rail alignment in support of this Rail Alignment EIS, DOE identified the Walker River, which Schurz alternative segment 6 would cross, as a water of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180889-PBS&J 2007, p. 3, Table 2 and Figure 3A).

The National Wetland Inventory dataset indicates that emergent wetlands border the Walker River. During field investigations in support of this Rail Alignment EIS, DOE confirmed the presence of emergent wetlands along the Walker River. Schurz alternative segment 6 would cross the Walker River and two DOE-delineated wetlands. There are two other wetlands (one north and one south of the alternative segment) adjacent to the Walker River (DIRS 180889-PBS&J 2007, Figure 4). Additionally, as the alternative segment continued south past Weber Reservoir, it would pass within approximately 1.6 kilometers (1 mile) of a small group of wetlands along the Walker River. The National Wetlands Inventory dataset identifies the playas at the southern end of Schurz alternative segment 6 and adjacent to the Walker River as wetlands; however, DOE field surveys in support of this Rail Alignment EIS confirmed that there are no wetlands in this area. Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Schurz alternative segment 6; however, the segment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with Schurz alternative segment 6.

There are no springs identified within 1.6 kilometers (1 mile) of Schurz alternative segment 6.

3.3.5.3.5 Department of Defense Branchline South (Boundary of Walker River Paiute Reservation to Thorne)

Except for a new siding inside the existing rail line right-of-way and construction camp 17 (which would be on the Hawthorne Army Depot), there would be no new construction along Department of Defense Branchline South. Neither the siding nor the construction camp would overlie any surface-water features. No additional road construction would be required (see Figure 3-181). Therefore, DOE has not characterized surface-water features along this portion of the Mina rail alignment.

3.3.5.3.6 Mina Common Segment 1 (Gillis Canyon to Blair Junction)

Beginning east of Thorne, Nevada, Mina common segment 1 would travel south of the Gillis Range through Walker Lake Valley and Soda Springs Valley, with the Gabbs Valley Range to the north and east and Garfield Hills to the west. This common segment would continue to travel south through Soda Springs Valley and Alkali Flat and pass to the east of Rhodes Salt Marsh between the Excelsior Mountains and Pilot Mountains. Mina common segment 1 would then travel to the east of Columbus Salt Marsh between the Candelaria Hills and the Monte Cristo Range before ending near Blair Junction. The common segment would parallel U.S. Highway 95 (see Table 3-106 and Figures 3-181 and 3-182). There are three *construction camps* associated with Mina common segment 1. Construction camp 16 would be adjacent to the rail alignment, 40 meters (131 feet) southeast of the junction of Mina common segment 1 with State Route 361. Two ephemeral washes that receive drainage from Gabbs Valley Range would run through the footprint for construction camp 16. Construction camp 15 would be adjacent to and west of the rail alignment, east of Tonopah Junction and Rhodes Salt Marsh. The construction camp would not overlie any surface-water features. Construction camp 14 would be adjacent to and east of the rail alignment at Blair Junction. Two ephemeral washes that receive drainage from the Monte Cristo Range would run through the footprint for construction camp 14. There are two potential quarry sites along Mina common segment 1. The first (Garfield Hills) would be approximately 2.23 kilometers (1.4 miles) south of the rail alignment near Hawthorne. Ephemeral washes draining down from the Garfield Hills would pass within 20 meters (66 feet) of the quarry. The second potential quarry site (Gabbs Range) would be approximately 0.77 kilometer (0.48 mile) east of the rail alignment, near Luning. Ephemeral washes draining down from Gabbs Valley Range into Soda Springs Valley would cross through the Gabbs Range quarry site.

Mina common segment 1 would begin in Walker Lake Valley, which receives its drainage from the Wassuk Range and Garfield Hills to the south and numerous canyons (including Ryan Canyon, Sheeps Head Canyon, and Montreal Canyon) and ephemeral washes draining Gillis Range to the north. The segment would pass to the north of a playa. As Mina common segment 1 continued through Walker Lake Valley, it would pass two playas (one of which receives drainage from Sheeps Head Canyon in the Gillis Range and ephemeral washes from Garfield Hills) and cross one playa. As the segment entered Soda Springs Valley, it would cross over a large playa that receives drainage from numerous ephemeral washes from the Gillis Range to the north and Garfield Hills to the south and pass by a smaller playa to the north that receives drainage from Gillis Range. Intermittent surface water would flow into Soda Springs Valley from unnamed washes draining ravines and side canyons of mountainous areas bordering Mina common segment 1.

Continuing south through Soda Springs Valley, the segment would pass east of two large playas in Alkali Flat. The first playa, just east of Luning, receives flow from Black Dyke Mountain to the west and numerous ephemeral washes draining Gabbs Valley Range. Drainage from Cinnabar Canyon, Dunlap Canyon, Mac Canyon, Water Canyon, and other washes in the Pilot Mountains to the east and Douglas Canyon and other washes in the Excelsior Mountains to the west flow into or toward the second playa.

As Mina common segment 1 would leave Soda Springs Valley, it would pass to the east of Rhodes Salt Marsh. This playa receives drainage from Long Canyon and numerous unnamed ephemeral washes from the Pilot Mountains to the east. Additional drainage from Candelaria Hills and the Excelsior Mountains flows toward the playa. The segment would follow a ridgeline of the Monte Cristo Range and pass east of Columbus Salt Marsh. Several ephemeral washes drain downslope from the headwaters of the Monte Cristo Range and flow west into Columbus Salt Marsh, at which point the drainages develop a braided drainage pattern. After passing around the southern end of the Monte Cristo Range, Mina common segment 1 would turn south as it crossed over U.S. Highway 95 and end at the northern edge of Big Smoky Valley. There are no streamflow or water-quality data available for the streams and washes Mina common segment 1 would cross.

The first approximately 15 kilometers (9 miles) of common segment 1 would be within the Walker River Basin, which is an interstate drainage system. DOE field investigations determined that none of the washes along this portion of common segment 1 have characteristics of waters of the United States. The 2 playas crossed in this basin have no hydrologic connection to tributaries of Walker Lake or other drainages in that basin. The remainder of Mina common segment 1 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along this portion of common segment 1 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water (DIRS 180889-PBS&J 2007, all).

Table 3-106. Hydrologic features potentially relevant to Mina common segment 1.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^b of the centerline of the rail alignment
Drainage from Wassuk Range, Garfield Hills, and numerous canyons (including Ryan Canyon, Sheeps Head Canyon, and Montreal Canyon) and ephemeral washes draining Gillis Range into Walker Lake Valley.	Segment would cross 141 unnamed washes. Segment would cross Alkali Flat.	Alignment would pass within 1.6 kilometers of 6 unnamed playas (some of which are identified as wetlands in the National Wetland Inventory).
Drainage from unnamed washes draining ravines and side canyons of mountainous areas into Soda Springs Valley.	Segment would cross through two unnamed playas (one of which is identified as a wetland in the National Wetland Inventory) and pass within 150 meters of another unnamed playa (which is identified as a wetland in the National Wetland Inventory).	Kinkaid Spring 0.23 kilometer north. Unnamed spring 0.54 kilometer east.
Drainage from Black Dyke Mountain, numerous ephemeral washes draining Gabbs Valley Range, Cinnabar Canyon, Dunlap Canyon, Mac Canyon, Water Canyon, and other washes in the Pilot Mountains, and Douglas Canyon and other washes in the Excelsior Mountains.		
Drainage from Long Canyon, numerous unnamed ephemeral washes from the Pilot Mountains, Candelaria Hills, and Excelsior Mountains into or towards Rhodes Salt Marsh.		
Drainage from Monte Cristo Range into Columbus Salt Marsh.		

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 51-53, and 58-59.

b. To convert meters to feet, multiply by 3.2808; to convert kilometers to miles, multiply by 0.62137.

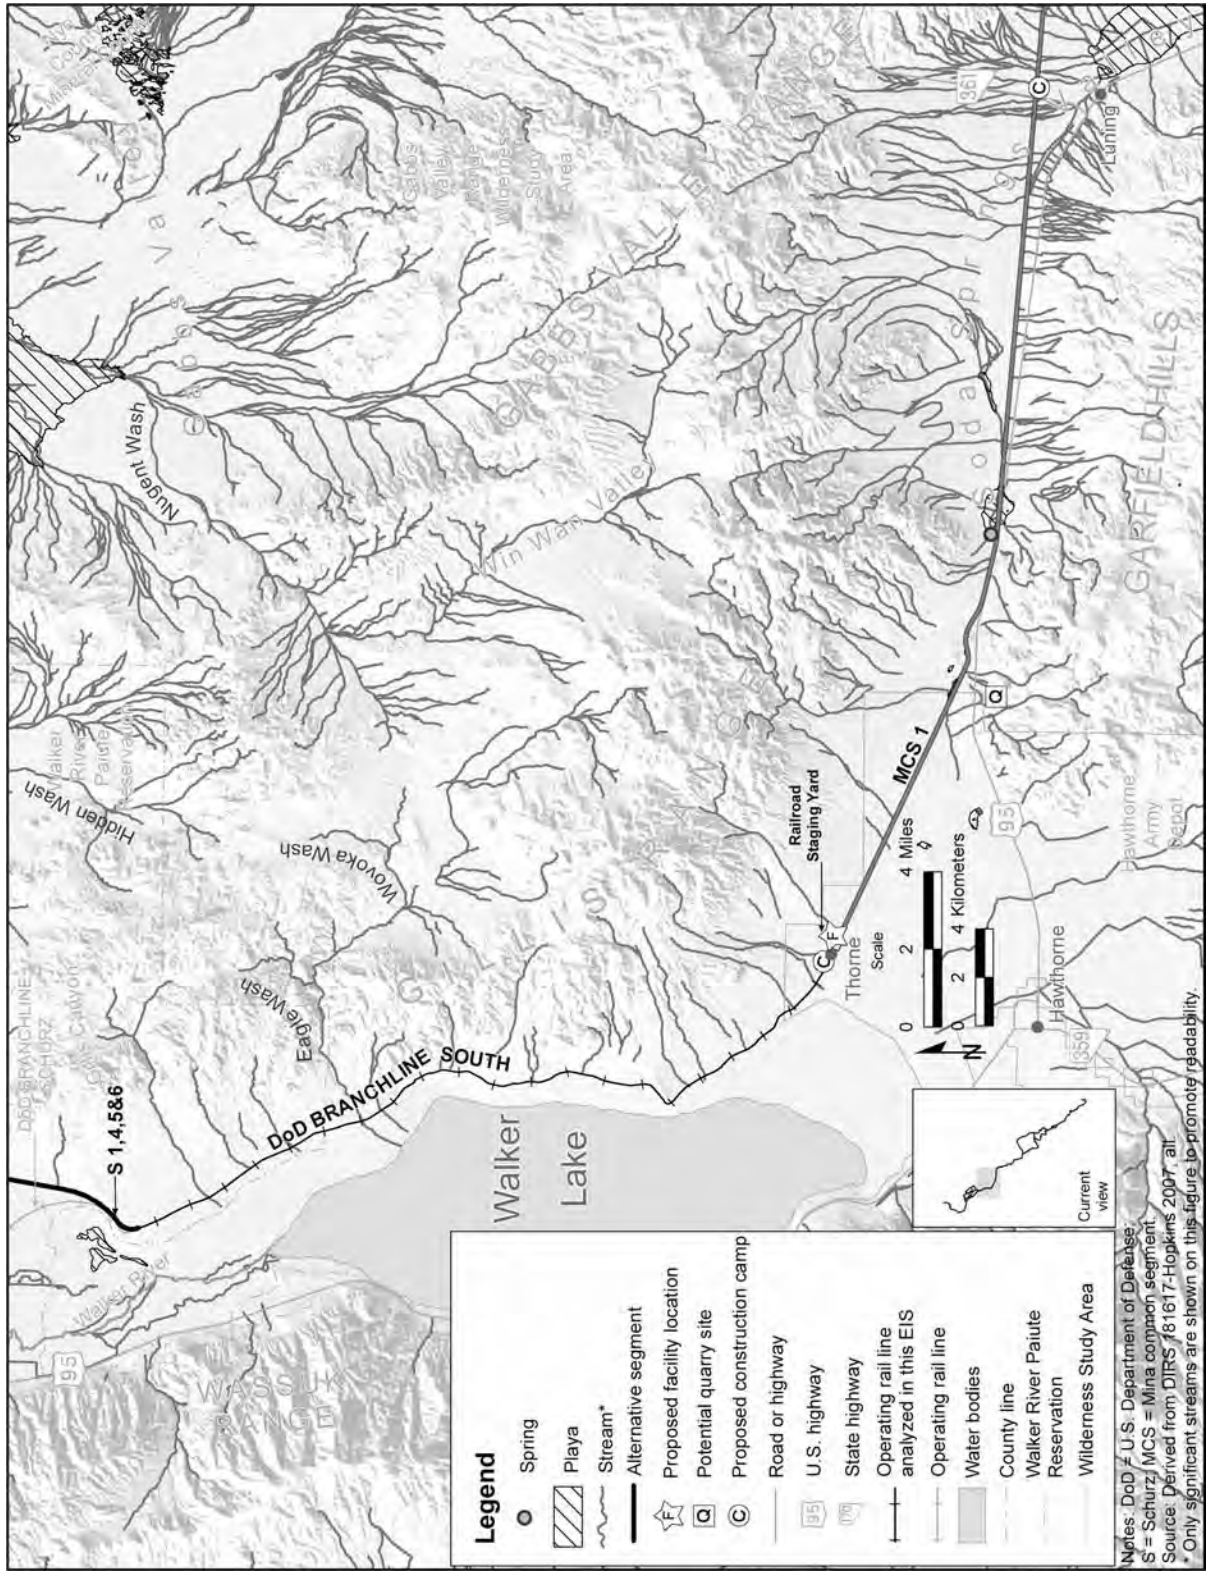


Figure 3-181. Surface drainage within map area 2.

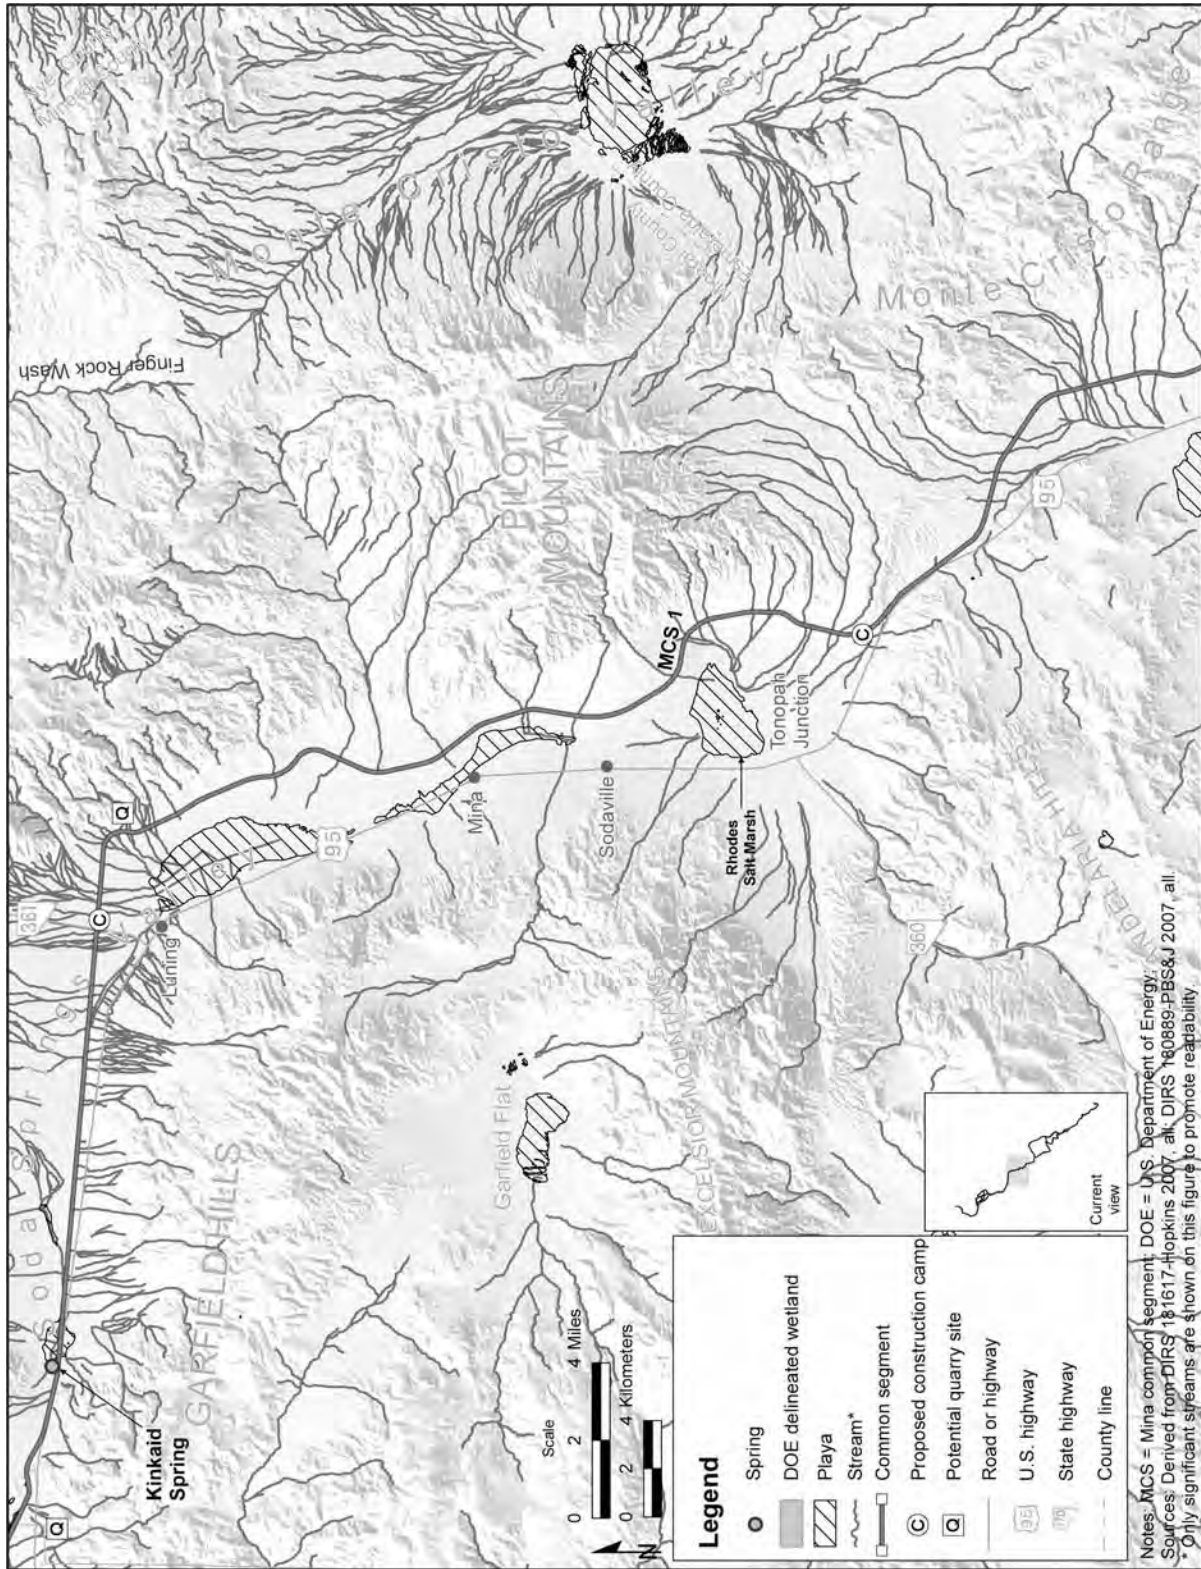


Figure 3-182. Surface drainage within map area 3.

The National Wetland Inventory dataset identifies the playas in Soda Springs Valley and Alkali Flat as wetlands; however, DOE field studies in support of this Rail Alignment EIS confirmed no wetlands in these areas (DIRS 180889-PBS&J 2007, Figure 5B). Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Mina common segment 1; however, the rail alignment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with the rail alignment.

There are two springs within the Mina common segment 1 region of influence – Kinkaid Spring and an unnamed spring. Kinkaid Spring is approximately 0.23 kilometer (0.14 mile) north of the common segment just west of the large playa in Soda Springs Valley (DIRS 180889-PBS&J 2007, p. 9). The unnamed spring is approximately 0.54 kilometer (0.34 mile) east of the common segment in the foothills of the Monte Cristo Range.

3.3.5.3.7 Montezuma Alternative Segments

3.3.5.3.7.1 Montezuma Alternative Segment 1. Montezuma alternative segment 1 would parallel State Route 265 as it traveled south from Big Smoky Valley past the Silver Peak Range and Mineral Ridge to the west and the Weepah Hills to the east. After entering Clayton Valley, the alternative segment would travel past Angel Island, Paymaster Ridge, Clayton Ridge, the Montezuma Range, Goldfield Hills, Cuprite Hills, Stonewall Flat, and Stonewall Mountain before ending near Lida Junction (see Table 3-107 and Figures 3-183 and 3-184). Construction camp 13A would be adjacent to Montezuma 1 just south of the community of Silver Peak. The construction camp would not overlie any surface-water features. Construction camp 9A would be adjacent to Montezuma alternative segment 1 approximately 290 meters (950 feet) northwest of where the rail segment would cross U.S. Highway 95. A small ephemeral wash draining downslope of Garfield Hills would run through the extreme southwest corner of the footprint for this construction camp (DIRS 180875-Nevada Rail Partners 2007, p. F-11). A potential quarry site, North Clayton, would be located along Montezuma alternative segment 1 near the Montezuma Range. The quarry would not overlie any surface-water features.

From Big Smoky Valley, Montezuma alternative segment 1 would travel south, paralleling State Route 265 to Silver Peak, and along the way, cross over numerous ephemeral washes flowing into Big Smoky Valley. Big Smoky Valley receives drainage from numerous ephemeral washes flowing downslope of the Monte Cristo Range to the north to join drainage from the Silver Peak Range and Mineral Ridge to the west and south via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes, and drainage from Weepah Hills to the east. Although Big Smoky Valley is an extensive topographic feature, Montezuma alternative segment 1 would only cross through the extreme western part. Once past Silver Peak, Montezuma alternative segment 1 would enter Clayton Valley, which receives drainage from the Silver Peak Range, Mineral Ridge, Palmetto Mountains, Clayton Ridge, Paymaster Range, and Weepah Hills via Lida Wash and unnamed washes. In Clayton Valley, the alternative segment would pass between Angel Island and Clayton Ridge, where it would cross numerous ephemeral washes flowing down from Clayton Ridge. As Montezuma alternative segment 1 passed through the gap between Paymaster Ridge and Clayton Ridge and rounded the southern portion of Clayton Ridge, it would cross over ephemeral washes flowing down from Paymaster Ridge, Clayton Ridge, and the Montezuma Range via Nevada Canyon and unnamed washes. After passing through a gap in the Montezuma Range, the segment would cross over Jackson Wash into an unnamed valley. Drainage from numerous ephemeral washes flows downslope of the Montezuma Range and the Goldfield Hills into this valley. Montezuma alternative segment 1 would skirt the western foothills of the Goldfield Hills, round the southern edge, cross over China Wash, and pass between the Goldfield Hills

and the Cuprite Hills, crossing over several washes flowing down from both hills. Montezuma alternative segment 1 would pass between a gap in the Cuprite Hills and end near Lida Junction. There are no streamflow or water-quality data available for the streams and washes Montezuma alternative segment 1 would cross.

Montezuma alternative segment 1 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Montezuma 1 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water.

Table 3-107. Hydrologic features potentially relevant to the Montezuma alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^b of the centerline of the rail alignment
<i>Montezuma alternative segment 1</i>		
Drainage from Monte Cristo Range, Silver Peak Range, Mineral Ridge, and Weepah Hills via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes to Big Smoky Valley.	Segment would cross Jackson Wash, China Wash, and 185 unnamed washes.	Hot Spring 0.53 kilometer west.
Drainage from Silver Peak Range, Mineral Ridge, Palmetto Mountains, Clayton Ridge, Paymaster Range, and Weepah Hills via Lida Wash and unnamed washes into Clayton Valley.		
Drainage from Paymaster Ridge, Clayton Ridge, and Montezuma Range via Nevada Canyon and unnamed washes.		
Drainage from numerous ephemeral washes flows downslope of the Montezuma Range and Goldfield Hills into an unnamed valley.		
<i>Montezuma alternative segment 2</i>		
Drainage from Monte Cristo Range, Silver Peak Range, Mineral Ridge, and Weepah Hills via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes to Big Smoky Valley.	Segment would cross Big Wash and 84 unnamed washes.	Slaughterhouse Spring 0.92 kilometer west.
Drainage from Lone Mountain, General Thomas Hills, and San Antonio Mountains flows into Montezuma Valley.	Segment would cross Stonewall Flat.	Rabbit Spring 0.20 kilometer west.
Drainage from Malpais Mesa, Goldfield Hills, Montezuma Range, and Chispa Hills flow into Alkali Lake Playa and Stonewall Flat.		
<i>Montezuma alternative segment 3</i>		
Drainage from Monte Cristo Range, Silver Peak Range, Mineral Ridge, and Weepah Hills via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes to Big Smoky Valley.	Segment would cross Big Wash and 147 unnamed washes.	
Drainage from Lone Mountain, General Thomas Hills, and San Antonio Mountains flows into Montezuma Valley.		
Drainage from numerous ephemeral washes flows down slope of the Montezuma Range and the Goldfield Hills into an unnamed valley.		

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 52-53, 58-59.

b. To convert meters to feet, multiply by 3.2808; to convert kilometers to miles, multiply by 0.62137.

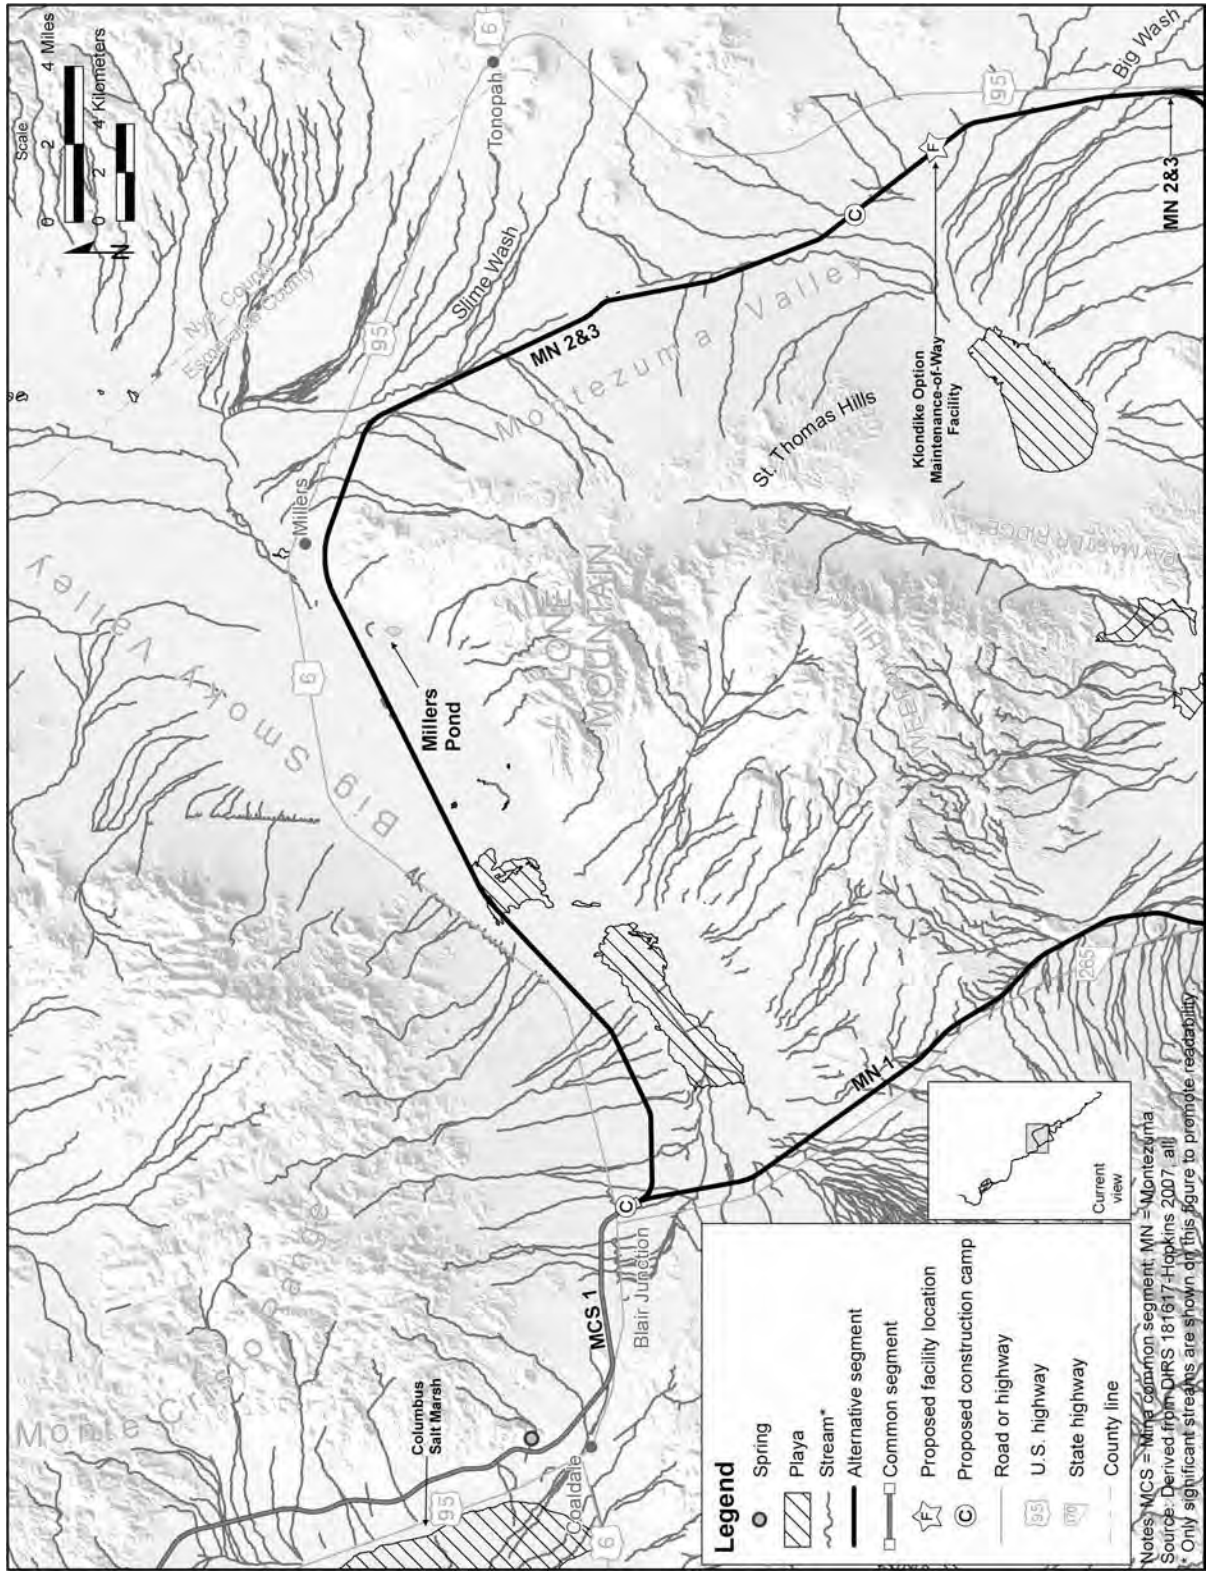


Figure -183. Surface drainage within map area 4.

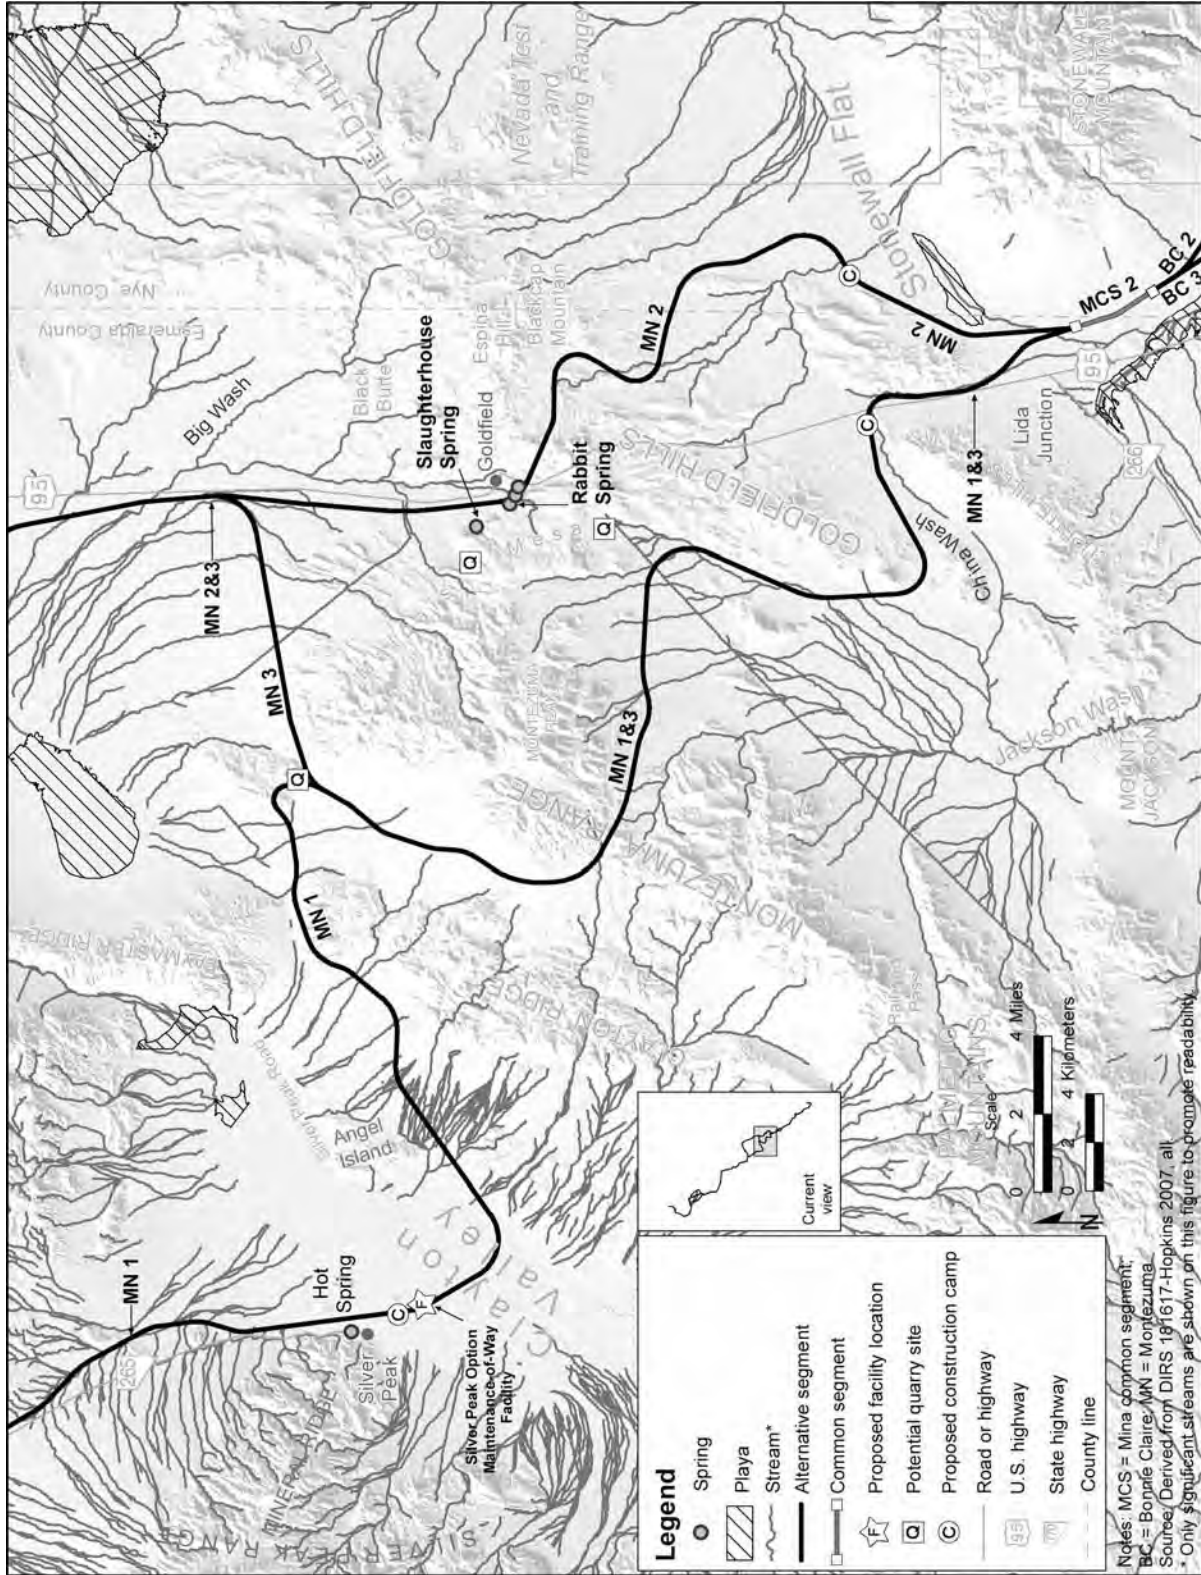


Figure 3-184. Surface drainage within map area 5.

The National Wetland Inventory dataset identifies a pond in the private, diked area near Silver Peak as a wetland; however, DOE field studies in support of this Rail Alignment EIS confirmed no wetlands in these areas (DIRS 180889-PBS&J 2007, all). Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Montezuma 1; however, the rail alignment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with the rail alignment.

Hot Spring is within the region of influence for Montezuma alternative segment 1, approximately 0.53 meter (0.33 mile) west of the alternative segment near the Silver Peak.

3.3.5.3.7.2 Montezuma Alternative Segment 2. Montezuma alternative segment 2 would parallel U.S. Highway 95 as it traveled east from Big Smoky Valley past Lone Mountain. After passing Millers, the segment would head south and enter Montezuma Valley. It would pass Tonopah, General Thomas Hills, and Klondike and parallel U.S. Highway 95 for a short time before crossing it near Malpais Mesa, Goldfield Hills, and Goldfield. Montezuma alternative segment 2 would end near Stonewall Flat (see Table 3-107 and Figures 3-183 and 3-184). Construction camp 9 would be adjacent to Montezuma alternative segment 2 just north of Stonewall Flat. The construction camp would not overlie any surface-water features. Construction camp 13B would be adjacent to Montezuma alternative segment 1 in Montezuma Valley. A small ephemeral wash draining hills near Hasbrouck Peak into Montezuma Valley would run through the footprint for the construction camp (DIRS 180875-Nevada Rail Partners 2007, p. F-10). Two potential quarry sites, ES-7 and Malpais Mesa South, would be along the Montezuma alternative segment 2 in Malpais Mesa near Goldfield. Neither quarry would overlie any surface-water features.

Montezuma alternative segment 2 would parallel State Route 6 as it traveled east along the southern edge of the Monte Cristo Range and into Big Smoky Valley. Big Smoky Valley receives drainage from numerous ephemeral washes flowing downslope of the Monte Cristo Range to the north to join drainage from the Silver Peak Range and Mineral Ridge to the west and south via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes, and drainage from Weepah Hills to the east. Montezuma alternative segment 2 would cross several ephemeral washes flowing down from the Monte Cristo Range, pass a few small playas, and cross a large playa twice. These playas are actually part of a larger playa in Big Smoky Valley. The segment would pass within 0.42 kilometer (0.26 mile) of a smaller playa in Big Smoky Valley. After crossing private property known as Millers, the segment would pass approximately 1.3 kilometers (0.81 mile) north of a tailings pond located on the same property. The pond, approximately 0.17 square kilometer (0.07 square mile) in size, appears to receive a portion of its hydrology as seasonal runoff from Lone Mountain. No water-quality data are available for Millers tailings pond.

In the Millers area, there is a small playa identified as a dry lake, which would be approximately 1.5 kilometers (0.93 mile) north of Montezuma alternative segment 2. As the segment passed Millers, it would turn south, proceed past Slime Wash to the east, and enter Montezuma Valley. Montezuma Valley receives drainage from numerous ephemeral washes flowing downslope of Lone Mountain and General Thomas Hills to the west and San Antonio Mountains to the east. As the Montezuma alternative segment 2 continued south through Montezuma Valley, it would pass to the west of a set of three small playas. A few small ephemeral washes originating near Mt. Butte to the east and Lone Mountain to the west might convey seasonal waters toward these playas. Just north of Goldfield, the Montezuma alternative segment 2 would cross Big Wash. Once in Goldfield, the rail segment would pass to the west of a number of small playas that receive drainage from Goldfield Hills to the south. At the extreme southern end of the Montezuma alternative segment 2, near Ralston, the segment would pass to the west of a large playa named Stonewall Flat, which is northwest of Stonewall Mountain. Runoff from Stonewall Flat drains

downslope into Lida Valley where it might remain as surface water for brief periods. The estimated runoff entering Stonewall Flat is 490,000 cubic meters (17.3 million cubic feet) per year (DIRS 101811-DOE 1996, Section 4.2.5.1). It is likely that ephemeral washes would convey seasonal runoff from Stonewall Mountain into the playa. Montezuma alternative segment 2 would end shortly after passing Stonewall Flat. There are no streamflow or water-quality data available for the streams and washes Montezuma 2 would cross.

Montezuma alternative segment 2 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Montezuma 2 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water.

The National Wetland Inventory dataset identifies the large playas in Big Smoky Valley and Stonewall Flat as wetlands; however, DOE field studies in support of this Rail Alignment EIS confirmed no wetlands in this area (DIRS 180889-PBS&J 2007, all). Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Montezuma alternative segment 2; however, the segment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with the rail alignment.

Slaughterhouse Spring and Rabbit Spring are located approximately 0.92 kilometer (0.57 mile) and 0.20 kilometer (0.12 mile), respectively, west of the rail alignment near the town of Goldfield. All three springs are within the Mina rail alignment region of influence but would be outside the construction right-of-way.

3.3.5.3.7.3 Montezuma Alternative Segment 3. Montezuma alternative segment 3 would parallel State Route 6 as it traveled east from Big Smoky Valley past Lone Mountain. After passing Millers, the segment would head south and enter Montezuma Valley. It would pass Tonopah, General Thomas Hills, and Klondike and parallel U.S. Highway 95 for a short time before turning west at the Montezuma Range, just north of Malpais Mesa. The segment would travel past Clayton Ridge, the Montezuma Range, Goldfield Hills, Cuprite Hills, Stonewall Flat, and Stonewall Mountain before ending near Lida Junction (see Table 3-107 and Figures 3-183 and 3-184). Construction camp 13B would be adjacent to Montezuma alternative segment 3 in Montezuma Valley. A small ephemeral wash draining hills near Hasbrouck Peak into Montezuma Valley would run through the footprint for the construction camp (DIRS 180875-Nevada Rail Partners 2007, p. F-10). Construction camp 9A would be adjacent to Montezuma 3 approximately 280 meters (920 feet) west of where the rail alignment would cross U.S. Highway 95 (DIRS 180875-Nevada Rail Partners 2007, p. F-11). A small ephemeral wash draining downslope of Garfield Hills would run through the extreme southwest corner of the construction camp. There are no potential quarry sites along Montezuma 3.

Montezuma alternative segment 3 would parallel State Route 6 as it traveled east along the southern edge of the Monte Cristo Range and into Big Smoky Valley. Big Smoky Valley receives drainage from numerous ephemeral washes flowing downslope of the Monte Cristo Range to the north to join drainage from the Silver Peak Range and Mineral Ridge to the west and south via Black Canyon, Eagle Nest Canyon, New York Canyon, Echo Canyon, Eagle Canyon, Custer Gulch, Great Gulch, and unnamed washes, and drainage from Weepah Hills to the east. The segment would cross several ephemeral washes flowing down from the Monte Cristo Range, pass a few small playas, and cross a large playa twice. These playas are actually part of a larger playa in Big Smoky Valley. Montezuma alternative segment 3 would pass within 0.42 kilometer (0.26 mile) of a smaller playa in Big Smoky Valley. After reaching

Millers, the segment would pass approximately 1.3 kilometers (0.81 mile) north of Millers Pond. The pond, approximately 0.17 square kilometer (0.07 square mile) in size, appears to receive a portion of its hydrology as seasonal runoff from Lone Mountain. No streamflow or water-quality data are available for Millers Pond. In Millers, there is a small playa identified as a dry lake, which would be approximately 1.5 kilometers (0.93 mile) north of Montezuma 3. As Montezuma alternative segment 3 passed Millers, it would turn south, proceed past Slime Wash to the east, and enter Montezuma Valley. Montezuma Valley receives drainage from numerous ephemeral washes flowing downslope of Lone Mountain and General Thomas Hills to the west and San Antonio Mountains to the east. As the segment continued south through Montezuma Valley, it would pass a set of three small playas to the east. A few small ephemeral washes originating near Mt. Butte to the east and Lone Mountain to the west might convey seasonal waters toward these playas. As Montezuma alternative segment 3 passed around the northern end of the Montezuma Range, it would cross over ephemeral washes flowing down from Paymaster Ridge, Clayton Ridge, and the Montezuma Range via Nevada Canyon and unnamed washes. After passing through a gap in the Montezuma Range, the Montezuma alternative segment 3 would cross Jackson Wash into an unnamed valley. Drainage from numerous ephemeral washes flows downslope of the Montezuma Range and the Goldfield Hills into this valley. Montezuma alternative segment 3 would skirt the western foothills of the Goldfield Hills, round the southern edge, and pass between Goldfield Hills and Cuprite Hills, crossing over several washes flowing down from both hills. Montezuma 3 would pass between a gap in the Cuprite Hills and end near Lida Junction. There are no streamflow or water-quality data available for the streams and washes Montezuma alternative segment 3 would cross.

Montezuma alternative segment 3 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Montezuma alternative segment 3 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water.

The National Wetland Inventory dataset identifies the large playa in Big Smoky Valley as a wetland; however, DOE field studies in support of this Rail Alignment EIS confirmed no wetlands in these areas (DIRS 180889-PBS&J 2007, all). Appendix F provides more information about wetlands.

The Federal Emergency Management Agency has not mapped floodplains in the area of Montezuma alternative segment 3; however, the rail alignment would cross floodplains associated with the valley floors and playas along its route. Appendix F further describes possible floodplains associated with the rail alignment.

There are no springs identified within 1.6 kilometers (1 mile) of Montezuma alternative segment 3.

3.3.5.3.8 *Mina Common Segment 2*

Mina common segment 2 would begin just east of Lida Junction and would cross Alkali Flat (within the Lida Valley) and end near the foot of Stonewall Mountain (see Table 3-108 and Figure 3-185). There are no proposed construction camps or potential quarry sites along Mina common segment 2.

Mina common segment 2 would begin in Lida Valley, south of Stonewall Flat, and cross over Alkali Flat. Runoff from Stonewall Flat drains downslope into Lida Valley where it might remain as surface water for brief periods. The estimated runoff entering Stonewall Flat is 490,000 cubic meters (17.3 million cubic feet) per year (DIRS 101811-DOE 1996, Section 4.2.5.1). Jackson Wash appears to be a notable drainage that contributes seasonal water to Lida Valley.

Table 3-108. Hydrologic features potentially relevant to Mina common segment 2.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^b of the centerline of the rail alignment
Drainage from northwest side of Stonewall Mountain and the Cuprite Hills would drain into Lida Valley and Alkali Flat Playa.	Jackson Wash, China Wash. Segment would cross three washes.	Alkali Flat/Lida Valley Playa.

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 59.

b. To convert meters to feet, multiply by 3.2808; to convert kilometers to miles, multiply by 0.62137.

There are no perennial streams in any of the surrounding basins; rather, the many washes that drain the upland areas convey ephemeral flow that ponds on the playas during periods of intense precipitation. No streamflow or water-quality data are available for the streams and washes Mina common segment 2 would cross.

Mina common segment 2 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Mina common segment 2 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water.

There are no wetlands within the Mina common segment 2 region of influence.

Federal Emergency Management Agency flood maps provide coverage for the entire length of Mina common segment 2; however, the common segment would not cross any floodplains. Because Mina common segment 2 follows valley floors and crosses unnamed ephemeral washes and playas, it is feasible that a floodplain could exist in low laying areas along this segment. Appendix F further describes possible floodplains associated with the rail alignment.

There are no springs identified within 1.6 kilometers (1 mile) of Mina common segment 2.

3.3.5.3.9 Bonnie Claire Alternative Segments

Bonnie Claire alternative segment 2 would begin south of Stonewall Flat, exit Lida Valley, and turn to the east, entering Sarcobatus Flat, a large playa. Sarcobatus Flat is bounded by Pahute Mesa on the east and Gold Mountain to the west (see Table 3-109 and Figure 3-185). There are no construction camps or quarries proposed for Bonnie Claire 2.

Bonnie Claire alternative segment 2 would be in an area that receives drainage from Stonewall Mountain, the foothills of Gold Mountain, and the Northern Pahute Mesa, which flows toward Lida Valley, Alkali Flat, and the Bonnie Claire area of Sarcobatus Flat. Unnamed washes run northeast to southwest, providing a path for overland flow from Pahute Mesa, including the south and southeast sides of Stonewall Mountain to Sarcobatus Flat. Bonnie Claire 2 would cross a notable braided wash at the north end of Sarcobatus Flat before running adjacent to the same wash for several kilometers. This braided wash flows from Stonewall Pass to the Bonnie Claire area of Sarcobatus Flat. There are no streamflow or water-quality data available for the streams and washes Bonnie Claire 2 would cross.

Bonnie Claire 2 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3).

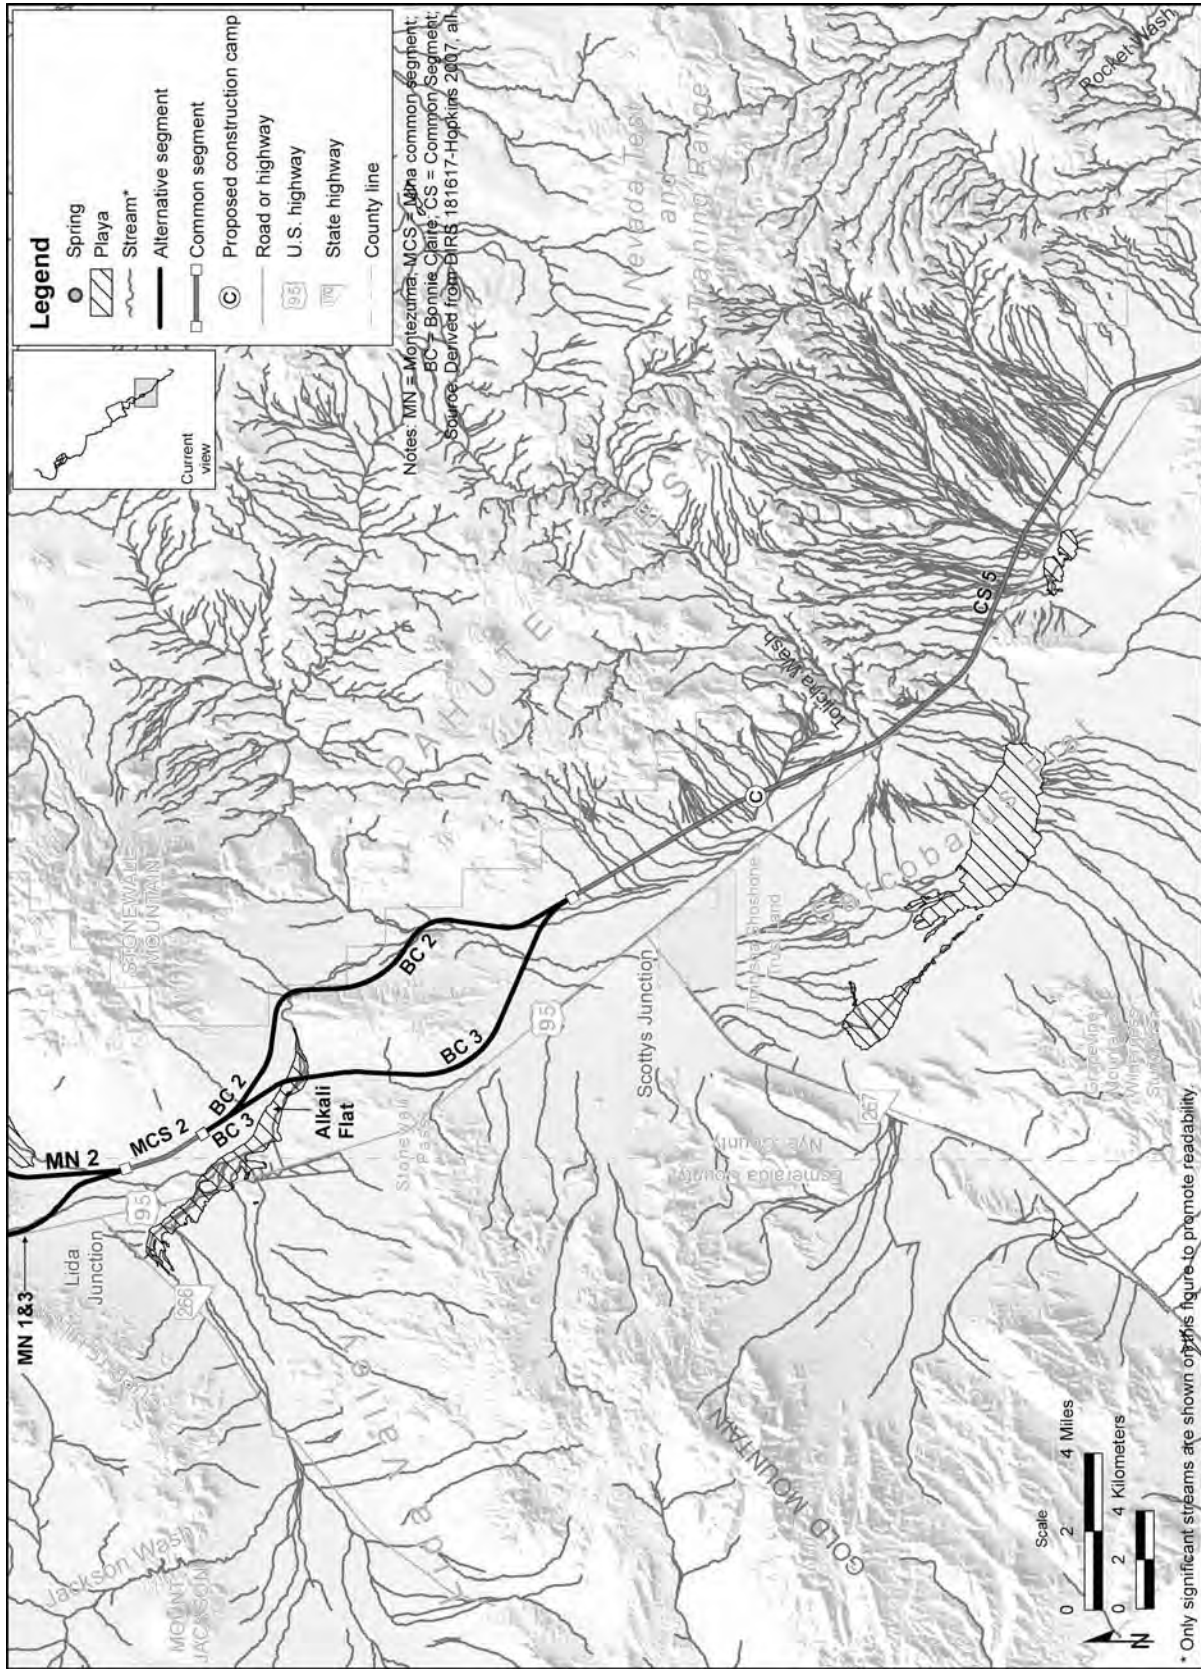


Figure 3-185. Surface drainage within map area 6.

Table 3-109. Hydrologic features potentially relevant to the Bonnie Claire alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Bonnie Claire alternative segment 2</i>		
Drainage from Stonewall Mountain, the foothills of Gold Mountain, Stonewall Pass, and Northern Pahute Mesa to Lida Valley, Alkali Flat, and Bonnie Claire area within Sarcobatus Flat.	Segment would cross 31 washes, including an unnamed braided wash.	Alkali Flat/Lida Valley Playa.
<i>Bonnie Claire alternative segment 3</i>		
Drainage from the foothills of Gold Mountain, Stonewall Mountain, Stonewall Pass, and Northern Pahute Mesa to Lida Valley, Alkali Flat, and Bonnie Claire area within Sarcobatus Flat.	Segment would cross Alkali Flat/Lida Valley Playa.	None.
	Segment would cross 23 washes.	

- a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO06007NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 59-60, and 68.
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert kilometers to miles, multiply by 0.62137.

Therefore, none of the washes along Bonnie Claire 2 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface water bodies with a connection to interstate water.

There are no wetlands within the region of influence for Bonnie Claire 2.

Federal Emergency Management Agency flood maps cover most of Bonnie Claire 2, but do not include a portion of the land on the eastern side of the alternative segment, which is shown on the maps as an old boundary of the Nevada Test and Training Range. Flood mapping does not extend east of this boundary. The flood maps also show a floodplain for an unnamed drainage feature from Pahute Mesa. The floodplain ends just south of Bonnie Claire 2 near one of the old Nevada Test and Training Range boundaries. It is possible that this floodplain would extend far enough to the northeast to be encountered by Bonnie Claire 2; however, the distance is too far to support such an assumption. In addition, Bonnie Claire 2 would run farther up in the foothill area where the wash would involve few tributaries. Appendix F provides additional information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of Bonnie Claire 2.

Bonnie Claire alternative segment 3 would begin south of Stonewall Flat, exit Lida Valley, and continue south into Sarcobatus Flat, a large playa. Sarcobatus Flat is bounded by Pahute Mesa on the east and Gold Mountain on the west (Table 3-112 and Figure 3-185). There are no potential quarry sites or proposed construction camps along Bonnie Claire alternative segment 3.

Bonnie Claire alternative segment 3 would be in an area that receives drainage from Stonewall Mountain, the foothills of Gold Mountain, and the Northern Pahute Mesa, which flows toward Lida Valley, Alkali Flat, and the Bonnie Claire area of Sarcobatus Flat. Unnamed washes run northeast to southwest, providing a path for overland flow from Pahute Mesa, including the south and southeast sides of Stonewall Mountain to Sarcobatus Flat. Bonnie Claire 3 would pass through Alkali Flat Playa, a major playa shown in Figure 3-185 and cross a notable braided wash in Sarcobatus Flat. This braided wash

flows from Stonewall Pass to the Bonnie Claire area of Sarcobatus Flat. There are no streamflow or water-quality data available for the streams and washes Bonnie Claire 3 would cross.

Bonnie Claire alternative segment 3 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Bonnie Claire alternative segment 3 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface water bodies with a connection to interstate water.

There are no wetlands within the region of influence for Bonnie Claire alternative segment 3.

Federal Emergency Management Agency flood maps cover most of Bonnie Claire alternative segment 3, but do not include a portion of the land on the eastern side of the segment, which is shown on the maps as an old boundary of the Nevada Test and Training Range. Flood mapping does not extend east of this boundary. Bonnie Claire alternative segment 3 would cross a 100-year floodplain associated with Alkali Flat Playa. The flood maps also show a floodplain for an unnamed drainage feature from Pahute Mesa. The floodplain ends just south of Bonnie Claire alternative segment 3 at one of the old Nevada Test and Training Range boundaries. The floodplain is close enough to Bonnie Claire alternative segment 3 that it is reasonable to assume it would be at a similar width if it extended farther up the wash to where Bonnie Claire alternative segment 3 would cross. Appendix F provides additional information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of Bonnie Claire alternative segment 3.

3.3.5.3.10 Common Segment 5 (Sarcobatus Flat Area)

Common segment 5 would begin approximately 3.1 kilometers (1.9 miles) east of U.S. Highway 95 and trend generally southeast, through the Sarcobatus Flat Area, and along the east side of U.S. Highway 95 (Table 3-110 and Figures 3-185 and 3-186). Common segment 5 would end approximately 6.4 kilometers (4 miles) north of Springdale. Construction camp 10 would be adjacent to the rail alignment and east of U.S. Highway 95. Numerous ephemeral wash draining downslope of Pahute Mesa would run through the construction camp. There are no potential quarry sites along common segment 5 (DIRS 180875-Nevada Rail Partners 2007, pp. 3-5).

Common segment 5 would cross washes that drain the Tolicha Peak area of Pahute Mesa. Drainage from the Pahute Mesa flows from the east into Sarcobatus Flat. The alluvial flat terrain between Tolicha Peak and U.S. Highway 95 is characterized by numerous braided washes. Although Sarcobatus Flat is an extensive topographic feature, there is only one portion designated as a minor playa that would be close to the rail alignment. The northern edge of this small playa is adjacent to U.S. Highway 95, and would be approximately 1.7 kilometers (1.1 miles) south of common segment 5 to the southeast of the point where Tolicha Wash crosses Interstate Highway 95. The segment would then cross surface drainage originating from Tolicha Peak and Springdale Mountain. There are no streamflow or water-quality data available for the streams and washes common segment 5 would cross.

Common segment 5 would be in the Central Hydrographic Region of Nevada, which has surface hydrology characterized by internally draining sub-areas and is considered an intrastate basin (DIRS 180889-PBS&J 2007, p. 3). Therefore, none of the washes along Mina common segment 5 qualify as waters of the United States, as regulated under Section 404 of the Clean Water Act, because there are no connections to surface-water bodies with a connection to interstate water.

The National Wetlands Inventory map identifies the playas associated with Sarcobatus Flat as wetlands; however, field studies conducted in support of this Rail Alignment EIS confirmed that there are no *hydric soils*, plant species indicative of wetlands, or other indicators of wetlands on or adjacent to the playa near

Table 3-110. Hydrologic features potentially relevant to common segment 5.^a

General hydrographic features/drainage	Hydrologic features within 150 meters of the centerline of the rail alignment ^b	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from Pahute Mesa and Bullfrog Hills flows to playas within Sarcobatus Flat and Bonnie Claire Lake within Sarcobatus Flat.	Segment would cross Tolicha Wash and 123 other washes. The alluvial flat terrain between Tolicha Peak and U.S. Highway 95 is characterized by numerous braided washes. Washes within this type of soil and terrain can shift in number and geography with a variation of precipitation intensity.	Dry lake bed 0.5 kilometer south.

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 59-60, 64, and 68.

b. To convert meters to feet, multiply by 3.2808.

c. To convert kilometers to miles, multiply by 0.62137.

the rail alignment (DIRS 180696-Potomac Hudson Engineering 2007, p. 6). Appendix F provides more information about wetlands in this area.

Federal Emergency Management Agency flood maps provide coverage for almost all of common segment 5. The maps show that the segment would cross a 100-year floodplain associated with Tolicha Wash where it drains toward Sarcobatus Flat. Appendix F provides more information on this floodplain.

There are no springs identified within 1.6 kilometers (1 mile) of common segment 5.

3.3.5.3.11 Oasis Valley Alternative Segments

Oasis Valley alternative segment 1 would begin north of Oasis Mountain and would run southeast for approximately 9.8 kilometers (6.1 miles) before converging with common segment 6 (Table 3-111 and Figure 3-186). Construction camp 11 would be along the west side of Oasis Valley alternative segment 1 approximately 3.1 kilometers (1.9 miles) north of its junction with common segment 6. Several ephemeral washes flowing downslope from Bullfrog Hills and mountains to the east would run through the construction camp. There are no potential quarry sites along Oasis Valley alternative segment 1 (DIRS 180875-Nevada Rail Partners 2007, pp. 3-5).

Oasis Valley alternative segment 1 would cross the Amargosa River and its tributaries. Although referred to as a river, the Amargosa River and tributary branches and washes receive ephemeral flows from winter and summer storms, and perennial flows near springs and seeps. For most of the year, the tributaries carry no water. The Amargosa River has approximately 20 branches and 40 tributary washes in Oasis Valley. The main branch enters the valley from the north through Thirsty Canyon. Most of the drainage into Oasis Valley is from Pahute Mesa (including Oasis and Springdale Mountains to the north) and the Bullfrog Hills to the southwest. There are no streamflow or water-quality data available for this area; however, there is regional data for the Death Valley Basin (DIRS 176325-USGS 2006, all).

The Amargosa River interstate drainage system flows to Death Valley in California. A survey of the washes along the Mina rail alignment identified the Amargosa River and one tributary that Oasis Valley alternative segment 1 would cross as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180889-PBS&J 2007, Figure 3B).

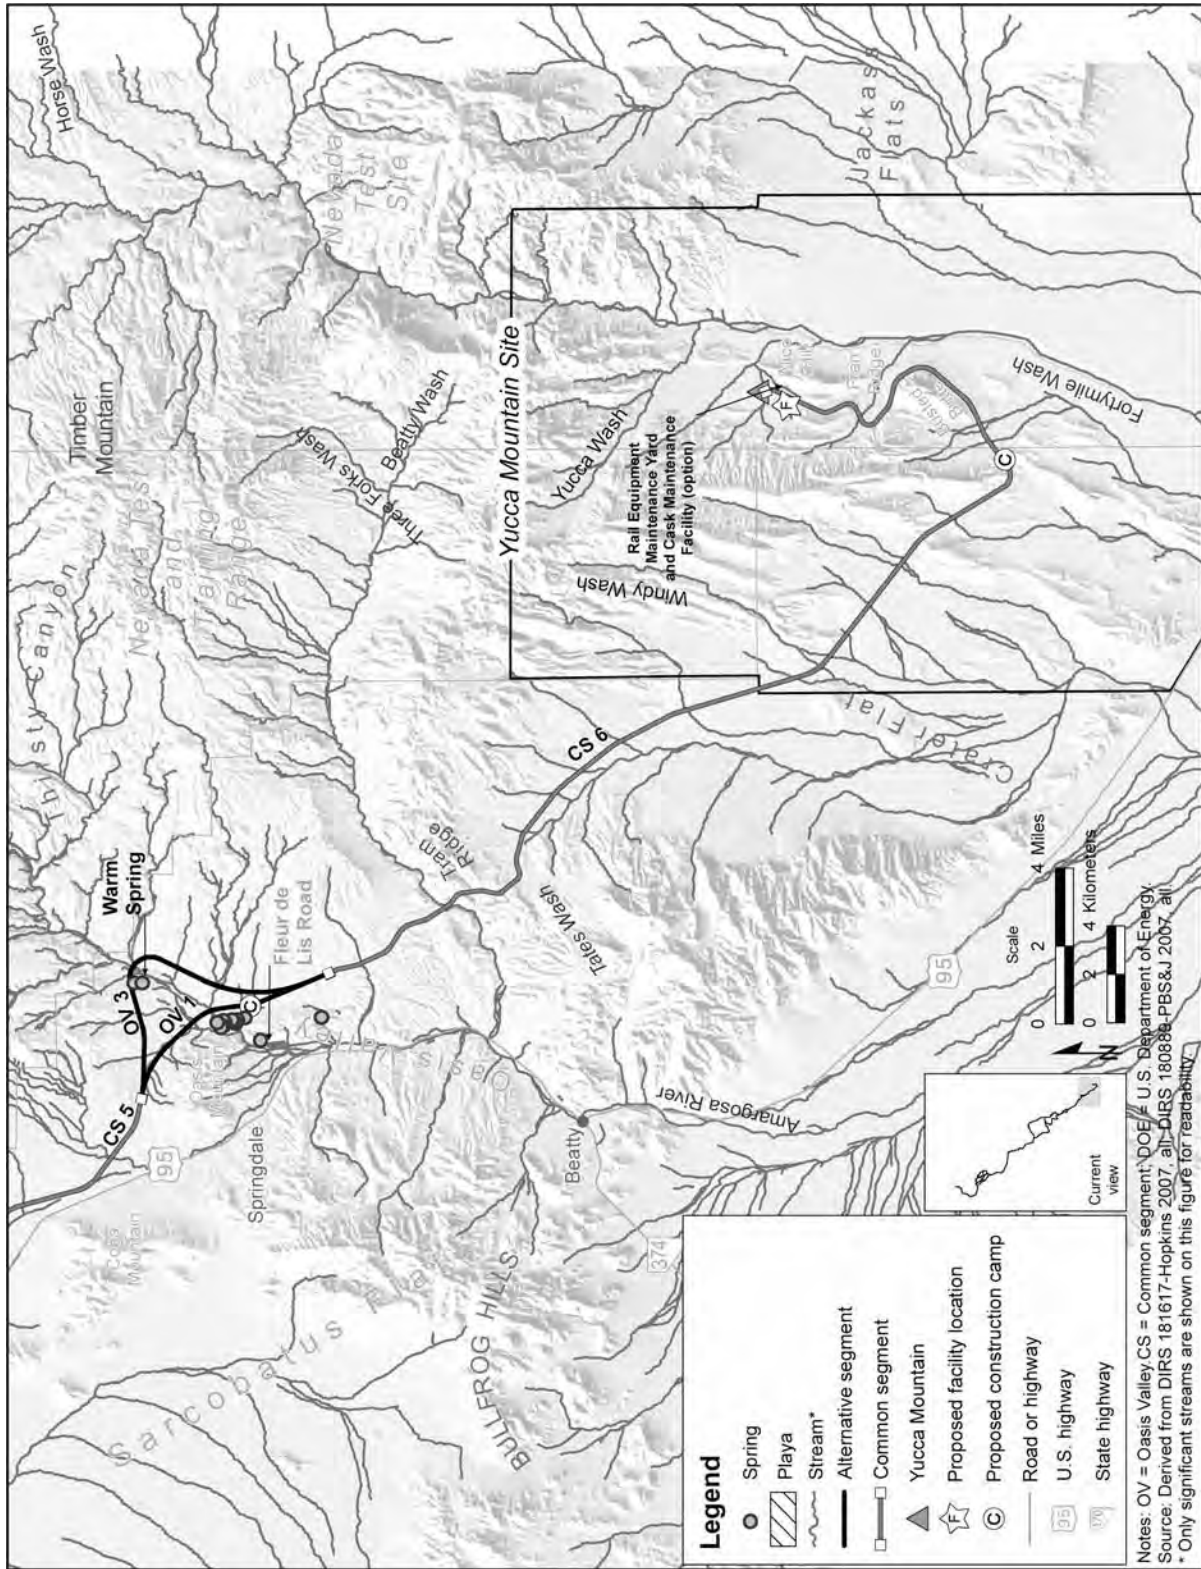


Figure 3-186. Surface drainage within map area 7.

Table 3-111. Hydrologic features potentially relevant to the Oasis Valley alternative segments.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
<i>Oasis Valley alternative segment 1</i>		
Drainage from Bull Frog Hills and the Pahute Mesa, including the Amargosa River and Amargosa River tributaries.	Segment would cross the Amargosa River and 23 unnamed washes.	Unnamed springs: 1.5 kilometers west 0.53 kilometer west 0.74 kilometer west 0.69 kilometer west 0.47 kilometer west 0.59 kilometer west 0.46 kilometer west 0.59 kilometer west 0.67 kilometer west 0.54 kilometer west 0.48 kilometer west 1.4 kilometers west 1.5 kilometers west
<i>Oasis Valley alternative segment 3</i>		
Drainage from Bull Frog Hills and the Pahute Mesa, including the Amargosa River and Amargosa River tributaries.	Segment would cross the Amargosa River, and 27 washes/tributaries to the Amargosa River.	Colson Pond (spring fed) 0.24 kilometer southwest. Small wetland 0.5 kilometer from Colson Pond. Unnamed springs: 0.20 kilometer west 1.1 kilometers west 1.2 kilometers west 1.2 kilometers west 1.3 kilometers west 1.3 kilometers west 1.3 kilometers west 1.4 kilometers west 1.4 kilometers west 1.5 kilometers west 1.5 kilometers west 1.6 kilometers west

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000; DIRS 176730-DeLorme 1996, p. 64.
 b. To convert meters to feet, multiply by 3.2808.
 c. To convert kilometers to miles, multiply by 0.62137.

There are no wetlands identified within the region of influence for Oasis Valley alternative segment 1.

Federal Emergency Management Agency flood maps provide complete coverage for Oasis Valley 1. The maps show that the segment would cross a 100-year floodplain associated with the Amargosa River. Appendix F provides more information about this floodplain.

There are numerous springs in Oasis Valley and Thirsty Canyon near where Oasis Valley alternative segment 1 would cross. Oasis Valley 1 would pass within 0.48 kilometer (0.30 mile) of several springs identified as the upper Oasis Valley Ranch Springs (DIRS 169384-Rainer et al. 2002, Figure 3).

These springs are near the narrows through which the Amargosa River leaves Oasis Valley. Table 3-111 lists these springs.

Oasis Valley alternative segment 3 would begin north of Oasis Mountain, generally run east and then south for approximately 14 kilometers (8.8 miles) and would cross Oasis Valley approximately 0.24 kilometer (0.15 mile) northeast of Colson Pond before converging with common segment 6 (Table 3-111 and Figure 3-186). There are no potential quarry sites or proposed construction camps along Oasis Valley 3.

Oasis Valley alternative segment 3 would cross the Amargosa River and its tributaries, as described above for Oasis Valley alternative segment 1.

A survey of washes performed along the Mina rail alignment identified the Amargosa River, which Oasis Valley alternative segment 3 would cross, as a water of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180889-PBS&J 2007, Figure 3B).

DOE field studies identified a small wetland associated with an unnamed seep located approximately 0.5 kilometer (0.31 mile) from Colson Pond (DIRS 180914-PBS&J 2006, Figure 4T). Appendix F provides more information about this wetland.

Federal Emergency Management Agency flood maps provide complete coverage for Oasis Valley 3. The maps show that the segment would cross a 100-year floodplain associated with the Amargosa River. Appendix F provides more information about this floodplain.

There are numerous springs in Oasis Valley and Thirsty Canyon near where Oasis Valley alternative segment 3 would cross (see Table 3-111). Colson Pond is spring fed and would be within 0.24 kilometer (0.15 mile) of the alternative segment. This spring is commonly known as Colson Pond Spring (DIRS 169384-Reiner et al. 2002, Plate 2), but is also referred to as Warm Spring.

3.3.5.3.12 Common Segment 6 (Yucca Mountain Approach)

Common segment 6 would begin at the south juncture of the end of the Oasis Valley alternative segments and proceed to the southeast toward Yucca Mountain (Table 3-112 and Figure 3-186).

The proposed location for construction camp 12 is adjacent to the rail line approximately 9.7 kilometers (6 miles) south of the *geologic repository* operations area. There are no potential quarry sites along common segment 6 (DIRS 180875-Nevada Rail Partners 2007, pp. 3-5).

Table 3-112. Hydrologic features potentially relevant to common segment 6.^a

General hydrographic features/drainage	Hydrologic features within 150 meters ^b of the centerline of the rail alignment	Hydrologic features between 150 meters and 1.6 kilometers ^c of the centerline of the rail alignment
Drainage from northern Yucca Mountain Range, including Tram Ridge, and Timber Mountain. Drainage from Yucca Mountain Range to Crater Flat and Amargosa Valley.	Segment would cross Beatty Wash, Tates Wash, Windy Wash, Busted Butte Wash, and 39 unnamed washes.	Fortymile Wash. Midway Valley Wash.

a. Source: DIRS 177710-MO0607NHDWBDYD.000; DIRS 177714-MO0607NHDFLM06.000; DIRS 176979-MO0605GISGNISN.000, all; DIRS 176730-DeLorme 1996, p. 64-65.
 b. To convert meters to feet, multiply by 3.2808
 c. To convert kilometers to miles, multiply by 0.62137.

Common segment 6 would cross terrain that drains from the southern end of Pahute Mesa and the Yucca Mountain Range to Crater Flat and the Amargosa River. The first significant tributary common segment 6 would cross is Beatty Wash and its tributaries, which provide drainage from Timber Mountain and Tram Ridge at the northern reaches of Yucca Mountain, to Oasis Valley and the Amargosa River at a point approximately 4.8 kilometers (3 miles) northeast of the community of Beatty. Beatty Wash is one of the largest tributaries of the Amargosa River. Common segment 6 would cross Beatty Wash at the north end of the Yucca Mountain Range, approximately 5.4 kilometers (3.4 miles) southeast of Oasis Valley. After crossing Beatty Wash, common segment 6 would proceed to the southeast toward Yucca Mountain, where it would cross several tributaries of Bates Wash. Approximately 26 kilometers (16 miles) from the start of common segment 6, the segment would cross Windy Wash and unnamed washes carrying drainage from the eastern side of Yucca Mountain. The segment would then continue around the southern tip of the Yucca Mountain Range before turning northeast, skirting the eastern edge of Busted Butte and continuing between Bow and Fran Ridges.

Near the Yucca Mountain Site, Fortymile Wash, a major wash that flows to the Amargosa River, drains the eastern side of Yucca Mountain (DIRS 169734-BSC M&O 2004, p. 7.1-3). The tributaries draining into Fortymile Wash at Yucca Mountain include Yucca Wash to the north; Drill Hole Wash, which, together with a tributary in Midway Valley, drains most of the repository site; and Busted Butte Wash (also known as Dune Wash) to the south. Common segment 6 would cross Busted Butte Wash, some of its unnamed tributaries, and unnamed tributaries of Drill Hole Wash. Common segment 6 would not actually cross Drill Hole Wash, but the wash would be within the common segment 6 region of influence. Fortymile Wash runs parallel to the end of common segment 6 at the Yucca Mountain Site, but common segment 6 would not cross the wash. Fortymile Wash is the most prominent drainage through Jackass Flats to the Amargosa River (DIRS 155970-DOE 2002, p. 3-36, Figure 3-11).

All of common segment 6 is within the Amargosa River interstate drainage system. Of the numerous washes along common segment 6, 14 were identified as waters of the United States, as regulated under Section 404 of the Clean Water Act (DIRS 180889-PBS&J 2007, Figures 3B and 3C). The Rail Equipment Maintenance Yard would be where the proposed rail line ends at Yucca Mountain. There are no perennial streams, natural bodies of water, or naturally occurring wetlands at Yucca Mountain (DIRS 155970-DOE 2002, p. 3-35). The facility would overlie an ephemeral stream but would not cross any waters of the United States.

Slightly more than half of common segment 6 has coverage on Federal Emergency Management Agency flood maps. These maps show that common segment 6 would cross a short span of the 100-year floodplain associated with Beatty Wash. Although the flood maps do not provide coverage for the area of the repository on the eastern side of Yucca Mountain, DOE has performed flood studies on several washes in that area, as addressed in the Yucca Mountain FEIS. An overlay of the Mina rail alignment with Yucca Mountain FEIS Figure 3-12 indicates that common segment 6 would cross short stretches of 100-year floodplains associated with Busted Butte Wash and Drill Hole Wash. The rail line would terminate just before reaching a floodplain associated with Midway Valley Wash (also known as Sever Wash) (DIRS 155970-DOE 2002, pp. 3-38 and 3-39, and Figure 3-12). Appendix F further describes the floodplains associated with common segment 6.

There are no springs identified within 1.6 kilometers (1 mile) of common segment 6. Ute Springs, 270 meters (890 feet) west of U.S. Highway 95 in Oasis Valley, would be within about 0.6 to 0.88 kilometer (0.37 to 0.55 mile) of potential alternative well sites OV9 through OV12 (see Figure 3.7) near U.S. Highway 95 (DIRS 169384-Rainer et al. 2002, Plate 2).

3.3.6 GROUNDWATER RESOURCES

This section describes groundwater resources along the Mina rail alignment. Section 3.3.6.1 describes the region of influence for groundwater resources; Section 3.3.6.2 is a general overview of groundwater features along the Mina rail alignment; and Section 3.3.6.3 describes more specific features for each of the Mina rail alignment alternative segments and common segments.

3.3.6.1 Region of Influence

The region of influence for groundwater resources along the Mina rail alignment includes aquifers that would underlie areas of the proposed railroad construction and operations, portions of groundwater aquifers DOE would use to obtain water for construction and operations support and that would be affected by these groundwater withdrawals, and nearby springs that might be affected by such groundwater withdrawals. The horizontal extent of the region of influence varies depending on the particular aspects of the specific project activity, as follows:

- DOE used the nominal width of the rail line construction right-of-way and the footprints of the railroad construction and operations support facilities to define where there would be construction or other land disturbances. These areas could be susceptible to changes in groundwater *infiltration*, discharge (for example, spring discharge), or quality. There could also be damage to, or loss of use of, an existing well (including potential need for well abandonment), if that well fell within the rail *roadbed* or was disturbed during railroad construction activities. Review of the available information on the locations of existing wells indicates that rail roadbed construction would not disturb any existing wells. However, the precise locations for existing wells have not been field-verified and actual well locations might vary from the coordinates identified and cataloged for the wells in State of Nevada and U.S. Geological Survey well databases (see Section 3.3.6.2.1).
- DOE used an initial screening-level distance of 1.6 kilometers (1 mile) on either side of the centerline of the rail alignment and an initial radius of 1.6 kilometers surrounding each proposed new well if that well would be outside of the nominal width of the construction right-of-way to define areas in the general vicinity of the rail alignment and proposed well locations that could also be affected by changes in groundwater discharge or quality at existing wells or springs, or in which there could be damage to, or loss of use of, an existing well if that well fell within the rail roadbed or was disturbed during rail construction activities.
- DOE considered both the individual groundwater basins (hydrographic areas) that underlie the Mina rail alignment and the railroad construction and operations support facilities and adjacent hydrographic areas for evaluating areas that might be affected by proposed groundwater withdrawals for construction or operations support. This would include areas that could be susceptible to changes in groundwater discharge or flow to an adjacent groundwater basin.

3.3.6.2 General Hydrogeologic Setting and Characteristics

This section is an overview of the general hydrogeologic setting and characteristics of groundwater underlying the area along the Mina rail alignment. Water-resource features, primarily those associated with groundwater, are described in relation to the hydrographic areas in which they lie.

Groundwater *recharge* in central and southern Nevada is affected by low precipitation and high annual evaporation rates typical of desert climates. Most recharge to aquifers in the region of influence is derived from precipitation falling in the higher parts of the inter-basin mountain ranges (DIRS 103136-Prudic, Harrill, and Burbey 1993, pp. 2, 58, 84, and 88).

3.3.6.2.1 Groundwater Hydrographic Areas and Groundwater Use in Nevada

To classify hydrographic regions and hydrographic areas and facilitate the management of groundwater resources within the State of Nevada, the state has been divided into a series of groundwater basins (designated as hydrographic areas) (DIRS 177741-State of Nevada 2005, all; DIRS 106094-Harrill, Gates, and Thomas 1988, all).

A total of 260 hydrographic areas are recognized within the Great Basin; all or parts of 232 hydrographic areas fall within Nevada (DIRS 106094-Harrill, Gates, and Thomas 1988, all; DIRS 177741-State of Nevada 2005, all).

Three types of aquifers are the principal sources of groundwater found in central and southern Nevada, as follows (DIRS 172905-USGS 1995, all):

- Alluvial valley fill: Composed primarily of unconsolidated alluvial sand and gravel. The distribution of sediment size is directly associated with distance from the mountains. In general, the coarsest materials (for example, gravel and boulders) were deposited near the mountains, and the finer materials (for example, sand, silt, and clay) were deposited in the central parts of the basins or in the lakes and playas. Alluvial fans are important hydrologic features within the hydrographic basins, sometimes serving as targets for groundwater development, and with alluvial valley fill portions of the basins receiving some of their recharge through the coarse sediment deposits in the alluvial fans. Alluvial deposits consisting of alluvial sand and gravel are present along the courses of modern ephemeral and intermittent streams or ancestral streams that generally parallel the long axes of the basins. Alluvial deposits underlie most of the Mina rail alignment.
- Volcanic-rock aquifers: Composed primarily of tuffs (ash flows, ash falls), rhyolite, or basalt. Groundwater movement in these materials is often controlled by the number and degree of joint interconnections, *fractures* or faults, or vesicle (void space) interconnection in lavas.
- Carbonate-rock aquifers: Composed primarily of limestones and dolomites. The carbonate rocks are commonly highly fractured and are locally fragmented. Groundwater flow in the carbonate rock aquifers is controlled by interconnected fractures.

Tectonic forces superimposed faulting on existing groundwater-bearing formations (aquifers) in this region. As a result, several aquifer units underlying the Mina rail alignment are fractured and faulted in some locations. These faults and fractures locally can influence groundwater flow patterns within the affected aquifer areas, with these features capable of acting as either barriers to, or conduits for, groundwater flow (see Appendix G).

Within the Basin and Range Province, any or all of the three basic aquifer types discussed above might be present within a particular area and might constitute three separate, hydraulically distinct, sources of water. Alternatively, any or all of the three aquifer types might underlie an area but might be hydraulically connected to form a single groundwater source.

Groundwater levels fluctuate seasonally and annually in response to changes in withdrawal (consumptive use) and climatic conditions, with levels generally rising from late winter to early summer and generally declining from summer to early winter (DIRS 172904-Berris et al. 2003, p. 6). In 2000, an estimated 1.75 billion cubic meters (1.42 million *acre-feet*) of groundwater were pumped in Nevada (DIRS 175964-Lopes and Evetts 2004, p. 7).

Acre-foot is a unit commonly used to measure water volume. It is the quantity of water required to cover 4,047 square meters (1 acre) to a depth of 0.3048 meter (1 foot), and is equal to 1,233.5 cubic meters (325,851 gallons). Sections 3.3.6 and 4.3.6 list perennial yields, committed groundwater resources, and consumptive use in acre-feet because it is the common unit used by industry and government agencies.

Irrigation and stock watering was the primary groundwater use, accounting for approximately 46 percent of the total groundwater withdrawal, followed by mining (approximately 26 percent), drinking-water systems (approximately 14 percent), geothermal production (approximately 8 percent), self-supplied domestic (approximately 5 percent), and miscellaneous (1 percent) (DIRS 175964-Lopes and Evetts 2004, p. 7) (see Figure 3-187). Virtually all major groundwater development in Nevada has been in the alluvial valley fill, with withdrawals from approximately the upper 460 meters (1,500 feet) of these aquifers. The carbonate rock aquifers in eastern and southern Nevada supply water to numerous springs (DIRS 106094-Harrill, Gates, and Thomas 1988, all).

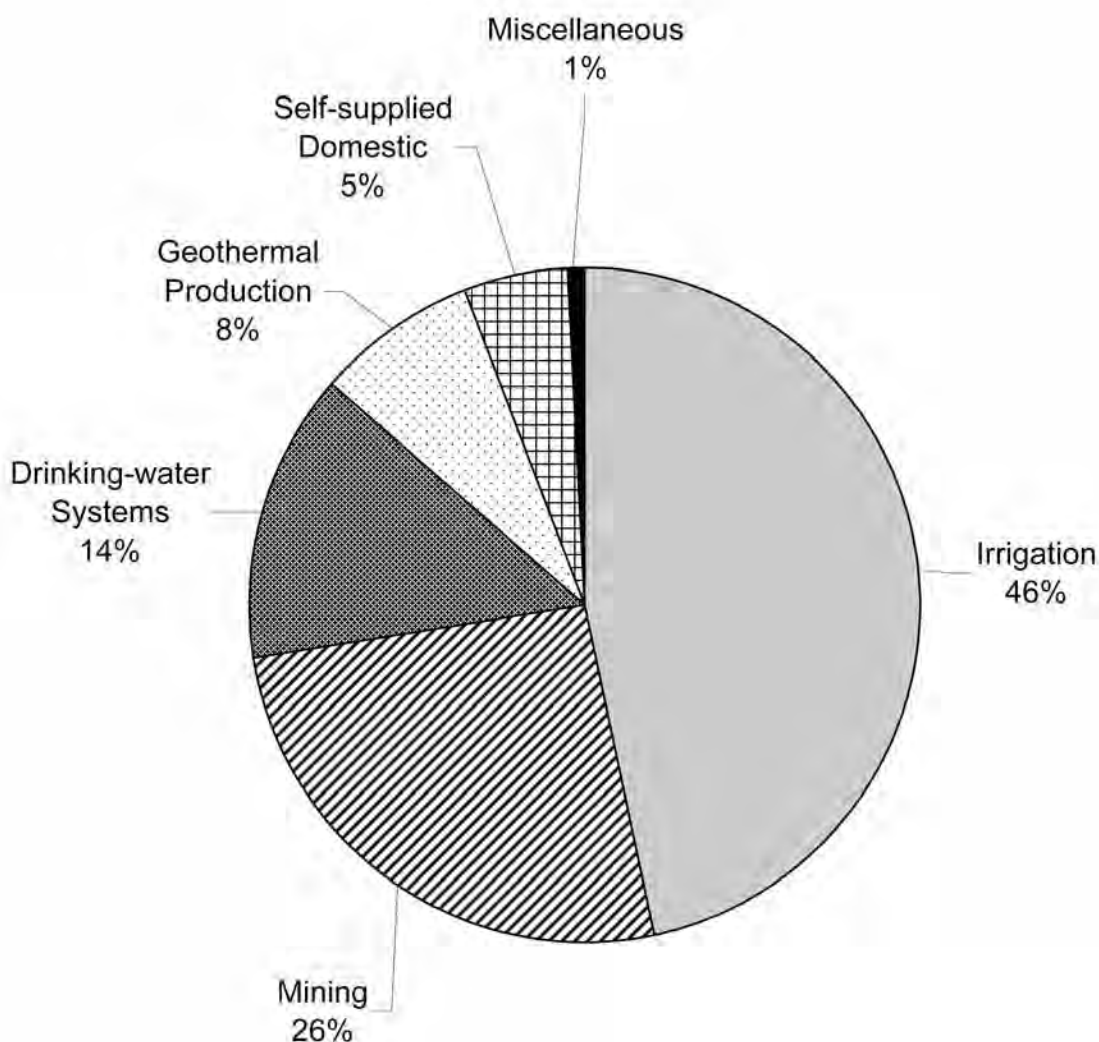


Figure 3-187. Groundwater usage in Nevada in 2000. (Source: DIRS 175964-Lopes and Evetts 2004, p. 7.)

Figure 3-188 shows generalized regional groundwater flow patterns in the vicinity of the Mina rail alignment. Available information regarding groundwater “interbasin” inflow and outflow (groundwater flow across hydrographic area boundaries) characteristics for hydrographic areas (groundwater basins) within central Nevada (DIRS 177524-Anning and Konieczki 2005, pp. 10 and 11, and Plate 1) indicates that interbasin groundwater outflow or groundwater inflow through alluvial valley-fill aquifer materials or through consolidated rock aquifers (lithified or cemented rock aquifers such as carbonate rock units, or

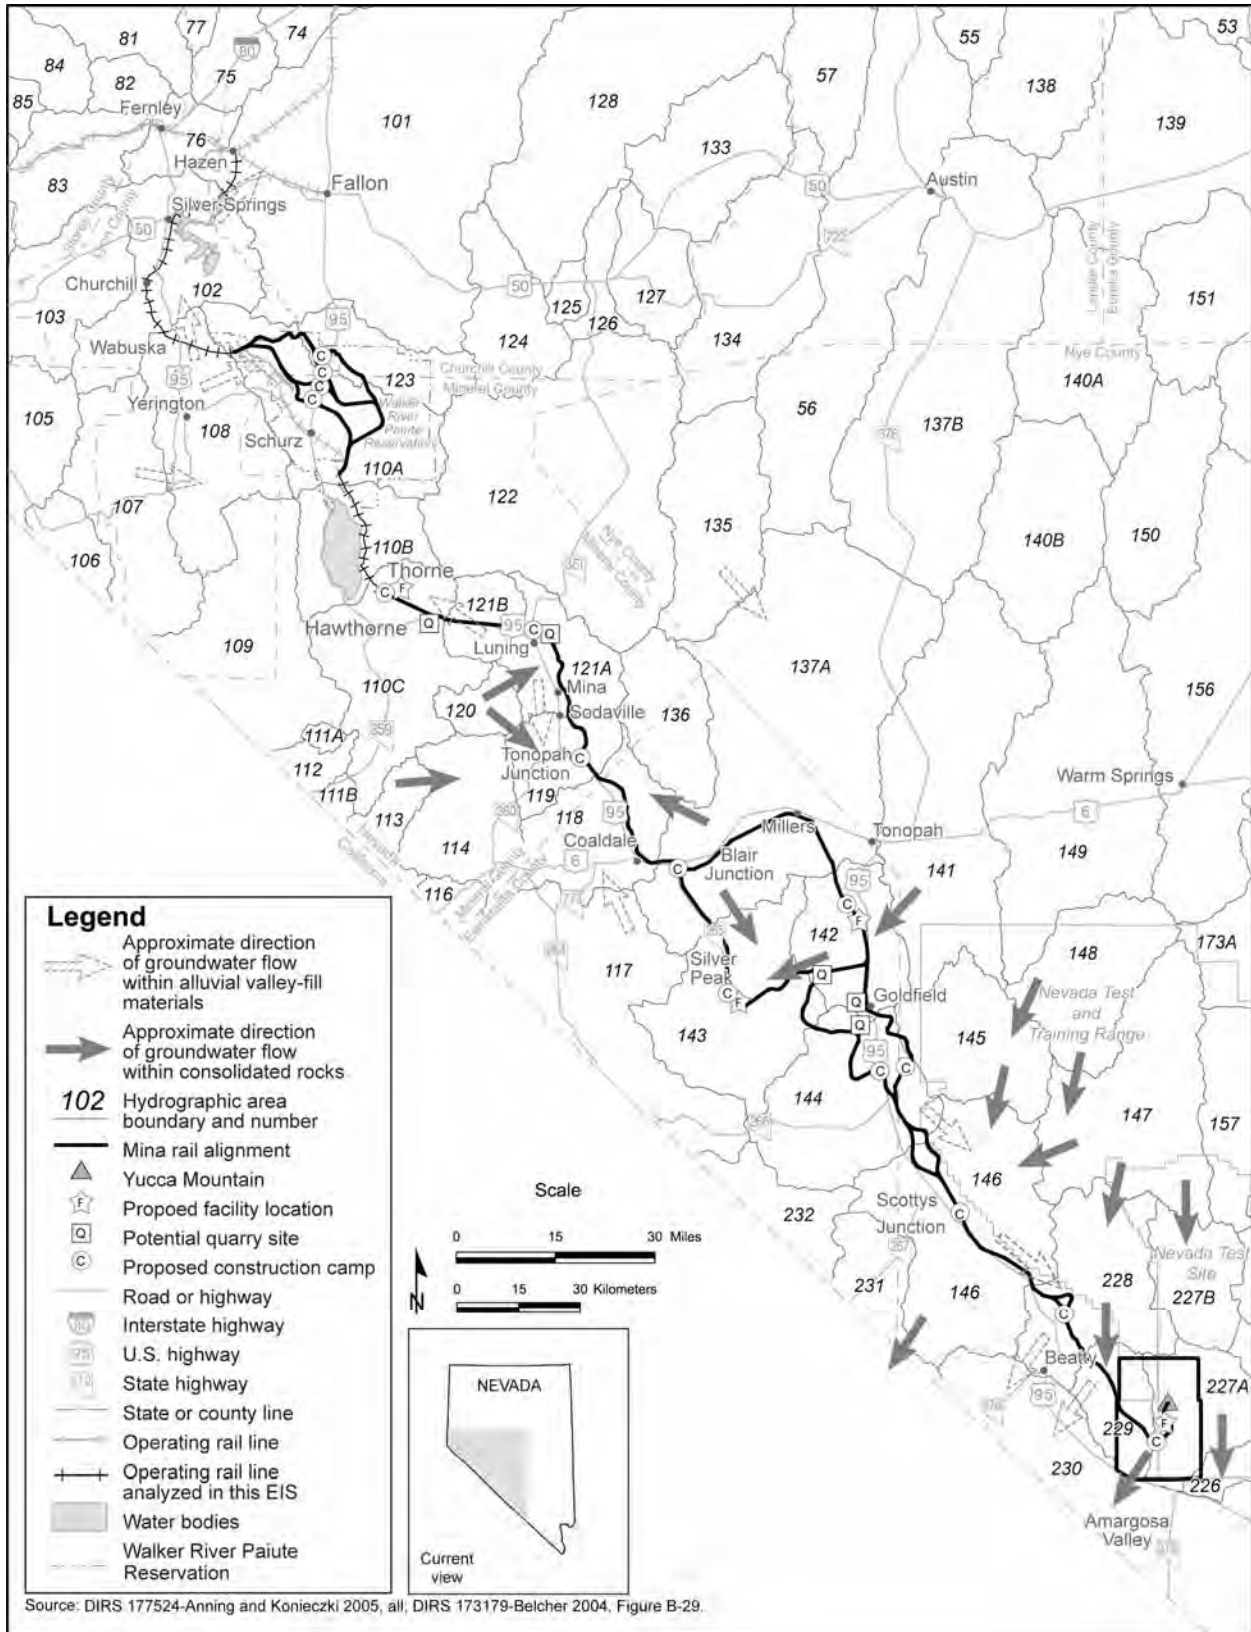


Figure 3-188. Generalized groundwater flow direction through alluvial valley-fill and consolidated rock aquifers in the vicinity of the Mina rail alignment.

clastic, metamorphic, igneous, or volcanic rock aquifers) appears to occur at some locations; at other locations, there appears to be no substantial interbasin groundwater flow occurring through either or both of these types of aquifer units. The figure depicts generalized flow directions within alluvial valley fill units and within consolidated rock aquifers, in areas where such flow is inferred to be occurring across hydrographic area boundaries.

This section describes groundwater resources in relation to hydrographic areas. Figure 3-189 shows the 18 hydrographic areas the Mina rail alignment would cross, depending on alternative segments selected. Table 3-113 lists the estimated annual *perennial yields* for the 18 hydrographic areas, and identifies which are State of Nevada-*designated groundwater basins*. The hydrographic areas are presented in the order the Mina rail alignment would cross them, beginning near Wabuska, moving southeast across Nevada toward Yucca Mountain.

Perennial yield is the amount of useable water from a groundwater aquifer that can be economically withdrawn and consumed each year for an indefinite period. It cannot exceed the natural recharge to that aquifer and ultimately is limited to the maximum amount of discharge that can be utilized for beneficial use.

The State of Nevada may identify a hydrographic area as a **designated groundwater basin** where permitted groundwater rights approach or exceed the estimated average annual recharge and the water resources are being depleted or require additional administration, including a state declaration of preferred uses (for example, municipal and industrial, domestic supply, etc.) (DIRS 103406-Nevada Division of Water Planning 1992, p. 18). Designated groundwater basins are also referred to as administered groundwater basins.

There are a number of published estimates of perennial yield for many of the hydrographic areas in Nevada, and those estimates often differ by large amounts. The perennial-yield values listed in Table 3-113 predominantly come from a single source, the Nevada Division of Water Planning (DIRS 103406-Nevada Division of Water Planning 1992, for Hydrographic Regions 10, 13, and 14); therefore, the table does not show a range of values for each hydrographic area.

In the Yucca Mountain area, the Nevada Division of Water Planning identifies a combined perennial yield for hydrographic areas 225 through 230. DOE obtained perennial yields from *Data Assessment & Water Rights/Resource Analysis of: Hydrographic Region #14 Death Valley Basin* (DIRS 147766-Thiel Engineering Consultants 1999, pp. 6 to 12) to provide estimates for hydrographic areas the Mina rail alignment would cross: hydrographic areas 227A, 228, and 229. That 1999 document presents perennial-yield estimates from several sources. Table 3-113 lists the lowest (that is, the most conservative) values cited in that document, which is consistent with the approach DOE used in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, pp. 3 to 136).

Table 3-113 also summarizes existing annual *committed groundwater resources* for each hydrographic area along the Mina rail alignment. However, all committed groundwater resources within a hydrographic area might not be in use at the same time. Table 3-113 also includes information on pending annual duties within each of these hydrographic areas. A *pending annual duty* represents the amount of water for which an appropriation applications has been submitted to the State Engineer for consideration and that the State Engineer has classified as a pending annual *duty* value within a hydrographic area, in accordance with applicable state statutes. Unless otherwise noted, the source of data for pending annual duties in the hydrographic areas the alignment would cross is DIRS 182759-Converse Consultants 2007, all; DIRS 182900-NDWR 2007, all; and DIRS 182288-NDWR 2007, all.

These data were acquired on March 31, 2007: NDWR Data Update (DIRS 182759-Converse Consultants 2007, all) and either April 18, 2007: NDWR Water Rights Data Hydrographic Area 110B (DIRS 182900-NDWR 2007, all) or May 30, 2007: NDWR Water Rights Data Update (DIRS 182898-NDWR 2007, all).

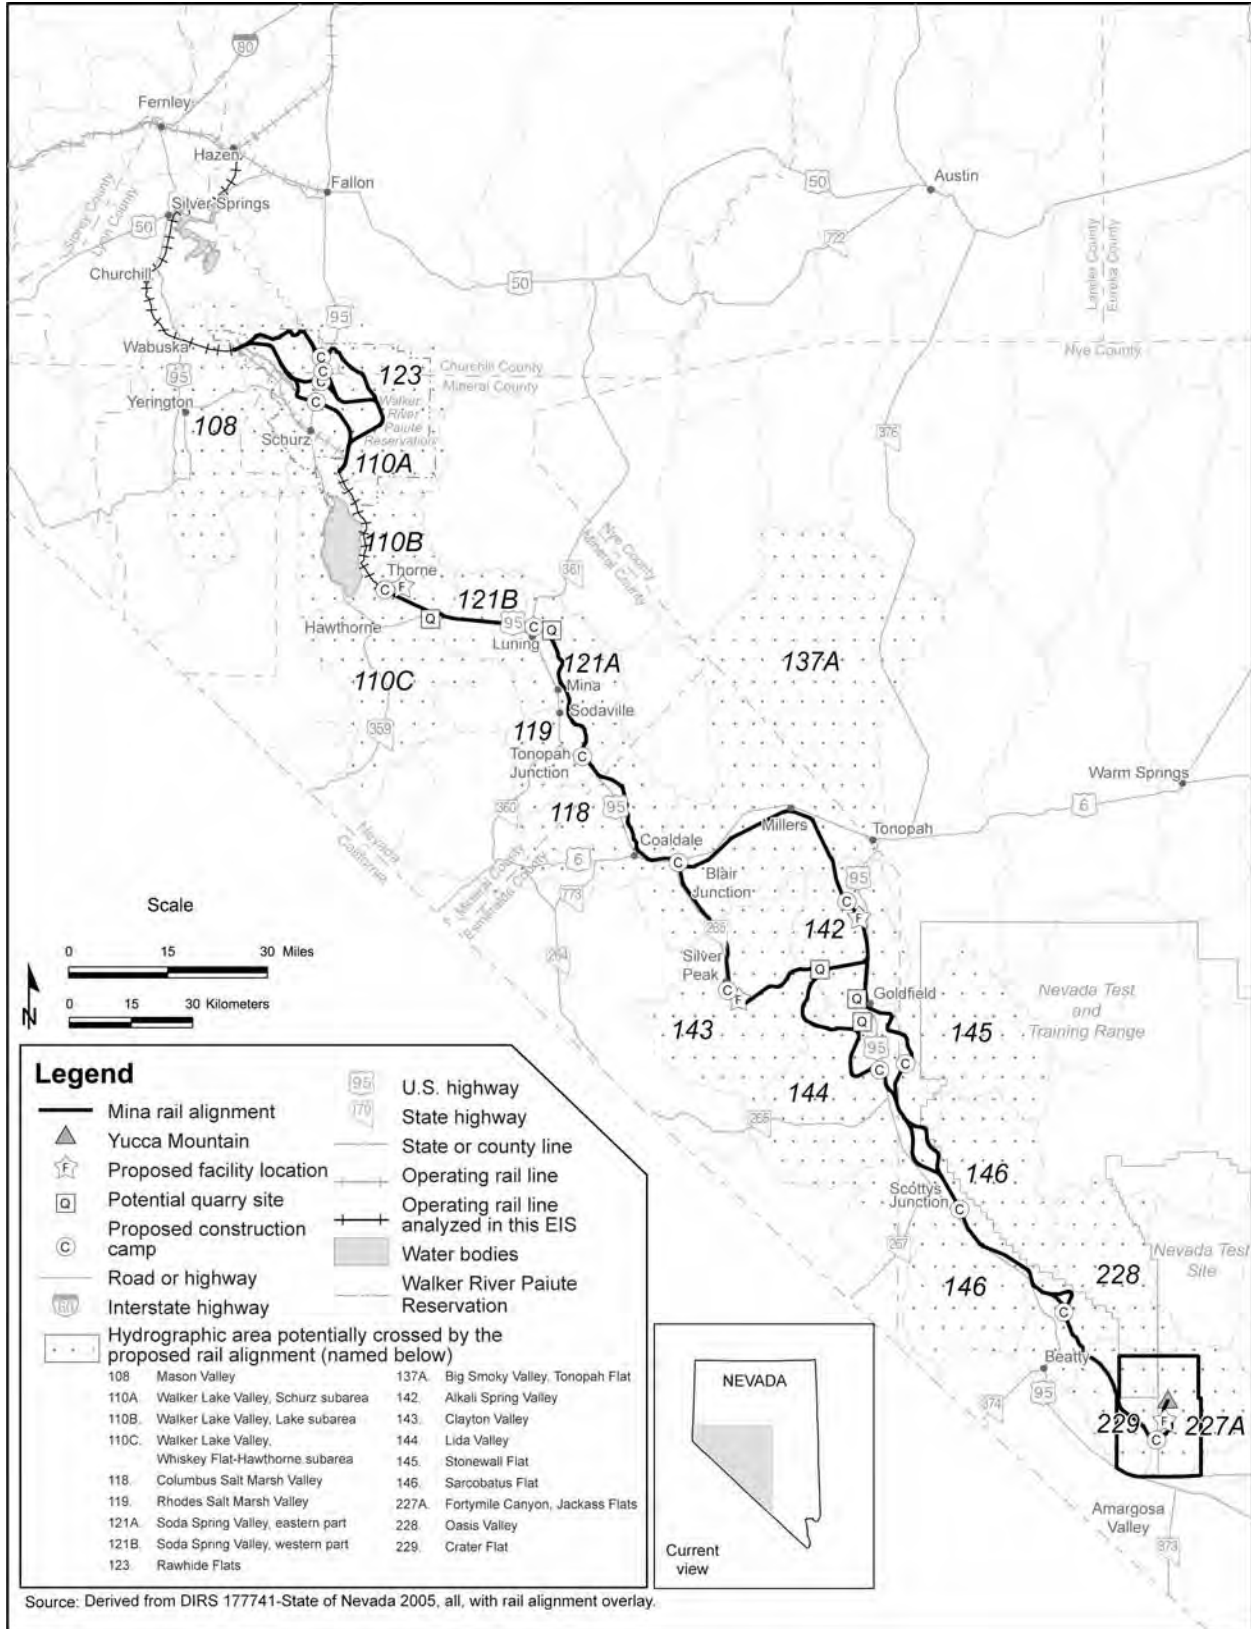


Figure 3-189. Hydrographic areas the Mina rail alignment would cross.

Table 3-113. Perennial yield and annual committed groundwater resources of hydrographic areas the Mina rail alignment would cross (page 1 of 2).

Rail line segment	Hydrographic area ^a number	Hydrographic area name	Perennial yield (acre-feet) ^{b,c}	Annual committed groundwater resources/pending annual groundwater duties (acre-feet) ^d	Designated groundwater basin ^{e,f}
Department of Defense Branchline North	108	Mason Valley	25,000	179,696/25,269	Yes
Schurz alternative segment 1, Department of Defense Branchline South	110A	Walker Lake Valley (Schurz subarea)	1,500	637/2	No
Schurz alternative segment 4, Department of Defense Branchline South					
Schurz alternative segment 5, Department of Defense Branchline South					
Schurz alternative segment 6, Department of Defense Branchline South					
Schurz alternative segment 5	123	Rawhide Flats	500	116/0	No
Schurz alternative segment 6					
Department of Defense Branchline South	110B	Walker Lake Valley (Lake subarea)	700	2,093/0	No
Department of Defense Branchline South, Mina common segment 1	110C	Walker Lake Valley (Whiskey Flat-Hawthorne subarea)	5,000	12,709/0	Yes
Mina common segment 1	121 B	Soda Spring Valley (western part)	200	354/0	Yes
Mina common segment 1	121 A	Soda Spring Valley (eastern part)	6,000	3,168/0	Yes
Mina common segment 1	119	Rhodes Salt Marsh Valley	1,000	49/0	No
Mina common segment 1	118	Columbus Salt Marsh Valley	4,000	1,764/0	No
Mina common segment 1, Montezuma alternative segment 1	137A	Big Smoky Valley (Tonopah Flat)	6,000	19,658/0	Yes
Mina common segment 1, Montezuma alternative segment 2					
Montezuma alternative segment 1	143	Clayton Valley	20,000	23,882/0	No

Table 3-113. Perennial yield and annual committed groundwater resources of hydrographic areas the Mina rail alignment would cross (page 2 of 2).

Rail line segment	Hydrographic area ^a number	Hydrographic area name	Perennial yield (acre-feet) ^{b,c}	Annual committed groundwater resources/pending annual groundwater duties (acre-feet) ^d	Designated groundwater basin ^{e,f}
Montezuma alternative segment 1	142	Alkali Spring Valley	3,000	2,596/0	No
Montezuma alternative segment 2					
Montezuma alternative segments 1, 2, and 3					
Montezuma alternative segment 1, Mina common segment 2, Bonnie Claire alternative segment 2	144	Lida Valley	350	72/0	No
Montezuma alternative segment 1, Mina common segment 2, Bonnie Claire alternative segment 3					
Montezuma alternative segment 2	145	Stonewall Flat	100	12/0	No
Bonnie Claire alternative segment 2, common segment 5	146	Sarcobatus Flat	3,000	3,591/0	Yes
Bonnie Claire alternative segment 3, common segment 5					
Common segment 5, Oasis Valley alternative segment 1, common segment 6	228	Oasis Valley	1,000	1,299/0	Yes
Common segment 5, Oasis Valley alternative segment 3/common segment 6					
Common segment 6	229	Crater Flat	220	1,147/82	No
Common segment 6	227A	Fortymile Canyon/Jackass Flats	880 ^g	58 ^h /5	No

a. Source: DIRS 106094-Harrill, Gates, and Thomas 1988, Summary, Figure 3, with the proposed rail alignment map overlay.

b. Source: DIRS 103406-Nevada Division of Water Planning 1992, Regions 10, 13, and 14, except hydrographic areas 227A, 228, and 229, for which the source is DIRS 147766-Thiel Engineering Consultants 1999, pp. 6 to 12.

c. To convert acre-feet to cubic meters, multiply by 1,233.49; to convert acre-feet to gallons, multiply by 3.259 x 10⁵.

d. Data for committed groundwater and pending annual duties are current as of March 31, 2007 (all hydrographic areas except areas 110B and areas 142, 144, 145, 146, 228, 229, and 227A) (DIRS 182759-Converse Consultants 2007, all); April 18, 2007 (hydrographic area 110B) (DIRS 182900-NDWR 2007, all); and May 30, 2007 (hydrographic areas 142, 144, 145, 146, 228, 229, and 227A) (DIRS 182288-NDWR 2007, all). Data for pending annual duties include underground duties but do not include duties for streams or springs. All values have been rounded to the nearest acre-foot.

e. Sources: DIRS 176488-State of Nevada 2006, Regions 10, 13, and 14; DIRS 177741-State of Nevada 2005, all.

f. Based on a 1979 Designation Order by the State Engineer; there are no committed resources in hydrographic area 227A. However, water-rights information from the Nevada Department of Water Resources indicates there are 58 acre-feet in committed resources for this area. The discrepancy appears to be related to the location of the boundary between areas 227A and 230 (Amargosa Desert) (DIRS 176600-Converse Consultants 2005, p. 29 and Tables 4 through 45). The perennial-yield value shown for hydrographic area 227A is the lowest estimated value presented in *Data Assessment & Water Rights/Resource Analysis of: Hydrographic Region #14 Death Valley Basin* (DIRS 147766-Thiel Engineering Consultants 1999, p. 8), for the western two-thirds of hydrographic area 227A. The perennial yield estimate for area 227A is broken down into 300 acre-feet for the eastern third of the area and 580 acre-feet for the western two-thirds of the area.

As part of an effort to assess water resources in the vicinity of the Mina rail alignment, DOE performed studies to identify groundwater conditions, the locations of springs, and the locations, use, and water rights status of groundwater-supply wells within 32 kilometers (20 miles) of either side of the centerline of the rail alignment. Information on groundwater characteristics in hydrographic areas that the rail alignment would cross and identified groundwater uses and use types within the 64-kilometer (40-mile) search area are compiled in the *Water Resources Assessment Report, Mina Rail Corridor* (DIRS 180887-Converse Consultants 2007, all). DOE reviewed several other published reports and maps providing information regarding hydrogeologic and groundwater characteristics in hydrographic areas the rail alignment would cross to obtain information to support the groundwater resources impacts assessment.

DOE reviewed several well and spring databases, including Nevada Division of Water Resources (NDWR) and U.S. Geological Survey National Water Information System (USGS NWIS) databases. Unless noted otherwise, the sources for the spring and well data in this section are as follows: DIRS 176600-Converse Consultants 2005, all; DIRS 176979-MO0605GISGNISN.000; DIRS 177294-MO0607USGSWNVD.000, all; DIRS 176325-USGS 2006, all; DIRS 182759-Converse Consultants 2007, all; DIRS 180887-Converse Consultants 2007, all; DIRS 177712-DTNMO0607NHDPOINT.000, all; DIRS 177710-MO0607NHDWBDYD.000; DIRS 182898-NDWR 2007, all; DIRS 182899-NDWR 2007, all; and DIRS 182900-NDWR 2007, all. An initial screening process to identify existing wells within 1.6 kilometers (1 mile) of the centerlines of the respective alternative segments, or within 1.6 kilometers of DOE-proposed new water-supply wells. As described later in this section, before analyzing potential impacts to groundwater resources, DOE extended the search radius for identifying existing beneficial-use wells and springs up to 2.4 kilometers (1.5 miles) away from a proposed new well if the initial search for such wells or springs within 1.6 kilometers (1 mile) did not reveal the presence of any such wells or springs. Additionally, on a case-by-case basis (see Section 4.3.6 and Appendix G) for a selected set of new groundwater withdrawal wells specifically targeted for installation within a fault zone or an extensive fracture zone, DOE identified the locations of existing wells and springs up to 9.7 kilometers (6 miles) away from each such proposed well (to address the possibility of fault zones or extensive fracture zones acting as conduits for groundwater flow).

Information for completing this compilation included well-log data and water-rights information obtained from the NDWR. NDWR well-log database entries and water-rights database information include a general and legal description of the location of existing wells, along with *borehole* and well completion information, well testing data (if available), and information on the appropriated water right (diversion rate and/or annual duty). The NDWR water-rights database includes data on the locations, manner of use, and appropriations status of wells having appropriated water rights in Nevada. The USGS website generally includes site information (for example, well location coordinates, elevation, depth) and water-level data. DOE eliminated from consideration in the impacts analysis wells in the NDWR well-log database and the NDWR water-rights database that did not have appropriated water rights or were not domestic wells (such as abandoned or plugged wells, monitoring wells, thermal gradient test wells, oil or gas exploration or groundwater investigation wells). DOE considered all USGS-identified wells.

The compiled well locations had varying levels of accuracy. For example, well locations recorded in the NDWR water-rights database are generally considered to be at the center of each 0.16-square-kilometer (40-acre) parcel representing each quarter-quarter section. Additionally, the well driller might have mapped the well incorrectly, or a well might have been inadvertently recorded in the NDWR water-rights database in the wrong hydrographic area (for example, for wells very near a hydrographic area boundary). Figures 3-190 through 3-196 identify well locations within 1.6 kilometers (1 mile) of the centerline of the Mina rail alignment or proposed wells. As a result of the characteristics of the well location specifications, there might be more than one existing well at some locations on these figures. Table 3-114 lists hydrographic areas the Mina rail alignment would cross and the corresponding number of wells within 1.6 kilometers (1 mile) of the centerline of the rail alignment.

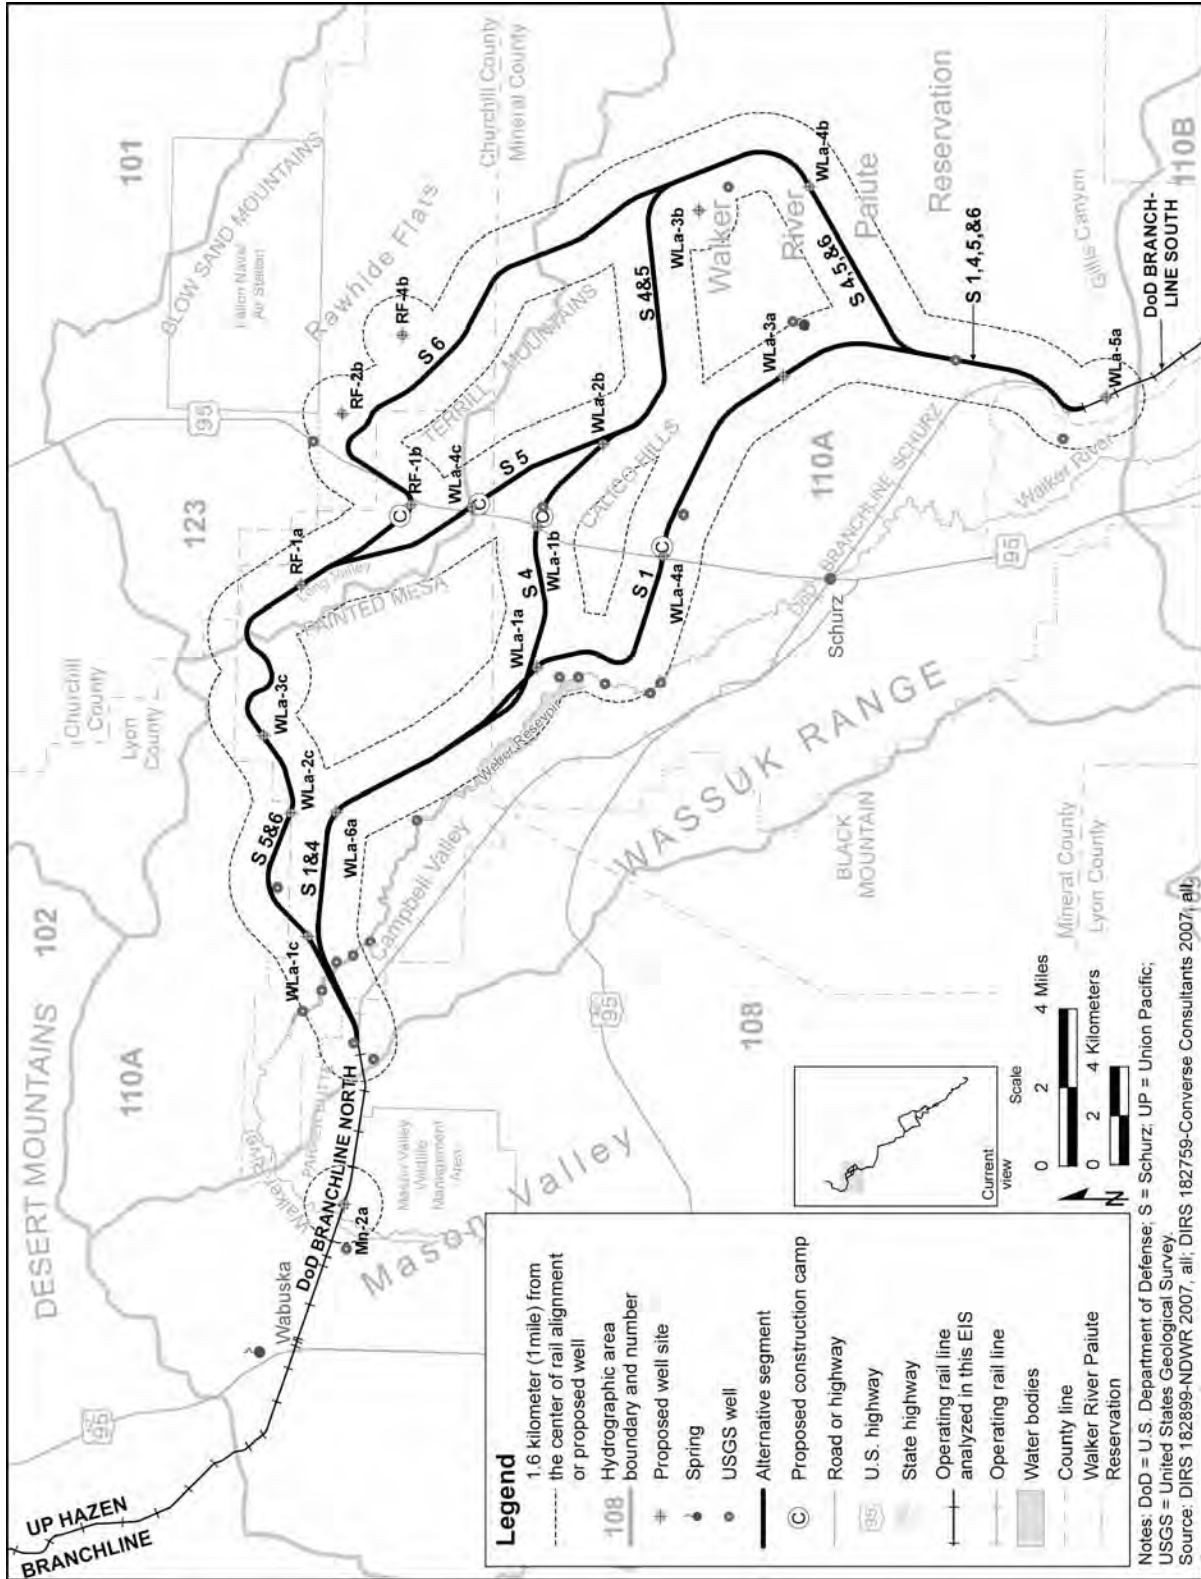


Figure 3-190. Proposed wells and existing USGS and NDWR wells and springs within map area 1.

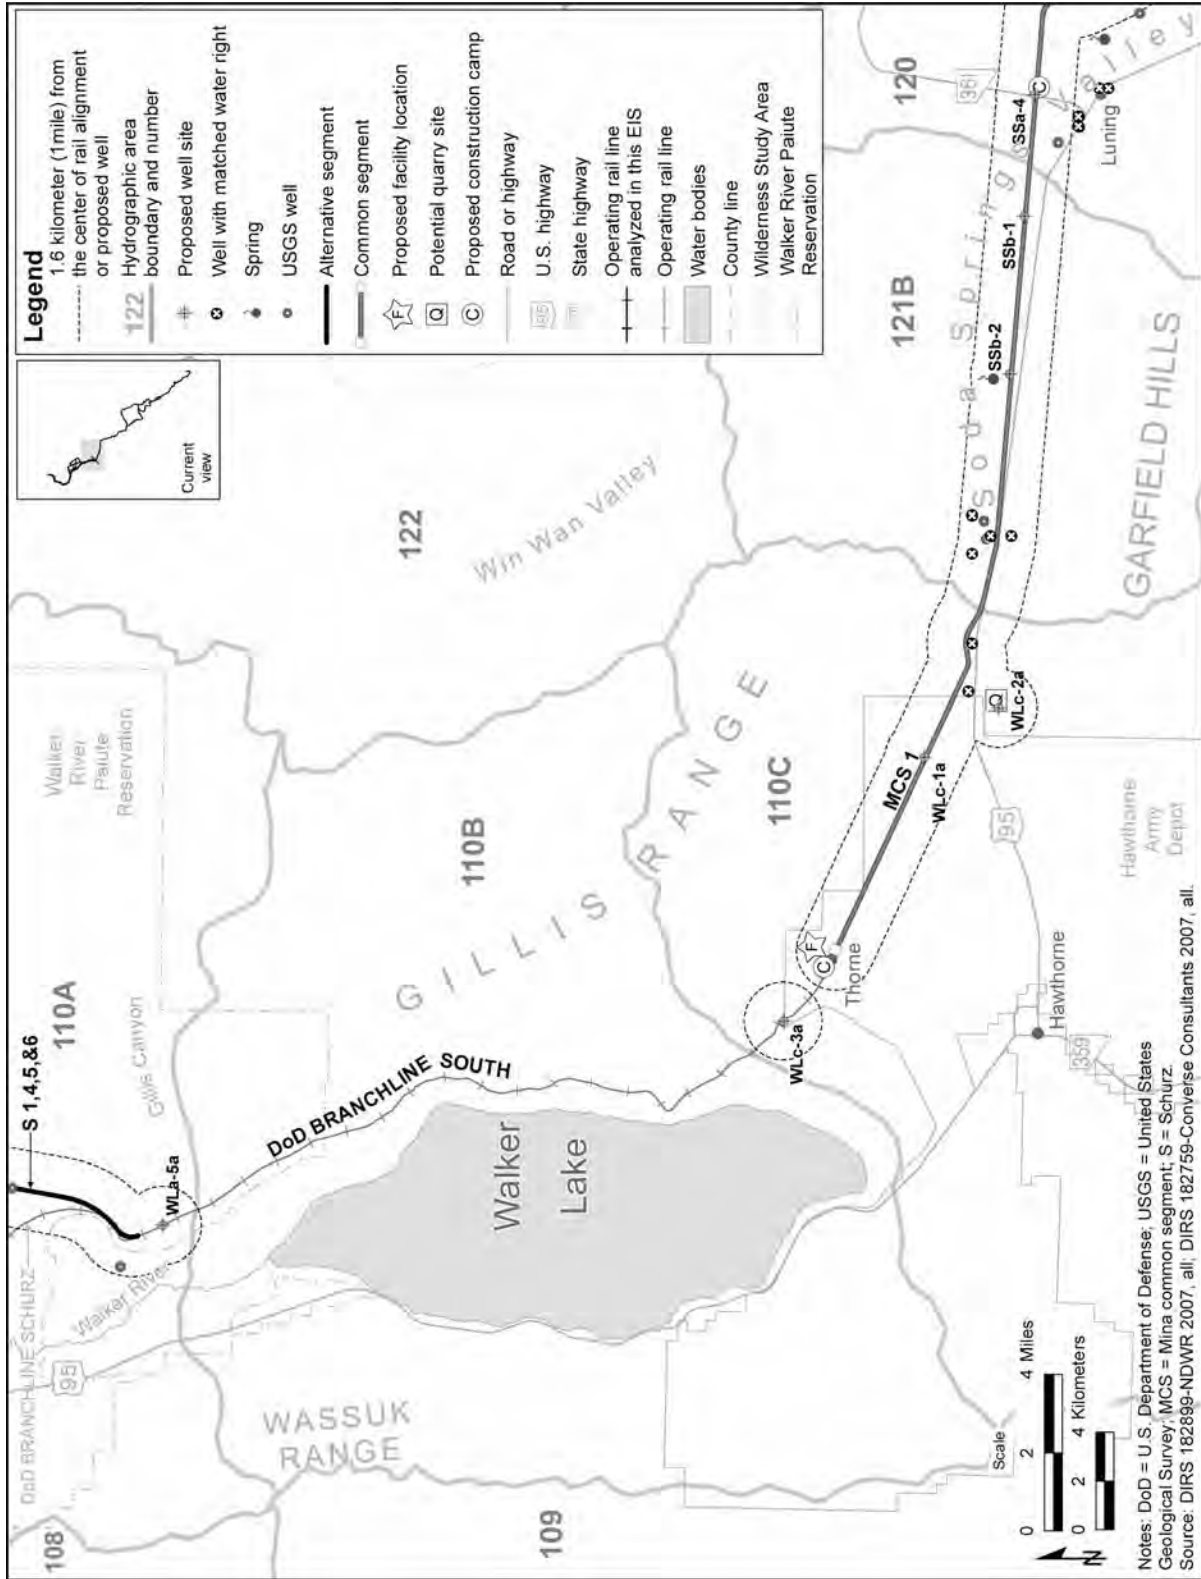


Figure 3-191. Proposed wells and existing USGS and NDWR wells and springs within map area 2.

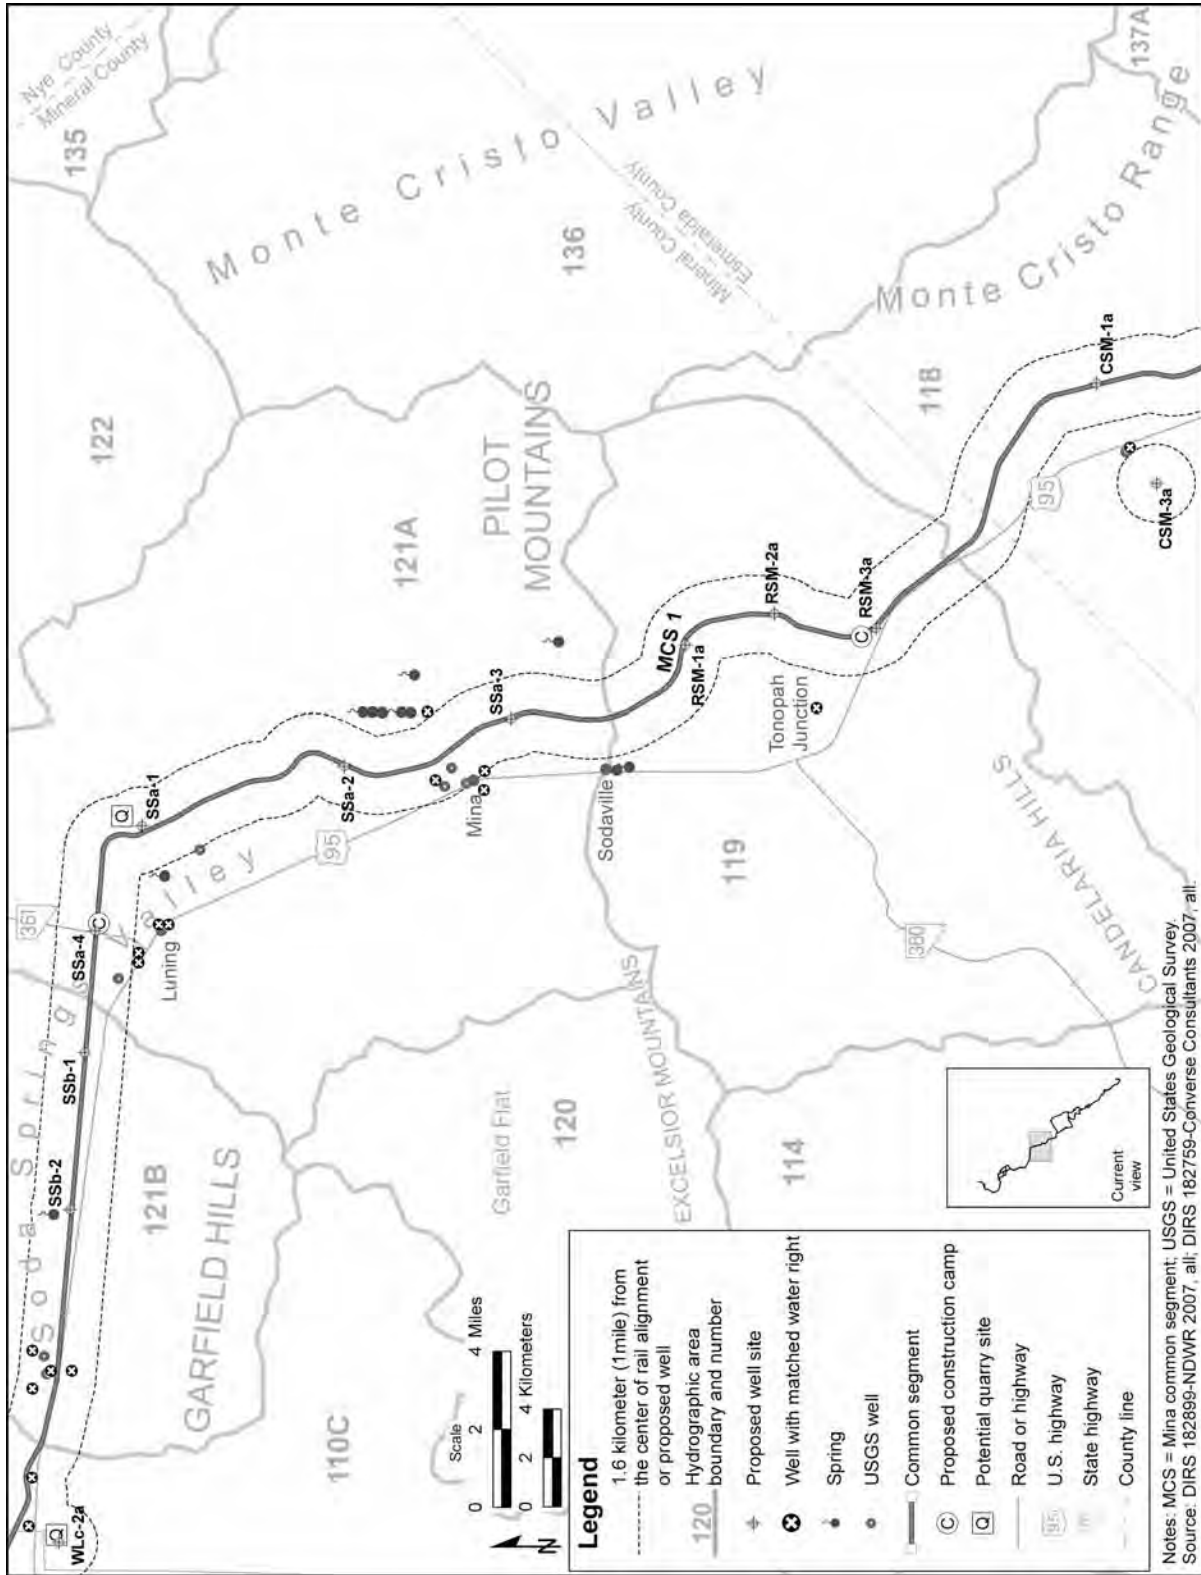


Figure 3-192. Proposed wells and existing USGS and NDWR wells and springs within map area 3.

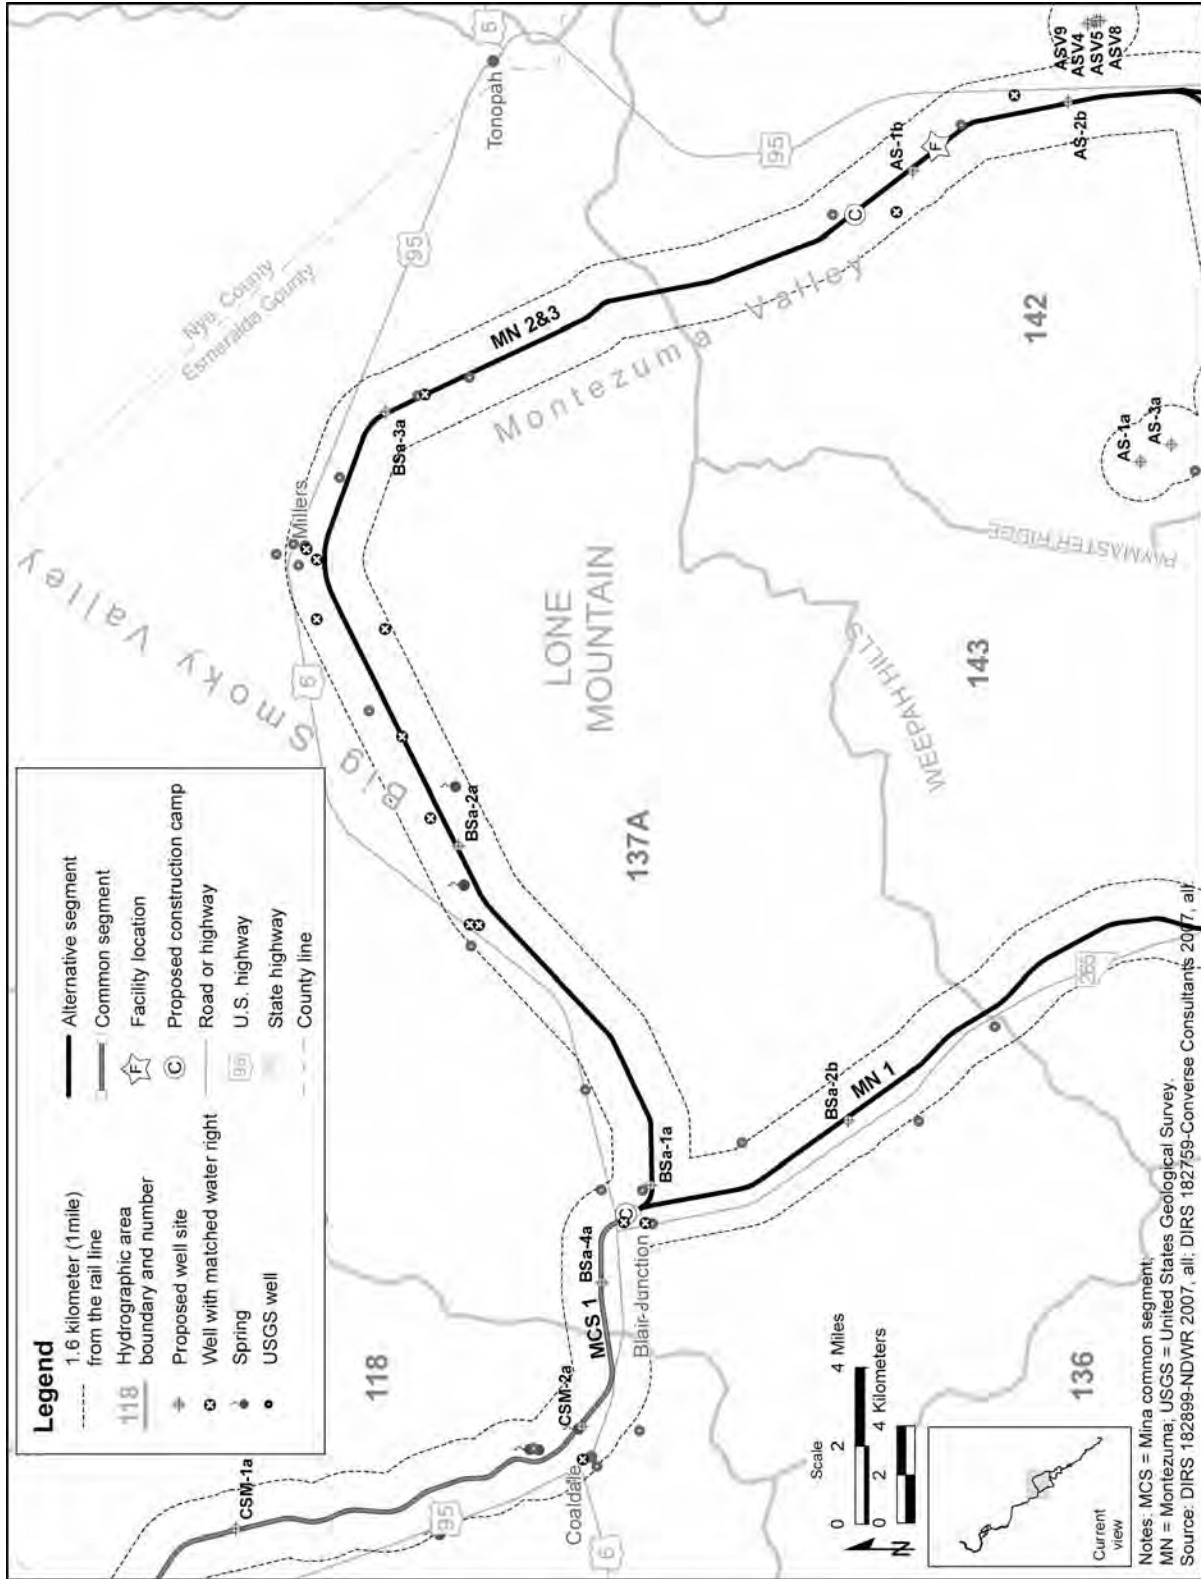


Figure 3-193. Proposed wells and existing USGS and NDWR wells and springs within map area 4.

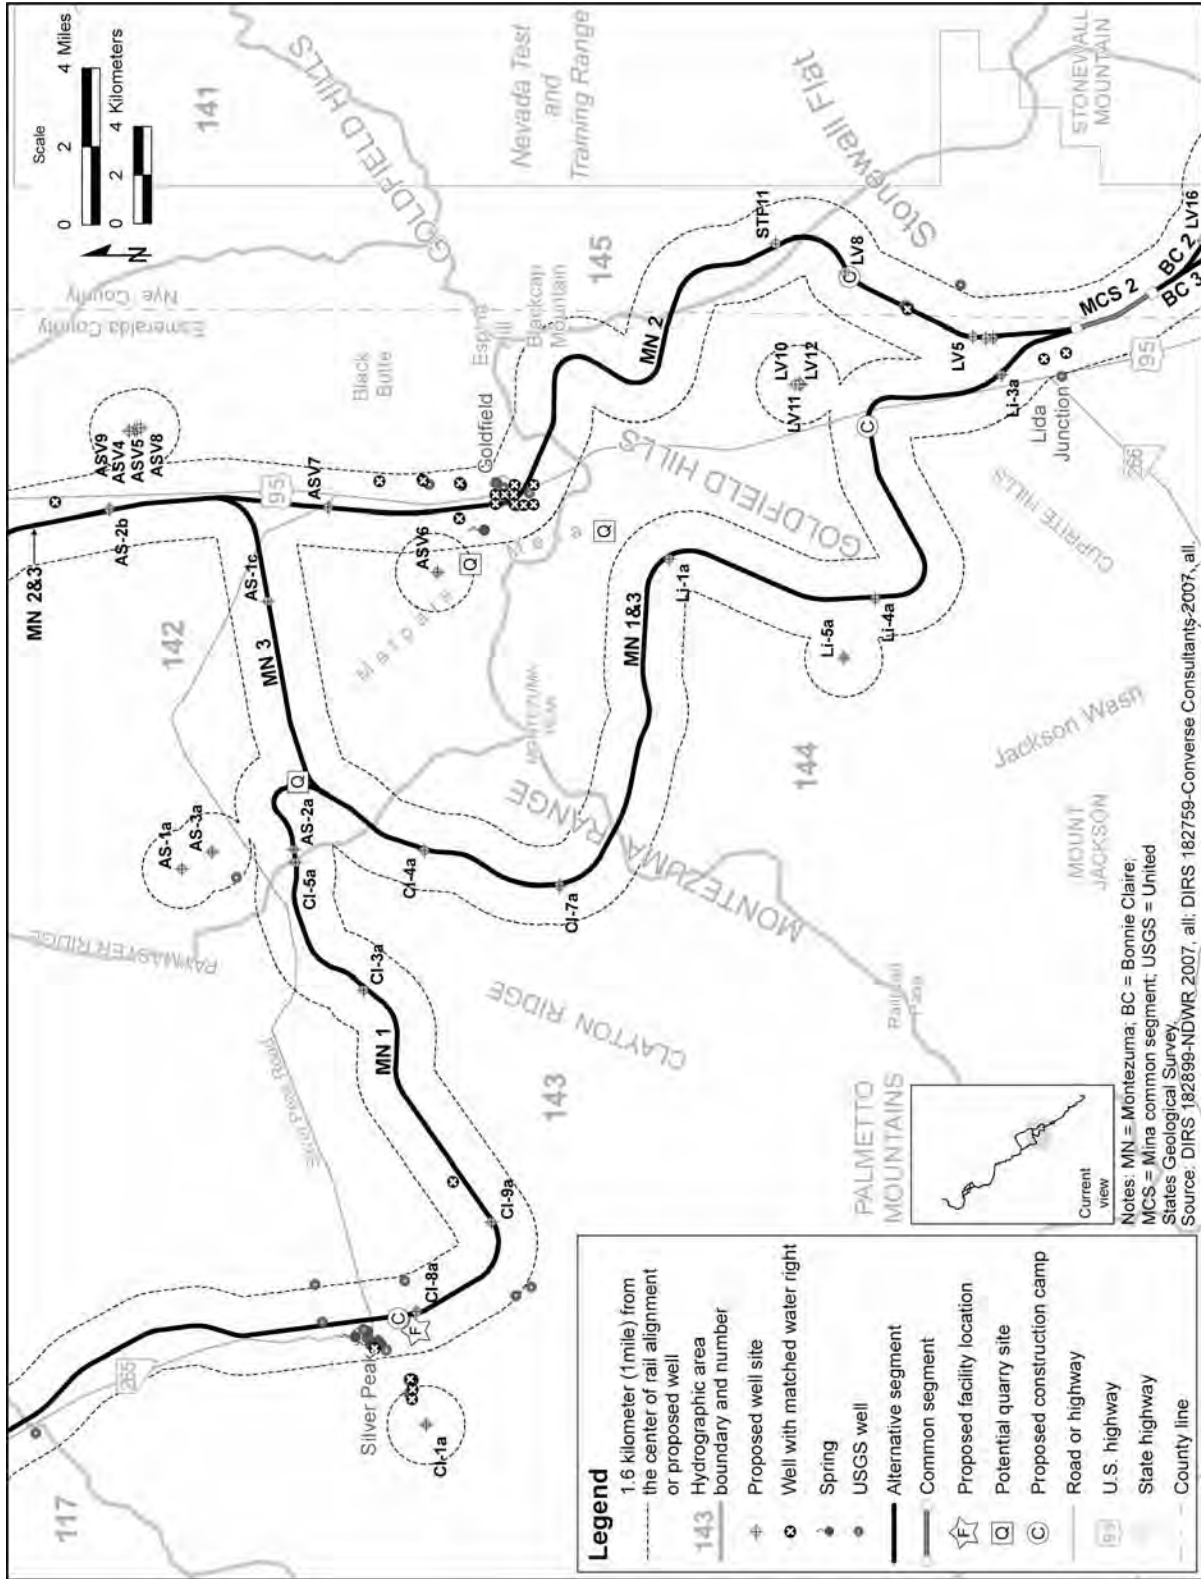


Figure 3-194. Proposed wells and existing USGS and NDWR wells and springs within map area 5.

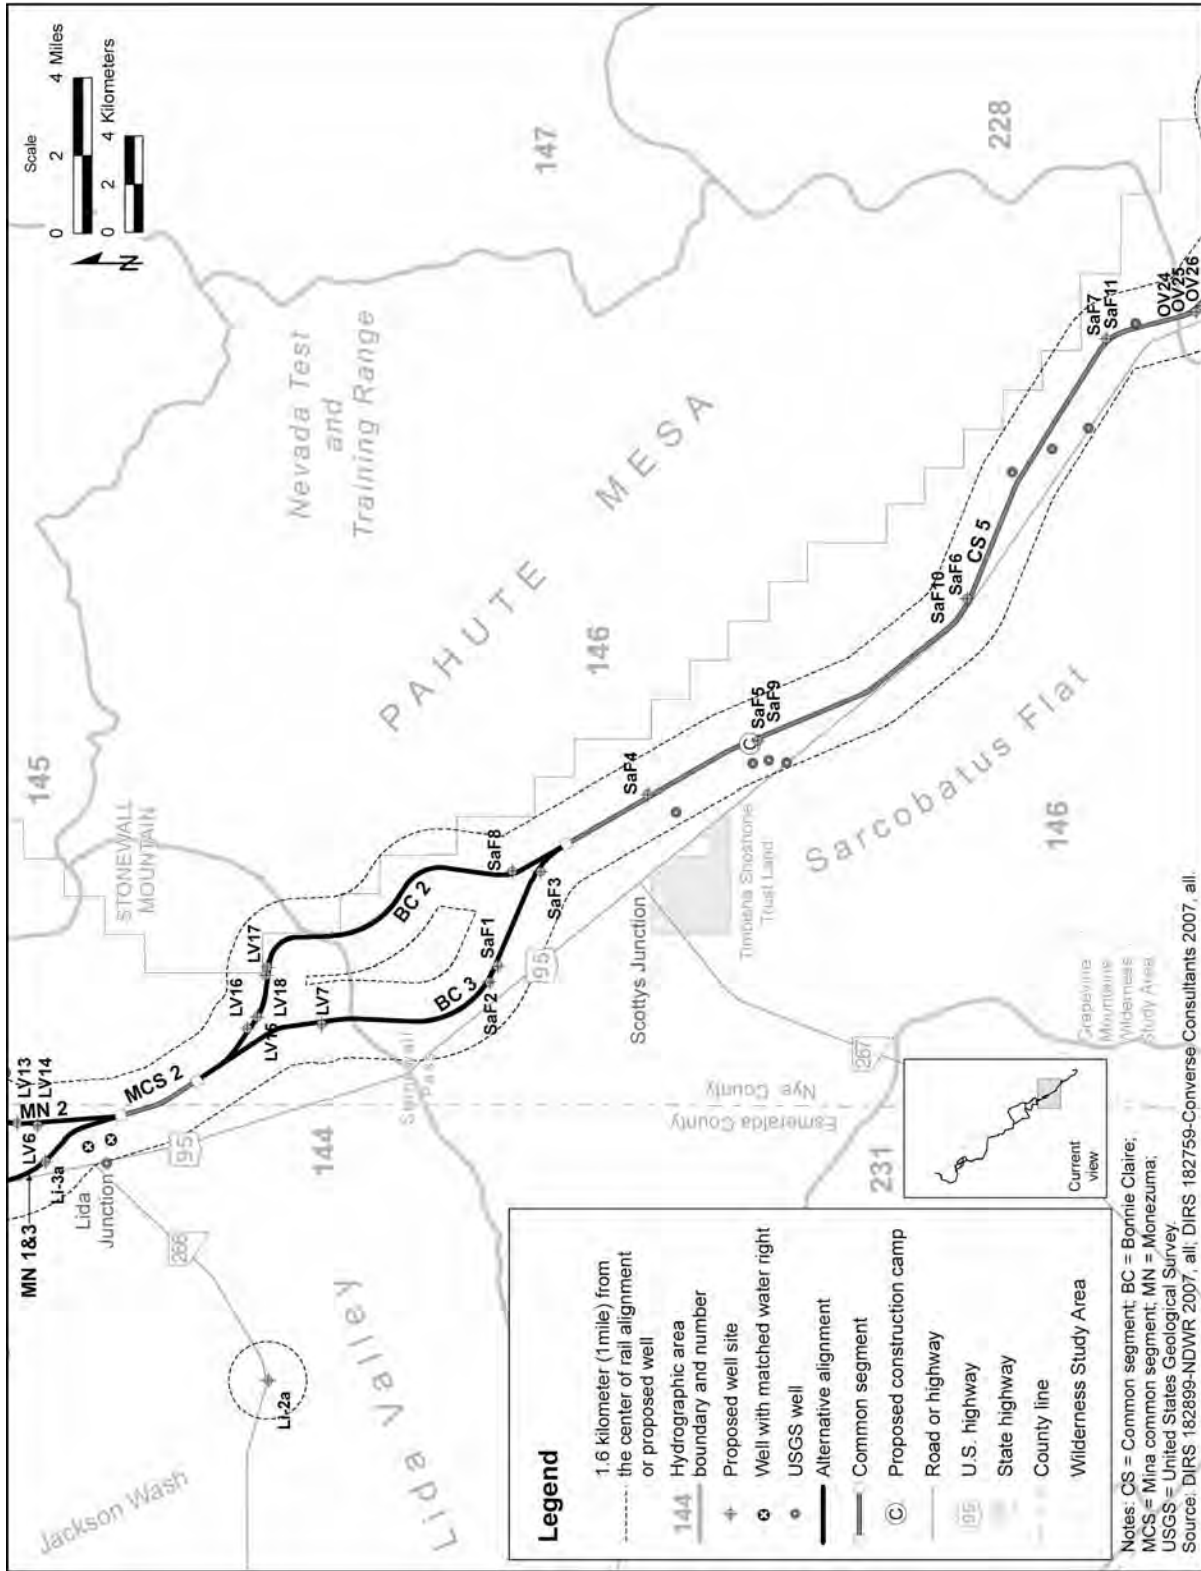


Figure 3-195. Proposed wells and existing USGS and NDWR wells and springs within map area 6.

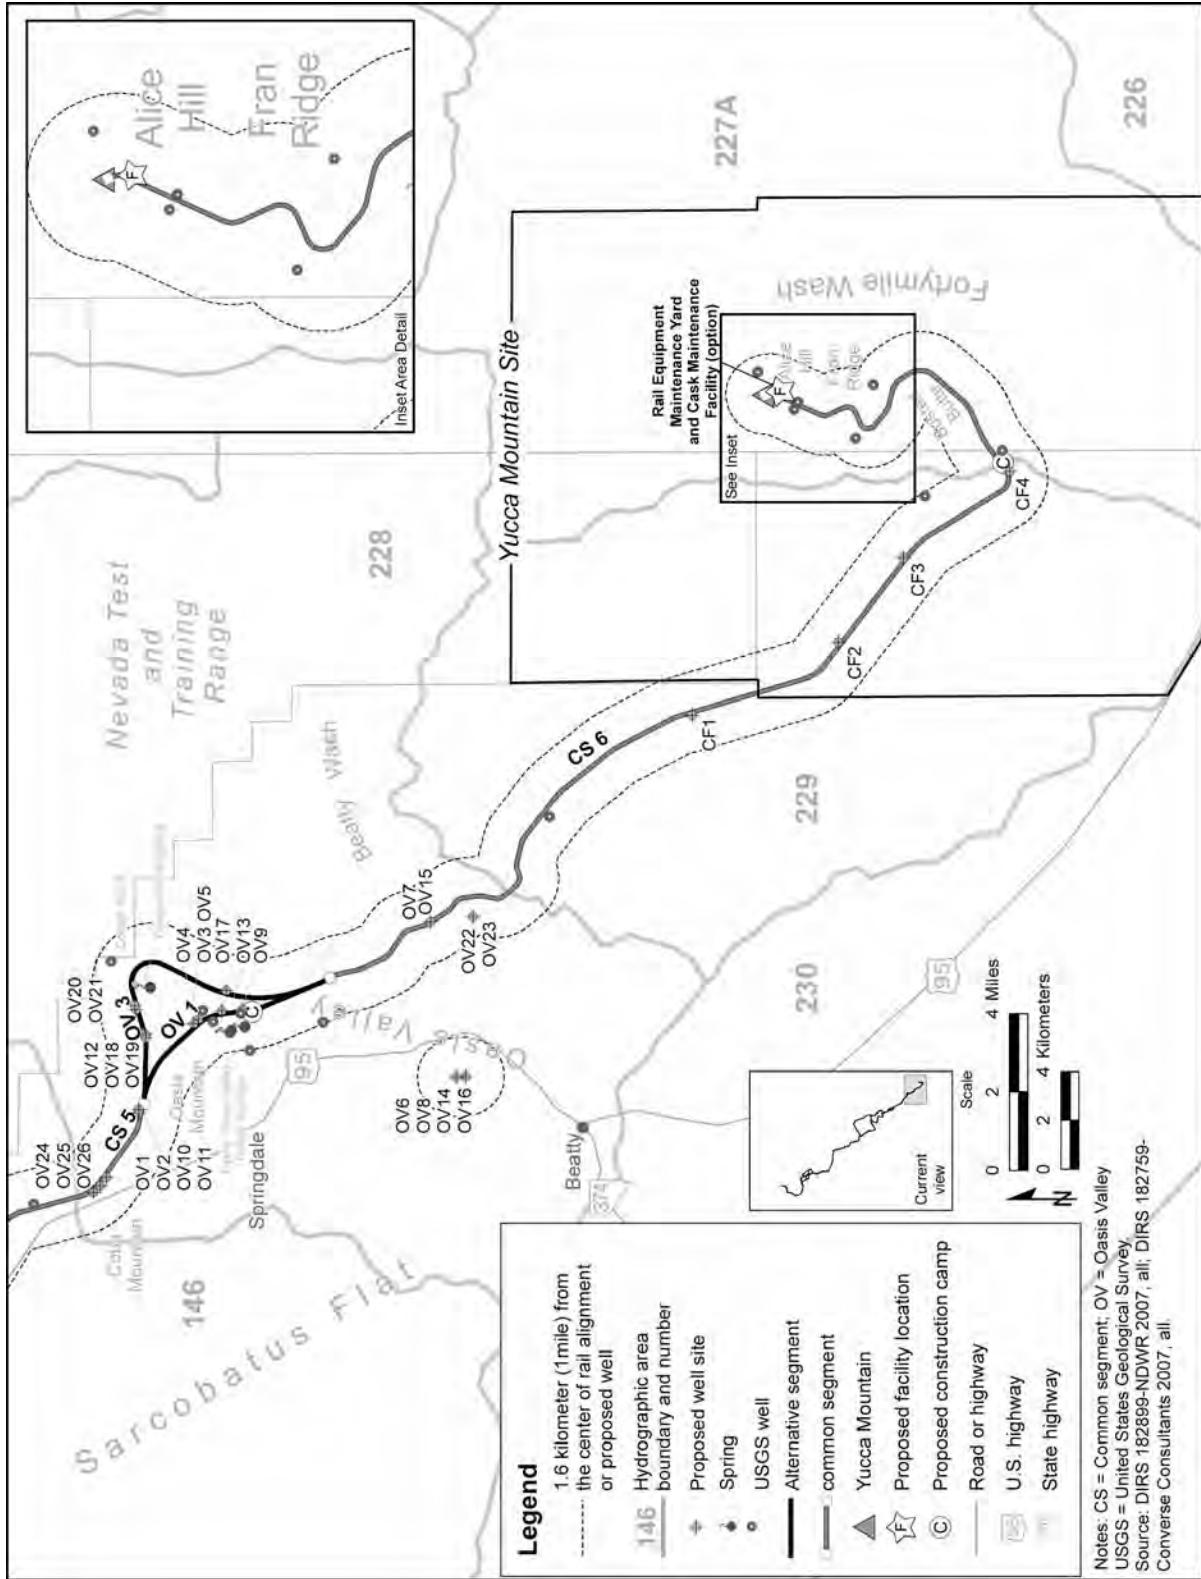


Figure 3-196. Proposed wells and existing USGS and NDWR wells and springs within map area 7.

Table 3-114. Existing wells and proposed new water-supply wells within 1.6 kilometers^a of the centerline of the Mina rail alignment by hydrographic area and/or within 1.6 kilometers of proposed new wells outside the rail line construction right-of-way.

Hydrographic area		Total number of wells and number of NDWR ^b wells with water rights by proposed-use category ^{c,d}												
Name	Area number	Number of wells ^{e,f}	C	G	H	I	K	N	P	S	X	Z		
Mason Valley	108	0	0	0	0	0	0	0	0	0	0	0		
Walker Lake Valley (Schurz subarea)	110A	32	0	0	0	0	0	0	0	0	0	0		
Walker Lake Valley (Lake subarea)	110B	0	0	0	0	0	0	0	0	0	0	0		
Walker Lake Valley (Whiskey Flat-Hawthorne subarea)	110C	2	2	0	0	0	0	0	0	0	0	0		
Rawhide Flats	123	1	0	0	0	0	0	0	0	0	0	0		
Soda Springs Valley (western part)	121B	7	0	0	0	0	4	0	0	1	0	0		
Soda Springs Valley (eastern part)	121A	14	0	0	2	0	3	0	3	0	0	1		
Rhodes Salt Marsh Valley	119	1	0	0	0	1	0	0	0	0	0	0		
Columbus Salt Marsh Valley	118	5	0	0	0	0	0	0	1	1	0	0		
Big Smoky Valley	137A	25	0	0	0	0	2	0	1	10	0	0		
Clayton Valley	143	13	0	0	0	0	0	0	5	1	0	0		
Alkali-Spring Valley	142	36	0	0	0	1	5	0	13	5	0	0		
Lida Valley	144	6	0	0	1	0	1	0	0	2	0	0		
Stonewall Flat	145	0	0	0	0	0	0	0	0	0	0	0		
Sarcobatus Flat	146	10	0	0	0	1	0	0	1	0	0	0		
Oasis Valley	228	10	0	0	0	0	0	0	0	0	0	0		
Crater Flat	229	4	0	0	0	0	1	0	0	0	0	0		
Fortymile Canyon, Jackass Flats	227A	14	0	0	0	0	0	0	0	0	0	0		
Totals		180	2	0	3	3	16	0	24	20	0	1		

a. To convert kilometers to miles, multiply by 0.62137.

b. NDWR = Nevada Division of Water Resources.

c. C = commercial; G = monitoring wells; H = domestic; I = irrigation; K = mining and milling; N = industrial (includes those designated in the database as N for “industrial” and as J for “industrial-cooling”); P = municipal or quasi municipal; S = stock; X = other (includes those designated in the database as Z for “other,” R for “recreation,” and U for “unused”).

d. Proposed use categories are tabulated only for wells (69 of the 180 wells) listed as NDWR wells with water rights, NDWR domestic wells or NDWR wells with an associated water rights application number.

e. Includes total number of NDWR-documented existing wells with water rights, plus NDWR domestic wells, plus U.S. Geological Survey National Water Information System-listed wells within 1.6 kilometers from the centerline of the rail alignment or within 1.6 kilometers of any DOE-proposed new groundwater-supply well. Note that the number of NDWR wells listed by proposed use category applies only to NDWR wells with water rights and NDWR domestic wells. U.S. Geological Survey wells are not included in the well counts, the Geological Survey NWIS database does not provide information regarding well use category.

f. Well locations have not been field-verified. Therefore, some of the identified wells might be farther than 1.6 kilometers from the centerline of the rail alignment or proposed new groundwater-supply wells.

Table 3-114 identifies the associated proposed-use category of the NDWR-cataloged wells (as defined in the State of Nevada well-log database). The USGS NWIS database does not categorize wells according to their use.

The distance of 1.6 kilometers (1 mile) reflects the first two of three aspects considered in establishing the groundwater region of influence, as described in Section 3.3.6.1. The wells identified in these figures were compiled from information provided in the *Water Resources Assessment Report, Mina Rail Corridor* and an NDWR Data Update Technical Memorandum (DIRS 180887-Converse Consultants 2007, all; and DIRS 182759-Converse Consultants 2007, all) and databases administered by the NDWR and the USGS NWIS. DOE would field-verify the locations of wells that could be affected during rail line construction before starting construction activities.

DOE-compiled well data include data on well locations for well records coded as “new” or “replacement” wells in the Nevada well-log database. Because each entry in the well-log database represents an event at a well site (for example, installation, re-drilling, abandonment), there is a possibility that there is more than one record to represent a particular well. To preclude duplication, DOE summarized only records that identified wells as new or replacement. As a result of the characteristics of the well location specifications, there might be more than one existing well that plot at the same location on these figures.

Table 3-114 lists hydrographic areas the Mina rail alignment would cross and the corresponding number of NDWR wells with water rights and USGS wells within 1.6 kilometers (1 mile) of the centerline of the rail alignment, or within a 1.6-kilometer radius of any proposed new water well that would be outside the rail line construction right-of-way. Table 3-114 identifies the associated proposed-use category of the NDWR-cataloged wells with water rights (as defined in the State of Nevada well-log and water-rights databases). The USGS NWIS database does not categorize wells according to their use. For this reason, the existing USGS wells that are included on Figures 3-190 through 3-196 are not included in the well use categorization presented in Table 3-114.

As shown in Table 3-114, there are 180 NDWR wells with water rights and USGS NWIS wells within 1.6 kilometers (1 mile) of the centerlines of all of the Mina rail alignment segments (combined) and/or within 1.6 kilometers of proposed new groundwater-supply wells. For those hydrographic areas containing multiple (alternative) segments, the actual number of existing wells falling within 1.6 kilometers of the completed rail line within that hydrographic area would be less than the number listed in Table 3-114, since only one alternative segment or unique set of alignment segments would be constructed in that hydrographic area.

As part of the Proposed Action, DOE proposes to install a series of new wells within the nominal width of the rail line construction right-of-way to acquire water needed to support railroad construction and operation. In addition to these wells, DOE might install additional wells at selected locations outside this construction right-of-way to serve as alternative-use water wells, supplemental wells to be used in combination with other water wells installed within the construction right-of-way, or to support proposed quarry operations. The need for installing alternative-use or supplemental wells would be based on wells installed at or very near a certain water *demand* location within the construction right-of-way not being adequate for meeting construction or operations needs. The locations of the proposed new wells are depicted on Figures 3-190 through 3-196.

There are numerous existing wells in hydrographic area 108 that are not reflected in Table 3-114; however, except for construction of a new siding in this area, with installation of one associated new small-production rate well, there is no new construction planned along this portion of the Mina alignment (see Section 3.3.6.3.1). There are no existing wells with water rights, no USGS NWIS wells, and no springs within a 1.6-kilometer (1-mile) radius of this proposed new well. Most of the existing wells near the remaining alignment segments are in areas 142 and 137A. Table 3-114 lists public supply-municipal

(24 out of 69 NDWR-listed wells with water rights), stock-watering (20 of 69 NDWR-listed wells with water rights), and mining (16 of 69 NDWR-listed wells with water rights) as the predominant use categories for those NDWR-listed wells with water rights that are within the 1.6-kilometer distance from the Mina rail alignment or any proposed new groundwater-supply well location.

3.3.6.2.2 Groundwater-Quality Characteristics

Water quality in aquifers in Nevada varies with location (DIRS 106094-Harrill, Gates, and Thomas 1988, all). In the Basin and Range, total dissolved solids concentrations can range from less than 500 to more than 10,000 milligrams per liter (DIRS 172905-USGS 1995, all). In general, at hydrographic area margins and on the slopes of alluvial fans, groundwater quality is good. In discharge areas (such as playas) and other selected areas, groundwater quality can be brackish. However, groundwater in deeper alluvial valley-fill units underlying some playa areas can be of better quality (DIRS 172905-USGS 1995, all). Groundwater quality in the carbonate aquifers in southern and central Nevada, including total dissolved solids concentrations, is generally more uniform in character and with depth within the aquifer (DIRS 101167-Winograd and Thordarson, 1975, p. C103). Total dissolved solids concentrations in alluvial valley fill underlying the Mina rail alignment range from less than 500 to more than 10,000 milligrams per liter (mg/L), or approximately 500 to 10,000 parts per million (DIRS 172905-USGS 1995, Figure 70, with overlay of hydrographic area boundaries). The U.S. Environmental Protection Agency has set an aesthetic standard of 500 mg/L (approximately 500 parts per million) of total dissolved solids for drinking water (40 CFR Part 143). Water with a total dissolved solids concentration of 500 mg/L or less is regarded as acceptable and pleasing for general consumption. A secondary preferred drinking water standard for total dissolved solids concentrations of 500 mg/L per liter for public water supplies has been adopted for Nevada. If water supplies that meet the preferred standard are not available, the Maximum Contaminant Level of 1,000 mg/L is enforceable by the State of Nevada. At higher concentrations, general consumption issues (pertaining to hardness, deposits, color, staining, and salty taste) could develop, but the water could be used for other purposes (for example, agriculture or earthwork compaction as part of embankment construction). Another parameter of interest for gauging the quality of groundwater in Nevada is arsenic. A revised drinking water standard for arsenic (for water systems meeting certain specified criteria) of 0.010 mg/L became enforceable in January of 2006 (40 CFR 141.23).

3.3.6.3 Hydrogeologic Setting and Characteristics along Alternative Segments and Common Segments

3.3.6.3.1 Department of Defense Branchline North

The Mina rail alignment would commence with Department of Defense Branchline North, beginning near Fort Churchill, Nevada. The beginning of Department of Defense Branchline North would overlie a portion of Mason Valley (hydrographic area 108). Department of Defense Branchline North would then proceed eastward where it would cross into a small portion of the Walker Lake Valley-Schurz subarea (hydrographic area 110A) (Figure 3-190). Department of Defense Branchline North would predominately overlie alluvial valley fill (DIRS 180887-Converse Consultants 2007, pp. 89 and 101, and Plates 4-10 and 4-12).

Hydrographic area 108, Mason Valley, is a designated groundwater basin (see Table 3-113). Committed groundwater resources exceed estimated perennial yield of 30.8 million cubic meters (25,000 acre-feet). However, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 3.57 billion cubic meters (2.9 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 108 (DIRS 180754-Rush et al. 1971, all). NDWR data indicate that there are approximately 31.2 million cubic meters (25,269 acre-feet) of

documented pending annual duties (see Table 3-113) in area 108 (DIRS 182759-Converse Consultants 2007; data acquired on March 31, 2007).

Table 3-115 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 108. The depth at which groundwater occurs varies from less than 3 meters (10 feet) to approximately 30.5 meters (100 feet) below ground along the portion of Department of Defense Branchline North that would lie within hydrographic area 108. Groundwater is primarily produced from the valley-fill sediments (DIRS 180697-Huxel and Harrill 1969, p. 11). Geologic units in the Mason Valley area include alluvial sediments, altered sediments, altered volcanic rocks, and granitic rocks.

Table 3-115. General groundwater-quality and aquifer characteristics – Department of Defense Branchline North.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
108 Mason Valley	Alluvial sediments, altered sediments, altered volcanic rocks, and granitic rocks	3 to 30	Upper 30.5 meters of alluvium: 2.9 million ^f	Total dissolved solids: Less than 500 to 97,100 mg/L ^g Fluoride: 7.7 mg/L (north of Wabuska) ^g
110A Walker Lake Valley (Schurz subarea)	Alluvial valley fill, granitic rocks, volcanics, altered volcanic rocks	0 to 150	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 500 to 1,800 mg/L ^g Fluoride: 9.3 mg/L ^g

a. Source: DIRS 180887-Converse Consultants 2007, pp. 102 and 89.

b. To convert meters to feet, multiply by 3.2808.

c. Source: DIRS 180887-Converse Consultants 2007, Plates 4-11 and 4-12. The listed depth ranges generally apply to areas underlying the alignment segments; groundwater may be deeper in the southern part of hydrographic area 108 (DIRS 180887-Converse Consultants 2007, p. 102).

d. To convert from acre-feet to cubic meters, multiply by 1,233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 90 and 102.

One new well (Mn-2a) is proposed along Department of Defense Branchline North in hydrographic area 108 (Figure 3-190). This well would be a small-production rate (less than 3.8 liters [1 gallon] per minute) well, and would supply water to support operation of a proposed rail siding. DOE determined that there are no existing NDWR wells with water rights and no USGS NWIS wells within a 1.6 kilometer (1 mile)-radius of this proposed well location (DIRS 180888-Converse Consultants 2007, Appendix B and Plate 4-12).

Hydrographic area 110A, Walker Lake Valley-Schurz subarea, is not a designated groundwater basin (see Table 3-113). Committed groundwater resources do not exceed estimated perennial yield of 1.85 million cubic meters (1,500 acre-feet). There could be approximately 1.85 billion cubic meters (1.5 million acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 110A (DIRS 180754-Rush et al. 1971, all). NDWR data indicate that there are approximately 2,500 cubic meters (2 acre-feet) of documented pending annual duties (see Table 3-113) in area 110A.

Table 3-115 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 110A. The depth at which groundwater occurs throughout hydrographic area 110A varies from 0 meters (0 feet) to approximately 150 meters (499 feet), with most groundwater being less than 30.5 meters (100 feet) below ground. Depth to groundwater is generally 15 meters (50 feet) along the segments of Department of Defense Branchline North that would lie within and along hydrographic area 110A (DIRS 180887-Converse Consultants 2007, p. 89 and Plate 4-11). Groundwater is primarily produced

from the valley-fill sediments. Geologic units in hydrographic area 110A include alluvial sediments, volcanic and altered volcanic rocks, and granitic rocks.

There are no springs and no existing NDWR wells with water rights, and there is one USGS NWIS well within 1.6 kilometers (1 mile) of the centerline of Department of Defense Branchline North in hydrographic area 110A (see Figure 3-190). The land crossed by the short portion of Department of Defense Branchline North (and by the Schurz alternative segments [Section 3.3.6.3.2]) is part of the Walker River Paiute Reservation. There are existing wells on the Reservation rangeland for which there is currently no documentation or information on the wells on file at the Nevada Division of Water Resources. The Nevada Division of Water Resources Well Log and Water Rights Databases are therefore incomplete regarding existing wells present in hydrographic 110A (and in hydrographic area 123 [Section 3.3.6.3.2]). Therefore, DOE does not have a complete record of groundwater usage on the Reservation.

3.3.6.3.2 Schurz Alternative Segments

The Schurz alternative segments would overlie hydrographic area 110A and/or the western part of hydrographic area 123 (Rawhide Flats) as shown on Figure 3-190. These alternative segments would overlie various geologic materials, depending on the specific combination of alternative segments constructed, including alluvial valley-fill materials, volcanic rocks, altered volcanic rocks, and/or granitic rocks (DIRS 180887-Converse Consultants 2007, pp. 89 and 95 and Plates 4-10 and 4-11).

Section 3.3.6.3.1 describes the hydrogeologic characteristics of hydrographic area 110A, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the Schurz alternative segments. Table 3-115 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 110A.

Area 123 is not a designated groundwater basin. Committed groundwater resources do not exceed estimated perennial yield of 617,000 cubic meters (500 acre-feet) (see Table 3-113). There could be between approximately 74 and 666 million cubic meters (60,000 and 540,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 123 (DIRS 180754-Rush et al. 1971, all; DIRS 181394-Everett and Rush 1967, Table 6). NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in area 123. Table 3-116 summarizes general groundwater quality and aquifer characteristics in hydrographic area 123. The depth at which groundwater occurs in hydrographic area 123 varies from less than 15 to greater than 150 meters (less than 50 to greater than 500 feet).

The NDWR Water Rights database (DIRS 182899-NDWR 2007, all) does not include any wells for hydrographic area 123 (DIRS 180887-Converse Consultants 2007, p. 97). According to the NDWR records, there are a total of approximately 2,500 cubic meters (2 acre-feet) in pending annual duties assigned to hydrographic area 110A and no pending annual duties assigned to hydrographic area 123 (see Table 3-113). Similar to the case for hydrographic area 110A as discussed in Section 3.3.6.3.1, land across which Schurz alternative segments would cross in hydrographic area 123 is part of the Walker River Paiute Reservation and therefore the NDWR Well Log and Water Rights Database is incomplete with respect to existing wells that exist in hydrographic area 123. For example, the NDWR Well Log Database has no record of any existing wells in hydrographic area 123, whereas information in a published historical report (DIRS 181394-Everett and Rush 1967, Table 4-9) provide data on two wells in that area (DIRS 180887-Converse Consultants 2007, Table 4-44).

Table 3-116. General groundwater-quality and aquifer characteristics – Schurz alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
110A Walker Lake Valley (Schurz subarea)	Alluvial valley fill, granitic rocks, volcanic rocks, altered volcanic rocks	0 to 140	Upper 30.5 meters: 1.5 million ^f	Total dissolved solids: 500 to 1,800 mg/L ^g Fluoride: 9.3 mg/L ^g
123 Rawhide Flats	Alluvial valley fill and volcanic rocks	Less than 15 to more than 150	Upper 30.5 meters for both aquifer types: 60,000 to 540,000 ^{f,h}	Total dissolved solids: 300 to 1,660 mg/L ^g Sulfate: 52 mg/L ^g Fluoride: 7.9 mg/L ^g
110A Walker Lake Valley (Schurz subarea)	Alluvial valley fill, granitic rocks, volcanic rocks, altered volcanic rocks	0 to 14	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 500 to 1,800 mg/L ^g Fluoride: 9.3 mg/L ^g

a. Source: DIRS 180887-Converse Consultants 2007 pp. 90 and 96.

b. The listed depth ranges generally apply to areas underlying the alternative segments (DIRS 180887-Converse Consultants 2007, Plates 4-10 and 4-11); groundwater can vary over a wide range of depth depending on location in each hydrographic area (DIRS 180887-Converse Consultants 2007, p. 90).

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 90 and 96.

h. Source: DIRS 181394-Everett and Rush 1967, Table 6.

Three wells (RF-2b, RF-4b, and WLa-3b) could be installed in hydrographic area 123 at locations outside of the construction rights-of-way for the various alternative segments (Figure 3-190). Geologic materials underlying these potential well locations are comprised of alluvial slope and alluvial valley-fill materials (DIRS 180888-Converse Consultants 2007, Appendix B and Plate 4-11).

3.3.6.3.3 Department of Defense Branchline South (Walker Lake Valley Area)

Department of Defense Branchline South would overlie the southern part of hydrographic area 110A, continue southward across hydrographic area 110B (Walker Lake Valley – Lake subarea), and cross over a small portion of the northwestern part of hydrographic area 110C (Walker Lake Valley, Whiskey Flat-Hawthorne subarea).

Section 3.3.6.3.1 describes the hydrogeologic characteristics of hydrographic area 110A, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the proposed alignment segments. Table 3-115 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 110A.

Area 110B is not a designated groundwater basin. Committed groundwater resources exceed the estimated perennial yield of 860,000 cubic meters (700 acre-feet) (see Table 3-113). However, as noted previously, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 123 million cubic meters (100,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 110B. NDWR data indicate that there no documented pending annual duties (see Table 3-113) in area 110B.

Department of Defense Branchline South would cross alluvial valley fill in hydrographic area 110B. Adjacent mountain ranges in hydrographic area 110B are comprised primarily of volcanic rocks.

Groundwater quality within hydrographic area 110B varies according to location within the area (DIRS 180887-Converse Consultants 2007, Plate 4-10). Table 3-117 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 110B.

Groundwater depth underlying the alignment in hydrographic area 110B (see Table 3-117) is on the order of 15 meters (50 feet). Groundwater depths reported in three wells in hydrographic area 110C, between 4.5 and 8.9 kilometers (2.8 and 5.5 miles) south of the southern boundary of subarea 110B, range from 15 to 31 meters (50 to 103 feet).

Hydrographic area 110C, Walker Lake Valley (Whiskey Flat-Hawthorne subarea), is a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 6.17 million cubic meters (5,000 acre-feet) (see Table 3-113). There could be approximately 1.11 billion cubic meters (900,000 acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 110C. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in area 110C.

Geologic units in the Walker Lake Valley (Whiskey Flat-Hawthorne subarea) area include alluvial valley fill, granitic rock, volcanics, altered volcanics and chert (see Table 3-117). The depth to groundwater in Walker Lake Valley (Whiskey Flat-Hawthorne subarea) near the proposed rail line is 15 to 150 meters (50 to 500 feet) (see Table 3-117). The primary source of groundwater in 110C is from unconfined aquifers of alluvial valley fill. Table 3-117 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 110C.

Most groundwater in hydrographic area 110C is a sodium sulfate type (DIRS 181394-Everett and Rush 1967, p. 32). The Hawthorne Army Depot property covers most of the Whiskey Flat-Hawthorne area. Contaminants have been reported in some groundwater monitoring wells underlying the Hawthorne Army Depot property, including explosives, volatile organic compounds, and inorganic nitrogen compounds. Areas of known impacted groundwater underlying the Hawthorne Army Depot property are approximately 4.5 kilometers (2.8 miles) to the west and southwest of the centerline of Department of Defense Branchline South and approximately 3.2 kilometers (2 miles) to the west and southwest of the centerline of Mina common segment 1 (DIRS 182749-Tetra Tech EM Inc., 2007 Figure 5).

Available information indicates that the groundwater flow direction in the areas of identified **contamination** and underlying the land surface between these areas and adjacent to Department of Defense Branchline South and Mina common segment 1 is westward to southwestward (DIRS 182749-Tetra Tech EM Inc., 2007, Figures 4A and 4B). On the basis of the groundwater flow directions underlying these areas and the distances to the proposed alignment and the impacted wells on the Hawthorne Army Depot property, it is extremely improbable that new wells installed within the rail alignment construction right-of-way to support construction of the proposed railroad (for example, well WLC-3a on Figure 3-191) would encounter the identified contaminated groundwater.

One new well (location WLa-5a) is proposed within hydrographic area 110A to support water needs associated with railroad construction and operation of a new rail siding. Figures 3-190 and 3-191 show the approximate location of this proposed new water well.

Available information indicates that there are no springs, no existing NDWR wells with water rights, and no USGS NWIS wells within 1.6 kilometers (1 mile) of the centerline of Department of Defense Branchline South or within 1.6 kilometers of the proposed new well location in hydrographic area 110A (see Figures 3-190 and 3-191).

Table 3-117. General groundwater-quality and aquifer characteristics – Department of Defense Branchline South.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
110A Walker Lake Valley (Schurz subarea)	Alluvial valley fill, granitic rocks, volcanic rocks, altered volcanic rocks	0 to 14	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 500 to 1,800 mg/L ^g Fluoride: 9.3 mg/L ^g
110B Walker Lake Valley (Lake subarea)	Alluvial valley fill and volcanic rocks ^h	15 to 31	Upper 30.5 meters for both aquifer types: 100,000 ^f	Total dissolved solids: 742 mg/L ⁱ Sulfate: 92 to 383 mg/L ⁱ Fluoride: 0 to 1.6 mg/L ⁱ
110C Walker Lake Valley (Whiskey Flat-Hawthorne subarea)	Alluvial valley fill, granitic rocks, volcanics, altered volcanics, chert	15 to 150	Upper 30.5 meters of alluvium: 900,000 ^f	Total dissolved solids: 191 to 1,033 mg/L ^g Sulfate: 19 to 502 mg/L ^g Fluoride: 6.8 mg/L ^g

a. Source: DIRS 180887-Converse Consultants 2007, pp. 82 and 90.

b. Estimated depth to groundwater obtained from DIRS 180887-Converse Consultants 2007, pp. 89 and 90 and Plates 4-9 and 4-10, and based on water depths in three wells in adjacent hydrographic area 110C (DIRS 181394-Everett and Rush 1967, Table 9 and Plate 1). The listed depth range for hydrographic area 110B generally applies to valley floor areas underlying the general vicinity of the proposed alignment segment; groundwater depths in other portions of hydrographic area 110B might be substantially different.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, p. 90.

h. Source: DIRS 182289-Ross 1961, Plate 2.

i. Source: DIRS 181394-Everett and Rush 1967, Table 8 and Plate 1; data are for a spring in hydrographic area 110A about 1.2 kilometers (0.75 mile) north of the subarea 110B boundary and a well 4.4 kilometers (2.75 miles) south of the subarea 110B boundary.

However, as discussed previously, the NDWR Well Log and Water Rights Databases are incomplete with respect to existing wells that might exist on the Walker River Paiute Reservation for this hydrographic area.

3.3.6.3.4 Mina Common Segment 1

Crossing from north to southeast, Mina common segment 1 would overlie hydrographic areas 110C (Walker Lake Valley, Whiskey Flat-Hawthorne subarea), 121B (Soda Spring Valley, western part), 121A (Soda Spring, eastern part), 119 (Rhodes Salt Marsh Valley), 118 (Columbus Salt Marsh Valley), and a small portion of hydrographic area 137A (Big Smoky Valley) (Figures 3-191 through 3-193). Mina common segment 1 would predominantly cross alluvial deposits. The depth to groundwater and groundwater-quality characteristics underlying Mina common segment 1 vary according to location within the hydrographic areas the rail line would cross. Table 3-118 summarizes the groundwater-quality and aquifer characteristics in the hydrographic areas Mina common segment 1 would cross.

Section 3.3.6.3.3 describes the hydrogeologic characteristics of hydrographic area 110C, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the proposed common segment. Table 3-116 and Table 3-117 summarize general groundwater-quality and aquifer characteristics in hydrographic area 110A.

Table 3-118. General groundwater-quality and aquifer characteristics – Mina common segment 1.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
110C Walker Lake Valley (Whiskey Flat-Hawthorne subarea)	Alluvial valley fill, granitic rocks, volcanics, altered volcanics, chert	15 to 150	Upper 30.5 meters of alluvium: 900,000 ^f	Total dissolved solids: 191 to 1,033 mg/L ^g Sulfate: 19 to 502 mg/L ^g Fluoride: 6.8 mg/L ^g
121B Soda Spring Valley (western part)	Alluvial valley fill, intrusive and metamorphic rock, minor clastic sandstones	15	Upper 30.5 meters for both aquifer types: 280,000 ^f	Total dissolved solids: Generally less than 500 to 1,170 mg/L ^g 6,500 mg/L (valley center discharge locations) ^g Sulfate: 350 to 372 mg/L ^g
121A Soda Spring Valley (eastern part)	Alluvial valley fill, intrusive and metamorphic bedrock units, and clastic sandstone	15 to 30	Upper 30.5 meters of alluvium: 430,000 ^f	Total dissolved solids: 200 to 1,250 mg/L ^g 6,500 mg/L (valley center discharge locations) ^g Sulfate: 82 to 744 mg/L ^g
119 Rhodes Salt Marsh Valley	Alluvial valley fill deposits, altered volcanics, chert, limestone, dolomite with interbedded zones of sandstone and conglomerates	15 to less than 30	Upper 30.5 meters of alluvium: 340,000 ^f	Total dissolved solids: 2,370 mg/L ^g Sulfate: 250 to 1,830 mg/L ^g
118 Columbus Salt Marsh Valley	Alluvial sediments, volcanic rocks and clastic rocks	3 to 30	Upper 30.5 meters of alluvium: 530,000 ^f	Total dissolved solids: 5,556 mg/L ^g Sulfate: 250 to 2,600 mg/L ^g
137A Big Smoky Valley	Alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, clastic rocks	Less than 3 to more than 30	Upper 30.5 meters of alluvium: 7 million ^f	Total dissolved solids: 300 to 4,000 mg/L ^g 6,500 mg/L (valley center discharge locations) ^g

a. Source: DIRS 180887-Converse Consultants 2007, pp. 81, 75, 68, 62, 56, and 51.

b. Estimated depth to groundwater obtained from DIRS 180887-Converse Consultants 2007, Plates 4-4 to 4-10 and pp. 51 and 52.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 52, 57, 58, 63, 70, 76, and 83.

Two potential quarry sites have been identified along Mina common segment 1 (Figure 3-191 and Figure 3-192). A new well is proposed at each potential quarry location. The first potential quarry site is in the northeast part of hydrographic area 110C (Walker Lake Valley, Whiskey Flat-Hawthorne subarea), approximately 2.1 kilometers (1.3 miles) south of the centerline of Mina common segment 1.

Proposed well WLC-2a would be installed adjacent to this quarry location. Geologic conditions found at this location include primarily volcanic rocks (DIRS 180881-Shannon & Wilson, Inc. 2007, p. 28). The

quarry and the quarry well would be located partially on grazing land and partially on the Hawthorne Army Depot (Section 4.3.2).

There are two existing wells in hydrographic area 110C, both NDWR wells with water rights and within 1.6 kilometers (1 mile) of the centerline of Mina common segment 1. One of these two wells is also within 1.6 kilometers of a proposed new well location (Figures 3-191 and 3-192). Figure 3-190 shows the locations of these wells. There are no springs within 1.6 kilometers of the centerline of Mina common segment 1 in hydrographic area 110C.

Hydrographic area 121B, Soda Spring Valley (western part), is a designated groundwater basin. Committed groundwater resources exceed its estimated perennial yield of 246,000 cubic meters (200 acre-feet) (see Table 3-113). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 345 million cubic meters (280,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 121B. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in the area.

The depth to groundwater in most parts of Soda Spring Valley (western part) ranges from approximately less than 15 to more than 90 meters (less than 50 to more than 300 feet) (DIRS 180887-Converse Consultants, p. 76). Depth to groundwater underlying the rail alignment in hydrographic area 121B is generally 15 meters (50 feet) (see Table 3-118) (DIRS 180887-Converse Consultants, Plate 4-8). Groundwater is generally low in dissolved solids with dominant ions of calcium and bicarbonate. The main use of groundwater in hydrographic area 121B is for mining (DIRS 180887-Converse Consultants, p. 77). The primary source of groundwater in Soda Spring Valley (western part) is inferred to be interbasin flow from the Soda Spring Valley-East Basin. Table 3-118 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 121B.

Geologic units in the Soda Spring Valley (western part) area include alluvial valley fill, metamorphic rocks, and clastic rocks. Alluvial valley fill comprises the best aquifers in hydrographic area 121B. There is an estimated 345 million cubic meters (280,000 acre-feet) of recoverable groundwater in the saturated aquifer material within this basin (see Table 3-118). There are a total of 7 existing NDWR wells with water rights and USGS NWIS wells in hydrographic area 121B within 1.6 kilometers (1 mile) of the centerline of Mina common segment 1 (see Table 3-114). Figures 3-191 and 3-192 identify the locations of these wells. There are no springs within 1.6 kilometers of the centerline of Mina common segment 1 or proposed new well locations outside of the segment construction right-of-way.

Hydrographic area 121A, Soda Spring Valley (eastern part), is a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 7.4 million cubic meters (6,000 acre-feet) (see Table 3-113). There could be approximately 530 million cubic meters (430,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 121A. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in area 121A.

Geologic units underlying the Soda Spring Valley (eastern part) hydrographic area include alluvial valley fill, intrusive and metamorphic bedrock units, and clastic sandstone (see Table 3-118). Mina common segment 1 would primarily overlie alluvial valley (alluvial valley floor and alluvial slope) deposits. Table 3-118 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 121A.

Faulting is mapped predominantly on the alluvial aprons in hydrographic area 121A. Mapped fault traces (for example, part of the Benson Springs fault system) in alluvial valley fill to the south of one proposed new well site (SSa-3, see Figure 3-192) could project northeastward past the well location to the east; faults are also identified along the alluvial apron at the bedrock contact to the east (base of the Pilot

Mountains), about 1.6 kilometers (1 mile) east of this proposed well location (DIRS 180888-Converse Consultants 2007, Appendix B; DIRS 180975-Stewart, Carlson, and Johannessen 1982, all). The possible effects of such faults on groundwater flow in hydrographic area 121A in the vicinity of proposed well location SSa-3 (DIRS 180888-Converse Consultants 2007, Appendix B) were evaluated in hydrogeologic impact analyses (Appendix G).

The depth to groundwater beneath Soda Spring Valley (eastern part) is generally between 15 to 30.5 meters (50 to 100 feet) (see Table 3-118). Available data regarding characteristics of the valley-fill aquifer underlying hydrographic area 121A indicate that approximately 530 million cubic meters (430,000 acre-feet) of recoverable groundwater might exist within saturated aquifer material within this basin (see Table 3-118).

A second potential quarry location is in the Gabbs Range northeast of Luning along the northeastern side of Mina common segment 1. Proposed well location SSa-1 is adjacent to this potential quarry site. The geology in this area consists of sedimentary and plutonic rocks (DIRS 180881-Shannon & Wilson, Inc. 2007, p. 28). The quarry and the quarry well would be located on grazing land (Section 4.3.2).

There are a total of 14 existing NDWR wells with water rights and USGS NWIS wells in hydrographic area 121A within 1.6 kilometers (1 mile) of either the centerline of Mina common segment 1 or any proposed new well outside of the segment construction right-of-way (see Table 3-118). There are no springs in hydrographic area 121A within 1.6 kilometers of the centerline of Mina common segment 1 or any proposed new well outside of the segment construction right-of-way.

Hydrographic area 119, Rhodes Salt Marsh Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 1.23 million cubic meters (1,000 acre-feet) (see Table 3-113). There could be approximately 420 million cubic meters (340,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 119. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in hydrographic area 119.

In the portion of hydrographic area 119 the rail line would cross, groundwater is approximately 15 meters (50 feet) to less than 30 meters (100 feet) below ground surface (see Table 3-118). Groundwater chemistry within hydrographic area 119 is highly variable. Groundwater is primarily obtained from the alluvial valley-fill aquifer. The primary geologic units comprising Rhodes Salt Marsh Valley include alluvial valley fill, volcanic rocks, and older carbonate and clastic rocks. There is one NDWR well with a water right, and no other USGS NWIS wells within 1.6 kilometers (1 mile) of the centerline of Mina common segment 1 or any proposed new well locations outside of the centerline (see Table 3-114). There are no springs in hydrographic area 119 within 1.6 kilometers of the centerline of Mina common segment 1 or within 1.6 kilometers of any proposed new well locations outside of the centerline (Figure 3-192). There are two existing springs in Sodaville, just north of hydrographic area 119 (Figure 3-192). These springs have documented discharge rates of approximately 280 liters (75 gallons) per minute but are more than 3.2 kilometers (2 miles) from the centerline of Mina common segment 1 (DIRS 180759-Vandenburgh and Clancy, p. 28 and Plate 1). Table 3-118 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 119.

Hydrographic area 118, Columbus Salt Marsh Valley, is not a designated groundwater basin. Committed groundwater resources do not exceed its estimated perennial yield of 4.9 million cubic meters (4,000 acre-feet) (see Table 3-113). There could be approximately 650 million cubic meters (530,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 118. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in area 118.

Groundwater derived within area 118 is primarily obtained from alluvial valley fill. Table 3-118 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 118.

The primary geologic units comprising Columbus Salt Marsh Valley are alluvial sediments, volcanic rock, and clastic rocks (see Table 3-118). Available data indicate that depth to groundwater beneath Mina common segment 1 in hydrographic area 118 could vary from about 3 to 30.5 meters (10 to 100 feet) (see Table 3-118).

There are two NDWR wells with water rights, three USGS NWIS wells, and four springs in hydrographic area 118 within 1.6 kilometers (1 mile) of the centerline of Mina common segment 1. Figure 3-192 shows the locations of the wells.

Big Smoky Valley (hydrographic area 137A) is a designated groundwater basin, and the committed groundwater resources exceed the perennial yield of 7.4 million cubic meters (6,000 acre-feet). There could be approximately 8.63 billion cubic meters (7 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 137A. NDWR data indicate that there are no documented pending annual duties (see Table 3-113) in area 137A. Geologic units in this hydrographic area include primarily alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, and clastic rocks (see Table 3-118). The alluvial valley-fill materials include sands and gravels along alluvial fans and washes, and silts and clays along the valley floor; most of the available groundwater in Big Smoky Valley is found in unconfined and semi-unconfined aquifers comprised of these valley-fill sediments.

Depth to groundwater in hydrographic area 137A typically varies from less than 3 to greater than about 30.5 meters (10 to 100 feet) below ground surface (see Table 3-118), with values as deep as 220 meters (720 feet) below ground surface reported for some locations in the alluvial apron. Groundwater in hydrographic area 137A contains dominant ions of calcium and bicarbonate, and groundwater at higher elevations has total dissolved solids concentrations that are relatively low (500 mg/L or less), although discharge areas in the center of the valley may have higher concentrations (see Table 3-118) (DIRS 180887-Converse Consultants 2007, p. 52).

Groundwater in Big Smoky Valley is mainly used for irrigation and mining purposes (DIRS 180887-Converse Consultants 2007, p. 53). Besides groundwater pumping and evapotranspiration, groundwater in the basin flows out of the area as subsurface outflow to Clayton Valley and Columbus Salt Marsh.

There are 25 existing wells in hydrographic area 137A within 1.6 kilometers (1 mile) of the centerline of alternative segments passing through this basin and/or proposed pumping well locations for alternative segments. Twelve of these wells are USGS wells and thirteen are NDWR wells with active water rights. There are no springs within 1.6 kilometers of the centerline of the rail alignment and/or proposed pumping well locations. There are no proposed groundwater supply-well locations in Big Smoky Valley for Mina common segment 1 that are outside of the construction right-of-way (Figures 3-193).

3.3.6.3.5 Montezuma Alternative Segment 1

Starting near Blair Junction, Montezuma alternative segment 1 would proceed southeastward towards Silver Peak, then continue eastward and southward in a sinuous fashion on its way to a point where the segment would connect to the beginning of Mina common segment 2, southeast of the Cuprite Hills. Montezuma alternative segment 1 would cross the following hydrographic areas: 137A (Big Smoky Valley), 143 (Clayton Valley), 142 (Alkali Spring Valley), and 144 (Lida Valley). Figures 3-193 through 3.3.6-8 depict the proposed Montezuma alternative segment 1 configuration. Aquifer characteristics, such as aquifer type(s), groundwater quality, and depth to groundwater underlying Montezuma alternative segment 1 vary according to the locations within the hydrographic areas that the rail line would cross.

Table 3-119 summarizes the groundwater-quality and aquifer characteristics for each hydrographic area Montezuma alternative segment 1 would cross.

Section 3.3.6.3.4 describes the hydrogeologic characteristics of hydrographic area 137A, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the proposed rail alignment segments. Table 3-119 summarizes general groundwater-quality and aquifer characteristics in hydrographic area 137A.

Clayton Valley (hydrographic area 143) is a designated groundwater basin, and the total active annual duties for the basin exceed the perennial yield of 24.6 million cubic meters (20,000 acre-feet) (see Table 3-113). There could be approximately 1.6 million cubic meters (1.3 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 143 (DIRS 180754-Rush et al. 1971, all). NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 143 (see Table 3-113).

Alluvial valley deposits consisting of silts and clays comprise the center of the valley and are hundreds of feet thick. Alluvial valley-fill materials, volcanic rocks, and carbonate and clastic rocks are the major geologic units encountered (see Table 3-119). Most of the available groundwater in Clayton Valley is found in alluvial valley-fill materials, with some groundwater contained in fractured rock of the surrounding mountains. Subsurface inflow from Big Smoky Valley and Alkali Spring Valley contributes most of the recharge to groundwater in Clayton Valley. The majority of groundwater leaves this basin as evapotranspiration or through pumping wells (DIRS 180887-Converse Consultants 2007, p. 47).

Depth to groundwater in hydrographic area 143 ranges from about 3 to 72 meters (10 to 237 feet) below ground surface (see Table 3-119). Groundwater in Clayton Valley is highly mineralized (brackish) with elevated sodium and chloride concentrations, and total dissolved solids as high as 10,000 mg/L in lower parts of the basin (see Table 3-119) (DIRS 180760-Albers and Stewart 1981, p. 2; DIRS 180887-Converse Consultants 2007, p. 46).

The dominant use for groundwater in Clayton Valley is solution-mining of lithium from brines in the playa area (DIRS 180887-Converse Consultants 2007, p. 47). There are 13 existing wells in hydrographic area 143 within 1.6 kilometers (1 mile) of the centerline of Montezuma alternative segment 1 passing through this basin and/or proposed pumping well locations for this alternative segment (see Table 3-114). Seven of these wells are USGS wells, and five are NDWR wells with active water rights. There are six springs within 1.6 kilometers of the centerline of Montezuma alternative segment 1 and/or the proposed pumping well locations.

Proposed groundwater supply-well location CI-1a is the only proposed well location for Montezuma alternative segment 1 that is outside the construction right-of-way in Clayton Valley (Figure 3-194). It is located on an alluvial fan, about 5.6 kilometers (3.5 miles) west of Montezuma alternative segment 1 (DIRS 180888-Converse Consultants 2007, Appendixes A and B). The quarry and the quarry well would be located on grazing land (Section 4.3.2).

Alkali Spring Valley (hydrographic area 142) is not a designated groundwater basin, and the total active annual duties for the basin do not exceed the perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-113). There could be approximately 1.6 billion cubic meters (1.3 million acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 142 (DIRS 180754-Rush et al. 1971, all). NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 142 (see Table 3-113).

Geologic units in this hydrographic area include primarily alluvial valley fill, volcanic rocks, rhyolite, and clastic and carbonate rocks (see Table 3-119). The alluvial valley deposits of Alkali Spring Valley contain most of the available groundwater, and groundwater production comes mainly from valley-fill wells.

Table 3-119. General groundwater-quality and aquifer characteristics – Mina common segment 1 and Montezuma alternative segment 1.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
137A Big Smoky Valley	Alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, clastic rocks	Less than 3 to more than 30	Upper 30.5 meters of alluvium: 7 million ^f	Total dissolved solids: 300 to 4,000 mg/L ^g 6,500 mg/L (valley center discharge locations) ^f
143 Clayton Valley	Alluvial valley fill, carbonate and clastic rocks, volcanic rocks	Less than 3 to 15	Upper 30.5 meters of alluvium: 1.3 million ^f	Total dissolved solids: Up to 1,700 mg/L ^g (more than 10,000 mg/L lower parts of the basin) ^g
142 Alkali Spring Valley (Esmeralda)	Alluvial valley fill, clastic and subordinate carbonate rocks, rhyolite dikes, volcanic rocks	Less than 3 to 27	Upper 30.5 meters of alluvium: 1.3 million ^f	Total dissolved solids: Less than 1,000 mg/L ^g 1,000 to 3,000 mg/L (in playa area) ^g
144 Lida Valley	Alluvial valley fill, volcanic sediments, and older rock units including hornfels, phyllite, quartzite, limestone, and dolomite	49 to 61	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g

a. Source: DIRS 180887-Converse Consultants 2007, pp. 52, 46, 39, and 32.

b. Estimated depth to groundwater obtained from DIRS 180887-Converse Consultants 2007, Plates 4-1 to 4-4 and pp. 32, 39, 45, 51, and 52; DIRS 176600-Converse Consultants 2005, Plates 4-3 and 4-5.

c. To convert meters to feet, multiply by 3.2808.

d. To convert from acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 34, 40, 46, and 52.

However, fractured rock is the source of groundwater discharging from small springs on the south side of the basin. Most aquifer recharge is from subsurface inflow from Ralston Valley, and groundwater in Alkali Spring Valley flows to the southwest, with the majority of groundwater leaving as outflow to Clayton Valley (DIRS 180887-Converse Consultants 2007, pp. 40 and 41).

Depth to groundwater in hydrographic area 142 varies from approximately 3 to 146.3 meters (10 to 480 feet) below ground surface (see Table 3-119). Depth to groundwater underlying the rail alignment in Alkali Spring Valley is approximately 27 meters (90 feet). Groundwater quality in Alkali Spring Valley varies throughout the basin. The northeastern part has the best water quality, with lower total dissolved solids; while the playa area and the vicinity of Alkali Hot Spring has groundwater that is high in sodium sulfate and total dissolved solids (see Table 3-119).

The dominant uses for groundwater in Alkali Spring Valley are for mining and municipal water supply. There are 36 existing wells in hydrographic area 142 within 1.6 kilometer (1 mile) of the centerline of alternative segments passing through this basin and/or proposed pumping well locations for the alternative

segments. Twelve of these wells are USGS wells, and twenty-four are NDWR wells with active water rights. There are two springs within 1.6 kilometer of the centerline of the alternative segments.

Lida Valley (hydrographic area 144) is not a designated groundwater basin, and the committed groundwater resources are less than the perennial yield of 430,000 cubic meters (350 acre-feet). There could be approximately 1.9 billion cubic meters (1.5 million acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 144. NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 144 (see Table 3-113).

Geologic units in hydrographic area 144 include primarily alluvial valley fill, volcanic rocks, limestone and dolomite, hornfels, phyllite, and quartzite (see Table 3-119). Groundwater is mostly found in unconfined aquifers of the alluvial valley-fill materials. Most aquifer recharge is derived from precipitation and subsurface inflow from Stonewall Basin, and groundwater exits the basin in the form of outflow to Sarcobatus Flat (DIRS 180887-Converse Consultants 2007, pp. 34 and 35).

Depth to groundwater in hydrographic area 144 varies from approximately 7.9 to 110 meters (26 to 360 feet) below ground surface. Depth to groundwater underlying the rail alignment in Lida Valley ranges from 50 to 61 meters (160 to 200 feet). Groundwater quality is reflected in the total dissolved solids (see Table 3-119).

The dominant uses for groundwater in hydrographic area 144 (Lida Valley) include mining, stockwatering, and municipal water supply. There are six existing wells in hydrographic area 144 within 1.6 kilometers (1 mile) of the centerline of the alternative segments passing through this basin and/or proposed pumping well locations for the alternative segments. Two of these wells are USGS wells, and four are NDWR wells with active water rights. There are no springs within 1.6 kilometers of the centerline of the alternative segments.

Proposed groundwater-supply wells for Montezuma alternative segment 1 in the Alkali Spring Valley and Lida Valley hydrographic areas that might be required outside the construction right-of-way (Figure 3-194) and which are not related to water-supply requirements for potential quarries include AS-1a and AS-3a and LV10/LV11/LV12 in hydrographic area 144. The AS-1a and AS-3a proposed well locations lie about 4.8 kilometers (3 miles) and 3.7 kilometers (2.3 miles) north, respectively, of the centerline of Montezuma alternative segment 1, on an alluvial valley-fill slope in an area without a history of much groundwater production. These two proposed well locations would be located on grazing land (Section 4.3.2). For both locations, there are north-northeast striking faults in bedrock to the southwest of these proposed well locations, which could impact groundwater flow and pumping conditions in the area (DIRS 180888-Converse Consultants 2007, Appendix B).

Another proposed groundwater supply-well location (Li-5a) that is in hydrographic area 144 for Montezuma alternative segment 1 that is outside of the construction right-of-way (Figure 3-194) is a proposed alternate quarry water-supply well in the central part of an alluvial fan, about 2.4 kilometers (1.5 miles) west of Montezuma alternative segment 1. This well site might be used in lieu of another proposed new well (Li-1a) located within the Montezuma alternative segment 1 construction right-of-way due to the possibility of encountering a sufficient thickness of alluvial valley-fill materials and a thicker *saturated zone* at location Li-5a than at location Li-1a (DIRS 180888-Converse Consultants 2007, Appendix B and Plate 4-1). This proposed alternate quarry well would be located on grazing land (Section 4.3.2).

3.3.6.3.6 Montezuma Alternative Segment 2

Montezuma alternative segment 2 would begin near Blair Junction and proceed from west to east through hydrographic area 137A (Big Smoky Valley), then proceed generally southward or southeastward through

hydrographic areas 142 (Alkali Spring Valley), 145 (Stonewall Valley), and 144 (Lida Valley), passing west of the community of Goldfield (Figures 3-193 through 3-195). Aquifer characteristics, such as aquifer type(s), groundwater quality and depth to groundwater underlying Montezuma alternative segment 2, vary according to the locations within the hydrographic areas that the rail line would cross. Table 3-120 summarizes the groundwater-quality and aquifer characteristics for each hydrographic area through which the alternative segment would pass.

Section 3.3.6.3.4 describes the hydrogeologic characteristics of hydrographic area 137A, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the proposed rail alignment segments. This information is again presented here for convenience.

Big Smoky Valley (hydrographic area 137A) is a designated groundwater basin, and the committed groundwater resources exceed the perennial yield of 7.4 million cubic meters (6,000 acre-feet) (see Tables 3.3.6-1 and 3.3.6-8). As described previously in Section 3.3.6.3.4, there are no documented pending underground annual duties in area 137A. Geologic units in this hydrographic area include primarily alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, and clastic rocks (see Table 3-120). The alluvial valley-fill materials include sands and gravels along alluvial fans and washes, and silts and clays along the valley floor; most of the available groundwater in Big Smoky Valley is found in unconfined and semi-unconfined aquifers comprised of these valley-fill sediments (DIRS 180887-Converse Consultants 2007, p. 51). Depth to groundwater in hydrographic area 137A typically varies from less than 3 to more than about 30.5 meters (10 to 100 feet) below ground surface (see Table 3-120), with values as deep as 220 meters (720 feet) below ground surface reported for some locations in the alluvial apron. Groundwater in hydrographic area 137A contains dominant ions of calcium and bicarbonate, and total dissolved solids is relatively low, under 500 mg/L (see Table 3-120), although discharge areas in the center of the valley may have higher concentrations.

Section 3.3.6.3.5 describes the hydrogeologic characteristics of hydrographic areas 142 and 144, including groundwater-quality and aquifer characteristics, as well as information regarding existing wells and springs in the vicinity of the proposed alternative segments. This information is again presented here for convenience.

Alkali Spring Valley (hydrographic area 142) is not a designated groundwater basin, and the total active annual duties for the basin do not exceed the perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-113). As described previously in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 142. Geologic units in hydrographic area 142 include primarily alluvial valley fill, volcanic rocks, rhyolite, and clastic and carbonate rocks (see Table 3-120).

The alluvial valley deposits of Alkali Spring Valley contain most of the available groundwater, and groundwater production comes mainly from valley-fill wells. However, fractured rock is the source of groundwater discharging from small springs on the south side of the basin. Most aquifer recharge is from subsurface inflow from Ralston Valley, and groundwater in Alkali Spring Valley flows to the southwest, with the majority of groundwater leaving as outflow to Clayton Valley (DIRS 180887-Converse Consultants 2007, pp. 40 and 41).

Depth to groundwater in hydrographic area 142 varies from less than 3 to 146.3 meters (10 to 480 feet) below ground surface (see Table 3-120). Groundwater quality in Alkali Spring Valley varies throughout the basin.

Table 3-120. General groundwater-quality and aquifer characteristics – Montezuma alternative segment 2.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^e
137A Big Smoky Valley	Alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, clastic rocks	Less than 3 to more than 30	Upper 30.5 meters of alluvium: 7 million ^f	Total dissolved solids: 300 to 4,000 mg/L ^g 6,500 mg/L (valley center discharge locations) ^g
142 Alkali Spring Valley (Esmeralda)	Alluvial valley fill, clastic and subordinate carbonate rocks, rhyolite dikes, volcanic rocks	Less than 3 to 146	Upper 30.5 meters of alluvium: 1.3 million ^f	Total dissolved solids: Less than 1,000 mg/L ^g 1,000 to 3,000 mg/L (in playa area) ^g
145 Stonewall Flat	Alluvial valley-fill deposits, volcanic rocks, older sedimentary rocks ^h	37 to 60	Upper 30.5 meters: 820,000 ^f	Total dissolved solids: Less than 300 mg/L ⁱ
144 Lida Valley	Alluvial valley fill, rhyolite volcanic sediments (including tuffs of the stonewall flat and tuffs of the Thirty Canyon Group), older rock units including claystone, siltstone, and limestone	50 to 85	Upper 30.5 meters: 1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g

a. Sources: DIRS 180887-Converse Consultants 2007, pp. 52, 39, and 32; DIRS 173842-Shannon and Wilson, 2005, pp. 23 and 24, 29, 30, and 33 to 35.

b. Estimated depth to groundwater obtained from DIRS 180887-Converse Consultants 2007, Plates 4-1 through 4-4 and pp. 32, 39, 45, 51, and 52; DIRS 176600-Converse Consultants 2005, p. 49 and Plate 4-5.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 34, 40, 46, and 52.

h. Source: DIRS 173179-Belcher 2004, p. 28 and Figure B-1.

i. Source: DIRS 176600-Converse Consultants 2007, p. 49.

The northeastern part has the best water quality, with lower total dissolved solids; while the playa area and the vicinity of Alkali Hot Spring has groundwater that is high in sodium sulfate and total dissolved solids (see Table 3-120).

Lida Valley (hydrographic area 144) is not a designated groundwater basin, and the committed groundwater resources are less than the perennial yield of approximately 432,000 cubic meters (350 acre-feet) (see Tables 3.3.6-1 and 3.3.6-8). As described previously in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 144. Geologic units in hydrographic area 144 include primarily alluvial valley fill, rhyolite volcanic rocks, (including tuffs of the Stonewall Flat and tuffs of the Thirty Canyon Group), and older rock units including claystone, siltstone, and limestone (see Table 3-120). Groundwater is mostly found in unconfined aquifers of the alluvial valley fill materials (DIRS 180887-Converse Consultants 2007, p. 32). Most aquifer recharge is derived from precipitation and subsurface inflow from Stonewall Basin, and groundwater exits the basin in the form of outflow to Sarcobatus Flats (DIRS 180887-Converse Consultants 2007, pp. 34 and 35).

Depth to groundwater in hydrographic area 144 varies from approximately 7.9 to 110 meters (26 to 360 feet) below ground surface (see Table 3-120). Depth to groundwater underlying the rail alignment varies from 73 to 85 meters (240 to 280 feet). Groundwater quality is reflected in the total dissolved solids, which are given in Table 3-120.

Two proposed groundwater supply-well locations for Montezuma alternative segment 2, BSa-2a and BSa-3a, both in Big Smoky Valley, are within several kilometers of faults that may act as conduits for a significant amount of groundwater, thus influencing groundwater flow and pumping conditions in the area (DIRS 180888-Converse Consultants 2007, Appendix B).

There are four locations where wells are proposed to support construction of Montezuma alternative segment 2 that would be outside the construction right-of-way. All of these proposed well locations would be located on grazing land (Section 4.3.2). A proposed set of groundwater supply-well locations (ASV4/ASV5/ASV8/ASV9) east of Montezuma alternative segment 2 in hydrographic area 142 (Figure 3-194) are at the same location as a set of wells of the same name that were proposed to support construction of Goldfield alternative segments, as described in Section 3.2.6.3.7 (DIRS 180888-Converse Consultants 2007, Appendix C). A proposed set of groundwater supply-well locations in hydrographic area 144 (LV10/LV11/LV12) west of the Montezuma alternative segment 2 in hydrographic area 144 are the same set of wells of the same name as those proposed for Caliente common segment 4, as described in Section 3.2.6.3.8. Up to two wells each at either proposed well site ASV6, or at a proposed alternate well site ASV7, if needed, west and northwest of Goldfield, respectively (Figure 3-194), could supply water to a potential quarry site (quarry ES-7) in that area. These wells would only be required if Montezuma alternative segment 2 were selected (DIRS 180875-Nevada Rail Partners 2007, pp. 3 and 4). Geologic conditions present at these proposed well sites include fractured volcanic rock units (ASV6 site) and alluvial fan deposits (ASV7 site) (DIRS 180888-Converse Consultants 2007, Appendix D).

Hydrographic area 145 (Stonewall Flat) is not a designated groundwater basin. Committed groundwater resources as of September 2006 do not exceed the perennial yield of approximately 120,000 cubic meters (100 acre-feet) (see Table 3-113). There could be approximately 1 billion cubic meters (820,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 145. NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 145 (see Table 3-113). Geologic units underlying hydrographic area 145 include alluvial valley-fill deposits, volcanic rocks, and older sedimentary rocks (DIRS 173179-Belcher 2004, p. 28 and Figure B-1).

Only a small portion (less than 8 kilometers [5 miles]) of Montezuma alternative segment 2 would overlie hydrographic area 145, and there are no proposed water supply-well locations within this hydrographic area (DIRS 180888-Converse Consultants 2007, Appendix A and Plate 4-1). Depth to groundwater is uncertain along Montezuma alternative segment 2 where it would cross a small portion of Stonewall Flat. However, based on projections from nearby areas, depth to groundwater could be approximately 37 to 60 meters (120 to 200 feet) (see Table 3-120). Groundwater quality is relatively good, with low total dissolved solids concentrations (see Table 3-120). Alluvial valley-fill material, volcanic rock, and older sedimentary rocks are the primary geologic units in the basin (see Table 3-120). There are no existing wells (USGS and NDWR) or springs in Stonewall Flat that are within 1.6 kilometers (1 mile) of Montezuma alternative segment 2.

3.3.6.3.7 Montezuma Alternative Segment 3

Montezuma alternative segment 3 would initially follow the same path as the first portion of proposed Montezuma alternative segment 2, proceeding eastward/northeastward from near Blair Junction through a portion of Big Smoky Valley (hydrographic area 137A) and then proceed southeastward and southward, passing through Alkali Spring Valley (hydrographic area 142). In the Alkali Spring Valley hydrographic

area, Montezuma alternative segment 3 would proceed westward beginning at a point along Montezuma alternative segment 2 to where it would intersect with a portion of a segment that would be the same as the eastern and southeastern portion of Montezuma alternative segment 1. Montezuma alternative segment 3 (comprised of the northern portion of Montezuma alternative segment 2, the short connecting Montezuma alternative segment 3, and the southern portion of Montezuma alternative segment 1) would then follow the same path as the southern portion of Montezuma alternative segment 1 through the Clayton Valley and Lida Valley areas, to the beginning of Mina common segment 2, southeast of the Cuprite Hills (Figures 3-193 and 3-194).

Aquifer characteristics, such as aquifer types(s), groundwater quality, and depth to groundwater underlying the portions of Montezuma alternative segments 1 and 2 would be the same as the northern and southern portions of Montezuma alternative segment 3 previously described in Sections 3.3.6.3.4 and 3.3.6.3.5, but this information is again presented here for convenience.

Big Smoky Valley (hydrographic area 137A), which the northern portion of Montezuma alternative segment 3 would cross, is a designated groundwater basin, and the committed groundwater resources exceed the perennial yield of 7.4 million cubic meters (6,000 acre-feet) (see Tables 3.3.6-1 and 3.3.6-9). There are existing groundwater-rights appropriations in hydrographic area 137A, but there are no pending underground annual duties (see Table 3-113). Geologic units in this hydrographic area include primarily alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, and clastic rocks (see Table 3-121). The alluvial valley-fill materials include sands and gravels along alluvial fans and washes, and silts and clays along the valley floor; most of the available groundwater in Big Smoky Valley is found in unconfined and semi-unconfined aquifers of these alluvial valley-fill sediments.

Depth to groundwater in hydrographic area 137A typically varies from less than 3 to more than about 30 meters (10 to 100 feet) below ground surface (see Table 3-121), with values as deep as 220 meters (720 feet) below ground surface reported for some locations in the alluvial apron. Groundwater in hydrographic area 137A contains dominant ions of calcium and bicarbonate, and total dissolved solids are relatively low, under 500 mg/L (see Table 3-121), although discharge areas in the center of the valley may have higher concentrations.

Alkali Spring Valley (hydrographic area 142), which Montezuma alternative segment 3 would cross, is not a designated groundwater basin, and the total active annual duties for the basin do not exceed the perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-113). There are existing groundwater-rights appropriations in hydrographic area 142, but there are no pending underground annual duties (see Table 3-113) (DIRS 182288-NDWR 2007).

Geologic units in this hydrographic area include primarily alluvial valley fill, volcanic rocks, rhyolite, and clastic and carbonate rocks (see Table 3-121). The alluvial valley deposits of Alkali Spring Valley contain most of the available groundwater, and groundwater production comes mainly from valley-fill wells. However, fractured rock is the source of groundwater discharging from small springs on the south side of the basin. Most aquifer recharge is from subsurface inflow from Ralston Valley, and groundwater in Alkali Spring Valley flows to the southwest, with the majority of groundwater leaving as outflow to Clayton Valley (DIRS 180887-Converse Consultants 2007, pp. 40 and 41).

Depth to groundwater in hydrographic area 142 varies from approximately 3 to 150 meters (10 to 480 feet) below ground surface. Depth to groundwater underlying the rail alignment in Alkali Spring Valley varies from 27 to 61 meters (90 to 200 feet) (Table 3-120). Groundwater quality in Alkali Spring Valley varies throughout the basin. The northeastern part has the best water quality, with lower total dissolved solids, while the playa area and the vicinity of Alkali Hot Spring has groundwater that is high in sodium sulfate and total dissolved solids (see Table 3-121).

Table 3-121. General groundwater-quality and aquifer characteristics – Montezuma alternative segments 1, 2, and 3.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
137A Big Smoky Valley	Alluvial valley fill, volcanic rocks, intrusive and metamorphic rocks, clastic rocks	Less than 3 to more than 30	Upper 30.5 meters of alluvium: 7 million ^f	Total dissolved solids: 300 to 4,000 mg/L ^g 6,500 mg/L (valley center discharge locations) ^g
142 Alkali Spring Valley (Esmeralda)	Alluvial valley fill, clastic and subordinate carbonate rocks, rhyolite dikes, volcanic rocks	Less than 27 to 61	Upper 30.5 meters of alluvium: 1.3 million ^f	Total dissolved solids: Less than 1,000 mg/L ^g 1,000 to 3,000 mg/L (in playa area) ^g
143 Clayton Valley	Alluvial valley fill, carbonate and clastic rocks, volcanic rocks	Less than 27 to 61	Upper 30.5 meters of alluvium: 1.3 million ^f	Total dissolved solids: Up to 1,700 mg/L ^g (more than 10,000 mg/L lower parts of the basin) ^g
144 Lida Valley	Alluvial valley fill, rhyolite volcanic sediments (including tuffs of the Stonewall Flat and tuffs of the Thirty Canyon Group), older rock units including claystone, siltstone, and limestone	90 to 85	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g

a. Sources: DIRS 180887-Converse Consultants 2007, pp. 51, 44, 45, 39, and 32; DIRS 173842-Shannon and Wilson, 2005, pp. 23-24, 29, 30, and 33 to 35.

b. The listed depth to groundwater ranges generally apply to areas underlying the alignment obtained from DIRS 180887-Converse Consultants 2007, Plates 4-1 through 4-4; groundwater can vary over a wide range of depth depending on location in each hydrographic area (DIRS 180887-Converse Consultants 2007, pp. 32, 39, 45, 51, and 52); DIRS 176600-Converse Consultants, 2005, Plate 4-5.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, pp. 34, 40, 46, and 52.

Clayton Valley (hydrographic area 143), which a portion of Montezuma alternative segment 3 would cross, is a designated groundwater basin, and the total active annual duties for this basin exceed the perennial yield of 24.7 million cubic meters (20,000 acre-feet) (see Table 3-113). There are no pending underground annual duties for hydrographic area 143 (see Table 3-113).

Alluvial valley deposits consisting of silts and clays comprise the center of the valley and are hundreds of feet thick. Alluvial valley-fill materials, volcanic rocks, and carbonate and clastic rocks are the major geologic units encountered (see Table 3-121).

Depth to groundwater in hydrographic area 143 ranges from about 3 to 72 meters (10 to 237 feet) below ground surface (see Table 3-121). Depth to groundwater underlying the rail alignment in Clayton Valley ranges from less than 3 to 61 meters (90 to 200 feet). Groundwater in Clayton Valley is highly mineralized with elevated sodium and chloride concentrations, with total dissolved solids as high as 10,000 mg/L in the lower parts of the basin (see Table 3-121) (DIRS 180760-Albers and Stewart 1981, p. 2).

Lida Valley (hydrographic area 144), which a portion of Montezuma alternative segment 3 would cross, is not a designated groundwater basin, and the committed groundwater resources are less than the perennial yield of 430,000 cubic meters (350 acre-feet) (Tables 3.3.6-1 and 3.3.6-9). As described previously in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 144. Geologic units in hydrographic area 144 include primarily alluvial valley fill, volcanic rocks, limestone and dolomite, hornfels, phyllite, and quartzite (see Table 3-121). Groundwater is mostly found in unconfined aquifers of the alluvial valley-fill materials.

Depth to groundwater in hydrographic area 144 varies from approximately 50 to 85 meters (160 to 280 feet) below ground surface (see Table 3-121). Depth to groundwater underlying the rail alignment varies from 73 to 85 meters (240 to 280 feet). Groundwater quality is reflected in the total dissolved solids, which are listed in Table 3-121.

As described in Section 3.3.6.3.6, up to two wells each that would be required if Montezuma alternative segment 2 is selected at either proposed well site ASV6, or at proposed alternate well site ASV7, west and northwest of Goldfield, respectively (Figure 3-194), would not be required if Montezuma alternative segment 3 is selected.

There are no proposed groundwater supply-well locations for the portion of Montezuma alternative segment 3 that is different from Montezuma alternative segments 1 and 2 that would lie outside the construction right-of-way (DIRS 180888-Converse Consultants 2007, Appendix A).

3.3.6.3.8 Mina Common Segment 2

Mina common segment 2 would begin at a point southeast of the Cuprite Hills in hydrographic area 144 (Lida Valley), and then proceed southeastward through that hydrographic area to the beginning of Bonnie Claire alternative segments 2 and 3 (Figures 3-194 and 3-195). Aquifer characteristics, such as groundwater quality and depth to groundwater underlying Mina common segment 2, would vary depending on the location within hydrographic area 144. Table 3-122 summarizes the groundwater-quality and aquifer characteristics for the Lida Valley hydrographic area.

Aquifer characteristics for hydrographic area 144, Lida Valley, have previously been described. Section 3.3.6.3.5 (Montezuma alternative segment 1) provides information regarding geology, groundwater quality, aquifer characteristics, and groundwater uses for this hydrographic area, as well as information regarding existing wells and springs in the vicinity of the proposed rail alignment segment. As described previously in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 144. There are no proposed groundwater supply wells for Mina common segment 2 (DIRS 180888-Converse Consultants 2007, Appendix A). Also, there are no existing USGS NWIS wells, no NDWR wells with water rights, no NDWR domestic wells, or springs in Lida Valley that are within 1.6 kilometers (1 mile) of Mina common segment 2.

3.3.6.3.9 Bonnie Claire Alternative Segments

From north to south, Bonnie Claire alternative segments 2 and 3 would cross hydrographic areas 144 (Lida Valley) and 146 (Sarcobatus Flat) (Figure 3-196). Section 3.3.6.3.5 provides information regarding geology, groundwater quality, aquifer characteristics, and groundwater uses for hydrographic area 144, as well as information regarding existing wells and springs in the vicinity of the proposed rail alignment segments. As described in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 144. There is one existing NDWR well with water rights, no NDWR domestic wells, no existing USGS NWIS wells, and no existing springs in hydrographic area 144 within 1.6 kilometers (1 mile) of the proposed Bonnie Claire alternative segments. There are four NDWR wells with water rights, no NDWR

Table 3-122. General groundwater-quality and aquifer characteristics – Mina common segment 2.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
144 Lida Valley	Alluvial valley fill, rhyolite volcanic sediments, (including tuffs of the Stonewall Flat and tuffs of the Thirty Canyon Group) and older rock units including claystone, siltstone, and, limestone	70 to 85	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g

a. Sources: DIRS 180887-Converse Consultants 2007, pp. 31 and 32; DIRS 176600-Converse Consultants 2005, Plate 4-5.

b. Estimated depth to groundwater obtained from DIRS 180887-Converse Consultants 2007, Plate 4-1 and p. 32.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 180887-Converse Consultants 2007, p. 34.

domestic wells, no USGS NWIS wells, and no existing springs in area 146 within 1.6 kilometers of the centerlines of the proposed Bonnie Claire alternative segments.

The Bonnie Claire alternative segments would predominantly overlie alluvial valley fill (see Table 3-123). Geologic units Bonnie Claire alternative segments 2 and 3 would cross primarily include alluvial valley-fill deposits and some volcanic rocks (DIRS 173842-Shannon & Wilson 2005, p. 28). The primary volcanic unit encountered along Bonnie Claire alternative segments 2 and 3 is tuff of the Timber Mountain Group (DIRS 173842-Shannon & Wilson 2005, p. 30 and Plate 2).

Hydrographic area 146, Sarcobatus Flat, is a designated groundwater basin, and has a perennial yield of 3.7 million cubic meters (3,000 acre-feet) (see Table 3-113). Committed groundwater resources in hydrographic area 146 exceed the estimated perennial yield, but as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 2.96 billion cubic meters (2.4 million acre-feet) of recoverable groundwater in the upper 30 meters (100 feet) of saturated aquifer materials within area 146. NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 146 (see Table 3-113).

There are no existing water-supply wells or springs in hydrographic area 146 within 1.6 kilometers (1 mile) of the centerlines of Bonnie Claire alternative segments.

Table 3-123 summarizes general groundwater characteristics in hydrographic areas 144 and 146. Groundwater in hydrographic area 146 contains elevated levels of sodium bicarbonate.

Most of the existing groundwater wells in hydrographic area 146 are *screened* in the alluvial valley fill; a few wells in the western portion of the basin are screened in volcanic rocks. The total volume of alluvial valley fill comprising the primary aquifer reservoir in hydrographic area 146 is not known because of variations in the thickness of valley fill that result in variations in the surface of the underlying bedrock. However, Malmberg and Eakin (DIRS 106695-Malmberg and Eakin 1962, pp. 13 and 19) suggested the maximum thickness of valley fill in hydrographic area 146 could be as much as thousands of meters (several thousand feet).

Table 3-123. General groundwater-quality and aquifer characteristics – Bonnie Claire alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics ^a	Depth to groundwater (meters) ^{b,c}	Estimated recoverable groundwater (acre-feet) ^d	Groundwater quality ^e
144 Lida Valley	Alluvial valley fill, rhyolite, volcanic sediments, (including tuffs of Stonewall Flat and tuffs of the Thirsty Canyon Group) and older rock units including claystone, siltstone, and, limestone	50 to 25	Upper 30.5 meters of alluvium: 1.5 million ^f	Total dissolved solids: 400 to 1,100 mg/L ^g Sulfate: 61 to 284 mg/L ^g
146 Sarcobatus Flat	Alluvial valley-fill deposits and some volcanic rocks ^h (Volcanic units are tuff of the Timber Mountain Group) ⁱ	24 to 40	Upper 30.5 meters of alluvium: 24,000 ^f	Total dissolved solids: 540 mg/L ^j

a. Sources: DIRS 180887-Converse Consultants 2007, pp. 31 and 32.

b. Estimated depths to groundwater obtained from DIRS 180887-Converse Consultants 2007, Plate 4-1 and p. 32; DIRS 176600-Converse Consultants 2005, p. 41 and Plate 4-5. The listed range of depths generally applies to the area underlying the proposed Bonnie Claire alternative segments.

c. To convert meters to feet, multiply by 3.2808.

d. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

e. mg/L = milligrams per liter.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 182759-Converse Consultants 2007, p. 34.

h. Source: DIRS 176600-Converse Consultants 2006, p. 40.

i. Sources: DIRS 173842-Shannon & Wilson 2005, pp. 23 and 24, 29, 30, and 33 to 35 and Plate 2; DIRS 173179-Belcher 2004, Figure B-1.

j. Source: DIRS 176600-Converse Consultants 2006, p. 42.

Figure 3-195 shows DOE-proposed wells for supplying water to support construction of Bonnie Claire alternative segments. All proposed water wells would be within the nominal width of the construction right-of-way of the selected alternative segment. There are no potential quarry sites along Bonnie Claire alternative segments.

3.3.6.3.10 Common Segment 5 (Sarcobatus Flat Area)

Crossing from north to south, common segment 5 would overlie hydrographic area 146 (Sarcobatus Flat) and a small portion of hydrographic area 228 (Oasis Valley) (Figures 3-195 and 3-196). Section 3.3.6.3.9 describes the groundwater-quality and aquifer characteristics of hydrographic area 146, which are summarized in Table 3-123. As described in Section 3.3.6.3.5, there are no documented pending underground annual duties in area 146. There are four NDWR wells with water rights, one NDWR domestic well, eight USGS NWIS wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 5 within area 146.

The categories for the NDWR wells with water rights are irrigation, quasi-municipal, and stock-watering (see Table 3-114). Most wells in hydrographic area 146 are screened in alluvial valley fill; a few wells are screened in volcanic rocks on the west side of the basin (DIRS 176600-Converse Consultants 2005, pp. 41 and 42).

Section 3.3.6.3.11 describes the hydrogeologic characteristics of hydrographic area 228, including groundwater-quality and aquifer characteristics; Table 3-124 summarizes those characteristics. Committed groundwater resources in these areas exceed estimated perennial yields (see Table 3-113). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There are no NDWR wells with water rights, no USGS NWIS wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 5, as shown on Figures 3-195 and 3-196 (DIRS 176600-Converse Consultants 2005, all; DIRS 176325-USGS 2006, all).

Table 3-124. General groundwater-quality characteristics – Oasis Valley alternative segments.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
228 Oasis Valley	Volcanic rocks, clastic rocks, older carbonate rocks, and alluvial valley fill ^e	10 to 30	Upper 30.5 meters of alluvium: 400,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g Fluoride: 1 to more than 4 mg/L ^h

a. Estimated depth to groundwater obtained from DIRS 176600-Converse Consultants 2005, p. 38. The listed depth range generally applies to the area underlying the proposed Oasis Valley alternative rail alignments; depth to groundwater is much greater in the central and northern parts of hydrographic area 228 (DIRS 176600-Converse Consultants 2005, Plate 4-3).

b. To convert meters to feet, multiply by 3.2808.

c. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the groundwater quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.

d. mg/L = milligrams per liter.

e. Sources: DIRS 176600-Converse Consultants 2005, p. 36; DIRS 181909-Fridrich et al. 2007.

f. Source: DIRS 180754-Rush et al. 1971, all.

g. Source: DIRS 172905-USGS 1995, Figure 70, with overlay of hydrographic area boundaries.

h. Source: DIRS 176600-Converse Consultants 2005, p. 38.

Common segment 5 would predominantly overlies alluvial valley fill, with depth to groundwater generally approximately 3 to 55 meters (10 to 180 feet) in those portions of hydrographic areas 146 and 228 the rail line would cross. Volcanic rocks are the predominant rock type comprising the hills surrounding the basin.

Figures 3-195 and 3-196 show DOE-proposed wells (see Section 4.3.6) for supplying water to support construction of common segment 5. All proposed water wells would be within the rail line construction right-of-way. There are no potential quarry sites along common segment 5.

3.3.6.3.11 Oasis Valley Alternative Segments

Oasis Valley alternative segments 1 and 3 would cross hydrographic area 228 (Oasis Valley) (Figure 3-196). This area is a designated groundwater basin with an estimated perennial yield in the range of 1.23 to 2.46 million cubic meters (1,000 to 2,000 acre-feet) (DIRS 147766-Thiel Engineering Consultants 1999, pp. 6 to 12) (see Table 3-113). Committed groundwater resources in hydrographic area 228 total 1.6 million cubic meters (1,300 acre-feet) per year (see Table 3-113). However, as previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 493 million cubic meters (400,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 228 (DIRS 180754-Rush et al. 1971, all). NDWR data indicate that there are no documented pending underground annual duties in area 228A (see Table 3-113).

Geologic units Oasis Valley alternative segments 1 and 3 would cross include sedimentary rocks, small areas underlain by volcanic rocks, and some alluvial valley fill (see Table 3-124). Depth to groundwater

is generally 3 to 46 meters (10 to 150 feet), with the shallowest groundwater occurring along Oasis Valley alternative segment 1, northeast of Springdale (see Table 3-124).

Oasis Valley has several springs and seeps. The locations of these springs and seeps are dictated by structurally controlled changes in rock unit *lithology* and thickness and conduits. The springs, seeps, and shallow groundwater in the valley are maintained primarily by groundwater flow moving into the area through a regional volcanic rock aquifer system (DIRS 169384-Reiner et al. 2002, p. 8). Most groundwater flowing south-southeastward into Oasis Valley through the welded tuff aquifer is diverted upward along faults where it either forms springs or flows laterally out of Oasis Valley as underflow, indicating a regional groundwater inflow component to the flow at the springs. Springs and seeps occur where upward diversion coincides with areas where the potentiometric surface is above the ground surface (DIRS 169384-Reiner et al. 2002, pp. 9 and 10). Most historical groundwater resource development in this area has been from springs.

Available information indicates a non-welded confining tuff unit separates the alluvial aquifer from a regional welded tuff volcanic rock aquifer throughout much of Oasis Valley, and indicates the regional welded tuff aquifer has moderate fracture *permeability*. Most groundwater flowing south-southeastward into Oasis Valley through the welded tuff aquifer is also diverted upward along faults where it either forms springs or flows laterally out of Oasis Valley as underflow, indicating a regional groundwater inflow component to the flow at the springs (DIRS 169384-Reiner et al. 2002, pp. 9 and 10).

Based on a review of the NDWR and USGS NWIS databases and other published information, Figure 3-196 identifies seven USGS NWIS wells, four springs, and one surface-water body within approximately 1.6 kilometers (1 mile) of the centerlines of the Oasis Valley alternative segments. As shown on the figure, there is a series of three springs (Upper Oasis Valley Ranch Springs) southwest of Oasis Valley alternative segment 1 (DIRS 177712-MO0607NHDPOINT.000). Colson Pond and Colson Pond Spring are also near Oasis Valley alternative segment 3 (Figure 3-196) (DIRS 177712-MO0607NHDPOINT.000; DIRS 177710-MO0607NHDWBDYD.000).

There are no existing NDWR wells with water rights and no NDWR domestic wells within 1.6 kilometers (1 mile) of the centerline of the Oasis Valley alternative segments. There is one cluster of three USGS-installed wells within approximately 0.64 kilometer (0.40 mile) of the centerline of Oasis Valley alternative segment 3 (wells ER-OV-01, ER-OV-06a, and ER-OV-06a2), and one USGS-installed well (ER-OV-02) within approximately 0.4 kilometer (0.25 mile) of Oasis Valley alternative segment 1 (DIRS 176600-Converse Consultants 2005, Plate 4-3 and Appendix A; DIRS 169384-Reiner et al. 2002, Plate 2). The use category for these wells is monitoring. There are three additional shallow USGS-installed wells (the OVU-Dune Well, OVU-Middle ET Well, and the OVU-Lower ET Well), used for monitoring groundwater levels, within approximately 0.32 to 0.48 kilometer (0.2 to 0.3 mile) of Oasis Valley alternative segment 1 (DIRS 176600-Converse Consultants 2005, Plate 4-3 and Appendix A; DIRS 169384-Reiner et al. 2002, Plate 2). Figure 3-196 does not show all existing wells in hydrographic area 228 that lie within 1.6 kilometers of the centerlines of Oasis Valley alternative segments because some wells are at very nearly the same locations and cannot be shown at the scale used in the figure.

Groundwater in much of Oasis Valley exhibits elevated levels of fluoride, in excess of the 4 milligrams per liter Nevada drinking water standard level (see Table 3-124). Dissolved-solids concentrations in the alluvial valley fill are expected to be less than 500 milligrams per liter (approximately 500 parts per million) in the vicinity of the Oasis Valley alternative segments.

Figure 3-196 shows DOE-proposed wells for supplying water to support construction of the Oasis Valley alternative segments. In addition to a series of new wells proposed for installation within the construction right-of-way, DOE might install other wells at other locations outside the construction right-of-way, and use them either as principal water wells or in combination with other water wells

installed within the construction right-of-way. These wells would be drilled in cases where either (1) groundwater resources within the construction right-of-way would not be adequate for meeting construction or operations needs, or (2) groundwater withdrawals would need to be spread out to reduce potential impacts on existing groundwater resources (see Section 4.3.6). Possible locations for wells in this category that could be used to obtain water for constructing the Oasis Valley alternative segments include the following (Figure 3-196):

- Up to two locations in the Oasis Valley groundwater basin, approximately 5.6 to 5.8 kilometers (3.5 to 3.6 miles) southwest of the centerline of common segment 6 (locations OV6 and OV8, or OV14 and OV16, depending on alternative segment). The target water source at this location would be alluvial valley fill (DIRS 176189-Converse Consultants 2006, Appendixes A and B, and Maps 14a and 14b).
- Locations in the southeastern part of Oasis Valley, approximately 0.8 kilometer (0.5 mile) west of common segment 6 (well location OV22 or OV23, depending on alternative segment). The target water source at this location would be a possibly water-bearing fault system (DIRS 176189-Converse Consultants 2006, Appendixes A and B, and Maps 14a and 14b).

Review of NDWR and USGS database data and other published information (DIRS 169384-Reiner et al. 2002, Plate 2) on existing wells and springs indicates the following:

- There are two existing NDWR wells with water rights, no NDWR domestic wells, and no USGS NWIS wells within 1.6 kilometers (1 mile) of locations OV6 and OV8, or OV14 and OV16; however, two springs (Ute Springs and Manley Springs) lie within approximately 1.3 to 1.4 kilometers (0.8 to 0.9 mile) east of locations OV6 and OV8, or OV14 and OV16.
- There are no known existing wells or springs within 1.6 kilometers of the proposed alternative well location at OV22/OV23.

3.3.6.3.12 Common Segment 6 (Yucca Mountain Approach)

From north to south, common segment 6 would cross a portion of hydrographic area 228 (Oasis Valley), all of hydrographic area 229 (Crater Flat), and a portion of hydrographic area 227A (Jackass Flats), as shown in Figure 3-196. Section 3.3.6.3.11 describes, and Table 3-125 summarizes groundwater-quality and aquifer characteristics of hydrographic area 228.

There are 14 USGS NWIS wells, no NDWR wells with water rights, no NDWR domestic wells, and no springs within approximately 1.6 kilometers (1 mile) of the centerline of common segment 6, as shown on Figure 3-196 (DIRS 176600-Converse Consultants 2005, all; DIRS 176325-USGS 2006, all; DIRS 177294-MO0607USGSWNVD.000, all; DIRS 182898-NDWR Water Rights Data 2007, all; DIRS 176979-MO0605GISGNISN.000, all; DIRS 182759-Converse Consultants 2007, all; DIRS 177712-MO0607NHDPOINT.000, all). Figure 3-196 does not show all existing wells in hydrographic area 227A that lie within 1.6 kilometers of the centerline of common segment 6 because some wells, particularly in hydrographic area 227A, are at very nearly the same locations and cannot be shown at the scale used in this figure.

Geologic units that common segment 6 would cross include volcanic rocks and basin-fill alluvium (DIRS 173179-Belcher 2004, p. 28). Specific volcanic rock units the segment would cross include volcanic rocks of the Crater Flat and Paintbrush Groups (DIRS 173842-Shannon & Wilson 2005, Plate 2).

Table 3-125. General groundwater-quality and aquifer characteristics – common segment 6.

Hydrographic area number and name	Aquifer geologic characteristics	Depth to groundwater (meters) ^{a,b}	Estimated recoverable groundwater (acre-feet) ^c	Groundwater quality ^d
228 Oasis Valley	Volcanic rocks, clastic rocks, older carbonate rocks, and alluvial valley-fill deposits ^e	10 to 30	Upper 30.5 meters of alluvium: 400,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g Fluoride: 1 to more than 4 mg/L ^h
229 Crater Flat	Volcanic rocks and alluvial valley fill ^e	180 to 370	Upper 30.5 meters of alluvium: 350,000 ^f	Total dissolved solids: 270 mg/L ^h
227A Fortymile Canyon, Jackass Flats	Volcanic rocks and alluvial valley fill ^e	210 to 370	Upper 30.5 meters of alluvium: 740,000 ^f	Total dissolved solids: Less than 500 to 1,000 mg/L ^g

- a. Estimated depth to groundwater obtained from DIRS 176600-Converse Consultants 2005, p. 30, 31, 34, and 38. The listed depth range for hydrographic area 228 generally applies to the area underlying the rail alignment; depth to groundwater is much greater in the central and northern parts of hydrographic area 228 (DIRS 176600-Converse Consultants 2005, Plate 4-3). The listed depth range for hydrographic area 229 generally applies to the area underlying the rail alignment; depth to groundwater is less in the northwestern and southern parts of hydrographic area 229 (DIRS 176600-Converse Consultants 2005, Plate 4-2).
- b. To convert meters to feet, multiply by 3.2808.
- c. To convert acre-feet to cubic meters, multiply by 1233.49; unless otherwise specified, the ground water quality refers to the upper 30 meters of the saturated alluvial valley-fill material in the hydrographic area.
- d. mg/L = milligrams per liter.
- e. Sources: DIRS 176600-Converse Consultants 2005, p. 36; DIRS 181909-Fridrich et al. 2007.
- f. Source: DIRS 180754-Rush et al. 1971, all.
- g. Sources: DIRS 172905-USGS 1995, Figure 70; DIRS 177741-State of Nevada 2005, all, with overlay of hydrographic area boundaries.
- h. Source: DIRS 176600-Converse Consultants 2005, pp. 35 and 38.

Hydrographic area 229, Crater Flat, is not a designated groundwater basin. Committed groundwater resources exceed the estimated perennial yield of about 271,000 cubic meters (220 acre-feet) (see Table 3-113). As previously noted, all committed resources within a hydrographic area might not be in use at the same time. There could be approximately 431 million cubic meters (350,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 229. In addition to existing groundwater wells in hydrographic area 229 that have water-rights appropriations, NDWR data indicate that approximately 101,000 cubic meters (82 acre-feet) of pending annual duties (see Table 3-113) exist in hydrographic area 229. The pending water-rights locations are not within 1.6 kilometers (1 mile) of the centerline of common segment 6.

Table 3-125 summarizes groundwater-quality and aquifer characteristics of hydrographic area 229. Groundwater is typically very deep in hydrographic area 229 beneath the rail alignment, generally 180 to 370 meters (600 to 1,200 feet) below ground. In the northwestern portion of hydrographic area 229 and west of the rail alignment, groundwater occurs within two aquifers and the estimated depth to groundwater varies from 55 to 200 meters (180 to 650 feet). There are three USGS NWIS wells, no NDWR wells with water rights, no domestic wells, and no springs in hydrographic area 229 within approximately 1.6 kilometers (1 mile) of the centerline of common segment 6, as shown on Figure 3-196 (DIRS 176600-Converse Consultants 2005, all; DIRS 176325-USGS 2006, all; DIRS 177292-MO0607NDWRWELD.000; DIRS 177294-MO0607USGSWNVD.000; DIRS 182898-NDWR 2007, all; DIRS 176979-MO0605GISGNISN.000, all).

Hydrographic area 227A, Fortymile Canyon (Jackass Flats), is not a designated groundwater basin. Committed groundwater resources do not exceed the total perennial yield value of 1.09 million cubic meters (880 acre-feet) per year estimated for the entire hydrographic area (see Table 3-113). NDWR data indicate that there are no documented pending underground annual duties in hydrographic area 227A (see

Table 3-113) (DIRS 178726-State of Nevada 2006, all). The perennial yield estimate for the western two-thirds of hydrographic area 227A is assumed to be approximately 720,000 cubic meters (580 acre-feet) per year, while the perennial yield estimate for the eastern one-third of this hydrographic area has been estimated at approximately 370,000 cubic meters (300 acre-feet) per year. There could be approximately 910 million cubic meters (740,000 acre-feet) of recoverable groundwater in the upper 30.5 meters (100 feet) of saturated aquifer materials within area 227A.

Table 3-125 summarizes groundwater-quality and aquifer characteristics of hydrographic area 227A. In hydrographic area 227A, groundwater occurs in alluvial valley-fill deposits in the southern portion of the area and deeper in volcanic rocks in the central part of the basin. The depths to groundwater in wells throughout the area vary from approximately 12 to 650 meters (38 to 2,150 feet) (DIRS 176600-Converse Consultants 2006, p.31). Most groundwater storage in hydrographic area 227A occurs toward the southern end of the basin, south of the rail alignment. Groundwater is typically very deep near the rail alignment, generally 210 to 370 meters (700 to 1,200 feet) below ground.

Most wells penetrating the volcanic rocks are monitoring wells used for monitoring groundwater conditions southwest, southeast, and south of the Yucca Mountain Site. There are 8 USGS NWIS wells, no NDWR wells with water rights, no NDWR domestic wells, and no springs in area 227A within 1.6 kilometers (1 mile) of the centerline of common segment 6 (Figure 3-196). The volcanic rocks in this area generally have low porosity, and are not considered suitable for groundwater production except in major fractured areas.

Figure 3-196 shows DOE-proposed wells for supplying water to support construction of common segment 6. All proposed water wells would be within the rail alignment construction right-of-way. There are no potential quarry sites along common segment 6.

3.3.7 BIOLOGICAL RESOURCES

This section describes the biological resources that could be affected by construction and operation of the proposed railroad along the Mina rail alignment.

Biological resources include vegetation, wildlife, special status species, game species, and wild horses and burros within or near the construction right-of-way described in Section 3.3.7.1. This discussion of biological resources is based on the results of a review of available data from federal, State of Nevada, local agencies, and data gathered during field investigations.

Special Status Species

Endangered species are classified under the Endangered Species Act as being in danger of extinction throughout all or a significant part of their range.

Threatened species are classified under the Endangered Species Act as likely to become endangered species in the foreseeable future.

Proposed species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information on their biological status and threats and that are the subject of a Fish and Wildlife Service *Federal Register* rulemaking notice to list them as endangered or threatened.

Candidate species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information to support a proposal to list as endangered or threatened, but development of a listing regulation is precluded by other higher priority listing activities.

Endangered Species Act candidate species are plants and animals for which the U.S. Fish and Wildlife Service has sufficient information on their biological status and threats to propose them as endangered or threatened under the Endangered Species Act.

State protected plant and animal species. Wildlife species or subspecies are classified as protected under Nevada Administrative Code (NAC) Chapter 503 if one or more of the following criteria exists:

1. The wildlife is found only in the State of Nevada and its population, distribution, or habitat is limited.
2. The limited population or distribution within Nevada is likely to decline.
3. The population is threatened as a result of the deterioration or loss of its habitat.
4. The wildlife has ecological, scientific, educational, or other value that justifies its classification as protected.
5. The available data is not adequate to determine the exact status of the wildlife population, but does indicate a limited population, distribution, or habitat.
6. The wildlife is listed by the U.S. Fish and Wildlife Service as a candidate species, or it is classified as threatened or endangered in the federal Endangered Species Act.
7. Other evidence exists to justify classifying the wildlife as protected.

Under NAC Chapter 527, plants are classified as being in danger of extinction if their survival requires assistance because of overexploitation, disease, or other factors or because its habitat is threatened with destruction, drastic modification, or severe curtailment. There are no State of Nevada-listed endangered plants present in the areas of assessment.

BLM-designated sensitive species are species other than federally listed, proposed, or candidate species, and may include such native species as those that:

1. Could become endangered in or extirpated from a state or within a significant portion of their distribution in the foreseeable future;
2. Are undergoing a status review by the U.S. Fish and Wildlife Service to determine whether to list the species as a threatened or endangered species across all or a significant portion of its range under the Endangered Species Act;
3. Are undergoing significant current or predicted downward trends in habitat capability that would reduce their existing distribution;
4. Are undergoing significant current or predicted downward trends in population or density such that federally listed, proposed, candidate, or state listed status might become necessary;
5. Have typically small and widely dispersed populations;
6. Are inhabiting ecological refugia or specialized or unique habitats; or
7. Are state listed but might be better conserved through application of BLM sensitive species status. Such species should be managed to the level of protection required by State laws or under the BLM policy for candidate species, whichever would provide better opportunity for their conservation.

Section 3.3.7.2 provides a general overview of biological resources, including vegetation, wildlife, special status species, game species, and wild horses and burros along the Mina rail alignment. Section 3.3.7.3 describes biological resources unique to each Mina rail alignment alternative segment and common segment. Appendix H, Biological Resources, provides additional information regarding biological resources along the Mina rail alignment.

3.3.7.1 Areas of Assessment

DOE used two areas of assessment to describe the affected environment for biological resources: the greater study area and the construction right-of-way area.

3.3.7.1.1 Construction Right-of-Way

The rail line construction right-of-way would be a nominal width of 300 meters (1,000 feet), which is 150 meters (500 feet) on either side of the rail alignment centerline. The footprint, which would be within the construction right-of-way, is the area that would involve clearing of vegetation, excavation, and filling for subgrade to support the rail line. This area would be directly affected, long term, by rail line construction activities. The footprint would fluctuate throughout the alignment due to topography, cut and fill requirements, land use, and the selected alternative segment. The footprint could also vary based on land use and avoidance or minimization of impacts to other resources (for example, water and structures) but generally would be 300 meters or less. The area between the footprint and the outer edge of the construction right-of-way would be directly affected, short term, by construction-related activities such as construction staging and temporary access roads construction. DOE analyzed the area between the footprint and the outer edge of the construction right-of-way for *short-term impacts* even though the use of this area would be minimized and the area might not be disturbed. For purposes of this analysis, DOE has taken a conservative approach of potentially overstating the environmental impacts to biological resources. For facilities that would be outside the nominal width of the rail line construction right-of-way (such as quarries and other *infrastructure*), the area DOE assessed as the affected environment is the maximum area or the footprint of the proposed facility.

3.3.7.1.2 Study Area

DOE identified a study area (16 kilometers [10 miles] wide, extending 8 kilometers [5 miles] on either side of the centerline of the rail alignment) for use in database and literature searches to ensure the identification of sensitive habitat areas near the Mina rail alignment and transient or migratory wildlife, particularly special status species, that could pass through the construction right-of-way. Using the larger study area also increased the chance of identifying special status species and/or habitat that could be present near the rail alignment, to better describe the habitat value and species use within the construction right-of-way.

3.3.7.2 General Environmental Setting and Characteristics

This section describes the affected environment for biological resources that could be present or have the potential to occur within the construction right-of-way or the study area. DOE used the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all), which the BLM currently uses in its conservation and management actions, to characterize the land-cover types for the affected environment for the Mina rail alignment.

As a starting point for classification, the 2004 Southwest Regional Gap Analysis Project divided the southwestern United States into general *ecoregions* (relatively discrete sets of ecosystems characterized by certain plant communities or assemblages) based on physical and biological similarities. Using satellite imagery and field data, the Project classified geographic areas or “mapping zones” within each

ecoregion based on their land-cover types, and generated maps of these land-cover types. The Project classified naturally vegetated types using the “ecological systems” and developed and described types based on dominant vegetation, physical characteristics of the land, hydrology, and climate in the area (DIRS 176369-Lowry et al. 2005, all; DIRS 173051-Comer et al. 2003, all). These mapping zones represent recurring groups of biological communities that are found in similar physical environments and are influenced by similar dynamic ecological processes, such as fire or flooding. As shown in Figure 3-197, the Mina rail alignment would cross three mapping zones: the Humboldt, the Nellis, and the Mojave. However, only the Nellis and Mojave mapping zones are considered in the analysis because the segment that crosses the Humboldt is an existing Union Pacific Railroad rail line and there would be no construction-related impacts. The land-cover types are grouped into land-cover classes. Eleven land-cover classes occur in this part of Nevada. To identify the land-cover types and classes within the construction right-of-way and the study area, digital maps of the land-cover types within the affected map zones were overlain (spatial analysis using a Geographic Information System) with the Mina rail alignment construction right-of-way and operations facilities. The Mina rail alignment construction right-of-way would cross 9 of the 11 classes (DIRS 174324-NatureServe 2004, all). Table 3-126 lists classes and types, and Figures 3-198 through 3-204 show the classes the rail alignment would cross.

To document additional site-specific information regarding vegetation and habitat, DOE performed literature and database searches, and consulted with land and resource management agencies and authorities, including the BLM, the U.S. Fish and Wildlife Service, the Nevada Natural Heritage Program, the Nevada Department of Wildlife, the University of Nevada–Reno, and the Nevada Division of Forestry.

In addition to the review of existing information, DOE conducted field surveys and gathered data to further characterize the mapping zones and associated vegetation communities, and to further characterize the habitats in the study area that might support special status species. DOE chose field survey locations to provide representative survey coverage of the different types of vegetation along the Mina rail alignment, specifically in the construction right-of-way, but also in the larger study area. The field survey data that was collected helped further characterize the types of habitats in the construction right-of-way and identified by the Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all). Appendix H describes the field survey methodology. The additional surveys and data searches are outlined in each specific resource area below.

3.3.7.2.1 Vegetation

The Mina rail alignment is situated within two large deserts: the Great Basin and the Mojave. The Great Basin Desert is considered a cold desert and has been referred to as the Basin and Range region due to its parallel north-south trending ranges, or mountains, and intervening basins, or valleys. This region covers most of central and northern Nevada, with its southern extent ending roughly in southern Lincoln, Esmeralda, and Nye Counties. The Mojave Desert is considered a hot desert and covers most of southern Nevada and much of southeastern California (DIRS 174412-Ryser 1985, p. 4). Although the two deserts are distinguished from one another climatically, the predominant vegetation and vegetation communities also distinguish each desert.

The Great Basin Desert is generally characterized by big sagebrush (*Artemisia tridentata*), which is mostly absent from the Mojave Desert except at moderate to high elevations in the mountains. Alternatively, the Mojave Desert is dominated by creosote bush (*Larrea tridentata* var. *arenaria*), which is mostly absent from the Great Basin Desert. There is a broad transitional zone where these two deserts meet, which exhibits characteristics of both regions.

Based on the spatial analysis described above, the Mina rail alignment would intersect 25 land-cover types, which are listed in Table 3-126 and shown in Figures 3-203 through 3-204. The most common

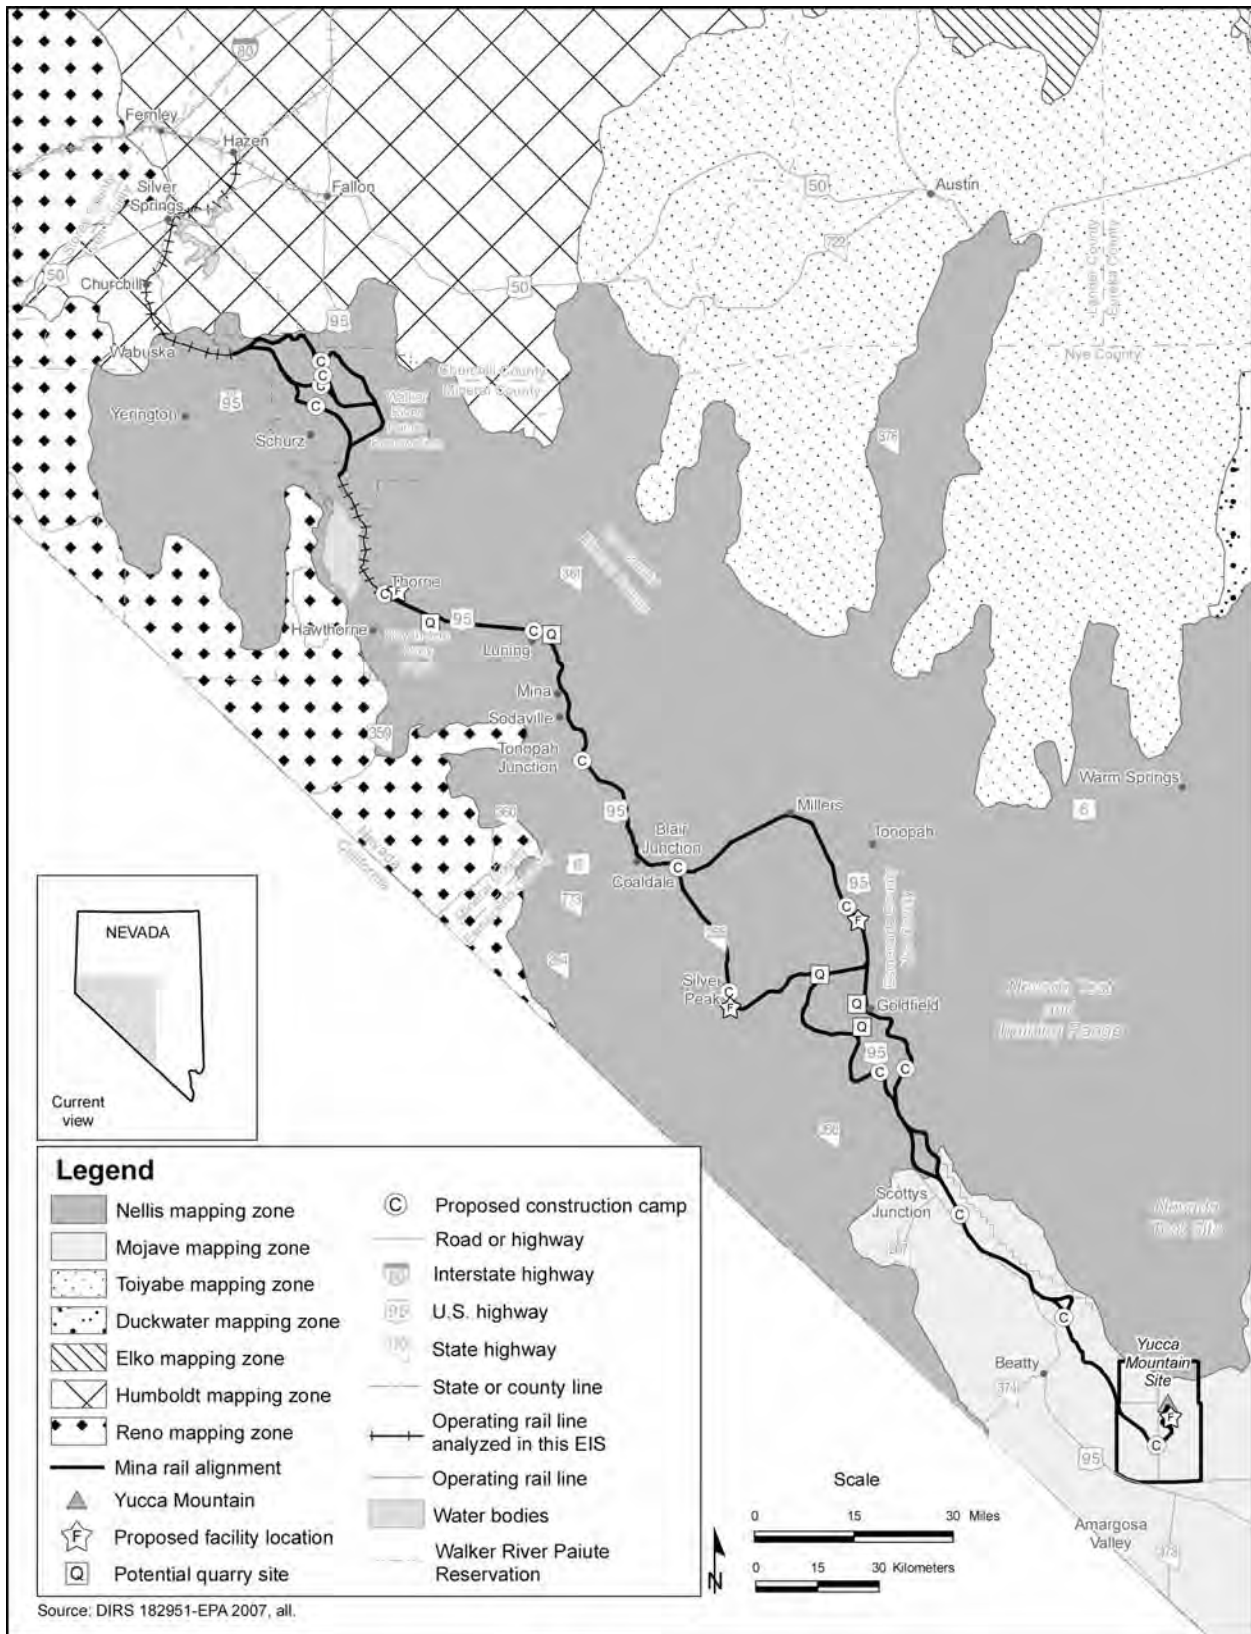


Figure 3-197. Mapping zones along the Mina rail alignment.

Table 3-126. Land-cover classes and types in the mapping zones.^a

Class and type ^b	Total amount of classes and land-cover types within the Mojave and Nellis mapping zones (square kilometers) ^c
<i>Barren Lands</i>	
Inter-Mountain Basins Playa	1,115
Inter-Mountain Basins Cliff and Canyon	394
North American Warm Desert Playa	524
North American Warm Desert Bedrock Cliff and Outcrop	525
Inter-Mountain Basins Active and Stabilized Dune	29
<i>Evergreen Forest</i>	
Great Basin Pinyon-Juniper Woodland	4,966
<i>Scrub/Shrub</i>	
Inter-Mountain Basins Mixed Salt Desert Scrub	25,547
Inter-Mountain Basins Big Sagebrush Shrubland	8,013
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	19,415
Great Basin Xeric Mixed Sagebrush Shrubland	6,328
Mojave Mid-Elevation Mixed Desert Scrub	10,030
Sonora-Mojave Mixed Salt Desert Scrub	2,976
<i>Grassland/Herbaceous</i>	
Inter-Mountain Basins Semi-Desert Shrub Steppe	4,768
Inter-Mountain Basins Semi-Desert Grassland	75
<i>Woody Wetland</i>	
Inter-Mountain Basins Greasewood Flat	1,409
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	77
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	28
<i>Emergent Herbaceous Wetland</i>	
North American Arid West Emergent Marsh	32
<i>Altered or Disturbed</i>	
Invasive Annual Grassland	48
Invasive Annual and Biennial Forbland	29
<i>Developed and Agriculture</i>	
Developed, Open Space - Low Intensity	430
Developed, Medium - High Intensity	84
<i>Other</i>	
Barren Lands, Non-specific	30

a. Source: DIRS 174324-NatureServe, all.

b. Mojave and Nellis ecoregions are included in totals. Humboldt ecoregion was excluded because construction-related impacts would not occur there.

c. To convert square kilometers to acres, multiply by 247.10.

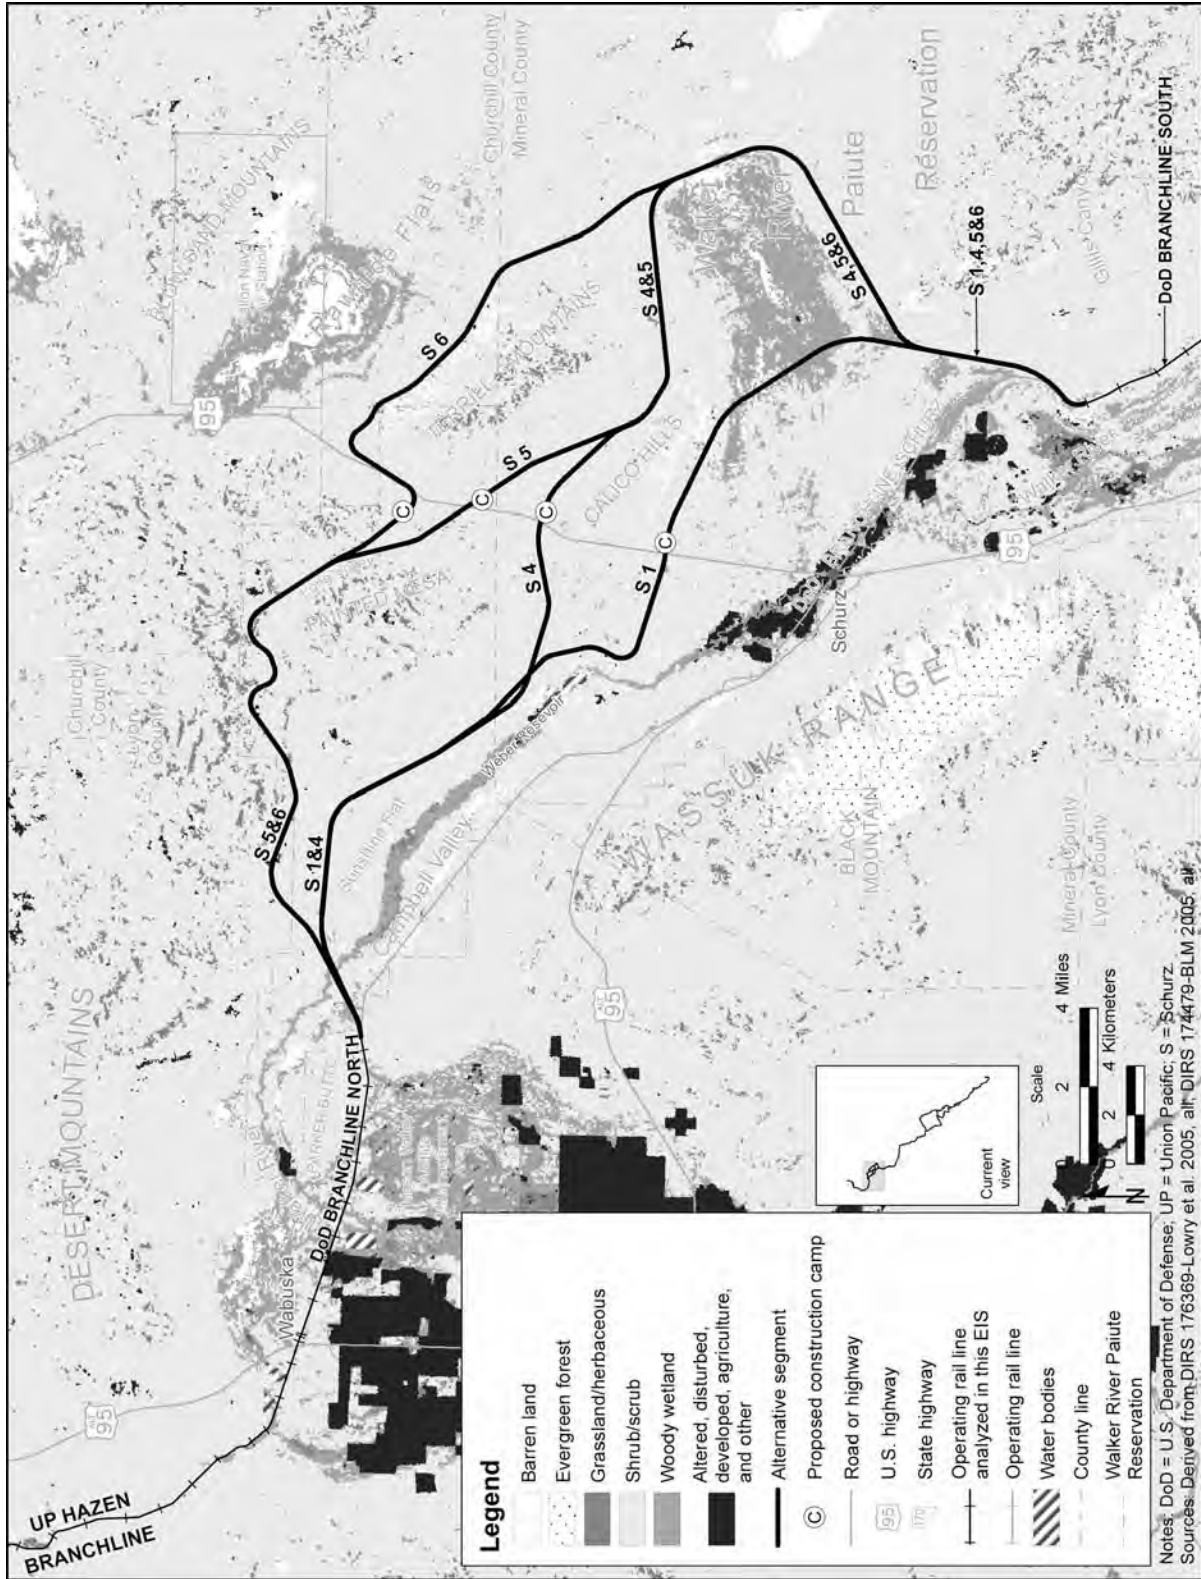


Figure 3-198. Land-cover classes the Mina rail alignment would cross within map area 1.

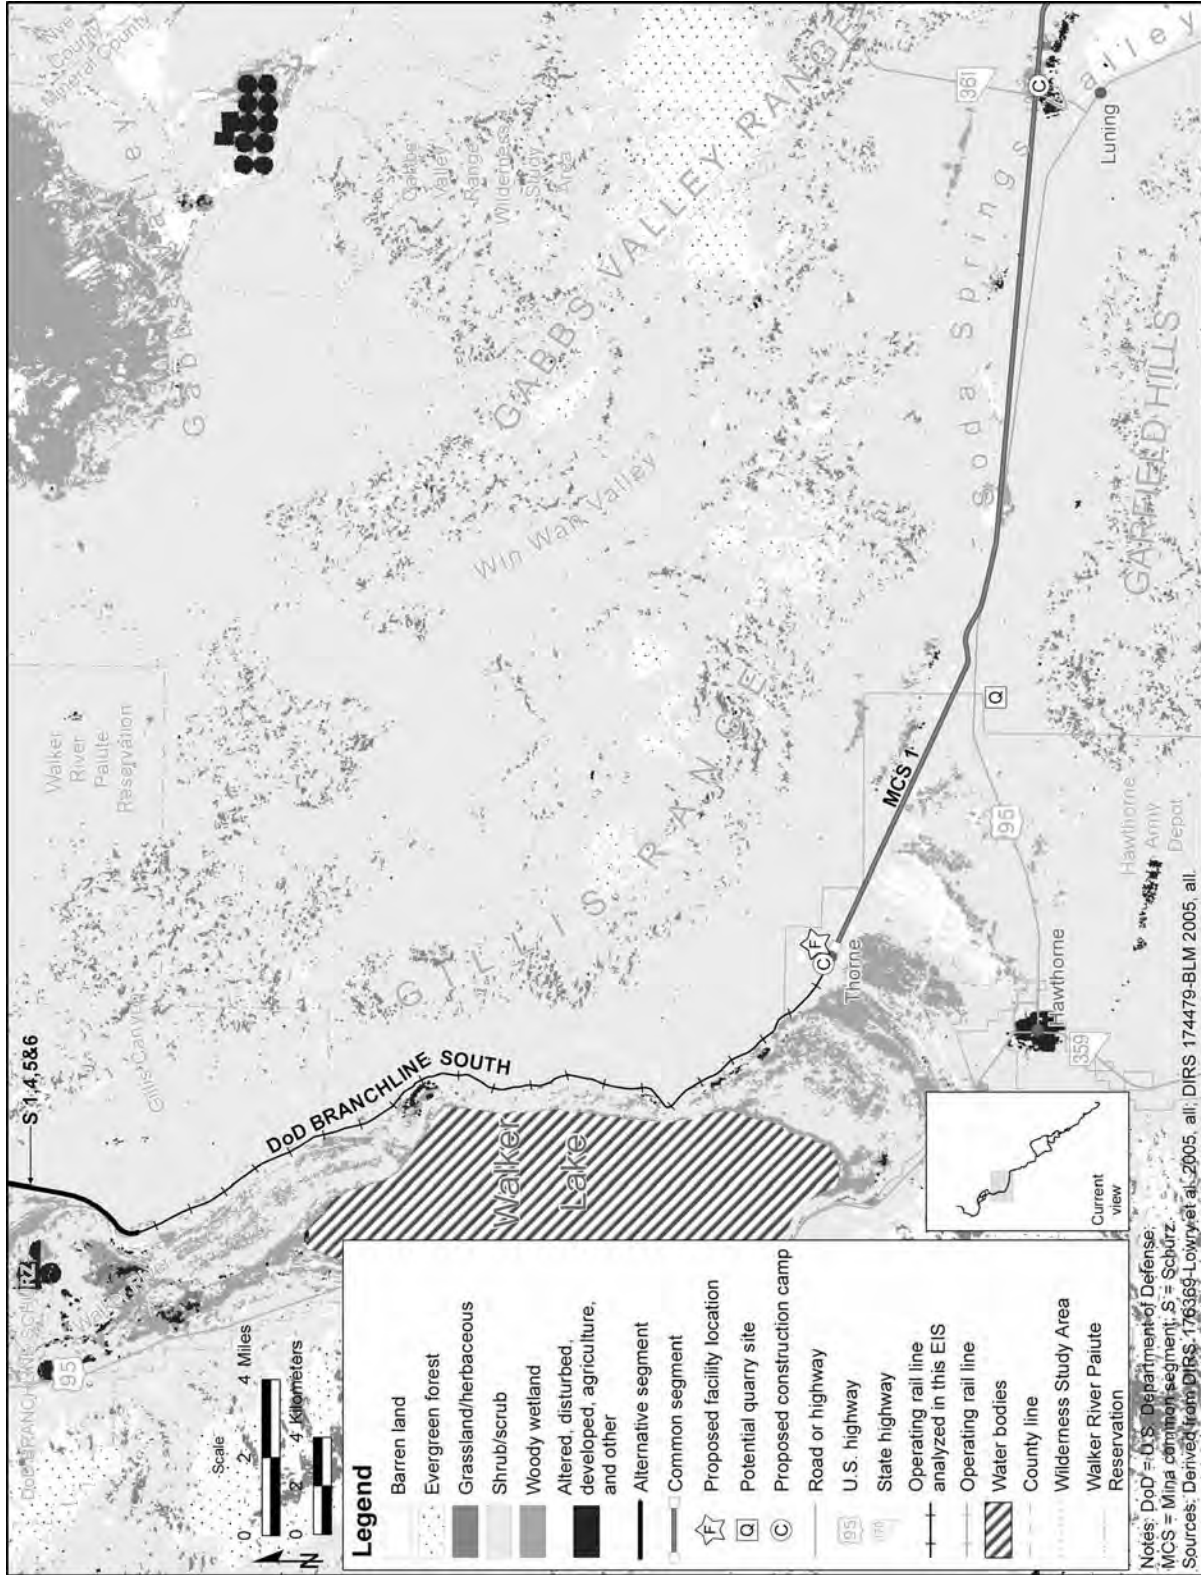


Figure 3-199. Land-cover classes the Mina rail alignment would cross within map area 2.

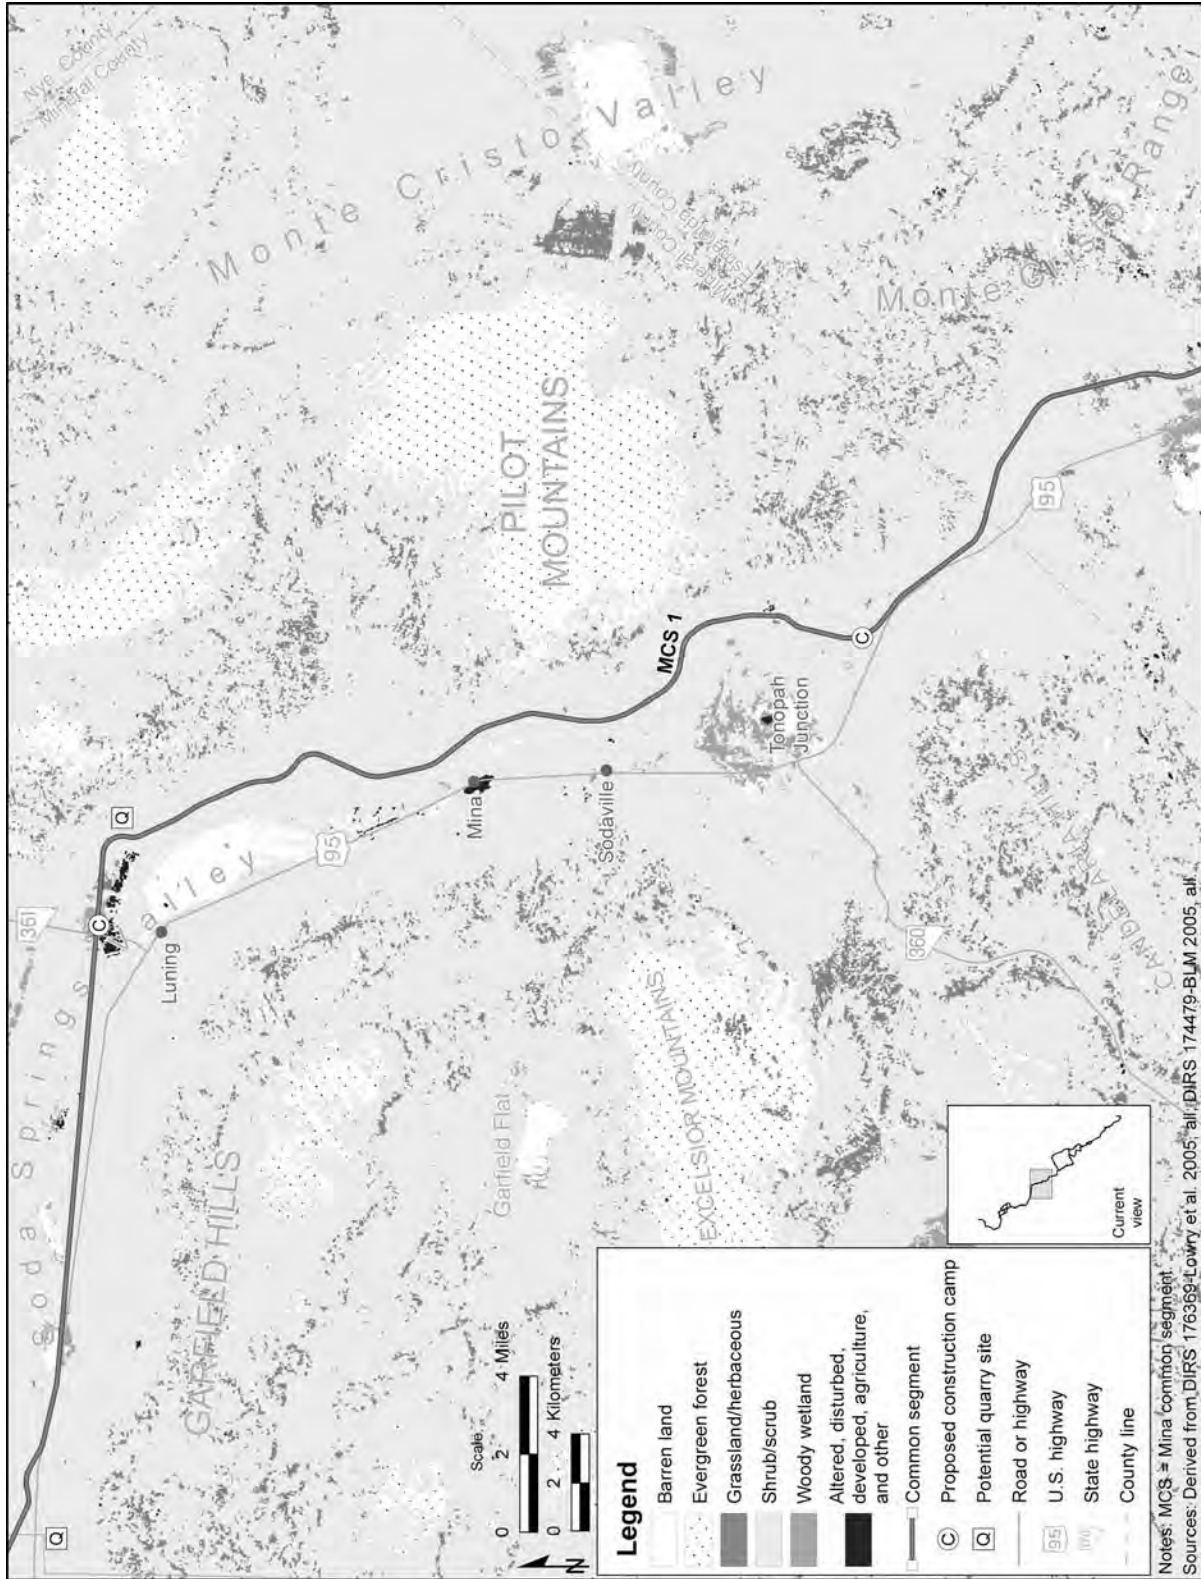


Figure 3-200. Land-cover classes the Mina rail alignment would cross within map area 3.

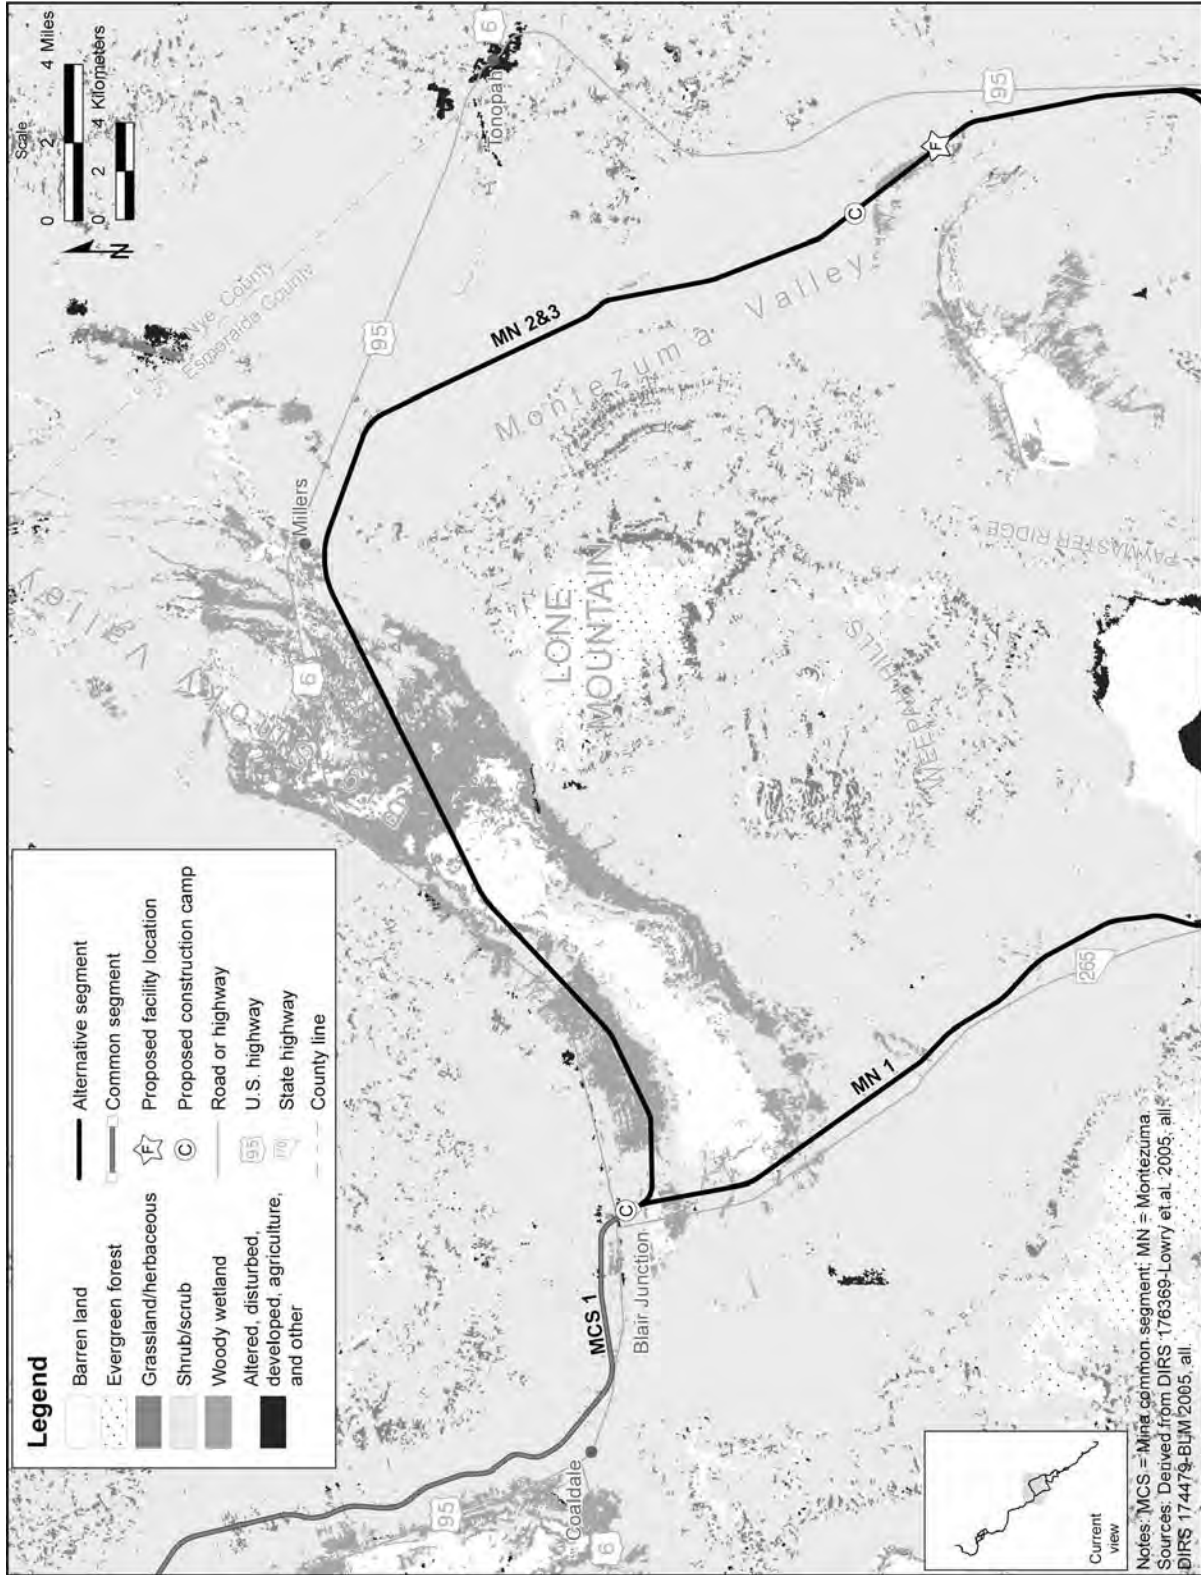


Figure 3-201. Land-cover classes the Mina rail alignment would cross within map area 4.

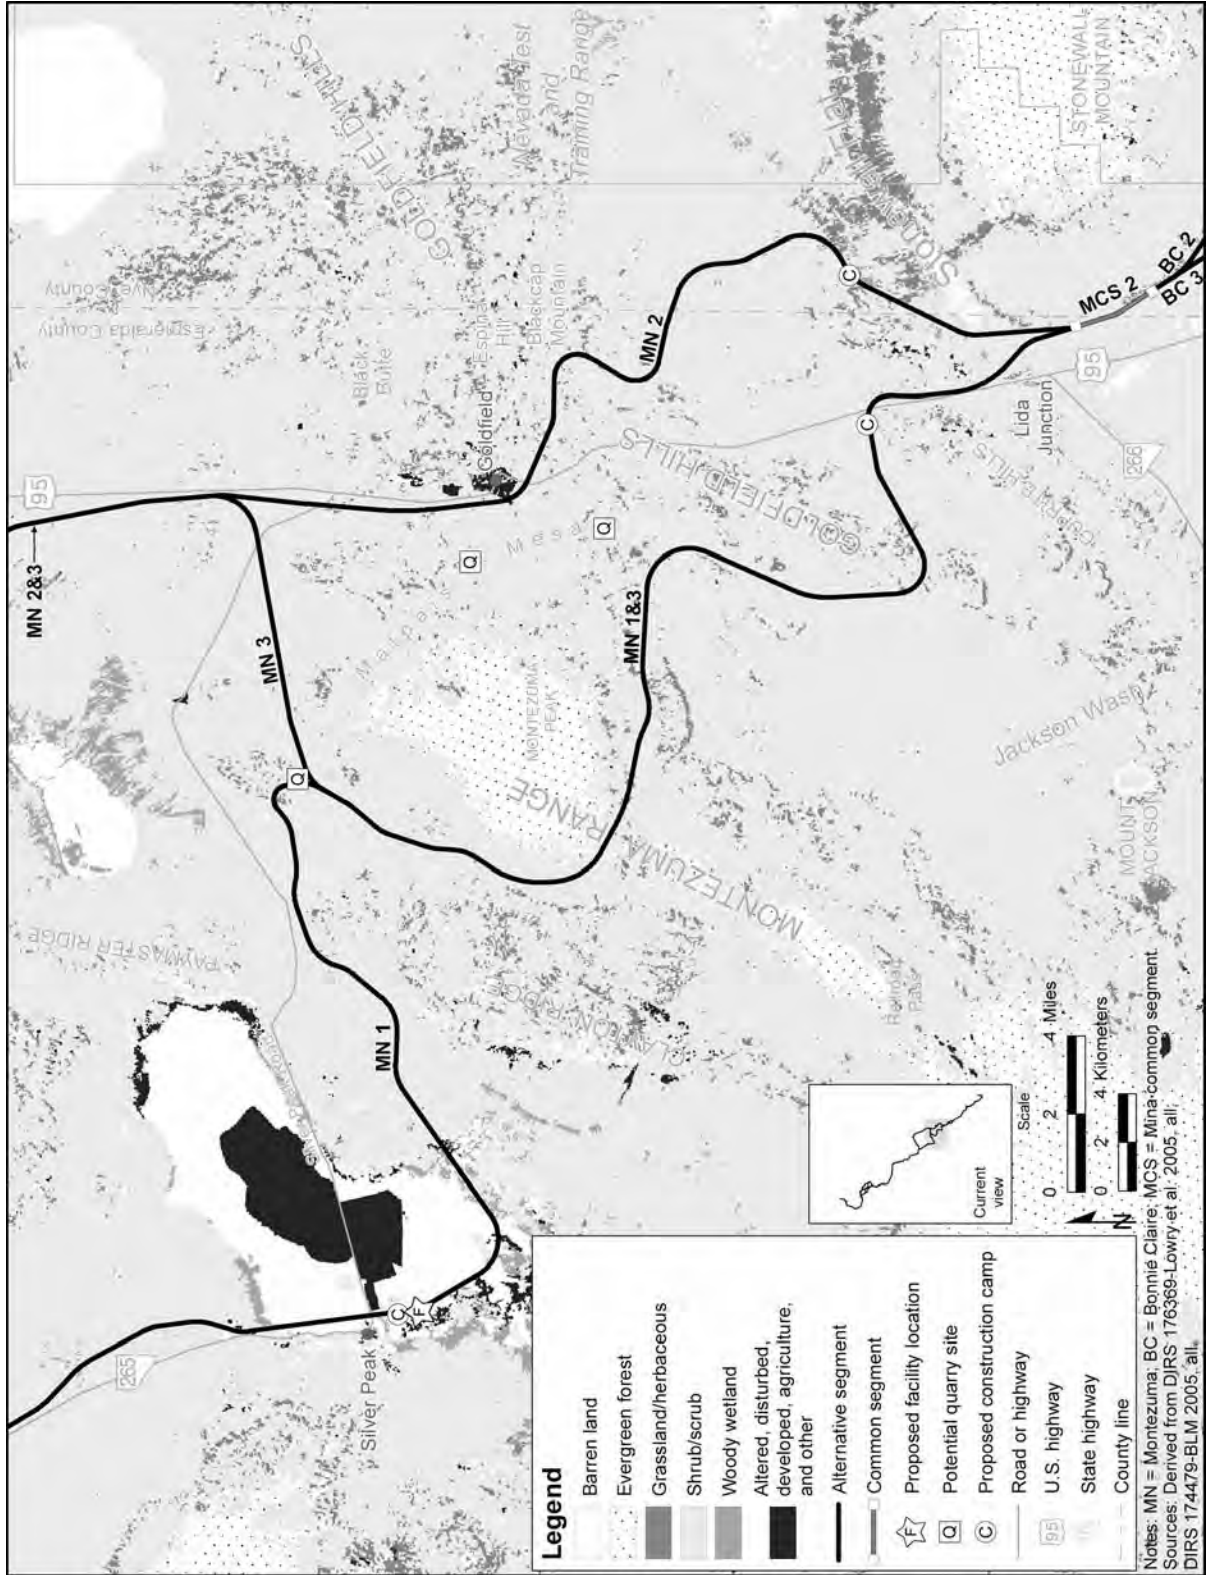


Figure 3-202. Land-cover classes the Mina rail alignment would cross within map area 5.

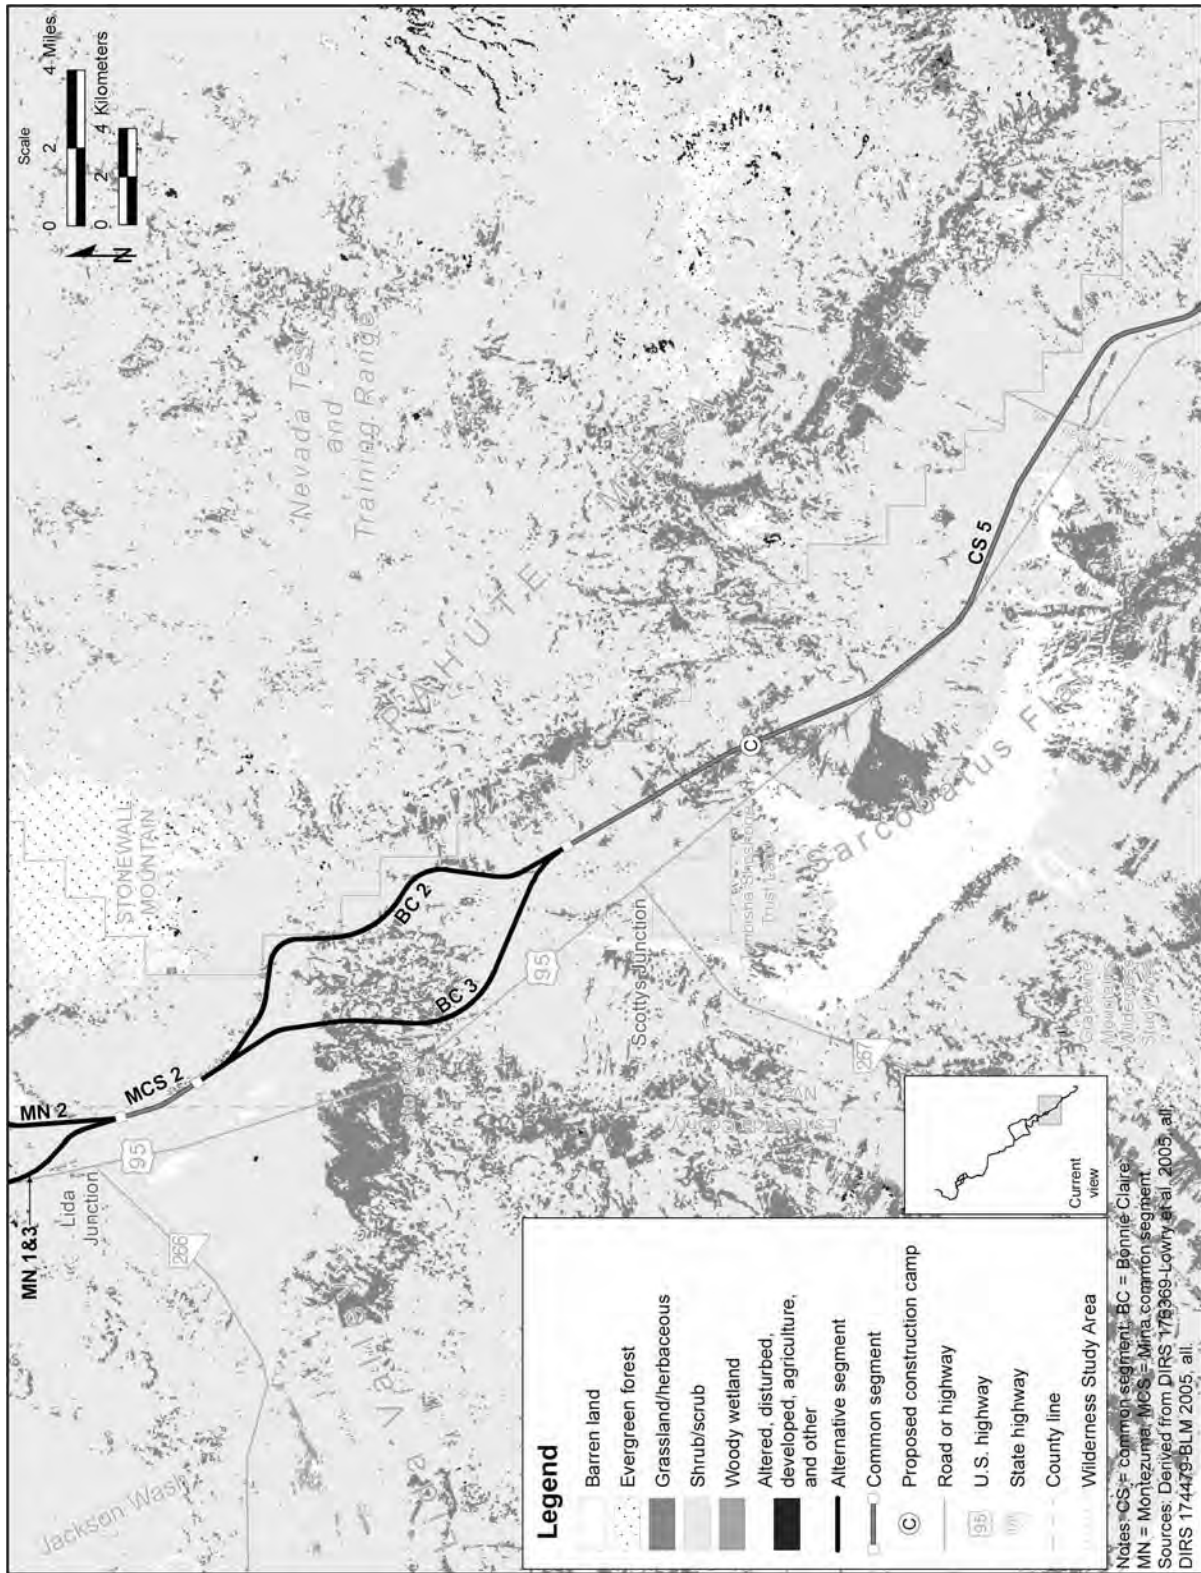


Figure 3-203. Land-cover classes the Mina rail alignment would cross within map area 6.

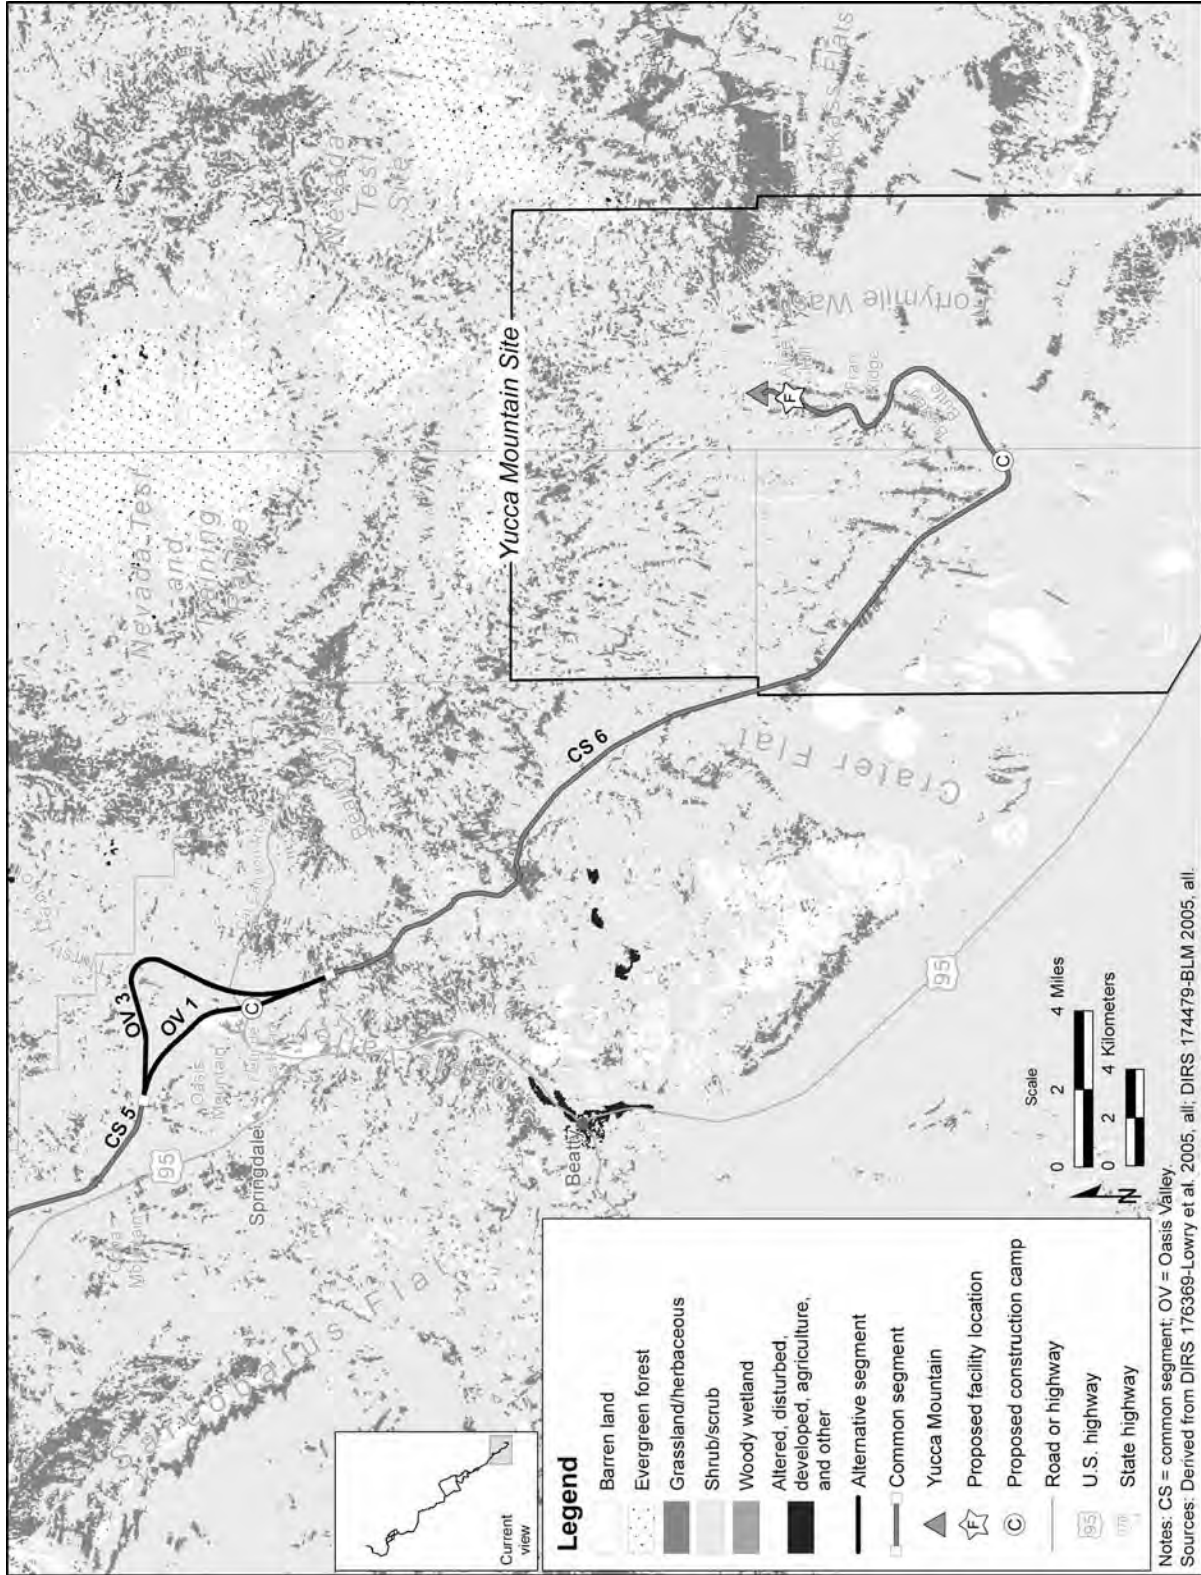


Figure 3-204. Land-cover classes the Mina rail alignment would cross within map area 7.

land-cover types within the construction right-of-way and study area are the Inter-Mountain Basins Mixed Salt Desert Scrub and the Inter-Mountain Basins Big Sagebrush Shrubland.

Appendix H, Table H-1, describes land-cover types.

Undisturbed areas of winterfat, or whitesage (*Krascheninnikovia lanata*), are present, but uncommon, within the construction right-of-way. While they have no official protected status with any federal or state agency, the BLM has identified these vegetation communities as important and their conservation or protection should be considered during development of any projects.

In addition to shrubs and grasses, biological soil crusts are an important component to both the Mojave and Great Basin ecosystems. Biological crusts are comprised of multiple species of lichen, moss, cyanobacteria and algae which live on top of the soil surface, binding with soil particles and forming a cohesive mat or crust on the surface of arid landscapes (DIRS 181866-Belnap 2006, p. 1). Biological crusts (if present) could play an important role in maintaining the health of some of the desert vegetation communities listed in Table 3-6, including but not limited to facilitating water infiltration, retaining soil moisture, and reducing soil loss from wind and water erosion (DIRS 181957-Kaltenecker and Wicklow-Howard 1994, p. 1-8). Crusts are highly sensitive to surface disturbance and are easily destroyed. Biological crusts likely occur within the region of influence in some areas where there has been no surface disturbance. Biological crusts are potentially present in areas where construction would occur, but because of insufficient data regarding the location and extent of biological crusts in the region of influence, Section 4.3.7 does not discuss impacts to biological crusts.

3.3.7.2.1.1 Noxious Weeds and Invasive Species. The Great Basin-Mojave Desert region is threatened by a number of *nonnative*, invasive plant species that have displaced *native plant species*. Invasive plant species, such as red brome (*Bromus rubens*), tamarisk (*Tamarix ramosissima*), and cheatgrass (*Bromus tectorum*), have the ability to out-compete individual species of native range plants, which results in extensive monocultures of the introduced species. *Invasive species* usually have little to no nutritional value for livestock and wildlife; some invasive species are toxic or physically injurious to animals, can increase the frequency of wildfires, and degrade wildlife habitat by reducing the diversity of native vegetation (DIRS 155925-Nevada Weed Action Committee 2000, p. 5).

Some plant species are considered *noxious weeds*, an official designation used by federal and state authorities to identify species with a high likelihood of being very destructive or difficult to control or eradicate. Chapter 555.010 of the Nevada Administrative Code lists species designated as noxious. Chapter 555 of the Nevada Revised Statutes directs that designated noxious weeds are to be controlled on both public and private land, and provides for enforcement measures should the landowner or occupier

Nonnative plant species: A species found in an area where it has not historically been found.

Native plant species: With respect to a particular ecosystem, a species that, other than as a result of an introduction, historically occurred or currently occurs in that ecosystem (Executive Order 13112, *Invasive Species*).

Invasive plant species: An alien species whose introduction does or is likely to cause economic or environmental harm or harm to human health (Executive Order 13112, *Invasive Species*).

Noxious weeds: The BLM defines noxious weeds as: “A plant that interferes with management objectives for a given area of land at a given point in time.” (DIRS 177037-BLM 1996, p. 3) The State of Nevada defines noxious weeds as: “Any species of plant which is, or liable to be, detrimental or destructive and difficult to control or eradicate...” (Nevada Revised Statute 555.005).

Weeds can be native or nonnative, invasive or non-invasive, and noxious or not noxious. Invasive species include not only noxious weeds, but also other non-native plants. The BLM considers plants invasive if they have been introduced into an environment where they did not evolve. As a result, invasive species usually have no natural enemies to limit their spread and can produce significant detrimental changes.

fail to take corrective action. While many noxious species are invasive, invasiveness is not required for a species to be designated noxious. Some species managed as noxious weeds are not considered truly invasive because they cannot effectively out-compete healthy communities of native vegetation.

3.3.7.2.1.2 Wetlands and Riparian Habitats. Riparian habitats are transition areas from wetland or stream habitat to upland habitat. Wetlands are areas that are saturated by water for a sufficient amount of time to support vegetation that is adapted to saturated soil conditions. While wetland and riparian habitats in Nevada cover a very small percentage of the total area of the state, they support a comparatively high number and large diversity of species, many of which are locally *endemic*. Wetland and riparian habitats have been reduced in the region over the years due in part to water removal, drought, and the presence of invasive species, such as tamarisk (DIRS 174518-BLM 2005, p. 3.5-9). Appendix F contains information on wetlands within the project area and Sections 3.3.5 and 4.3.5 discuss impacts in relation to Section 404 of the Clean Water Act and wetland fill permitting. This section discusses wetlands and riparian habitats that support terrestrial and aquatic species.

To maintain consistency within this section, DOE assessed the amount and type of wetland and riparian habitat utilizing the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all). Section 3.3.5, Surface Water Resources, utilizes National Wetlands Inventory maps (DIRS 176976-NWI 2006, all) and the results of the wetland delineations conducted during the field surveys in 2007 (DIRS 180889-PBS&J 2007, all) and 2006 (DIRS 180889 PBS&J 2007, pp. 11 and 12) to calculate the area of the wetlands. Therefore, the area totals differ between Sections 3.3.5 and 3.3.7 because Section 3.3.7 analyzes wetland and riparian habitat and Section 3.3.5 analyzes only the wetland areas.

According to the Southwest Regional Gap Analysis Project, there are three types of wetland or riparian land-cover types along the Mina rail alignment and at locations of the proposed rail line construction and operations support facilities: North American Warm Desert Lower Montane Riparian Woodland and Shrubland; Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland; and North American Arid West Emergent Marsh (Figures 3-205 to 3-211) and (see Table 3-126).

The North American Warm Desert Lower Montane Riparian Woodland and Shrubland is found along perennial and seasonally intermittent streams. Generally located in middle to low elevations and found in canyons and valleys, vegetation in this land-cover type depends on seasonal flooding and removal of sediment that occurs during these flood events. The vegetation is a mix of tree and shrub species including Fremont cottonwood (*Populus fremontii*) and willows, including sandbar willow (*Salix exigua*) and seep willows (*Baccharis salicifolia*) (DIRS 174324-NatureServe 2004 pp. 140 to 142).

The Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland land cover occurs in the mountains of the Great Basin from middle to high elevations. This habitat requires flooding, and the scouring and subsequent deposition of soils that occurs during flood events, for maintenance and germination of vegetation. Vegetation typically associated with this type of riparian habitat includes Fremont cottonwood, willows, rushes (*Juncus* spp.), and sedges (*Carex* spp.) (DIRS 174324-NatureServe 2004, pp. 149 and 150).

The North American Arid West Emergent Marsh land-cover type occurs throughout the arid regions of the western United States. This land cover occurs along slow-moving streams, has soils that are able to accumulate organic material, and contains vegetation that is adapted to frequently or continually saturated soil conditions. Vegetation commonly found in marsh areas includes bulrushes (*Scirpus* spp.), cattails (*Typha* spp.), and rushes (DIRS 174324-NatureServe 2004, pp. 154 to 156).

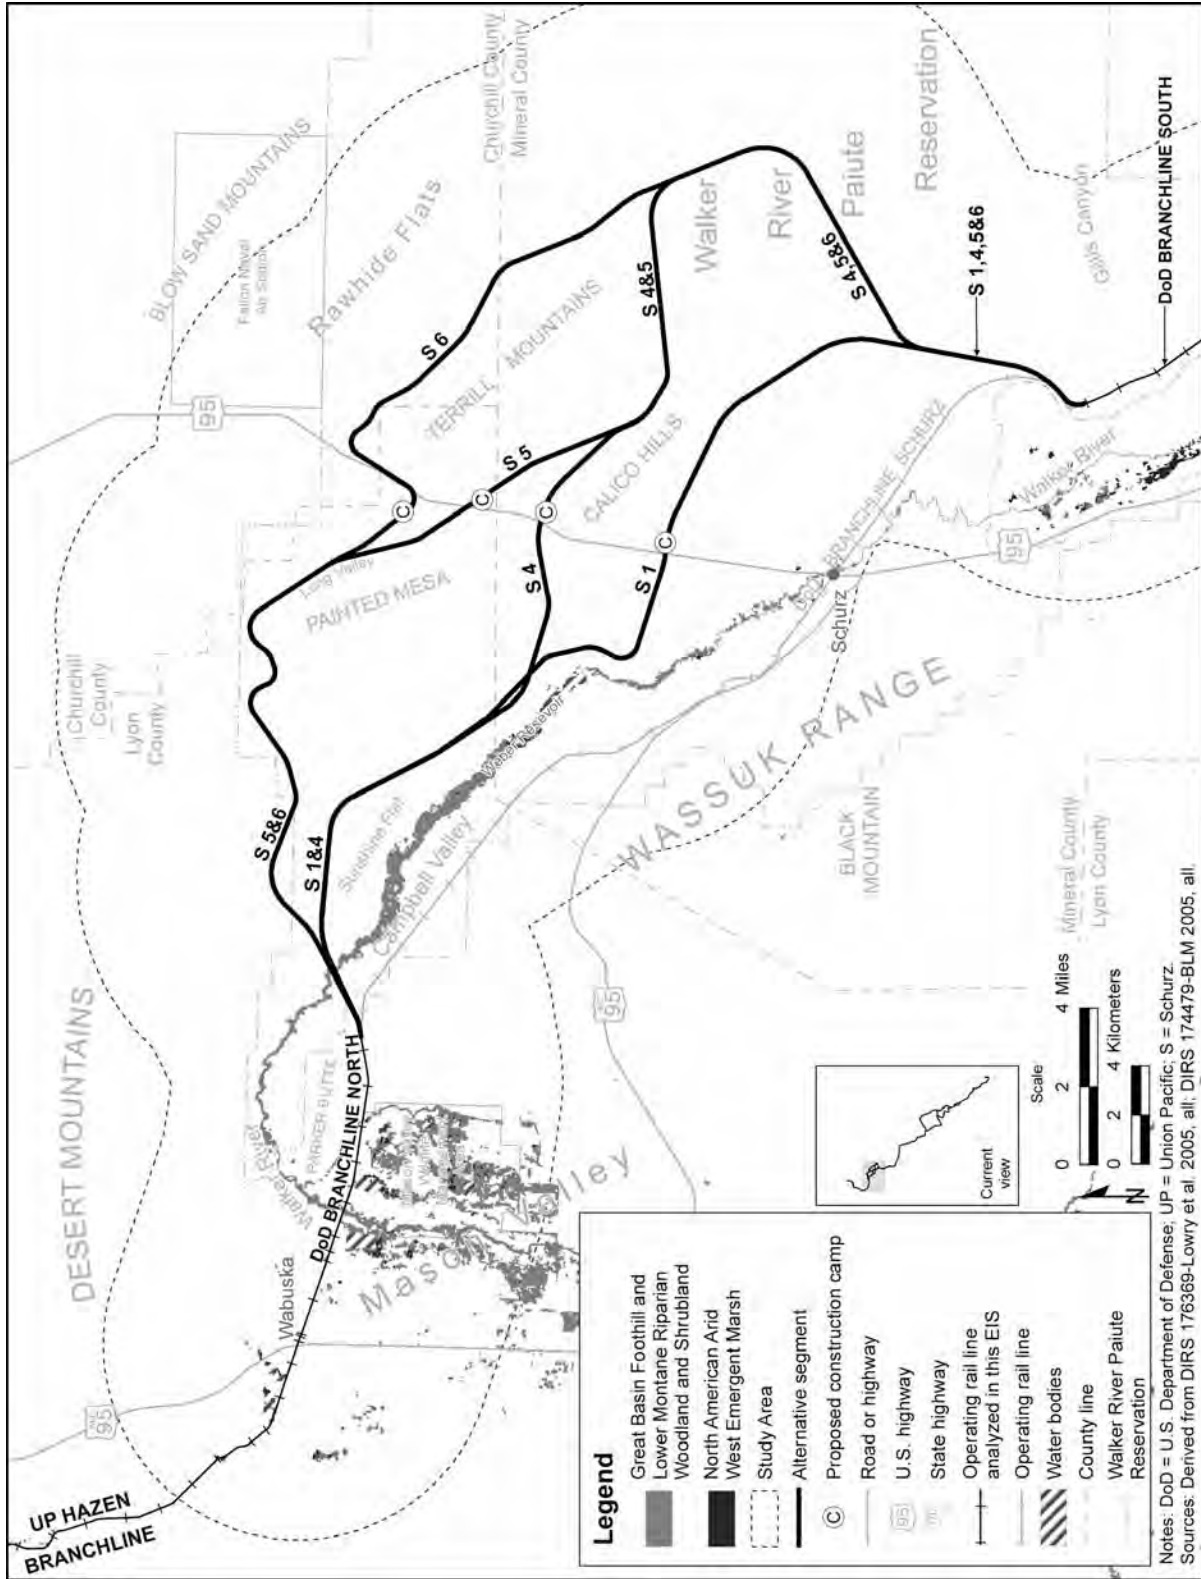


Figure 3-205. Wetland/riparian habitat the Mina rail alignment would cross in map area 1.

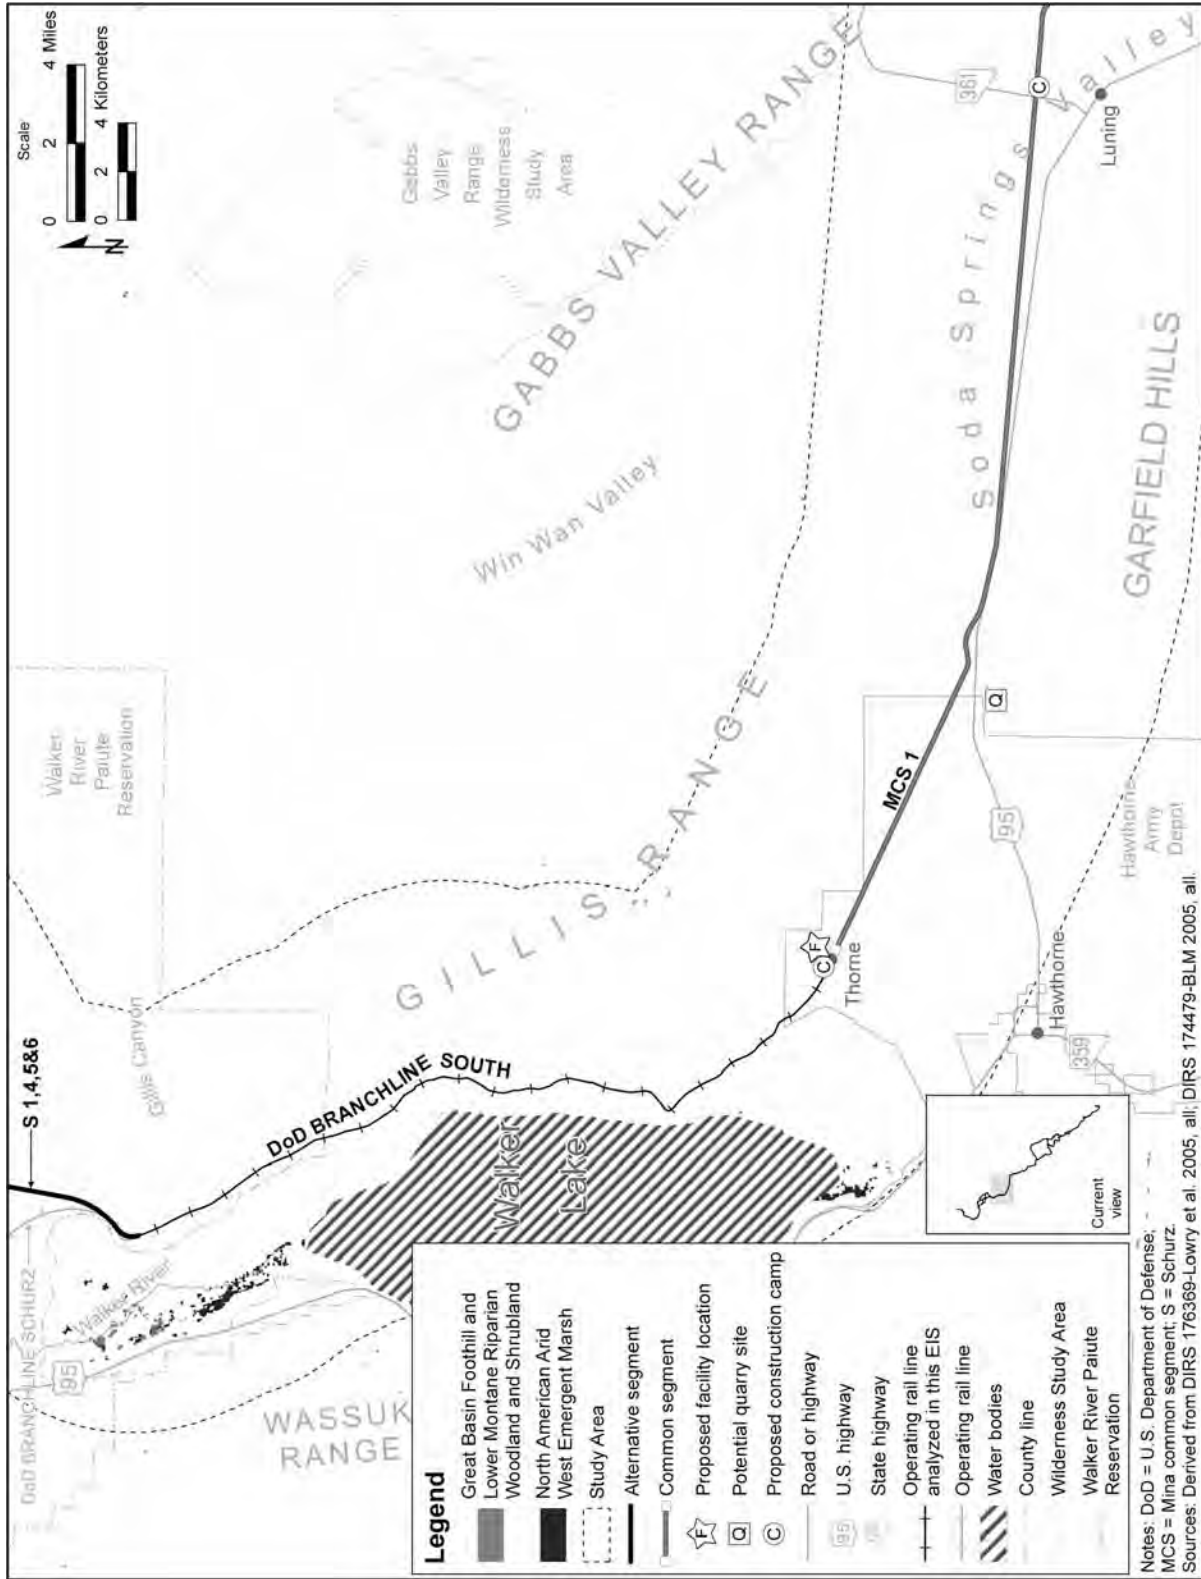


Figure 3-206. Wetland/riparian habitat the Mina rail alignment would cross in map area 2.

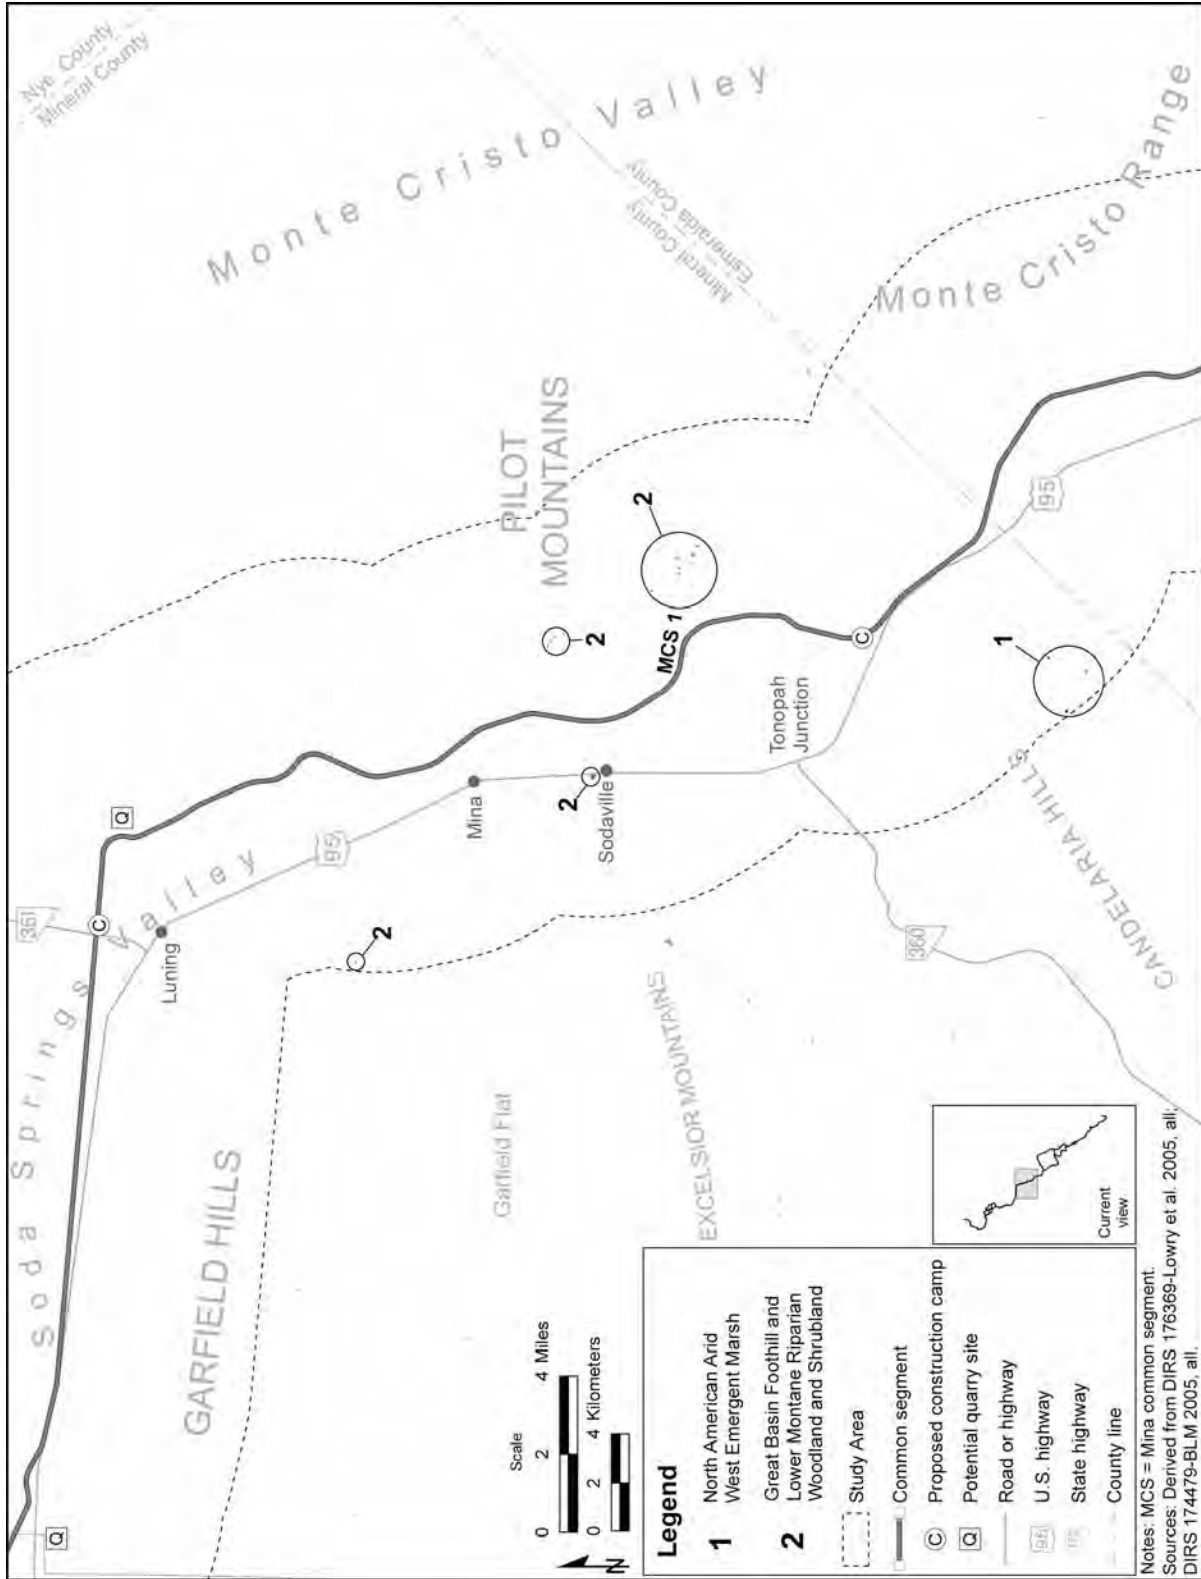


Figure 3-207. Wetland/riparian habitat the Mina rail alignment would cross in map area 3.

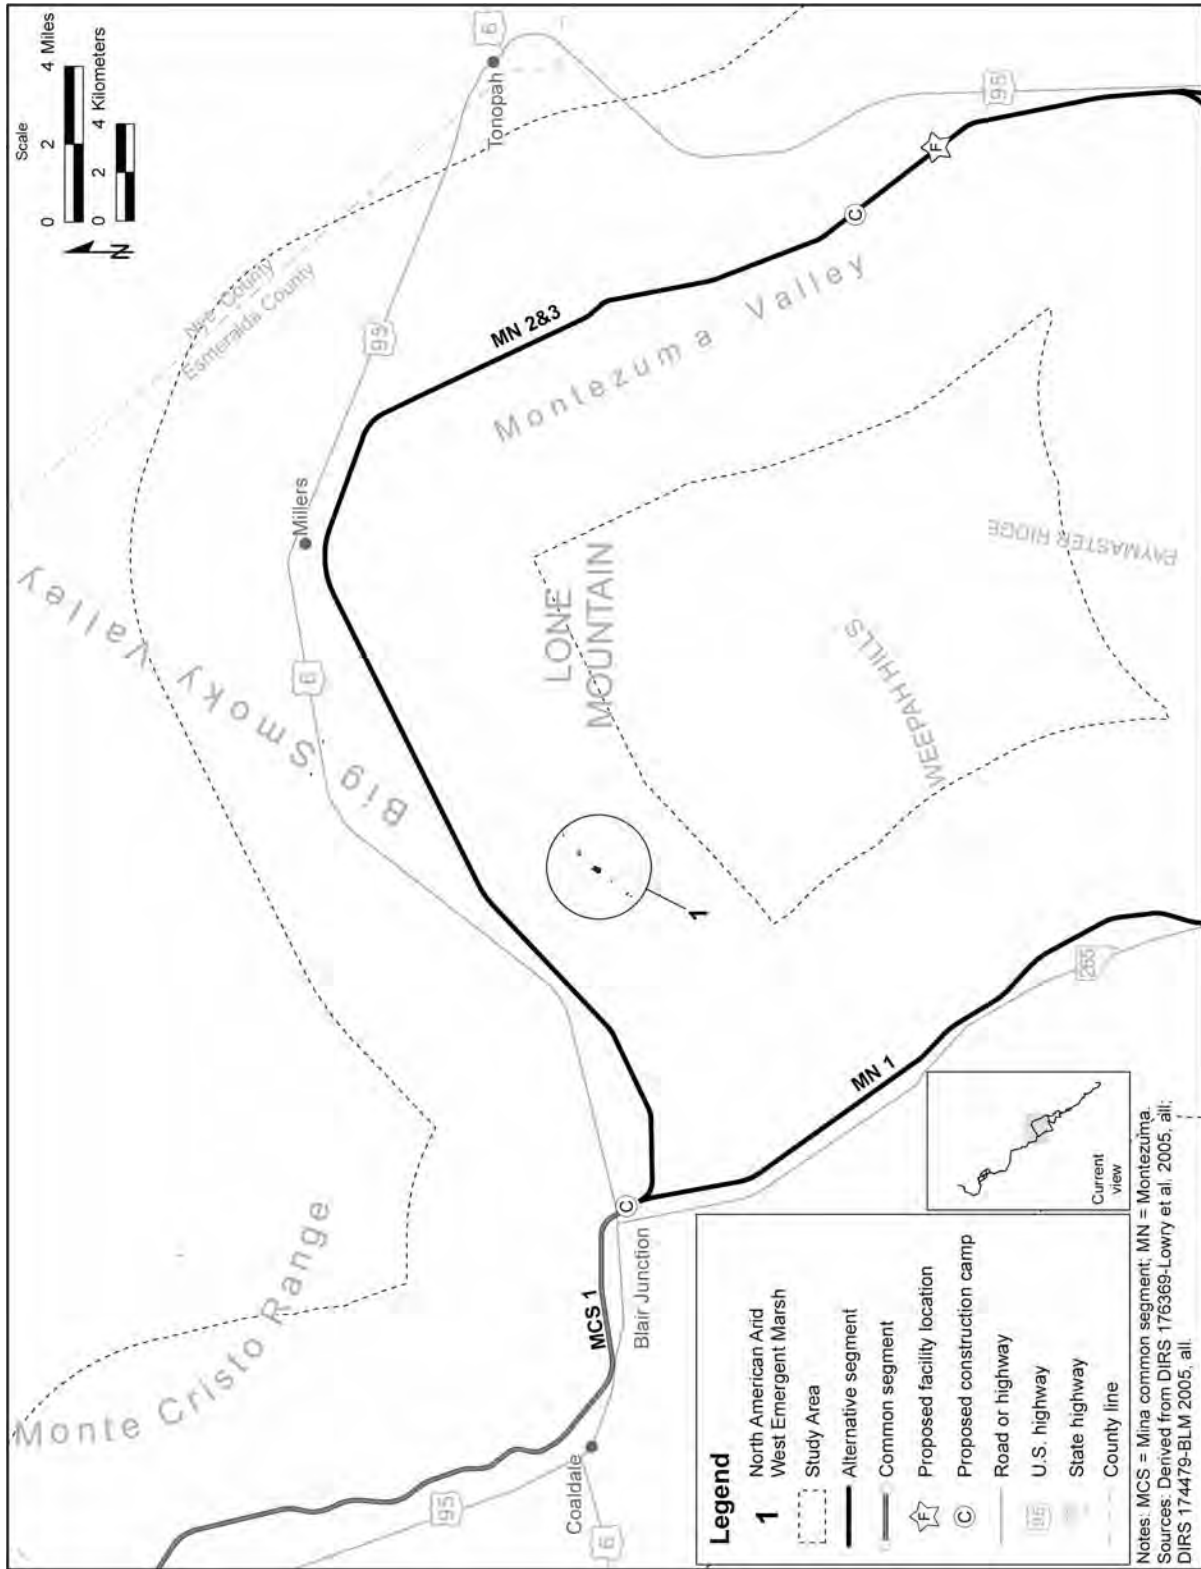


Figure 3-208. Wetland/riparian habitat the Mina rail alignment would cross in map area 4.

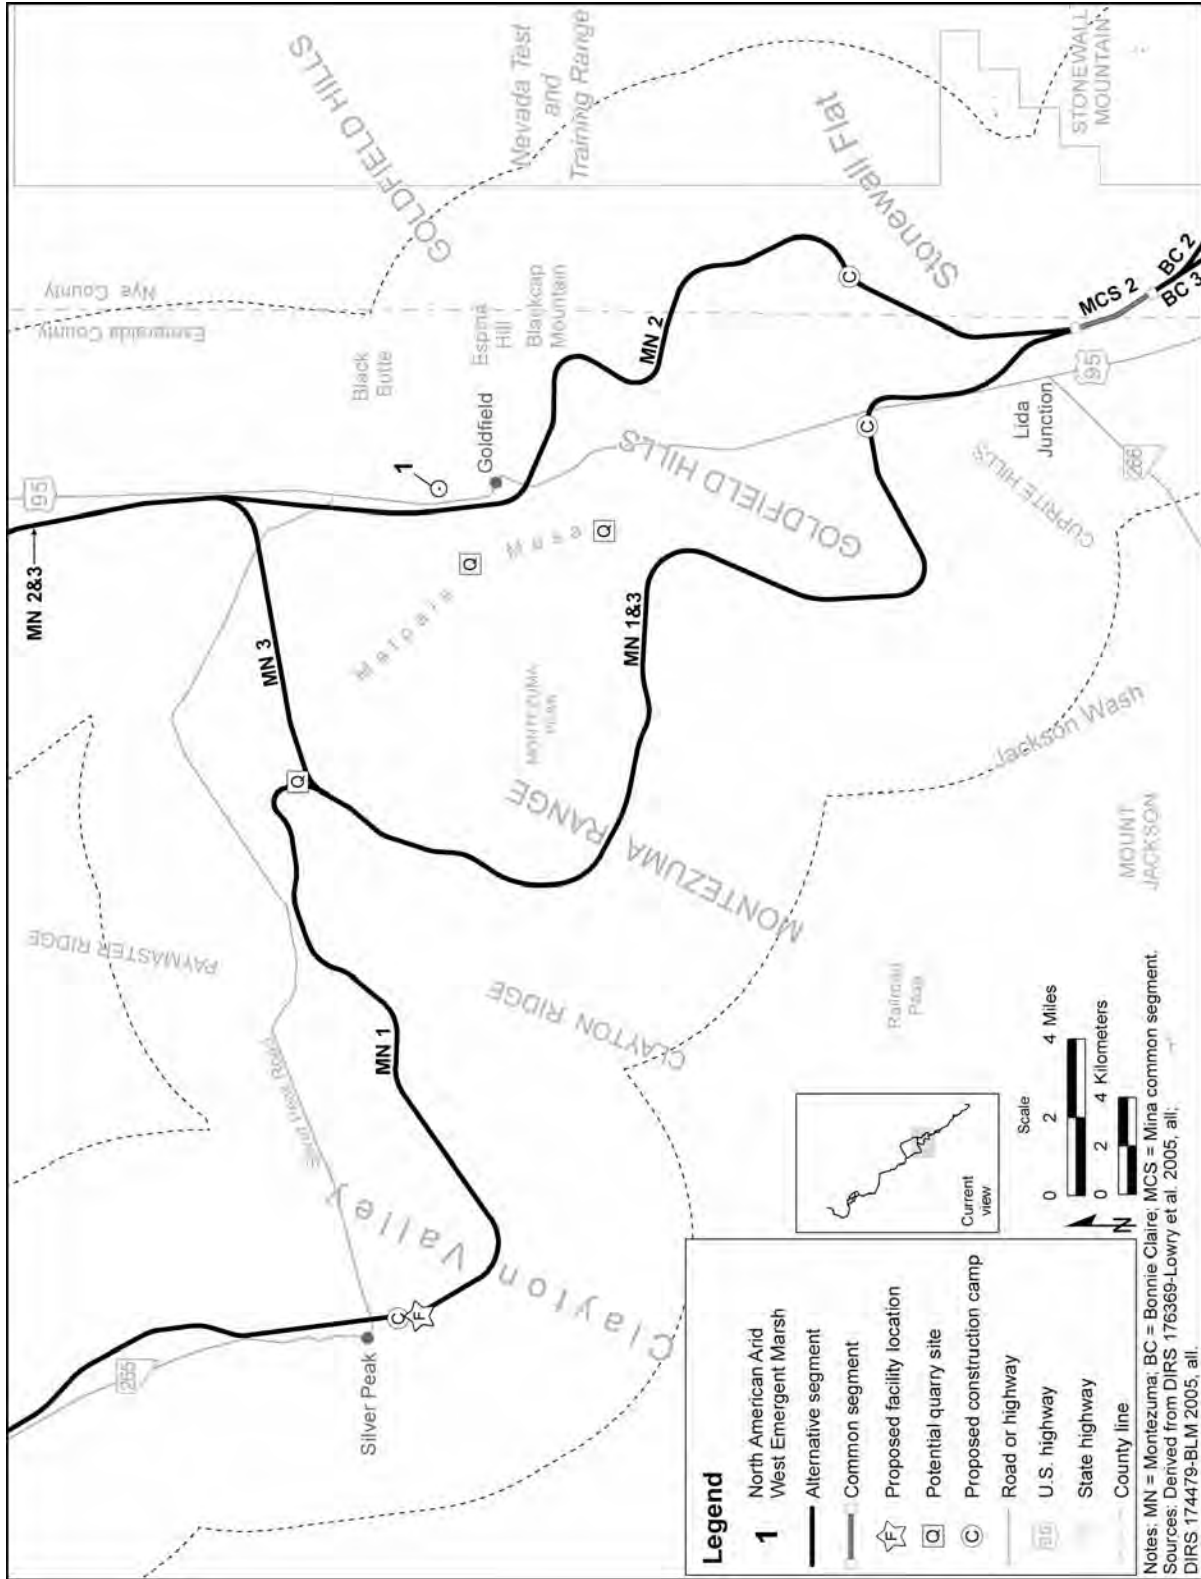


Figure 3-209. Wetland/riparian habitat the Mina rail alignment would cross in map area 5.

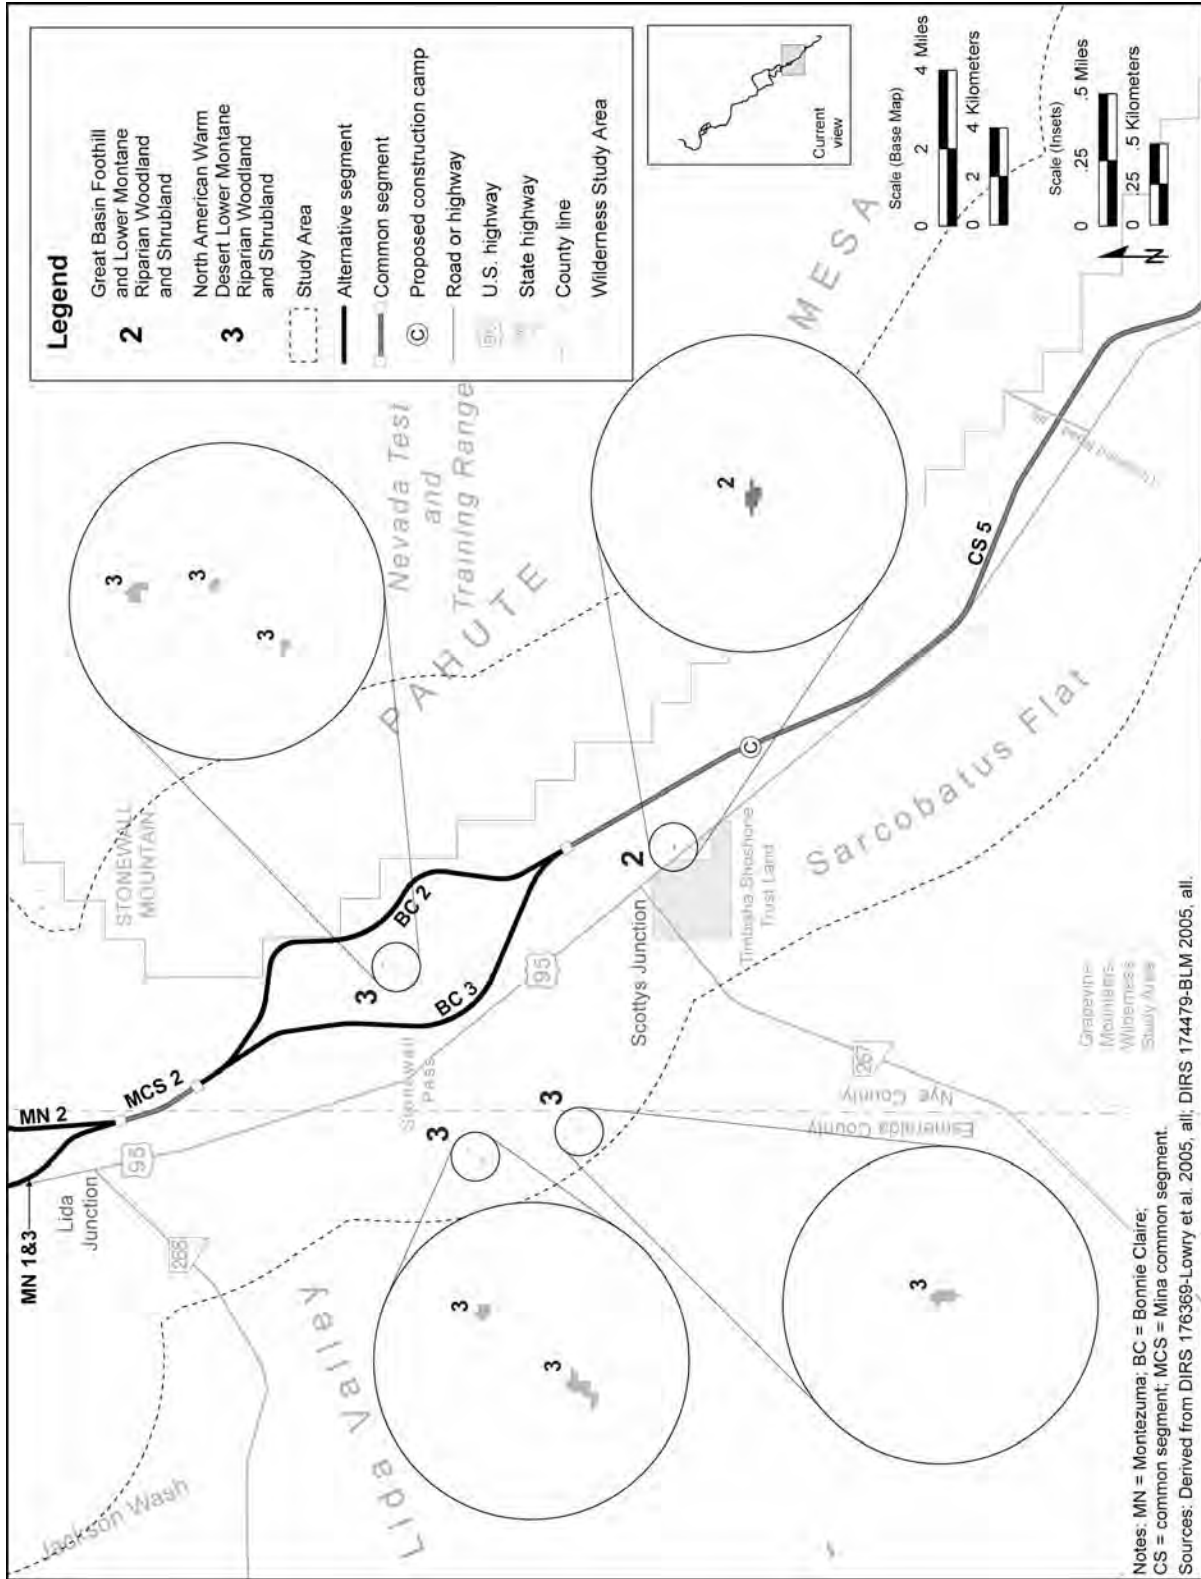


Figure 3-210. Wetland/riparian habitat the Mina rail alignment would cross in map area 6.

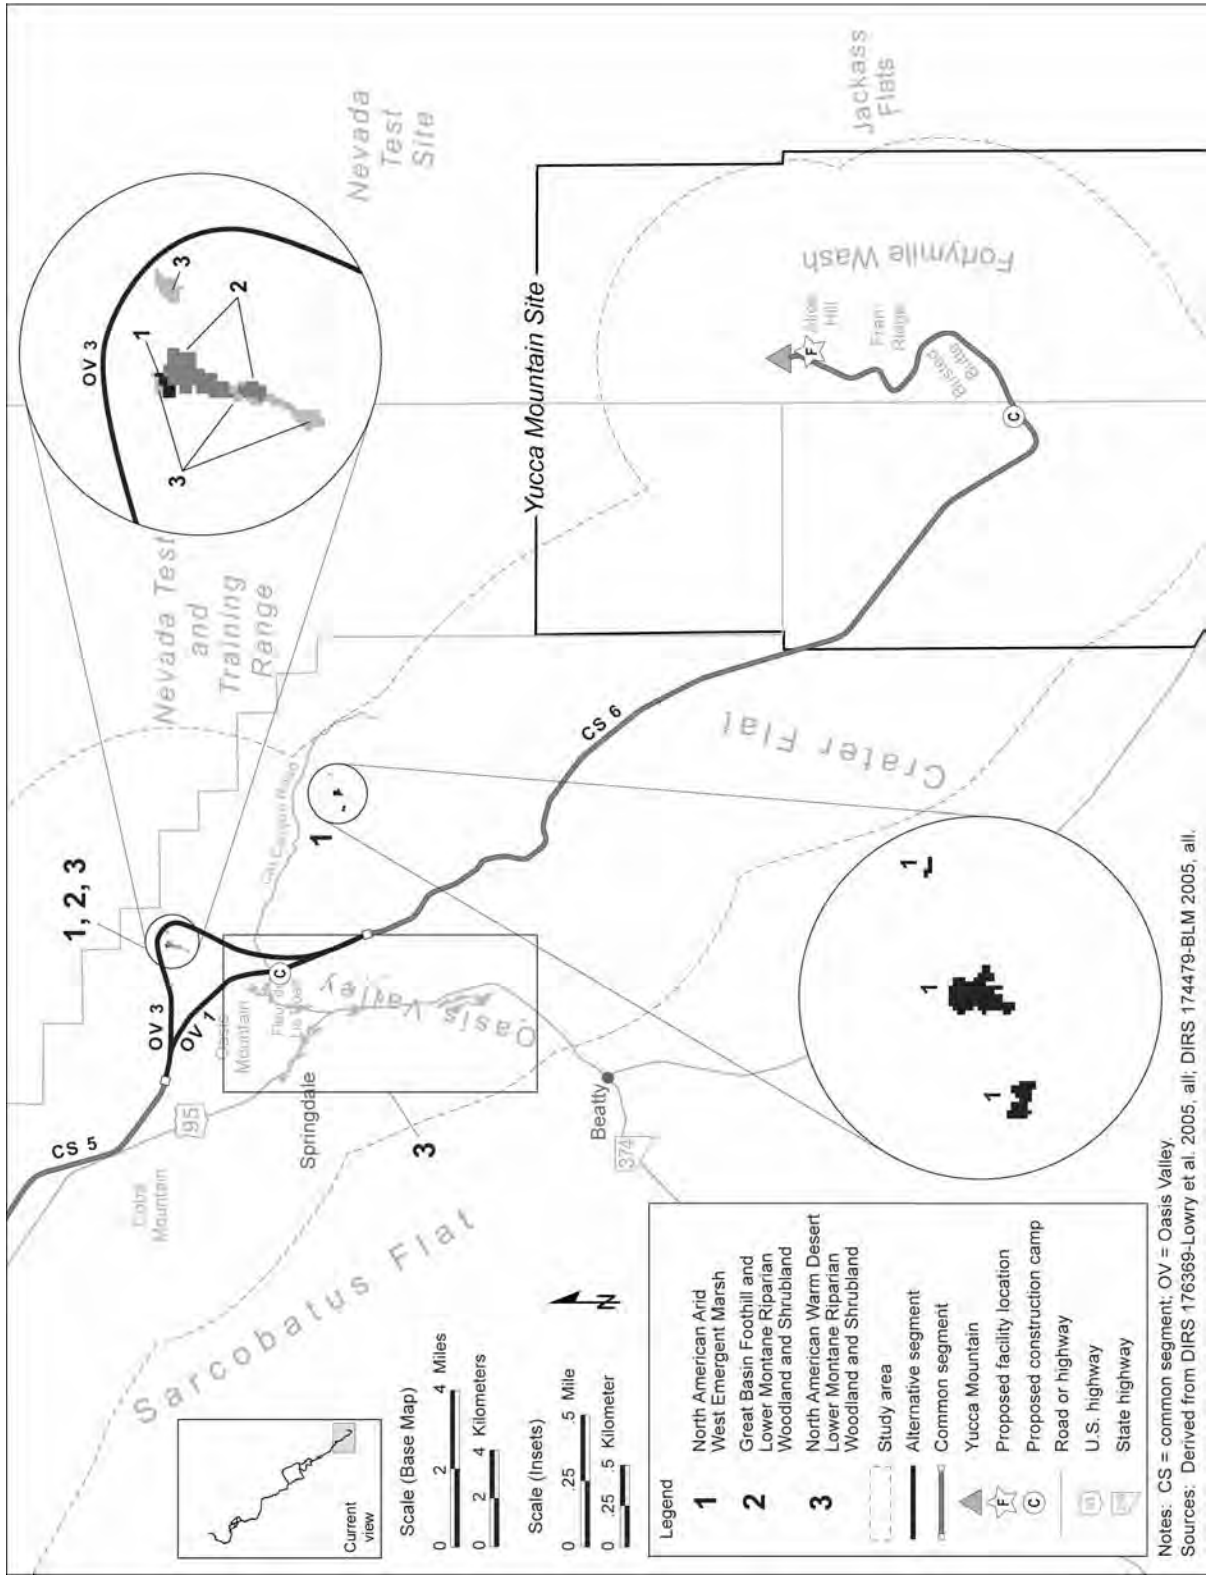


Figure 3-211. Wetland/riparian habitat the Mina rail alignment would cross in map area 7.

3.3.7.2.2 Wildlife

As with the vegetation communities and wetland habitats, DOE gathered data on wildlife communities to identify existing information regarding the occurrence and distribution of wildlife, including mammals, birds, reptiles, and aquatic species, within the construction right-of-way. These investigations incorporated literature and database searches and consultations with land and resource management agencies and authorities, including the BLM, the U.S. Fish and Wildlife Service, the Nevada Natural Heritage Program, and the Nevada Department of Wildlife. DOE also obtained information regarding Nevada game species from these agencies. Concurrent with other field surveys, the Department gathered information during field observations to identify the presence of wildlife within the construction right-of-way. DOE used habitat-related information from the Southwest Regional Gap Data to identify areas where a high probability of species existence occurred in relation to the construction right-of-way. Appendix H contains a map detailing field survey locations.

3.3.7.2.3 Special Status Species

Special status species are plants, fish, and wildlife species that are afforded some level of protection or special management under federal or state laws or regulations. DOE contacted the U.S. Fish and Wildlife Service to obtain a list of species protected under the federal Endangered Species Act that are known to exist or could exist within the construction right-of-way or within the study area (DIRS 181055-Williams 2007). The Department assessed the potential for federally listed species to occur within the construction right-of-way by reviewing agency listings of known, or potentially occurring, listed species, and through a review of potential habitat for those species along the Mina rail alignment. The Department also obtained location records for special status species from a statewide database managed by the Nevada Natural Heritage Program that contains records of incidental observations of rare or protected plants, fish, and wildlife species (DIRS 182061-Hopkins 2006, all). The special status species DOE selected for further consideration are one or a combination of the following:

- Special status species documented as occurring within the study area (Figure 3-212 and Figure 3-213)
- Special status species identified as potentially occurring in the study area by personnel affiliated with appropriate resource management agencies, including the BLM (DIRS 172900 BLM 2003, all), the U.S. Fish and Wildlife Service, the Nevada Department of Wildlife, or the Nevada Division of Forestry
- Special status species identified as potentially occurring in the study area because field personnel identified potentially suitable habitat during the field surveys

DOE used a Geographic Information System database to map the documented occurrences of special status plants and wildlife species within the study area in relation to the Southwest Regional Gap Analysis Project land-cover types. The Department then used these maps to identify areas of potential habitat and the presence of the documented special status species. Through field surveys, the Department further evaluated areas that appeared to contain viable habitat for a special status species. Appendix H provides details on the survey methodology for special status species.

3.3.7.2.4 State of Nevada Game Species

Table 3-127 lists the game species identified in the Nevada Administrative Code Sections 503.020, 503.045, and 503.060 that potentially occur in the study area and construction right-of way. Game species identified in these sections of the Nevada Administrative Code that are absent from the study area are listed in Appendix H, Table H-5, and are not considered further in this Rail Alignment EIS.

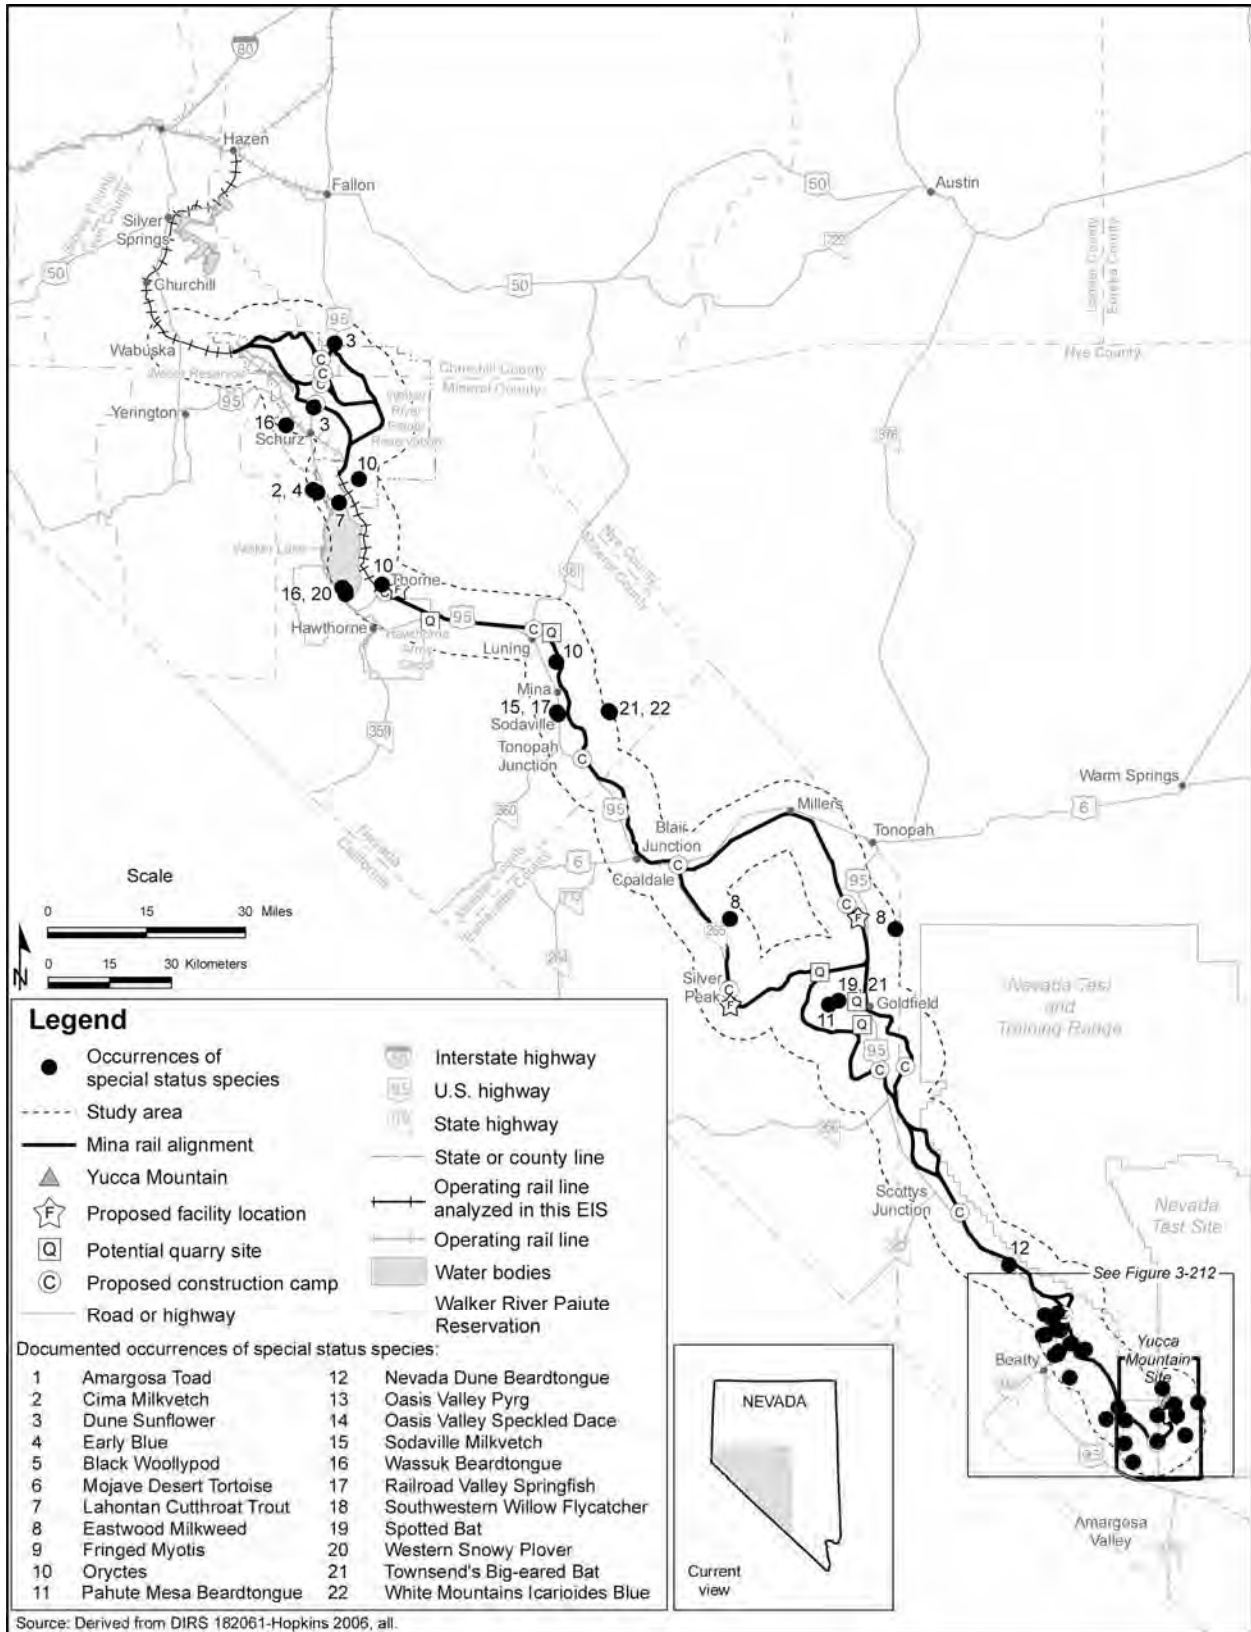


Figure 3-212. Occurrences of special status species documented in the Nevada Natural Heritage Program database along the Mina rail alignment.

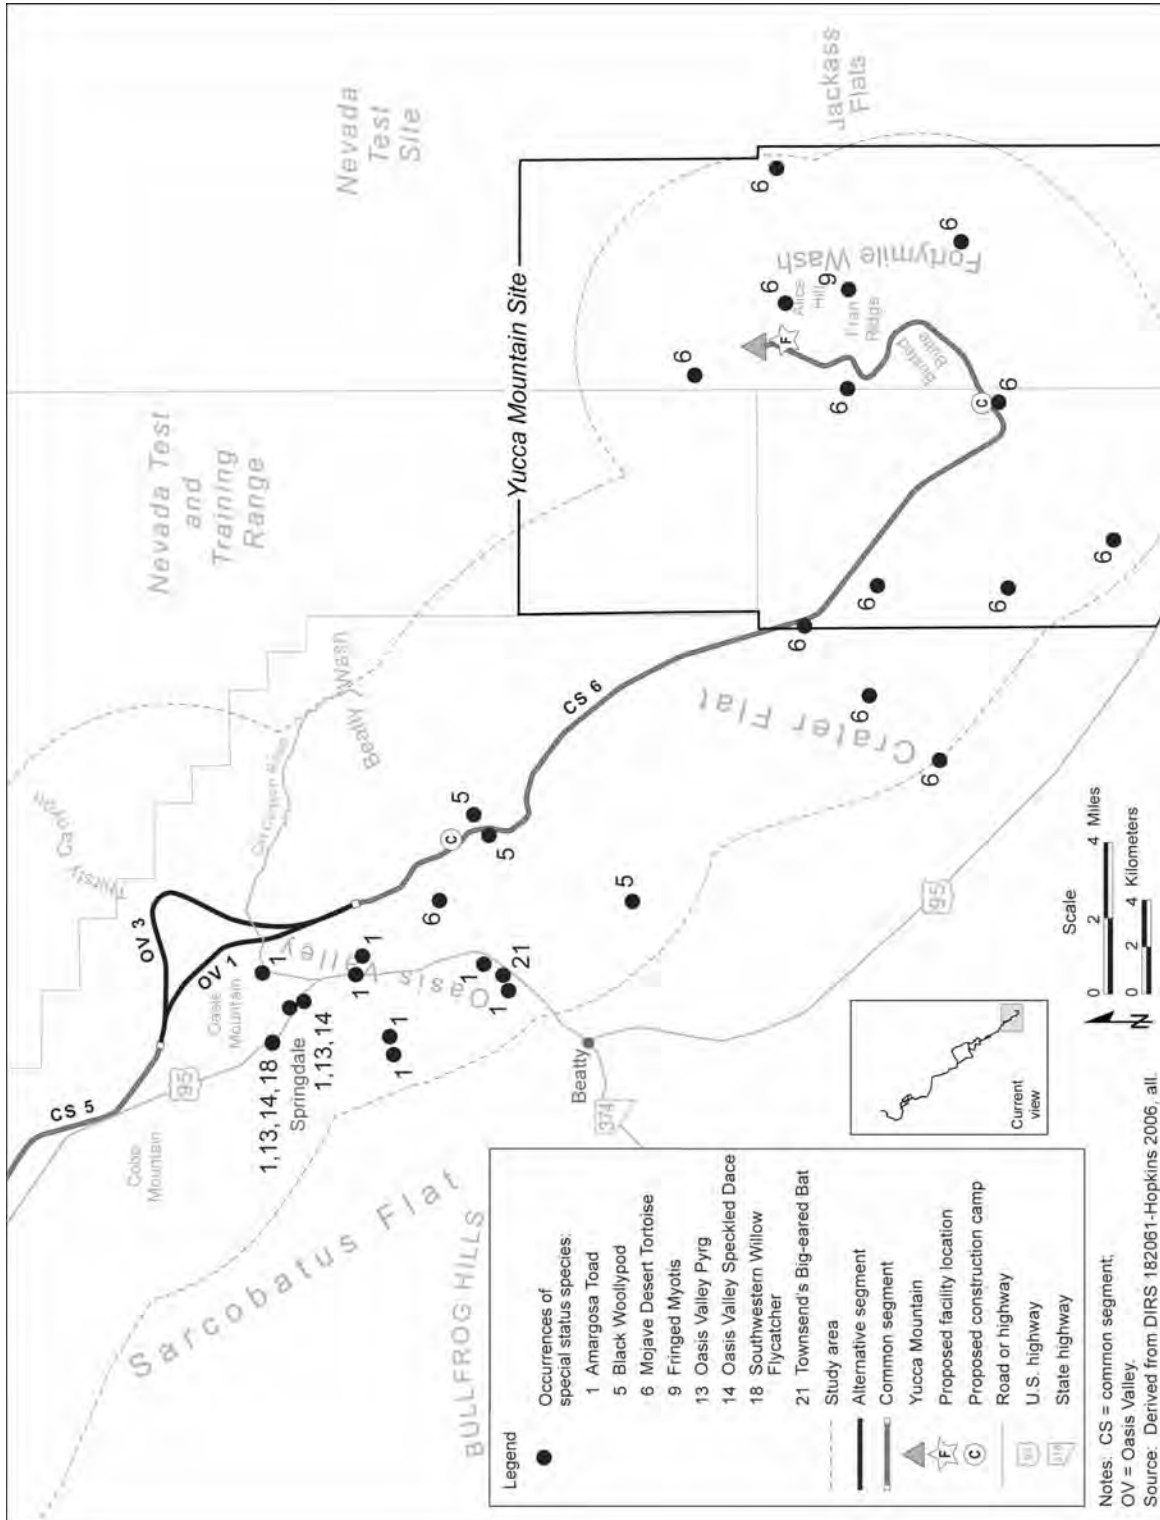


Figure 3-213. Occurrences of special status species documented in the Nevada Natural Heritage Program database adjacent to the Oasis Valley alternative segments and the Yucca Mountain Site.

The greater sage-grouse (*Centrocercus urophasianus*) and pygmy rabbit (*Sylvilagus idahoensis*) are game species that are also BLM-listed sensitive and State of Nevada protected. The bighorn sheep is a BLM-listed sensitive species that is managed by the Nevada Department of Wildlife as a big game mammal.

DOE conducted surveys along the Mina rail alignment to further characterize the presence or absence of game species. Observations included identification of tracks and fecal pellets, and direct observation of animals on or near the rail alignment. Results do not imply population level or habitat quality, only the presence or absence of game species and their approximate level of use.

3.3.7.2.5 Wild Horses and Burros

The BLM has delineated herd management areas within the wild horse herd areas. Each herd management area has an appropriate management level determined by the BLM through a rangeland assessment and a public review process. The appropriate management level is the number of wild horses and burros that the herd management area is managed for, and it is established to avoid the ecological degradation of the herd management area. DOE reviewed the Tonopah Resource Management Plan (DIRS 173224-BLM 1997, all), Carson City Consolidated Resource Management Plan (DIRS 179560-BLM 2001, all), and herd management plans for the Battle Mountain and Carson City BLM Districts to obtain current information on herd management areas. The Department contacted the BLM to obtain Geographic Information System data on management areas and to obtain data regarding the use of the herd management areas by wild horses and burros (Figure 3-214). Concurrent with other field investigations, DOE performed observations for wild horses and burros, or signs of their presence. Section 3.3.2, Land Use and Ownership, describes the grazing allotment planning process.

3.3.7.3 Affected Environment along Alternative Segments and Common Segments

This section describes biological resources in the Mina rail alignment construction right-of-way and study area. To avoid unnecessary repetition, this section discusses biological resources by resource type (vegetation, wildlife, special status species, migratory birds, State of Nevada game species, and wild horses and burros) rather than by alternative segment or common segment.

3.3.7.3.1 Vegetation

There are 25 different land-cover types within the construction right-of-way and multiple options for the proposed Mina railroad construction and operations support facilities. Tables 3-128 through 3-130 list land-cover types along the rail alignment and the areas of proposed operations support facilities. The percentages disclosed are the percent of land-cover types that could be affected and these percentages are related to the total acreages in the Mojave and Nellis mapping zones (see Table 3-126). The land-cover types listed and the percentages that could be affected are based on the nominal width of the rail line construction right-of-way for the alternative segments and common segments and the footprint of each proposed operation support facility. Table 3-131 lists the land-cover types present in the areas of the potential quarry sites.

3.3.7.3.1.1 Noxious Weeds and Invasive Species. Cheatgrass is found along most of the Mina rail alignment where it fills open space between shrubs. Red brome is also common, although it is generally confined to areas along the rail alignment that would cross the Mojave Desert region. These observations were made during the 2005 field surveys.

Table H-2 in Appendix H of this Rail Alignment EIS lists invasive and noxious species likely to occur in the area around the Mina rail alignment. The information is based on general habitat requirements or documented occurrences.

Table 3-127. Nevada game species present or potentially present in the biological resources study area – Mina rail alignment.^a

Common name	Scientific name	Occurrence within the study area
<i>Game mammals</i>		
Pronghorn antelope	<i>Antilocapra americana</i>	Present
Mule deer	<i>Odocoileus hemionus</i>	Present
Mountain lion	<i>Felis concolor</i>	Present
Cottontail rabbit	<i>Sylvilagus</i> spp	Present
Black-tailed jackrabbit	<i>Lepus californicus</i>	Present
Bighorn sheep	<i>Ovis canadensis</i>	Present
Elk	<i>Cervus elaphus</i>	Present
<i>Upland and migratory game birds</i>		
Greater sage-grouse	<i>Centrocercus urophasianus</i>	Potentially present
Chukar	<i>Alectoris chukar</i>	Present
Ring-necked pheasant	<i>Phasianus colchicus</i>	Present
Gambel's quail	<i>Callipepla gambelii</i>	Present
Wild turkey	<i>Meleagris gallopavo</i>	Present
American crow	<i>Corvus brachyrhynchos</i>	Present
Ducks, geese, and swans	Family <i>Anatidae</i>	Present only in wetland/marsh areas
Wild doves and pigeons	Family <i>Columbidae</i>	Present
Cranes	Family <i>Gruidae</i>	Present only in wetland/marsh areas
Rails, coots, and gallinules	Family <i>Rallidae</i>	Present only in wetland/marsh areas
Woodcocks and snipes	Family <i>Scolopacidae</i>	Present only in wetland/marsh areas
<i>Game fish</i>		
Lahontan cutthroat trout	<i>Oncorhynchus clarki henshawi</i>	Present
Brown trout	<i>Salmo trutta</i>	Present
Rainbow trout	<i>Oncorhynchus mykiss</i>	Present
Mountain whitefish	<i>Prosopium williamsoni</i>	Present
Channel catfish	<i>Ictalurus punctatus</i>	Present
White catfish	<i>Ameiurus catus</i>	Present
White bass	<i>Morone chrysops</i>	Present
Largemouth black bass	<i>Micropterus salmoides</i>	Present
Spotted bass	<i>Micropterus punctulatus</i>	Present
White crappie	<i>Pomoxis annularis</i>	Present
Yellow perch	<i>Perca flavescens</i>	Present
Bluegill sunfish	<i>Lepomis macrochirus</i>	Present
Walleye	<i>Stizostedion vitreum</i>	Present

a. Source: Nevada Administrative Code Sections 503.020, 503.045, and 503.060.

3.3.7.3.1.2 Wetlands and Riparian Habitat. Before conducting field surveys, DOE reviewed pertinent maps, the 2004 Southwest Regional Gap Analysis Project (DIRS 174324-NatureServe 2004, all), and available state wetland and land-use inventories to identify the locations of possible wetland and riparian habitat within the rail line construction right-of-way and the study area.

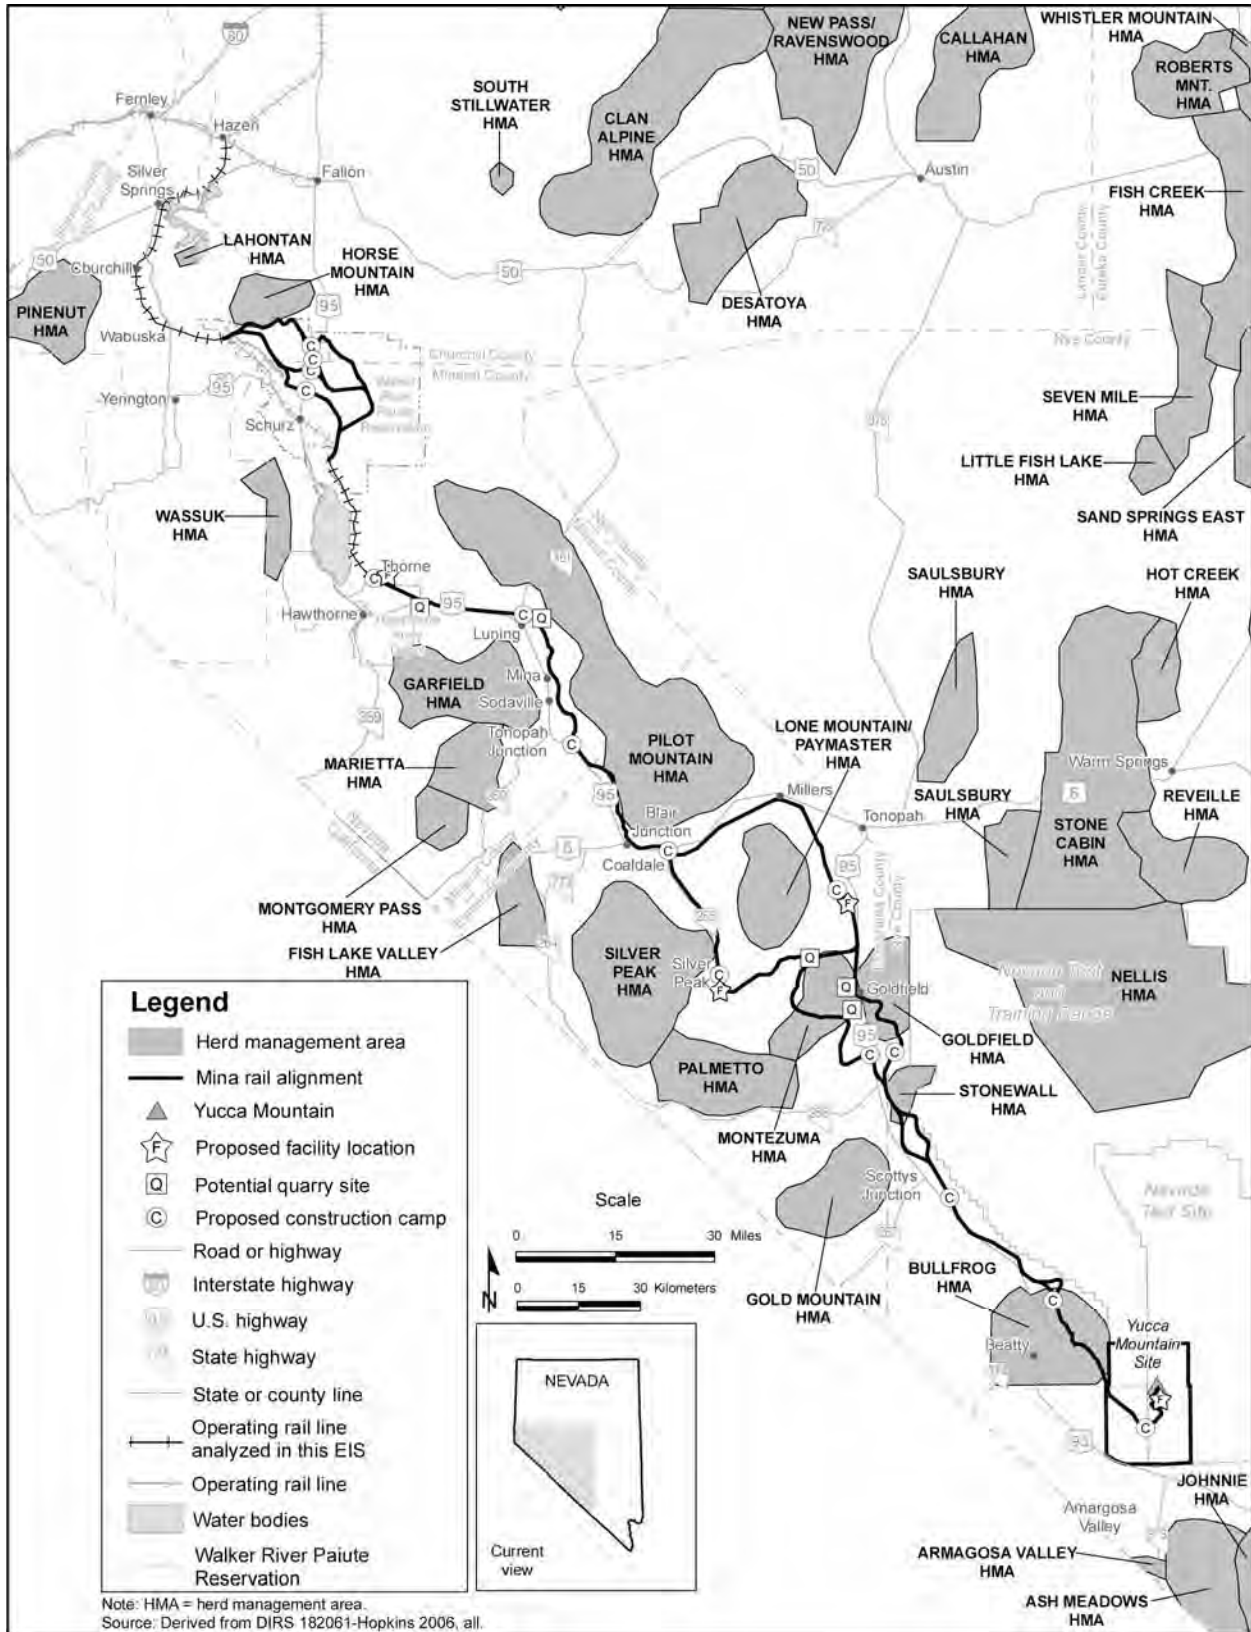


Figure 3-214. Herd management areas, all along the Mina rail alignment.

Table 3-128. Land-cover types and percentages within the construction right-of-way by common segment.^a

Land-cover type	Area covered by common segment ^b (percent)			
	CS1	CS2	CS5	CS6
Barren Lands, Non-specific	0.23	0	0	0
Inter-Mountain Basins Active and Stabilized Dune	0.29	0		0
Inter-Mountain Basins Cliff and Canyon	<0.01	0		0
Great Basin Pinyon-Juniper Woodland	0	0	0.10	0
Great Basin Xeric Mixed Sagebrush Shrubland	0	0	0	0
Inter-Mountain Basins Big Sagebrush Shrubland	0	0	0.05	0
Inter-Mountain Basins Greasewood Flat	1.87	0	0	0
Inter-Mountain Basins Mixed Salt Desert Scrub	93.78	93.81	0	0
Inter-Mountain Basins Playa	1.95	0	0	0
Inter-Mountain Basins Semi-Desert Grassland	0	0	0	0
Inter-Mountain Basins Semi-Desert Shrub Steppe	1.81	6.19	7.55	13.59
Invasive Annual and Biennial Forbland	0.06	0	0	0
Invasive Annual Grassland	0.02	0	0	0
Mojave Mid-Elevation Mixed Desert Scrub	0	0	12.46	23.92
North American Warm Desert Bedrock Cliff and Outcrop	0	0	0	0.39
North American Warm Desert Playa	0	0	<0.01	0.13
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	0	0	26.47	61.38
Sonora-Mojave Mixed Salt Desert Scrub	0	0	53.37	0.59
Totals^c	100	100	100	100

a. Source: DIRS 174324-NatureServe 2004.

b. CS = common segment; < = less than.

c. Totals might differ from sums of values due to rounding.

DOE identified wetland and riparian habitat along the following portions of the Mina rail alignment using a combination of fieldwork and the 2004 Southwest Regional Gap Analysis Project (see Figures 3-205 to 3-211):

- Schurz alternative segments
- Mina common segment 1
- Bonnie Claire alternative segments
- Oasis Valley alternative segments

This section discusses only portions of the Mina rail alignment in which there are wetland and/or riparian habitats. Section 3.3.5, Surface-Water Resources, provides information on springs and their locations and specific information on function and value of wetlands for Section 404 compliance. Table 3-132 details the identified wetland and riparian land-cover types found in the construction right-of-way and the study area along alternative segments and common segments of the Mina rail alignment.

Table 3-129. Land-cover types and percentages within the construction right-of-way by alternative segment^a (page 1 of 2).

Land-cover type	Area covered by alternative segment (percent) ^b												
	Schurz			Montezuma			Bonnie Claire			Oasis Valley			
	S1	S4	S5	S6	MN1	MN2	MN1/MN3	MN3	BC2	BC3	OV1	OV3	
Barren Lands, Non-specific	0	0	0	0	1.12	0.03	0	0	0	0	0	0	
Developed, Medium-High Intensity	0	0	0	0	0	0.08	0	0	0	0	0	0	
Developed, Open Space – Low Intensity	0	0	0	0	0	0.24	0	0	0	0	0	0	
Inter-Mountain Basins Active and Stabilized Dune	1.95	0.84	0.35	0.42	<0.01	0	0	0	0	0	0	0	
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0.35	0.27	0.25	0.23	0	0	0	0	0	0	0	0	
Great Basin Pinyon-Juniper Woodland	0	0	0	0	0	0	0.047	0	0	0	0	0	
Great Basin Xeric Mixed Sagebrush Shrubland	0	0	0	0	0.84	1.60	8.05	<0.01	0.11	0	0	0	
Inter-Mountain Basins Big Sagebrush Shrubland	0	0	0.04	0.04	0.56	11.40	17.87	7.38	5.04	0.80	0	0	
Inter-Mountain Basins Cliff and Canyon	0	0	0	0.01	0	0	0	0	0	0	0	0	
Inter-Mountain Basins Greasewood Flat	15.1	5.85	4.21	3.93	0	1.54	0	0	0	0	0	0	
Inter-Mountain Basins Mixed Salt Desert Scrub	82.0	92.95	94.02	94.03	75.59	2.71	1.93	0	33.59	30.27	0	0	
Inter-Mountain Basins Playa	0	0	0	0	16.53	0	0	0	0.51	0	0	0	

Table 3-129. Land-cover types and percentages within the construction right-of-way by alternative segment^a (page 2 of 2).

Land-cover type	Area covered by alternative segment (percent) ^b												
	Schurz			Montezuma			Bonnie Claire			Oasis Valley			
	S1	S4	S5	S6	MN1	MN2	MN1/MN3	MN3	BC2	BC3	OV1	OV3	
Inter-Mountain Basins Semi-Desert Shrub-Steppe	0	0	0	0	0.32	2.71	1.93	0	0	0	0	0	
Inter-Mountain Basins Playa	0.55	0	0	0.04	16.53	0	0	0	0	0.51	0	0	
Inter-Mountain Basins Semi-Desert Grassland	0	0.09	0.07	0.10	0	0	0	0	0	0	0	0	
Inter-Mountain Basins Semi-Desert Shrub Steppe	0	0	0	0	0.32	2.71	1.93	0	10.66	16.53	4.88	3.13	
Inter-Mountain Basins Wash	0	0	0	0	0	0	0	0	0	0	0	0	
Invasive Annual Grassland	0	0	0.41	0.39	0	0	0	0	0	0	0	0	
Invasive Annual and Biennial Forbland	0	0	<0.01	<0.01	0	0	0	0	0	0	0	0	
Mojave Mid-Elevation Mixed Desert Scrub	0	0	0	0	0	0	0	0	31.44	23.43	3.61	0.45	
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0	0	0	0	0	0	0	0	0	0	0.43	
North American Warm Desert Playa	0	0	0	0	0	0	0	0	0	0	5.33	1.07	
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	0	0	0	0	0	0	0	0	13.88	27.01	77.56	72.68	
Sonora-Mojave Mixed Salt Desert Scrub	0	0	0	0	0	0	0	0	5.29	1.84	8.63	22.24	
Totals^c	100	100	100	100	100	100	100	100	100	100	100	100	

a. Source: DIRS 174324-NatureServe 2004.

b. < = less than.

c. Totals might differ from sums of values due to rounding.

Table 3-130. Land-cover types and percentages within facility footprints by facility.^a

Land-cover type	Area covered by facility (percent)			
	Staging Yard at Hawthorne	Silver Peak option Maintenance-of-Way Facility	Klondike option Maintenance-of-Way Facility	Rail Equipment Maintenance Yard
Great Basin Xeric Mixed Sagebrush Shrubland		0	0	0
Inter-Mountain Basins Active and Stabilized Dune	0.14	0.05	0	0
Inter-Mountain Basins Greasewood Flat	0.93	2.65	45.35	0
Inter-Mountain Basins Mixed Salt Desert Scrub	98.93	9.40	53.40	0
Inter-Mountain Basins Playa	0	87.91	0	0
Inter-Mountain Basins Semi-Desert Grassland	0	0	0	0
Inter-Mountain Basins Semi-Desert Shrub Steppe	0	0	1.26	15.04
Mojave Mid-Elevation Mixed Desert Scrub	0	0	0	8.04
Sonora-Mojave Creosotebush-White Bursage Desert Scrub	0	0	0	74.94
Sonora-Mojave Mixed Salt Desert Scrub	0	0	0	1.98

a. Source: DIRS 174324-NatureServe 2004.

b. Totals might differ from sums of values due to rounding.

Table 3-131. Land-cover types and percentages within the footprints of potential quarry sites^a (page 1 of 2).

Land-cover type	Area covered (percent)
<i>Garfield Hills</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	99.99
Inter-Mountain Basins Big Sagebrush Shrubland	<0.01 ^c
Total^b	100
<i>Gabbs Range</i>	
Inter-Mountain Basins Big Sagebrush Shrubland	0.38
Inter-Mountain Basins Mixed Salt Desert Scrub	99.62
Total	100
<i>North Clayton</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	7.37
Inter-Mountain Basins Big Sagebrush Shrubland	20.21
Inter-Mountain Basins Mixed Salt Desert Scrub	68.43
Inter-Mountain Basins Semi-Desert Shrub Steppe	3.99
Total	100

Table 3-131. Land-cover types and percentages within the footprints of potential quarry sites^a (page 2 of 2).

Land-cover type	Area covered (percent)
<i>Quarry ES-7</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	29.69
Inter-Mountain Basins Big Sagebrush Shrubland	48.14
Inter-Mountain Basins Mixed Salt Desert Scrub	20.68
Inter-Mountain Basins Semi-Desert Shrub Steppe	1.48
Total	100
<i>Malpais Mesa</i>	
Great Basin Xeric Mixed Sagebrush Shrubland	6.58
Inter-Mountain Basins Big Sagebrush Shrubland	55.48
Inter-Mountain Basins Mixed Salt Desert Scrub	34.86
Inter-Mountain Basins Semi-Desert Shrub Steppe	3.08
Total	100

- a. Source: DIRS 174324-NatureServe 2004.
- b. Totals might differ from sums of values due to rounding.
- c. < = less than.

Wetlands within and adjacent to the Mina rail alignment were classified as Great Basin foothill and lower mountain riparian woodland and shrubland; North American arid west emergent marsh; and North American warm desert lower montane riparian woodland and shrubland (DIRS 180889-PBS&J 2007, p. 16). Plant species considered indicators of wetland conditions that were found within and adjacent to the Mina rail alignment include bulrushes, sedges, Fremont cottonwood, willows (including sandbar willow), broadleaf cattail (*Typha latifolia*), Baltic rush (*Juncus balticus*), common reed (*Phragmites australis*), tamarisk, and Russian olive (*Eleagnus angustifolia*) (DIRS 180889-PBS&J 2007, p. 17).

Oasis Valley alternative segment 3 contains a small (approximately 0.02 square kilometer [5 acres]) wetland area within the construction right-of-way (Figure 3-210). See Section 3.3.5, Surface-Water Resources, for more specific information on wetlands.

3.3.7.3.2 Wildlife

This section describes the wildlife and wildlife communities potentially present in the Mina rail alignment construction right-of-way. Figures 3-215 through Figure 3-218 detail the manmade wildlife water sources, also called **wildlife guzzlers**, within the study area. There are 46 wildlife guzzlers within the study area. The largest concentrations of guzzlers are located along Schurz alternative segments 5 and 6 (10 guzzlers), and along Mina common segment 1 (35 guzzlers.) The wildlife guzzlers closest to the Mina rail alignment are DM#24, which is approximately 1.6 kilometers (1 mile) north of Schurz alternative segments 5 and 6; and PI#1 and PI#4, which are both approximately 1.6 kilometers east of Mina common segment 1. Section 3.3.5, Surface-Water Resources, provides information about and locations of other sources of water available to wildlife.

A **wildlife guzzler** is a water development for wildlife that relies on rainfall or snowmelt to recharge it, rather than springs or streams. Usually used where there are no other sources of water for wildlife.

The following sections describe the most common species of mammals, birds, reptiles, amphibians, and fish potentially found within the study area or construction right-of-way of the Mina rail alignment including federally listed threatened and endangered species, and federally and state-listed sensitive or protected species, migratory birds, Nevada game species, and wild horses and burros.

Table 3-132. Wetland and riparian land-cover types within the Mina rail alignment construction right-of-way and study area.^a

Segment/land-cover type	Amount in construction right-of-way (square kilometers) ^b	Amount in study area (square kilometers)
<i>Schurz alternative segment 1</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0.01	20.75
North American Arid West Emergent Marsh	0	2.90
<i>Schurz alternative segment 4</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0.01	20.04
North American Arid West Emergent Marsh	0	2.86
<i>Mina common segment 1</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.19
North American Arid West Emergent Marsh	0	0.04
<i>Bonnie Claire alternative segment 2</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.03
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0.03
<i>Bonnie Claire alternative segment 3</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.02
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	0.07
<i>Oasis Valley alternative segment 1</i>		
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.08
North American Arid West Emergent Marsh	0	0.13
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0	2.02
<i>Oasis Valley alternative segment 3</i>		
North American Warm Desert Lower Montane Riparian Woodland and Shrubland	0.02	2.02
North American Arid West Emergent Marsh	0	0.23
Great Basin Foothill and Lower Montane Riparian Woodland and Shrubland	0	0.08

a. Source: DIRS 174324-NatureServe 2004, all.

b. To convert square kilometers to acres, multiply by 247.10.

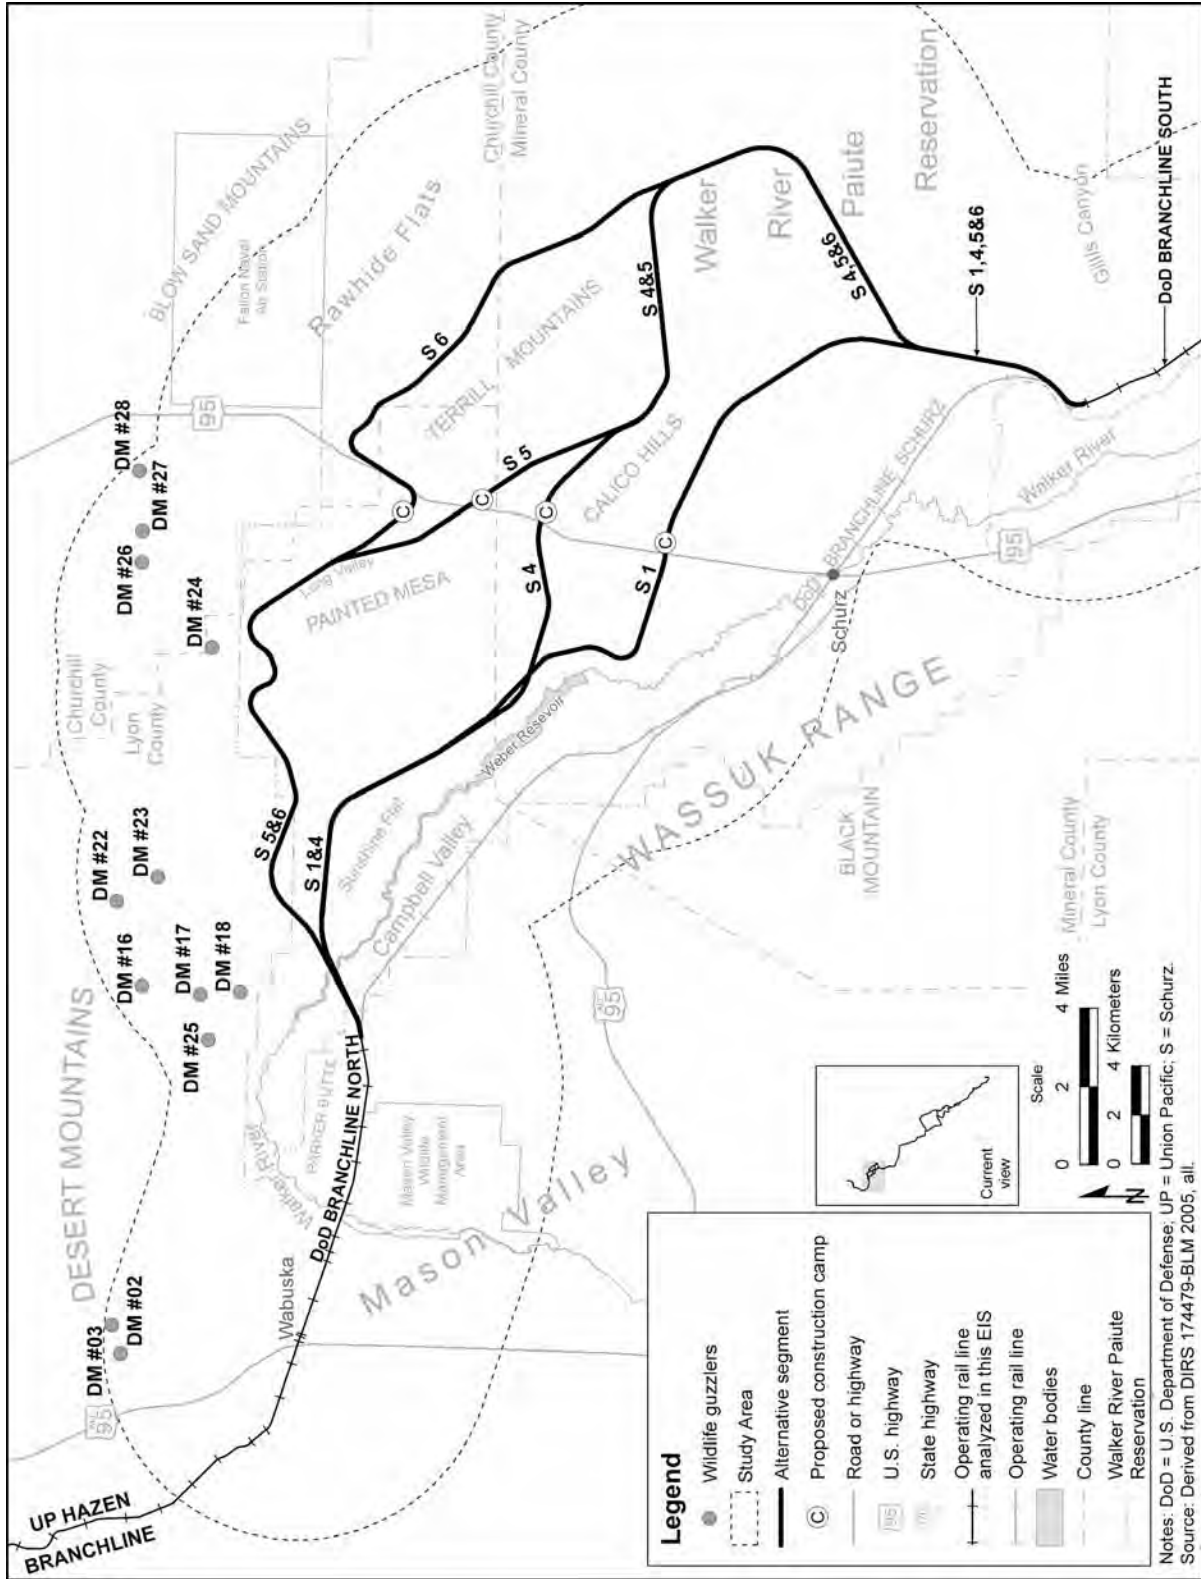


Figure 3-215. Wildlife guzzlers located along the Mina rail alignment in map area 1.

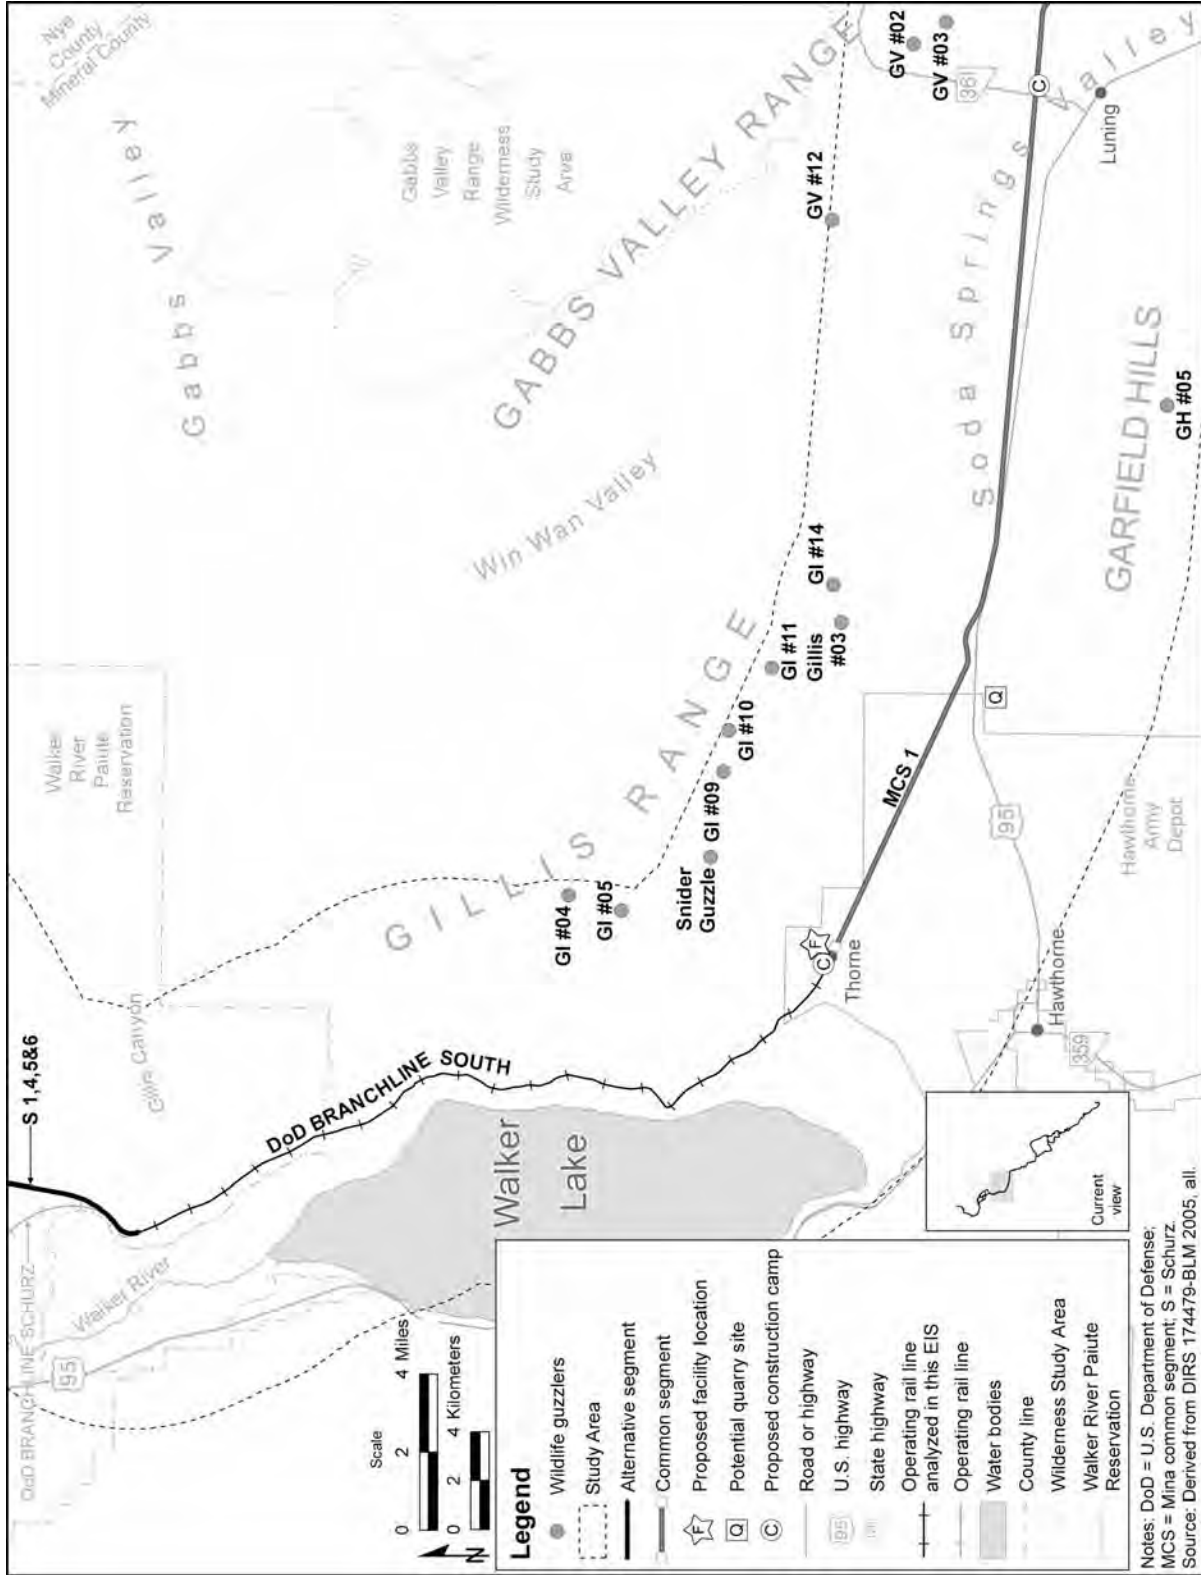


Figure 3-216. Wildlife guzzlers located along the Mina rail alignment in map area 2.

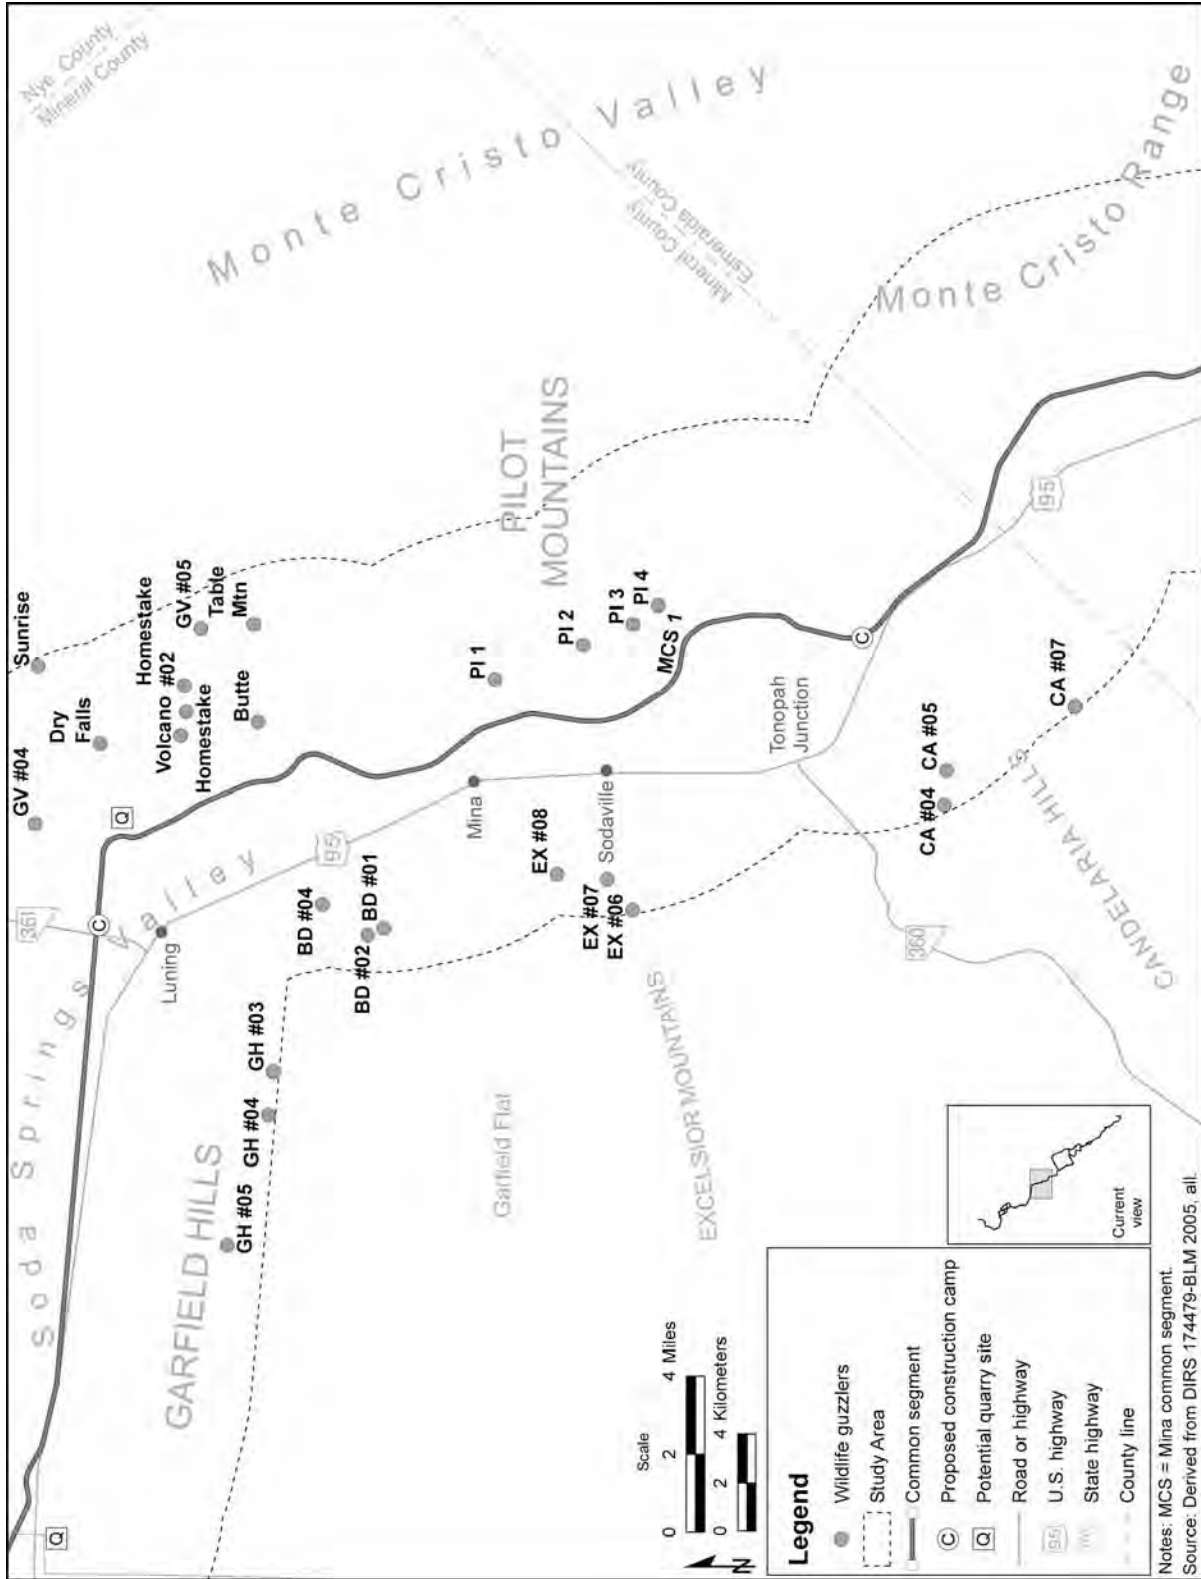


Figure 3-217. Wildlife guzzlers located along the Mina rail alignment in map area 3.

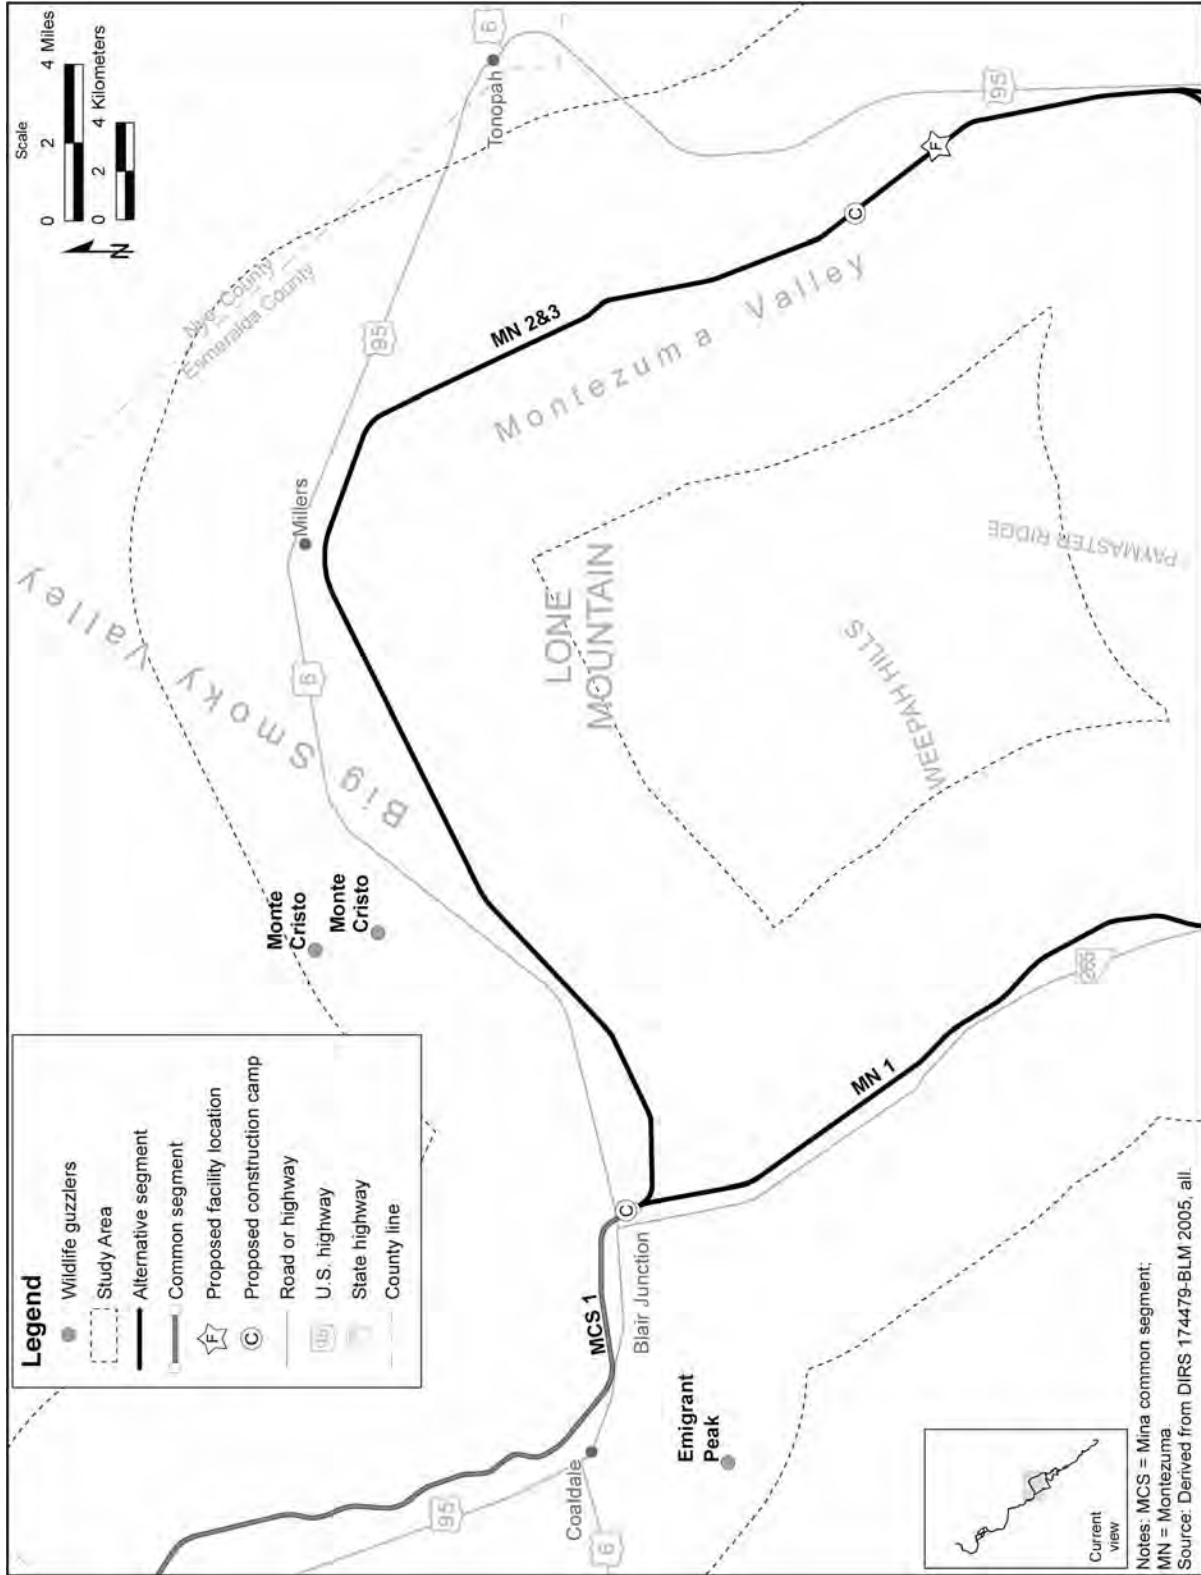


Figure 3-218. Wildlife guzzlers located along the Mina rail alignment in map area 4.

3.3.7.3.2.1 Mammals. Mammals are known to exist within the study area along the entire length of the Mina rail alignment. The types of mammals found within the study area would depend on the vegetation communities. Mammals that occur in the greater study area and the construction right-of-way of the Mina rail alignment include:

- Mountain lion (*Felis concolor*)
- Bighorn sheep (*Ovis Canadensis*)
- Kit fox (*Vulpes macrotis*)
- Coyote (*Canis latrans*)
- Bobcat (*Lynx rufus*)
- Badger (*Taxidea taxus*)
- Beaver (*Castor canadensis*)
- Raccoon (*Procyon lotor*)
- Cottontail rabbit (*Sylvilagus* spp.)
- Various rodents
- Pronghorn antelope (*Antilocapra americana*)
- Grey fox (*Urocyon cinereoargenteus*)
- Mule deer (*Odocoileus hemionus*)
- Black-tailed jackrabbit (*Lepus californicus*)
- Ringtail (*Bassariscus astutus*)
- Common muskrat (*Ondatra zibethicus*)
- Striped skunk (*Mephitis mephitis*)
- Various bats
- Ground squirrels (*Spermophilus* spp.)

3.3.7.3.2.2 Birds. A variety of bird species are commonly observed in central and southern Nevada, including year-round residents, summer residents, migratory species breeding in southern Nevada, winter residents that breed to the north, and seasonal migrants passing through central and southern Nevada en route to breeding ranges to the north and winter ranges to the south. Table H-4 in Appendix H lists the bird species that could occur along the Mina rail alignment. Several federal laws and state statutes protect various groups of birds. Chapter 6, Statutory, Regulatory, and Other Applicable Requirements, details these protections.

The Great Basin region of Nevada is an important migration route for waterfowl and other species of birds traveling between southern wintering areas and northern breeding territories; however, suitable habitat for waterfowl and shorebirds is limited to the Walker River, Walker Lake, and other rare open-water areas. No waterfowl or shorebirds were observed during the 2006 field surveys; however, DOE assumes that there are such birds on Walker Lake which may move through the study area and construction right-of-way. Walker Lake is approximately 1 kilometer (0.6 miles) from the Mina rail alignment.

Common species of resident and migrating birds observed along the Mina rail alignment include:

- Common raven (*Corvus corax*)
- Black-billed magpie (*Pica hudsonia*)
- Horned lark (*Eremophila alpestris*)
- Northern oriole (*Icterus galbula*)
- Red-winged blackbird (*Agelaius phoenicius*)
- American crow (*Corvus brachyrhynchos*)
- House wren (*Troglodytes aedon*)
- Killdeer (*Charadrius vociferous*)
- Loggerhead shrike (*Lanius ludovicianus*)
- Yellow warbler (*Dendroica petechia*)

Two upland game bird species are expected to occur within the Mina rail alignment construction right-of-way: chukar (*Alectoris chukar*) and Gambel's quail (*Callipepla gambelii*). Chukars were observed during surveys conducted along the rail alignment. Chukars were recorded in cliff and talus habitat in the Beatty Wash area. Mourning doves are common and were observed at multiple locations along the rail alignment. The greater sage-grouse (*Centrocercus urophasianus*) is a BLM-listed special status species and receives additional protection from the State of Nevada (see Section 3.3.7.3.3). The greater sage-grouse is an upland game bird that has historically occurred in low abundance near portions of the rail alignment, but outside of the study area (Figure 3-219).

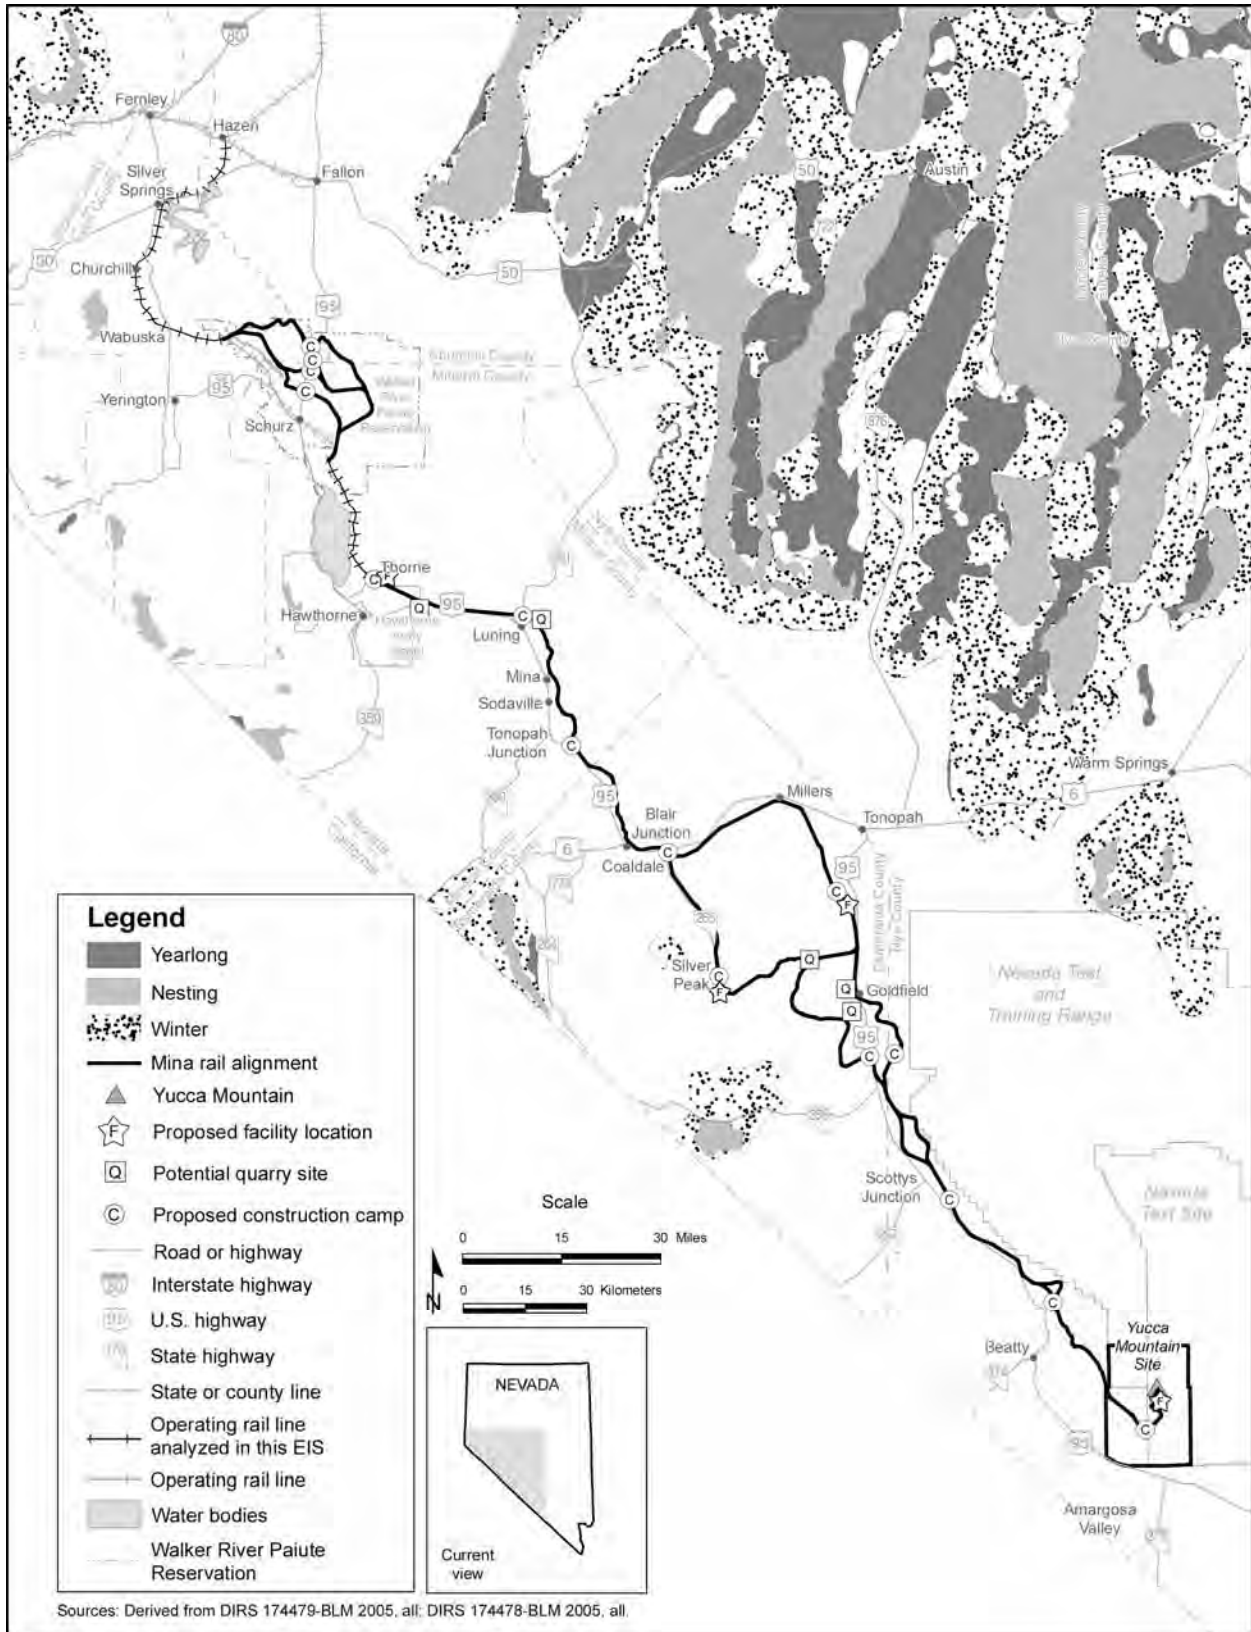


Figure 3-219. Potential greater sage-grouse habitat along the Mina rail alignment.

Populations of raptors are typically low in numbers and occurrence in the rail line construction right-of-way due to minimal roosting, nesting, and foraging potential along the alignment. Raptors observed during field surveys included prairie falcon (*Falco mexicanus*), red-tailed hawk (*Buteo jamaicensis*), rough-legged hawk (*Buteo lagopus*), northern harrier (*Circus cyaneus*), burrowing owl (*Athene cunicularia*), great-horned owl (*Bubo virginianus*), turkey vulture (*Cathartes aura*), and golden eagle (*Aquila chrysaetos*). In addition, ferruginous hawks (*Buteo regalis*) have been reported to occupy, and in some cases nest in, areas with trees adjacent to the construction right-of-way (DIRS 174519-Bennet 2005, Plate 5).

Waterfowl are abundant within the study area in the vicinity of the Walker River. Common species include mallard (*Anas platyrhynchos*), Canada goose (*Branta canadensis*), and blue-winged teal (*Anas discors*) (DIRS 182302-Miller Ecological Consultants 2005, p.3-30).

Populations of bird species that rely on sagebrush habitat in Nevada are declining because cattle grazing and the proliferation of nonnative weeds have degraded the native sagebrush habitat (DIRS 174518-BLM 2005, pp. 3.6-10 and 3.6-11). Sagebrush-dependent species that might occupy habitat along the proposed rail alignment could include sage thrasher (*Oreoscoptes montanus*), sage sparrow (*Amphispiza belli*), Brewer's sparrow (*Spizella breweri*), and vesper sparrow (*Pooecetes gramineus*). The Mina rail alignment (Montezuma alternative segments 2 and 3) would cross sagebrush habitat in southeastern Railroad Valley and the Montezuma Range.

3.3.7.3.2.3 Reptiles. A variety of species of lizards and snakes are present throughout the southern Great Basin Desert and northern Mojave Desert and along the Mina rail alignment. Table H-6 in Appendix H lists the reptiles that could occur along the Mina rail alignment. The desert tortoise (*Gopherus agassizii*) is found within the proposed rail alignment at its southern end, from the Goldfield area to Yucca Mountain. The most common lizard species observed during the 2005 and 2006 field surveys were:

- Western fence lizard (*Sceloporus occidentalis*)
- Western whiptail lizard (*Cnemidophorus tigris*)
- Long-nosed leopard lizard (*Gambelia wislizenii*)
- Side-blotched lizard (*Uta stansburiana*)
- Sagebrush lizard (*Sceloporus graciosus*)
- Desert horned lizard (*Phrynosoma platyrhinos*)

Other lizard species that were observed, but did not appear to be common, were:

- Zebra-tailed lizard (*Callisaurus draconoides*)
- Desert spiny lizard (*Sceloporus magister*)
- Desert iguana (*Dipsosaurus dorsalis*)

Great Basin collared lizards (*Crotaphytus bicinctores*) and desert night lizards (*Xantusia vigilis*) were not observed during field surveys, but probably occur in the study area and potentially in the construction right-of-way. Chuckwalla (*Sauromalus ater*) commonly occurs in the southern portion of common segment 6, although none were observed during field surveys. This species is found in rocky outcrops and is rarely seen above ground. Various other species of snakes are likely to occur in the study area and potentially in the construction right-of-way, but were not directly observed during field surveys.

3.3.7.3.2.4 Aquatic Species. Aquatic species are species that require wet environments for at least part of their life cycle. The only native fish species found within the Mina rail alignment study area are special status species and include:

- Lahontan cutthroat trout (*Onchorynchus clarki henshawii*)
- Railroad Valley springfish (*Crenichthys nevadae*)
- Oasis Valley speckled dace (*Rhinichthys osculus* ssp. 6 [unnamed])

Nine other species of amphibians may be found in the southern Great Basin Desert and northern Mojave Desert outside of the rail alignment study area or construction right-of-way and are listed in Appendix H. Potential amphibian habitat correlates with the riparian and wetland habitat found along the rail alignment. The Amargosa toad (*Bufo nelsoni*) occurs only in Oasis Valley north of Beatty. Nonnative bullfrogs (*Rana catesbeiana*) are also present in some waterways and water bodies in the Mina rail alignment study area.

3.3.7.3.3 Special Status Species

Special status species are plants or wildlife species that are afforded some level of protection or special management under federal or state laws or regulations. Sections 3.3.7.3.3.1 and 3.3.7.3.3.2 describe two categories for special status species, including threatened or endangered species and BLM special status (designated sensitive) and State of Nevada protected species. Table 3-133 lists special status species, their BLM, State, and federal status, and their likely occurrence within the Mina rail alignment study area. Figures 3-212 and 3-213 show documented locations of special status species along the rail alignment from the Nevada Natural Heritage Program database. Not all special status species listed in Table 3-133 appear on the figures because this table represents a compilation of sources including the BLM, the U.S. Fish and Wildlife Service, the Nevada Department of Wildlife, or the Nevada Division of Forestry, and the Nevada Natural Heritage Program database (DIRS 182061-Hopkins 2006, all). The review of the Nevada Natural Heritage Program database for the study area revealed 54 special status species that occur or may occur within the study area and potentially within the construction right-of-way.

Table 3-133. Special status species potentially within the Mina rail alignment study area^a (page 1 of 5).

Common name	Species name	Status			Portion of the Mina rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Plants</i>					
Bodie Hills rockcress	<i>Arabis bodiensis</i>				
Eastwood milkweed	<i>Asclepias eastwoodiana</i>	N		xC2	Montezuma alternative segments 2 and 3
Cima milkvetch	<i>Astragalus cimae</i> var. <i>cimae</i>				Schurz alternative segments 4 and 5
Sodaville milkvetch	<i>Astragalus lentiginosus</i> var. <i>sesquimetralis</i>		P		Mina common segment 1
Black woollypod	<i>Astragalus funereus</i>	N		xC2	Common segment 6; Oasis Valley alternative segments 1 and 3
Tiehm buckwheat	<i>Eriogonum tiehmii</i>	N		xC2	Mina common segment 1
Dune sunflower	<i>Helianthus deserticola</i>				All
Oryctes	<i>Oryctes nevadensis</i>				Department of Defense Branchline South; Staging Yard at Hawthorne; Mina common segment 1

Table 3-133. Special status species potentially within the Mina rail alignment study area^a (page 2 of 5).

Common name	Species name	Status			Portion of the Mina rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Plants (continued)</i>					
Nevada dune beardtongue	<i>Penstemon arenarius</i>	N		xC2	Mina common segment 1; Schurz alternative segments 1, 4, and 5; Montezuma alternative segments 2 and 3; common segment 5
Pahute Mesa beardtongue	<i>Penstemon pahutensis</i>	N		xC2	Montezuma alternative segments 1 and 3
Rock purpusia	<i>Ivesia arizonica var. saxosa</i>	N			Common segment 6
Wassuk beardtongue	<i>Penstemon rubicundus</i>				All
Mono County phacelia	<i>Phacelia monoensis</i>	N		xC2	
Lone Mountain tonestus	<i>Tonestus graniticus</i>	N		xC2	Montezuma alternative segments 1 and 3
<i>Invertebrates</i>					
Oasis Valley pyrg	<i>P. micrococcus</i>	N		xC2	Oasis Valley alternative segments 1 and 3; common segments 5 and 6
Nevada viceroy	<i>Limenitis archippus lahontani</i>	N		xC2	
Early blue	<i>Euphilotes enoptes primavera</i>	N			Department of Defense Branchline South
White Mountains icarioides blue	<i>Icaricia icarioides albihalos</i>			xC2	Mina common segment 1
<i>Fish</i>					
Railroad Valley springfish	<i>Crenichthys nevadae</i>	--	T	LT	Schurz alternative segments 1 and 6
Oasis Valley speckled dace	<i>Rhinichthys osculus</i> spp. 6	N	P	--	Common segments 5 and 6; Oasis Valley alternative segments 1 and 3
Lahontan cutthroat trout	<i>Oncorhynchus clarki henshawi</i>	--	G	LT	Schurz alternative segments 1 and 6; Department of Defense Branchline South
<i>Amphibians and reptiles</i>					
Amargosa toad	<i>Bufo nelsoni</i>	N	P	--	Oasis Valley alternative segments 1 and 3; common segments 5 and 6
Southwestern toad	<i>Bufo microscaphus</i>	N			Common segment 6
Desert tortoise (Mojave Desert pop.)	<i>Gopherus agassizii</i>	N	T	LT	Common segment 6
Chuckwalla	<i>Sauromalus ater</i>	N	--	xC2	Common segment 6
<i>Birds</i>					
Common loon	<i>Gavia immer</i>	--	P	--	Department of Defense Branchline South
Western snowy plover	<i>Charadrius alexandrinus nivosus</i>	N	P	LT*	Department of Defense Branchline South
Western least bittern	<i>Ixobrychus exilis hesperis</i>	N	P	xC2	Montezuma alternative segments 1, 2 and 3; common segment 5

Table 3-133. Special status species potentially within the Mina rail alignment study area^a (page 3 of 5).

Common name	Species name	Status			Portion of the Mina rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Birds (continued)</i>					
White-faced ibis	<i>Plegadis chihi</i>	N	P	xC2	Union Pacific Railroad Hazen Branchline; Department of Defense Branchline South; Mina common segment 1; Oasis Valley alternative segments 1 and 3; common segment 6
Western burrowing owl	<i>Athenes cucularia</i>	N		xC2	All
Flammulated owl	<i>Otus flammeolus</i>	N	P	--	None
California spotted owl	<i>Strix occidentalis occidentalis</i>	N	P	xC2	None
Greater sage-grouse	<i>Centrocercus urophasianus</i>	N	G	--	Union Pacific Railroad Hazen Branchline; Montezuma alternative segment 1
Western yellow-billed cuckoo	<i>Coccyzus americanus</i>		P	C	Montezuma alternative segments 2 and 3
Southwestern willow flycatcher	<i>Empidonax traillii extimus</i>		E	LE	Montezuma alternative segments 2 and 3; Oasis Valley alternative segments 1 and 3
Ferruginous hawk	<i>Buteo regalis</i>	N		xC2	Montezuma alternative segments 2 and 3; common segment 5
Swainson's hawk	<i>Buteo swainsoni</i>	N		--	Schurz alternative segment 2; Oasis Valley; common segment 6
Peregrine falcon	<i>Falco peregrinus</i>	N	E	NL	Oasis Valley; common segment 6
Bald eagle	<i>Haliaeetus leucocephalus</i>	N	E	Delisted 2007	Union Pacific Railroad Hazen Branchline; Schurz alternative segments 1 and 4; Department of Defense Branchline South
Loggerhead shrike	<i>Lanius ludovicianus</i>	N	S	xC2	All
Sage thrasher	<i>Oreoscotes montanus</i>	N	S	--	Oasis Valley; Montezuma alternative segments 2 and 3
Phainopepla	<i>Phainopepla nitens</i>	N		--	Oasis Valley; common segment 6
Brewer's sparrow	<i>Spizella breweri</i>	N	S	--	Oasis Valley; Montezuma alternative segments 2 and 3; common segment 6
<i>Mammals</i>					
Pygmy rabbit	<i>Brachylagus idahoensis</i>	N	G	xC2	Montezuma alternative segments 1 and 3
Pale kangaroo mouse	<i>Microdipidops pallidus</i>	--	P	--	Montezuma alternative segments 2 and 3
Dark kangaroo mouse	<i>Microdipodops megacephalus albiventer</i>	N	P	xC2	Montezuma alternative segments 2 and 3
Desert bighorn sheep	<i>Ovis canadensis</i>	N	G	--	Mina common segment 1; Montezuma alternative segments 2 and 3; Mina common segment 2; Bonnie Claire alternative segment 2; common segment 5; common segment 6

Table 3-133. Special status species potentially within the Mina rail alignment study area^a (page 4 of 5).

Common name	Species name	Status			Portion of the Mina rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Mammals (continued)</i>					
Townsend's big-eared bat	<i>Corynorhinus townsendii</i>	N	S	--	Schurz alternative segments 1 and 4; Department of Defense Branchline South; Goldfield alternative segment 4; Oasis Valley alternative segments 1 and 3; common segment 6
Spotted bat	<i>Euderma maculatum</i>	--	T	xC2	Schurz alternative segments 1 and 4; Department of Defense Branchline South
Western red bat	<i>Lasiurus blossivillii</i>	N	S	--	Schurz alternative segments 1 and 4; Department of Defense Branchline South; Goldfield alternative segments 4; common segment 5; Oasis Valley alternative segments 1 and 3; common segment 6
California myotis	<i>Myotis californicus</i>	N	--	--	Union Pacific Railroad Hazen Branchline; Schurz alternative segments 1 and 4; Department of Defense Branchline South; Goldfield alternative segment 4; common segment 5; Oasis Valley alternative segments 1 and 3; common segment 6
Little brown myotis	<i>Myotis lucifugus</i>	N	--	--	Union Pacific Railroad Hazen Branchline; Schurz alternative segments 1 and 4; Department of Defense Branchline South; Goldfield alternative segment 4; common segment 5; Oasis Valley alternative segments 1 and 3; common segment 6
Small-footed myotis	<i>Myotis ciliolabrum</i>	N	--	xC2	Union Pacific Railroad Hazen Branchline; Schurz alternative segments 1 and 4; Department of Defense Branchline South; Goldfield alternative segment 4; common segment 5; Oasis Valley alternative segments 1 and 3; common segment 6
Fringed myotis	<i>Myotis thysanodes</i>	N	P	xC2	Union Pacific Railroad Hazen Branchline; Schurz alternative segments 1 and 4; Department of Defense Branchline South; common segment 6
Big brown bat	<i>Eptesicus fuscus</i>	N			All segments
Greater western mastiff bat	<i>Eumops perotis</i>	N	S	xC2	All segments
Allen's lappet-browed bat	<i>Idionycteris phyllotis</i>	N	P	xC2	All segments
Hoary bat	<i>Lasiurus cinereus</i>	N			All segments
Pallid bat	<i>Antrozous pallidus</i>		P		All segments
Silver-haired bat	<i>Lasionycteris noctivagans</i>	N			All segments
California leaf-nosed bat	<i>Macrotus californicus</i>	N	S	xC2	All segments
Long-eared myotis	<i>Myotis evotis</i>	N			All segments
Cave myotis	<i>Myotis velifer</i>	N		xC2	All segments
Long-legged myotis	<i>Myotis volans</i>	N			All segments

Table 3-133. Special status species potentially within the Mina rail alignment study area^a (page 5 of 5).

Common name	Species name	Status			Portion of the Mina rail alignment where species could be found
		BLM ^b	State ^c	FWS ^d	
<i>Mammals (continued)</i>					
Yuma myotis	<i>Myotis yumanensis</i>	N			All segments
Western pipistrelle	<i>Pipistrellus hesperus</i>	N			All segments
Brazilian free-tailed bat	<i>Tadarida brasilliansis</i>	N	P		All segments

a. Source: DIRS 182061-Hopkins 2006, all.

b. BLM = U.S. Bureau of Land Management. Status definitions: N = designated sensitive by the BLM state office.

c. State = State of Nevada Protected Species (under NAC 503). Status definitions: G = game; P = protected; T = threatened; E = endangered; S = sensitive; CE = critically endangered plant; CY = state-protected cactus and yucca; CE# = recommended for listing as CE.

d. FWS = U.S. Fish and Wildlife Service. Status definitions: LE = listed endangered; LT = listed threatened; C = candidate, xC2= former Category-2 Candidate, now “species of concern;” NL = not listed (removed from list); * = not listed part of range that overlaps project.

e. Numbers refer to unnamed subspecies.

3.3.7.3.3.1 Threatened and Endangered Species. Table 3-133 identifies six federally listed fish and wildlife species, or candidates for listing, with the potential to occur along the Mina rail alignment, including two fish, one reptile, and three bird species. However, in 2007, the U.S. Fish and Wildlife Service de-listed the bald eagle and the golden eagle. These two species are protected under the Bald and Golden Eagle Protection Act, but are no longer federally listed (see Section 3.3.7.3.3.2). There are no federally listed mammals or plant species along the Mina rail alignment.

Fish The Lahontan cutthroat trout was listed as threatened in 1970 under the Endangered Species Act. This species is found in Walker Lake and its associated tributaries, including the Walker River up to the Weber Dam. Currently no Lahontan cutthroat trout are within the area proposed for the crossing of the Walker River due to the passage barrier of Weber Dam. In 2005 the Bureau of Reclamation completed the Record of Decision to repair and modify Weber Dam and include a fish passage structure. This structure is consistent with the recovery plan and will provide passage into the Walker River to the site where the rail line crossing would take place. The analysis for Lahontan cutthroat trout for the Mina rail alignment is based on the future foreseeable action of the Bureau of Reclamation’s Record of Decision.

The Lahontan cutthroat trout is an inland subspecies of cutthroat trout belonging to the Salmonidae family. Life history characteristics are greatly influenced by stream conditions. Stream-dwellers generally live less than 5 years, and lake-dwellers live between 5 and 9 years. Lahontan cutthroat trout range between 25 and 38 centimeters (10 and 15 inches) in length, and feed on terrestrial and aquatic insects (DIRS 181900-USFWS 1995, p.22). Lahontan cutthroat trout, like other trout species, are found in a wide variety of cold-water habitats including large terminal alkaline lakes, such as Walker Lake. Generally, Lahontan cutthroat trout occur in cool flowing water with available cover, velocity breaks, well-vegetated and stable stream banks, and relatively silt free, rocky *substrate* in riffle-run areas. Spawning occurs in spring or early summer, the timing depending on stream flow and temperature.

Lacustrine Lahontan cutthroat trout populations have adapted to a wide variety of lake habitats from small alpine lakes to large desert waters.

The Railroad Valley springfish was listed as threatened in 1986 under the Endangered Species Act. The Railroad Valley springfish is the only fish species native to the thermal spring systems of Railroad Valley, Nye County, Nevada, and have been introduced into four other springs in Nevada. This species is typically found in warm spring pools, outflow streams, and adjacent marshes. Railroad Valley springfish have been documented to occur at the southernmost of two spring groups near Sodaville, Nevada. Railroad Valley springfish are uniquely adapted to survive in an environment of high water temperature (30° to 38° Centigrade [86° to 100° Fahrenheit] at the spring source) and low dissolved-oxygen content

(1.5 to 6.0 parts per million). In their natural environment, Railroad Valley springfish will occupy habitats with water temperatures at the extremes of their tolerance limits for limited amounts of time. There are no known springfish within the construction right-of-way or habitat that supports them that would be impacted by the Mina alignment.

Amphibians and Reptiles The desert tortoise, which is listed as threatened under the Endangered Species Act and by the State of Nevada (Mojave Desert population only), is found along the southern end of the Mina rail alignment from approximately Beatty Wash to Yucca Mountain (DIRS 101830-Bury et al. 1994, pp. 57 to 72). The desert tortoise's range in this portion of Nevada extends approximately 16 kilometers (10 miles) north of Beatty near Springdale (DIRS 176649-Williams 2003, all). Approximately 48 kilometers (30 miles) of the rail alignment is within potentially suitable desert tortoise habitat (Figure 3-220). Mojave Desert tortoises are generally confined to warm, creosote bush and shadscale (*Atriplex confertifolia*) scrub habitats with well-drained sandy loam soils. These soils are composed of sand or sandy gravel that permit the tortoises to burrow and nest (DIRS 102475-Brussard et al. 1994, p.15). The area through which common segment 6 would pass and the location of the Rail Equipment Maintenance Yard are not designated as critical habitat for the desert tortoise. This area is primarily considered low-density for the desert tortoise, with the population of tortoises at a low level in relation to other areas within the range of this species in Nevada. There are 12 records of this species along common segment 6; the closest record is approximately 0.2 kilometer (0.12 mile) away from common segment 6, which is outside of the construction right-of-way (Figure 3-220).

Birds The southwestern willow flycatcher, listed as endangered under the Endangered Species Act, is potentially present in Nevada from May through September, where it breeds in dense riparian habitat. This species' preferred habitat is typically dominated by willows, cottonwood, or invasive tamarisk. Southwestern willow flycatchers have been documented to occur approximately 19 kilometers (12 miles) north of Beatty, near Oasis Valley (DIRS 182061-Hopkins 2006, all). This recorded occurrence was approximately 4.4 kilometers (2.7 miles) southwest of Oasis Valley alternative segment 1 and well outside the Mina rail alignment construction right-of-way. Potentially suitable foraging and roosting habitat exists along Schurz alternative segments 1 and 4, where it passes within 0.8 kilometer (0.5 mile) of the Walker River. The nearest documented occurrence of this species is approximately 4.5 kilometers (2.8 miles) away from Oasis Valley alternative segment 1, outside the construction right-of-way (DIRS 182061-Hopkins 2006, all). There is no suitable breeding habitat for southwestern willow flycatchers within the construction right-of-way and this species has not been documented within the construction right-of-way. The area with the greatest potential for southwestern willow flycatchers is the area where the new construction would be on the old rail roadbed and where the river crossings would require some of the trees and surrounding riparian vegetation to be removed. However, this habitat is marginal and only a small amount would be affected by construction.

The yellow-billed cuckoo is a federal *candidate species* under the Endangered Species Act. The nearest documented nest site for this species was recently located near the City of Caliente and approximately 260 kilometers (160 miles) east of the Mina rail alignment (DIRS 173227-Micone and Tomlinson 2000; DIRS 173228-Gallagher et al. 2001, p. 10; DIRS 173229-Furtek et al. 2002, p. 13-21; DIRS 173230-Furtek et al. 2003, p. 18-23; DIRS 173231-Furtek and Tomlinson 2003, p. 16-22). Yellow-billed cuckoos nest in tall cottonwood trees and willow riparian woodlands in the West and require patches of an average of 0.17 square kilometer (42 acres) of dense riparian habitat with at least 0.03 square kilometer (7 acres) of it closed canopy (DIRS 175505-Laymon and Halterman 1987, pp. 19-25). There is no suitable breeding habitat for yellow-billed cuckoos within the Mina rail alignment construction right-of-way. Potential suitable foraging and roosting habitat for this species is limited to riparian habitat along the Carson and Walker Rivers. These areas of riparian vegetation would not be disturbed during the construction phase. The lack of confirmed records for this species throughout Nevada and the lack of

sufficient breeding habitat within the Mina rail alignment construction right-of-way suggest that it is highly unlikely that the yellow-billed cuckoo would occur within the project area.

3.3.7.3.3.2 BLM Special Status and State of Nevada Protected Species. The BLM State Office and the State of Nevada have identified a number of species as requiring conservation and protection. The BLM State Office designates species as sensitive and the State of Nevada designates species as protected. Many of the species designated as sensitive by the BLM are also designated as protected by the State of Nevada. Additionally, a few *BLM-designated sensitive species* and State of Nevada-designated protected species are also listed as threatened, endangered, proposed, or candidate under the Endangered Species Act. Federally listed species are addressed above in Section 3.3.7.3.3.1. Table 3-133 lists BLM-designated sensitive and State of Nevada-designated protected species and provides information on their status and known or potential locations along the Mina rail alignment. These species are described below by plant and animal categories.

Plants DOE performed field surveys in June 2006 to confirm the presence of BLM-designated sensitive species and to identify potential habitat for such species along the Mina rail alignment. Appendix H contains detailed survey information.

In addition to location records for BLM-designated sensitive species obtained from the Nevada Natural Heritage Program (DIRS 182061-Hopkins 2006, all), these species were passively observed in other locations with habitat characteristics of the species. Because the field surveys did not cover the entire construction right-of-way, and there is both seasonality to the presence or absence of visible signs of plants and annual variability among plant species, the fact that a BLM-designated sensitive species was not documented at a specific location does not indicate a definitive absence of the species.

Bodie Hills rockcress is found growing in dry, rocky granitic sites associated with sagebrush within pinyon-juniper and mountain sagebrush communities in the range of 2,048-3,039 meter (6,720-9,970 feet) elevations (DIRS 181868-NNHP 2001). This species' known population in Nevada is limited to Mineral county within the Walker River watershed (DIRS 182068-NatureServe 2007). Potential habitat for this species occurs within the Wassuk Range and White Mountains west of Schurz but is not found within the construction right-of-way.

The Eastwood milkweed has been documented approximately 8 kilometers (5 miles) east of Montezuma alternative segments 2 and 3, near Mud Lake (DIRS 182061-Hopkins 2006, all), outside the construction right-of-way. It is also known to occur west of Tonopah and north of Silver Peak, 4.6 kilometers (2.9 miles) east of Montezuma alternative segment 1. Typical habitat for this species consists of sandy soils in mixed desert shrub or salt desert scrub, and sagebrush from 1,400 to 2,150 meters (4,600 to 7,000 feet) elevation (DIRS 181869-NNHP 2001, all).

Typical habitat for Cima milkvetch includes dry, barren calcareous slopes at elevations ranging from 1,554 to 1,956 meters (5,100 to 6,416 feet) (DIRS 181870- NNHP 2001). There are several areas along the Mina rail alignment that support potential habitat for this species, including the Calico Hills within the Terrill Mountain Range on the Walker River Paiute Reservation (Schurz alternative segments 4 and 5) and the southeast-facing side of the Montezuma Mountain Range (Montezuma alternative segments 1 and 3). There is a documented occurrence about 7 kilometers (4 miles) east of Department of Defense Branchline South on the west side of Highway 95 (DIRS 182061-Hopkins 2006, all) but no occurrences within the construction right-of-way for all segments.

Sodaville milkvetch has a limited range in Nevada and is associated with moist, alkaline drainages within the *Sarcobatus* ssp. community type and is wetland-dependent (DIRS 181871-NNHP 2001). This species was proposed to be listed under the Endangered Species Act in 1992 but the proposal was withdrawn in 1998 due to insufficient evidence of its habitat being threatened, and because one population occurs

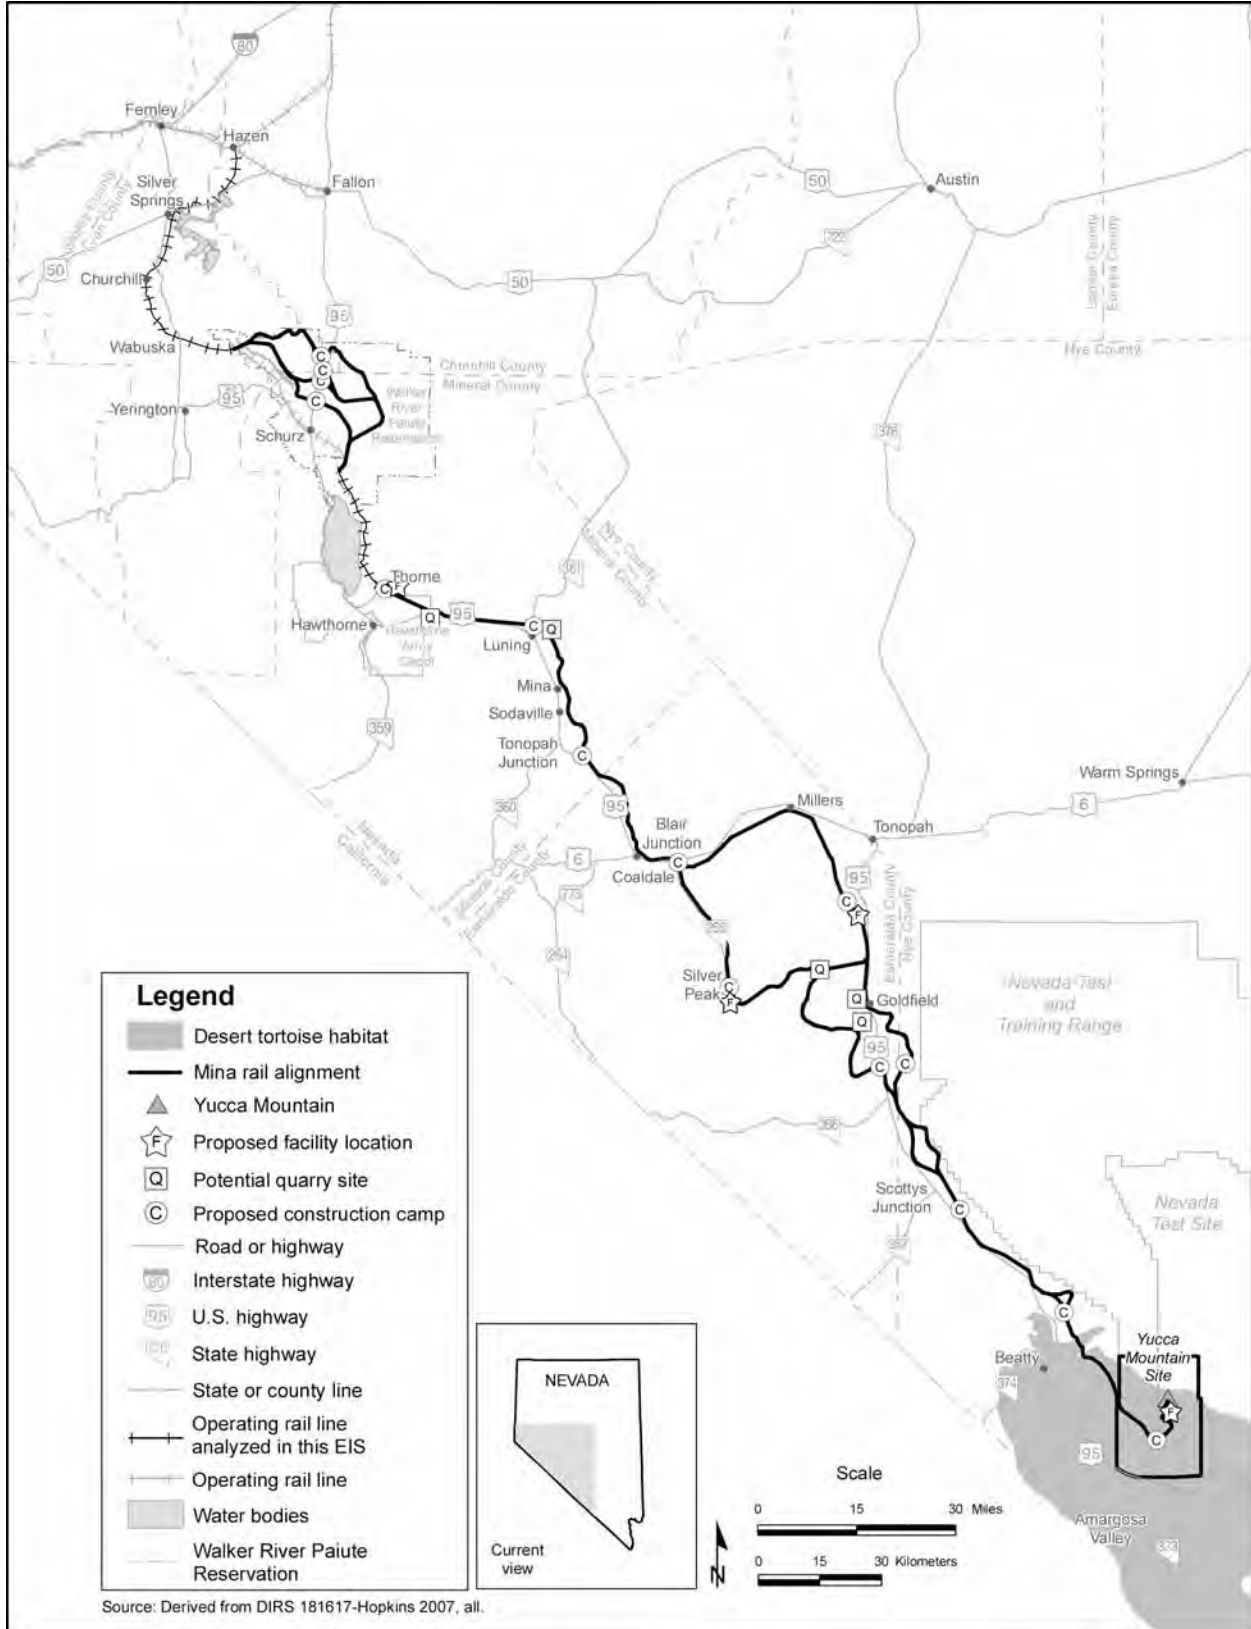


Figure 3-220. Estimated northern extent of potential desert tortoise habitat in relation to the Mina rail alignment.

within lands designated as wilderness, where potential threats are minimized (Death Valley National Monument (*Endangered and Threatened Wildlife and Plants; Withdrawal of Proposed Rule to List the Plants Astragalus Lentiginosus var. micans (shining milk-vetch) and Astragalus Lentiginosus var. sesquimetalis (Sodaville milk-vetch) as Threatened* [63 FR 53631, October 6, 1998])). One population has been documented near Sodaville, 2.5 kilometers (1.5 miles) west of Mina common segment 1 (DIRS 182061-Hopkins 2006, all) outside the construction right-of-way. Habitat for this population is associated with Soda Springs.

The black woollypod has been observed approximately 6 kilometers (4 miles) east of U.S. Highway 95, near Beatty Wash (Figure 3-216). The closest occurrence to the alignment is 240 meters (790 feet) southeast of the centerline of common segment 6, within the construction right-of-way. Field surveys along common segment 6 in Beatty Wash confirmed the presence of this species. This plant is common locally on very steep, gravelly slopes of light-colored volcanic tuff in the area where there is little competition from other species. Habitat for this species is characterized by open, talus, or gravelly slopes on alluvium soils composed of volcanic tuff around 975 to 2,340 meters (3,200 to 7,700 feet) elevation (DIRS 181872-NNHP 2001).

Tiehm buckwheat is known to occur within a small distribution range in Nevada in the Silver Peak Range. This species' preferred habitat consists of light-colored clay soils on steep slopes within the *Atriplex confertifolia* community type (DIRS 181873- NNHP 2001). Potential habitat occurs on the slopes within Soda Spring Valley, in the vicinity of Mina common segment 1. However, there are no documented occurrences of this species within the study area or construction right-of-way.

The Dune sunflower is dependent on stabilized vegetated sand dunes or deep, loose sand on flats or slopes, associated with *Tetradymia* ssp. and *Sarcobatus* ssp. community types (DIRS 182786-NNHP 2001). This species has been found just north of the Terrill Mountains, 1.8 kilometers (1 mile) north of Schurz alternative segment 6 and 0.8 kilometer (0.5 mile) southwest of Schurz alternative segment 1. Potential habitat for this species occurs throughout the Mina rail alignment construction right-of-way where deep sandy soils and sand dunes are present, but no species were found.

Oryctes is dependent on sand dunes or deep, loose sand within washes or flats and is associated with various salt desert shrubs (DIRS 181874-NNHP 2001). This species is widely distributed in Nevada but population density at known locations were found to be low (DIRS 181883- NatureServe 2006). Potential habitat occurs on the eastside of Walker Lake at the base of the Agai Pah Hills. There is a known occurrence just northeast of Walker Lake about 4 kilometers (2.5 miles) from Department of Defense Branchline South, and another occurrence 1.4 kilometers (0.8 mile) northeast of Department of Defense Branchline South and 1.2 (0.7 mile) kilometers northwest from the proposed Hawthorne Staging Yard. An additional occurrence is located within Soda Spring Valley, 0.5 kilometer (0.3 mile) from Mina common segment 1 (DIRS 182061-Hopkins 2006, all).

Nevada dune beardtongue is known to occur within sandy soils associated with *Sarcobatus vermiculatus* and *Atriplex canescens* at elevations between 1,195 to 1,817 meters (3,920 to 5,960 feet) (DIRS 181875- NNHP 2001). Potential habitat for this species occurs throughout the proposed Mina rail alignment construction right-of-way, primarily within the areas associated with Mina common segment 1 and Montezuma alternative segments 2 and 3. It has been documented 0.8 kilometer (0.5 mile) west of common segment 5 (DIRS 182061-Hopkins 2006, all).

Potential habitat for the Pahute Mesa beardtongue occurs within juniper-pinyon or sagebrush communities at elevations between 1,634 to 2,512 meters (5,360 to 8,240 feet) in rocky or loose soils (DIRS 181876- NNHP 2001). This species is known to occur within the Montezuma Range, 5.5 kilometers (3.4 miles) from Montezuma alternative segments 1 and 3 (DIRS 182061-Hopkins 2006, all).

Wassuk beardtongue potential habitat occurs within the entire Mina rail alignment. This species prefers rocky to gravelly soils with ephemeral washes, roadsides, and recently disturbed areas (DIRS 181877-NNHP 2001). This species is documented within the east side of the Wassuk Range. The closest recorded occurrence is 6.8 kilometers (4.2 miles) from the Department of Defense Branchline South (DIRS 182061-Hopkins 2006, all). However, several barriers (preventing population expansion and any potential impacts) occur between the rail alignment and this occurrence, including Walker Lake and Highway 95.

Mono County phacelia is typically found within sparsely vegetated disturbed soils or road berms associated with alkaline or clay-like soils at elevations between 1,804 to 2,760 meters (5,920 to 9,055 feet). Documented populations occur within the Wassuk Range (DIRS 181873-NNHP 2001). However, there are no documented occurrences of this species within the study area or construction right-of-way.

Lone Mountain tonestus or granite serpent weed grows within crevices or rock outcrops of granite at high elevations, 2,377 meters (7,800 feet), in the pinyon-juniper zone (DIRS 181878- NNHP 2001). One occurrence has been documented within the Weepah Hills, south of Montezuma alternative segments 2 and 3, and north of Montezuma alternative segment 1, but these occurrences are outside of the study area. There is potential habitat for this species within the Montezuma Peak area within the study area of Montezuma alternative segments 1 and 3, but no individuals were observed within the construction right-of-way during the 2006 and 2007 field surveys.

As defined in Section 3.3.7.3.3, special status species are species that are afforded some level of protection or special management under federal or state laws or regulations. As such, all cacti and yucca are considered special status because they are protected by the State of Nevada and the BLM. All cacti, yucca, and Christmas trees have special consideration under Nevada Revised Statutes Section 527.050, and are protected from unauthorized removal. Removal or possession of any cactus, yucca, or Christmas tree for commercial purposes on any state, county, or privately owned lands is regulated by the State Forester Fire Warden. Removal of such species from private lands would require a permit requisition from the State Forester Fire Warden. DOE would salvage cacti and yucca in accordance with this law and the requirements of applicable land management agencies during the construction phase. Stipulations for salvage are outlined in BLM Manual 6840, *Special Status Species Management* (DIRS 172901-BLM 2001).

Invertebrates The Oasis Valley pyrg, a snail, is known to occur in the Amargosa River drainage in Oasis Valley. Specifically, this snail has been documented to occur in an unnamed spring near Fleur de Lis Spring 12 kilometers (7.5 miles) from the community of Springdale (see Figure 3-220) (DIRS 104593-CRWMS M&O 1999) and potentially inhabits other springs in the Amargosa River drainage. It has been documented to occur approximately 2 kilometers (1.2 mile) southeast of the Oasis Valley alternative segment 1 (DIRS 182061-Hopkins 2006, all). This snail inhabits small springs and stream outflows where it is typically found on stone, travertine, watercress, and plant debris (DIRS 175029-NatureServe Explorer 2005, all).

The larval host plant for the colonial early blue butterfly is wild buckwheat (*Eriogonum* spp.) (DIRS 182785-UC Davis). The closest documented occurrence of this colonial butterfly is approximately 10.5 kilometers (6.5 miles) west of Department of Defense Branchline South (DIRS 182061-Hopkins 2006, all).

In Nevada, the White Mountains *Icarioides* blue is currently known from Esmeralda and Mineral counties (DIRS 181845- NatureServe 2007) where it feeds primarily on lupine (*Lupinus* spp.). The closest documented occurrence of this rare butterfly is approximately 7.9 kilometers (5 miles) from Mina common segment 1 (DIRS 182061-Hopkins 2006, all).

Fish The Oasis Valley speckled dace occurs in the Amargosa River drainage and Fleur de Lis Spring near Springdale and Beatty, approximately 3 kilometers (1.8 mile) southeast from Oasis Valley alternative segment 1 (see Figure 3-220). This subspecies has a very limited range and is only known from the watershed in Oasis Valley. Specific distribution of this fish varies with available water.

Amphibians and Reptiles The Amargosa toad is found in or near riparian habitats associated with the Amargosa River drainage (Oasis Valley) and at Fleur de Lis Spring, Crystal Spring, Indian Spring, and other springs and seeps near the towns of Springdale and Beatty (DIRS 174414-Stebbins 2003, pp. 209 and 210; DIRS 104593-CRWMS M&O 1999, p. 3-20). Vegetation bordering this toad's habitat includes cottonwood trees, cattails, and sedges. Adult toads hide and rest under bushes and in rodent burrows, and generally hibernate from November to March. If moist soil is available, open water might not be necessary for the adult toad to survive (DIRS 176795-BLM n.d.). The nearest documented occurrence of this species is approximately 2.7 kilometers (1.7 miles) away from Oasis Valley alternative segment 1. This species has also been documented along common segment 6 (DIRS 182061-Hopkins 2006, all).

The chuckwalla has been documented in the southeastern foothills of Yucca Mountain, adjacent to common segment 6. This area represents the chuckwalla's northern-most range in southern Nevada. This large lizard is typically found among talus slopes, large rocky outcrops and boulders, which provide cover and basking sites (DIRS 174414-Stebbins 2003, p. 269-270). This species has not been documented within the study area.

Birds Western burrowing owls are known to occur throughout the Mojave and Great Basin Deserts (DIRS 176455-Dickinson 1999, p. 256). DOE identified one burrowing owl burrow, which appeared to be active, near the Mina rail alignment in the vicinity of Yucca Mountain. Typical burrowing owl habitat is characterized by well-drained, level-to-gently sloping areas in arid or semi-arid environments. This species has been known to overwinter throughout Nevada; however, they are predominantly encountered during their breeding season from mid-March through September (DIRS 176361-Klute et al. 2003, p. 1-12).

Bald eagles almost exclusively occupy habitat associated with large bodies of water during the breeding season, but occasionally use upland areas for food and roost sites. They usually nest in tall trees and they feed opportunistically on fish, waterfowl and seabirds, various mammals, and carrion. In the winter, bald eagles preferentially roost in large, shelter-providing trees (DIRS 180967-NatureServe 2006, all). Nevada's only nesting pair of bald eagles has been documented at the Lahontan Reservoir and approximately 0.97 kilometer (0.6 mile) east of the existing Union Pacific Hazen Branchline (DIRS 181844-Jeffers 2007). In addition to using the Lahontan Reservoir, this species is likely to forage in the Carson and Walker Rivers and Walker Lake and Weber Reservoir.

Ferruginous hawks have been reported to occupy and, in some cases, nest in areas adjacent to the Mina rail alignment (DIRS 174519-Bennet 2005, plate 5). The ferruginous hawk is a relatively rare breeder in the study area. This species prefers to nest in trees; however, in Nevada tall trees are scarce, so the species is often found in pinyon-juniper associations or occasionally on shrubs or rocks on the ground. Potentially suitable habitat for this species is present in higher elevation woodlands near Montezuma alternative segments 1 and 3. No ferruginous hawks or nests were observed during the 2005 or 2006 field surveys, although they have been previously reported in the area.

Peregrine falcons are found in a wide variety of habitats during the breeding season, from tundra, moorlands, steppe, and seacoasts to mountains, open forested regions, and human population centers. They typically nest on rocky cliffs. Outside the breeding season, the falcons occur in areas where prey (primarily birds) concentrate, including farmlands, marshes, lakeshores, river mouths, tidal flats, dunes and beaches, broad river valleys, cities, and airports (DIRS 180966- NatureServe 2006, all). There is

potential nesting habitat for peregrine falcons on cliffs throughout the Mina rail alignment but outside the construction right-of-way for all segments.

Loggerhead shrikes have been documented along the Mina rail alignment where suitable habitat is present. Habitat used by this species during the breeding season includes open country with scattered trees and shrubs, savanna, desert scrub (southwestern U.S.) and, occasionally, open woodlands (DIRS 180963- NatureServe 2006, all). They typically nest in thick brush, shrubs, or small trees in open areas. Potentially suitable habitat for loggerhead shrikes occurs along all segments of the Mina rail alignment.

Sage thrashers are known to occur in sagebrush habitat within the Mina rail alignment construction right-of-way. Habitat for this bird species consists of large stands of sagebrush, which can be found in areas where the rail alignment would cross mountain ranges, including the Blow Sand Mountains, Wassuk Range, Clayton Ridge, Goldfield Hills, and Montezuma Range. There is potential sagebrush habitat within the Railroad Valley.

Phainopepla is known to occur in the southern portion of the Mina rail alignment at Oasis Valley and common segment 6. This species inhabits desert scrub and desert woodland habitats (DIRS 176455- Dickinson 1999, p. 364).

Brewer's sparrows are strongly associated with sagebrush over most of their range, in areas with scattered shrubs and short grass (DIRS 180959- NatureServe 2006, all). Sagebrush habitat can be found in areas where the rail alignment would cross mountain ranges, including Blow Sand Mountains, Wassuk Range, Clayton Ridge, Goldfield Hills, and Montezuma Range. Brewer's sparrows are likely to occur in sagebrush habitat within the Mina rail alignment construction right-of-way.

Mammals The State of Nevada classifies desert bighorn sheep as a game species. As further discussed in Section 3.3.7.3.5, the State of Nevada manages the desert bighorn sheep as a game species throughout the state.

The pygmy rabbit (*Brachylagus idahoensis*), a small sagebrush-dependent rabbit, is well distributed throughout the Great Basin; however, overall the populations tend to be locally clustered in areas of high-density sagebrush, which they use for both cover and food. Field surveys did not indicate the presence of pygmy rabbit habitat in the study area of the Mina rail alignment (DIRS 174519-Bennett 2005, Plate 3). The nearest documented sign (scat) of a pygmy rabbit is from the Kawich Range in Nye County and more than 120 kilometers (75 miles) east of the Mina rail alignment study area (DIRS 181899-USAF 2007, pp. 50 and 51). There is no known suitable pygmy rabbit habitat within the construction right-of-way or study area of the Mina alignment.

The dark kangaroo mouse and the closely related pale kangaroo mouse are known to occur in appropriate habitat near Goldfield (DIRS 174519-Bennett 2005, plate 1 and 2). Habitat for these two mice species is characterized by alkali (salt) sinks and desert scrub dominated by shadscale or big sagebrush. These rodents usually prefer soft sand accumulated at bases of shrubs for burrow sites (DIRS 176370-O'Farrell and Blaustein 1974, p. 1-2; DIRS 176372-O'Farrell and Blaustein 1974, p. 1).

There are 23 species of bats in Nevada. In general, bats are highly mobile and all of the 23 species could at some time of the year fly over or, if appropriate habitat exists, roost and forage near the Mina rail alignment. Twenty-one of the 23 species of bats that occur in Nevada are considered BLM-sensitive (DIRS 172900-BLM 2003, p. 2) and nine are State of Nevada protected. Of these bat species, seven have a strong probability of utilizing habitat along the rail alignment (DIRS 181865-Bradley et al. 2006), as follows:

- Pallid bat
- Townsend's big-eared bat
- Small-footed myotis bat
- Western pipistrelle bat

- Big brown bat
- California myotis bat
- Brazilian free-tailed bat

All of these bat species are commonly found throughout the Mojave and southern Great Basin Deserts. These species are known to roost in cliff faces, caves, rocky outcrops, and man-made structures where available. Bats are also known to forage over natural or artificial water sources.

3.3.7.3.4 Migratory Birds

More than 300 species of birds are commonly observed in southern Nevada, including year-round residents, seasonal migrants that breed in southern Nevada, winter residents that breed in the north, and seasonal migrants that pass through southern Nevada while traveling in spring and fall between breeding ranges to the north and winter ranges to the south. All of the migratory birds found along the Mina rail alignment are protected under the Migratory Bird Treaty Act (16 U.S.C. 703 *et seq.*) and Executive Order 13186. Appendix H, Table H-4, lists bird species that could occur in the construction right-of-way.

3.3.7.3.5 State of Nevada Game Species

The Mina rail alignment would cross several areas designated as game habitat (DIRS 173224-BLM 1997, Maps 9-13; DIRS 174518-BLM 2005, Maps 3.6-1 to 3.6-4). As shown in Table 3-133, three game species that occur, or have the potential to occur, within or near the construction right-of-way are cross-listed as BLM-designated sensitive, are state protected, or both. The game species that are also BLM-designated sensitive include greater sage-grouse, pygmy rabbit, and desert bighorn sheep. The Nevada Department of Wildlife actively manages the desert bighorn sheep as a big game animal. Its distribution is shown on Figure 3-221. Other game species that could be affected by the proposed railroad construction and operation include mule deer, pronghorn antelope, and mountain lion. Figures 3-222 and 3.3.7-28 indicate the general habitat locations for mule deer and pronghorn antelope, respectively. Mountain lions occur throughout the State of Nevada in canyon, mountain, and forested areas; therefore, no distribution map is included for this species.

3.3.7.3.5.1 Desert Bighorn Sheep. Desert bighorn sheep are found predominantly in lower foothills and grasslands of mountain ranges, often where terrain is rough, rocky and steep, and broken up by canyons and washes. Desert bighorn sheep require access to freestanding water, especially during the summer, and distribution of water holes significantly influences patterns of home-range movement (DIRS 176363-Shackleton 1985, p. 4). Any natural or artificial water sources within this species' range could be subject to desert bighorn use. Year-round habitat for this species is found throughout much of the Mina alignment from south of Schurz to the Yucca Mountain Site. Common segment 6 would cross a *movement corridor*, or an area of high use at certain times of the year, in the Beatty Wash area (Figure 3-221). The Mina rail alignment does not cross any crucial habitat for this species.

3.3.7.3.5.2 Mule Deer. Mule deer are fairly common in southern Nevada and throughout the western United States, and are found in a variety of habitats from coniferous forests at high elevations to desert shrub, chaparral, and grasslands at lower elevations (DIRS 176454-Whitaker 1992, p. 652). Mule deer are often associated with successional vegetation, especially near agricultural lands. Mule deer are found along the entire Mina rail alignment (Figure 3-222), but would most likely be encountered near the communities of Wabuska and Silver Peak. The rail alignment would not cross any mule deer crucial habitat.

3.3.7.3.5.3 Pronghorn Antelope. Most of the Mina rail alignment would abut year-round pronghorn antelope habitat located east of the rail alignment from Schurz to Beatty (Figure 3-223). The only areas of the rail alignment that would cross year-round pronghorn habitat would be between Churchill and Wabuska and also between Mills and Goldfield. Pronghorn antelope are generally found at lower elevations in open desert grasslands, salt desert scrub, or bunchgrass-sagebrush vegetation in the

valleys and foothills throughout the western United States. This species also occurs in dense sagebrush communities at higher elevations during the breeding season (DIRS 176454-Whitaker 1992, pp. 662 and 663). The Nevada Department of Wildlife did not identify these areas as pronghorn antelope augmentation sites.

3.3.7.3.5.4 Mountain Lion. Mountain lions occur throughout the State of Nevada in low numbers in canyon, mountainous, and forested areas (DIRS 103439- Hall 1995, pp. 269 to 271) and are known to occur within the study area of the Mina rail alignment. Adult mountain lions are generally tawny in color with a white underbelly and are approximately 6 to 8 feet long (DIRS 103439- Hall 1995, pp. 269 to 271). The mountain lion’s diet consists mostly of deer; however, they will also feed on rabbits and large rodents. This species is shy, solitary, secretive, and active mostly at night (DIRS 103439-Hall 1995, pp. 269-271).

Section 3.3.7.3.5 provides more information on this species and the other game mammals present in the study area.

3.3.7.3.6 Wild Horses and Burros

Wild horses are generally presumed to descend from horses that were released by, or escaped from, settlers of western North America, possibly dating as far back as Spanish settlers in the 1600s. The size, color, and confirmation of the horses depend on the type of stock or breed from which the wild horses descended (DIRS 174518-BLM 2005, p. 3.8-1).

Generally, burros live in the lower elevations year-round, while wild horses reside in the higher elevations in summer and migrate to the lower elevations in winter. Both wild horses and burros will travel as far as 16 kilometers (10 miles) away from permanent water sources. Their diets vary—burros prefer shrubs, horses tend to prefer grasses (DIRS 103079-BLM 1998, p. 3-48).

Wild horse herd areas were originally identified by federal agencies in 1971, with passage of Public Law 92-195, the Wild Free-Roaming Horses and Burros Act. The BLM has delineated herd management areas within the wild horse herd areas. Each herd management area has an appropriate management level determined by the BLM through a rangeland assessment and a public review process. The appropriate management level is the number of wild horses and burros the herd management area population is managed to, and it is established to avoid the ecological degradation of the herd management area and any riparian areas within each herd management area (DIRS 176364-State of Nevada [n.d.], all)

The Mina rail alignment would cross approximately 7 designated wild horse and burro herd management areas (Figure 3-214). Appendix H provides detailed information on the individual herd management areas. Table 3-134 identifies each Mina rail alignment alternative segment and common segment that would cross or lie within herd management areas and describes the location, size, and management level of each herd management area.

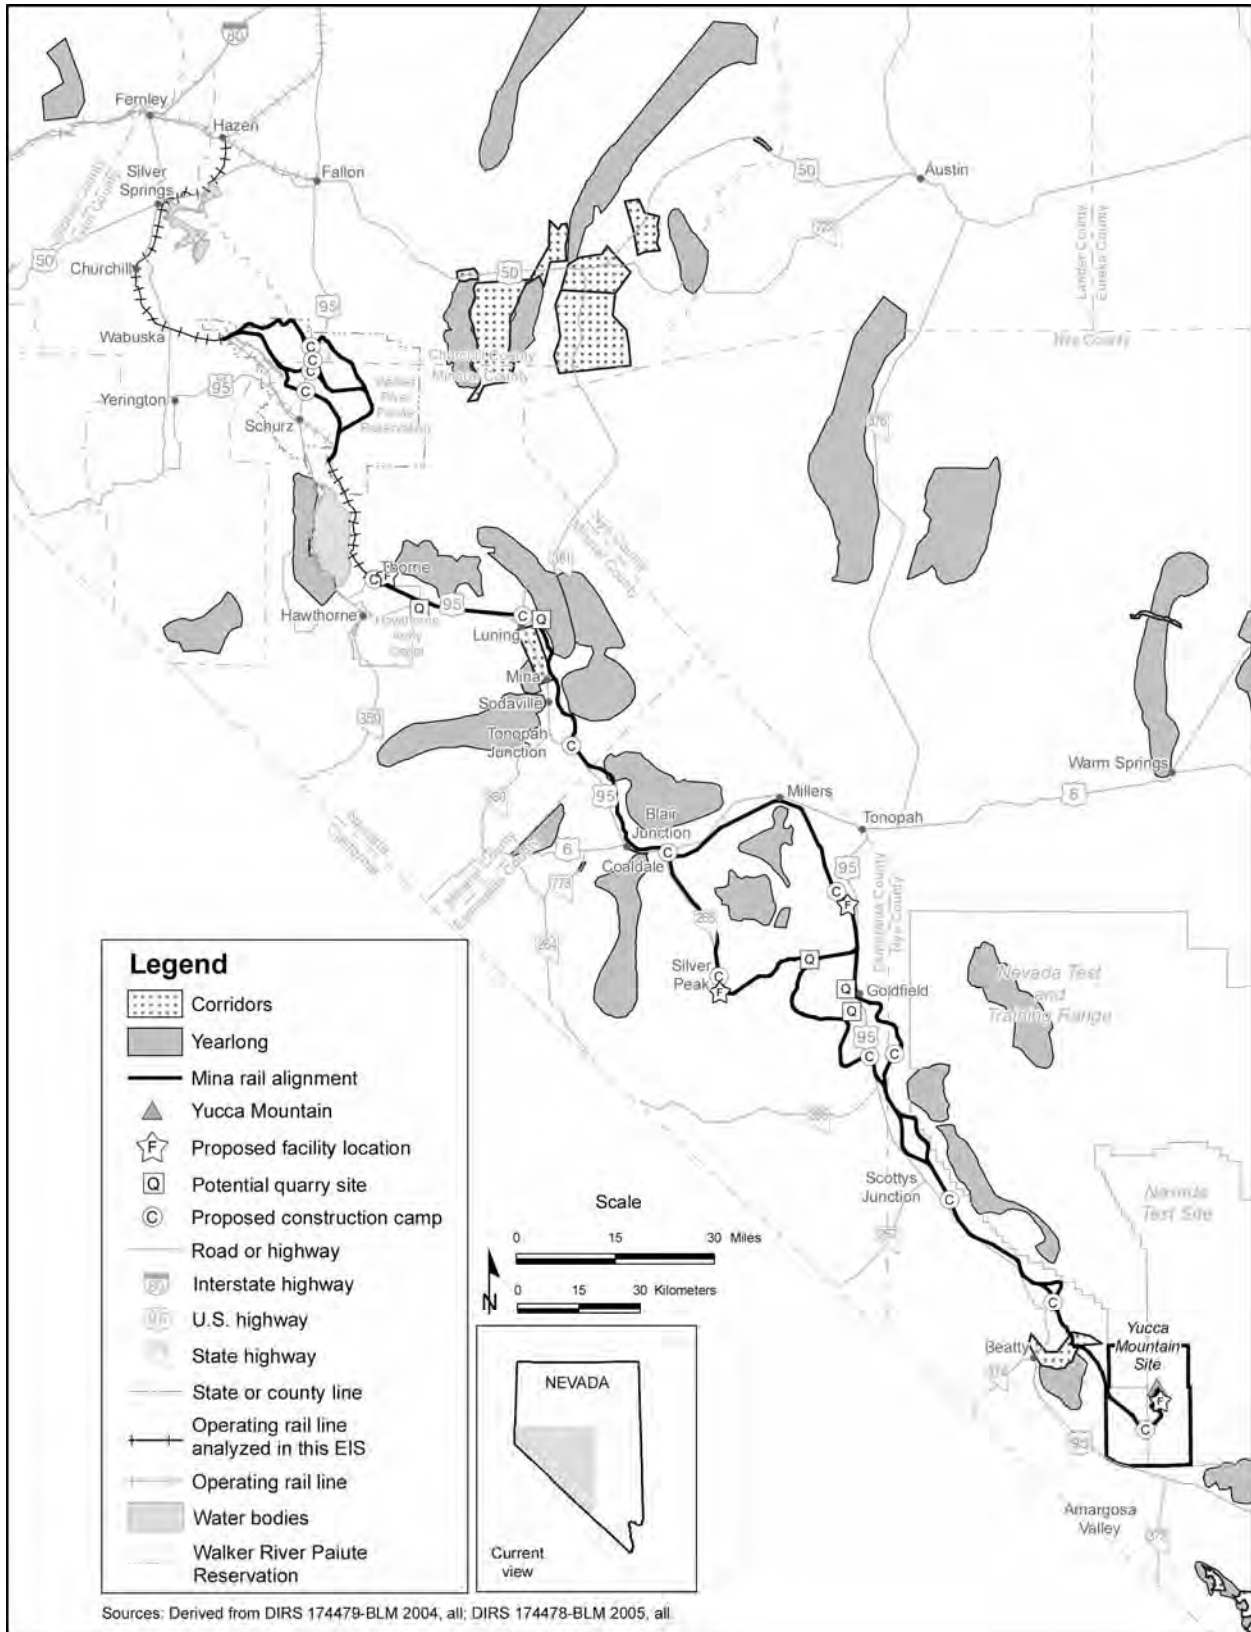


Figure 3-221. Desert bighorn sheep habitat along the Mina rail alignment.

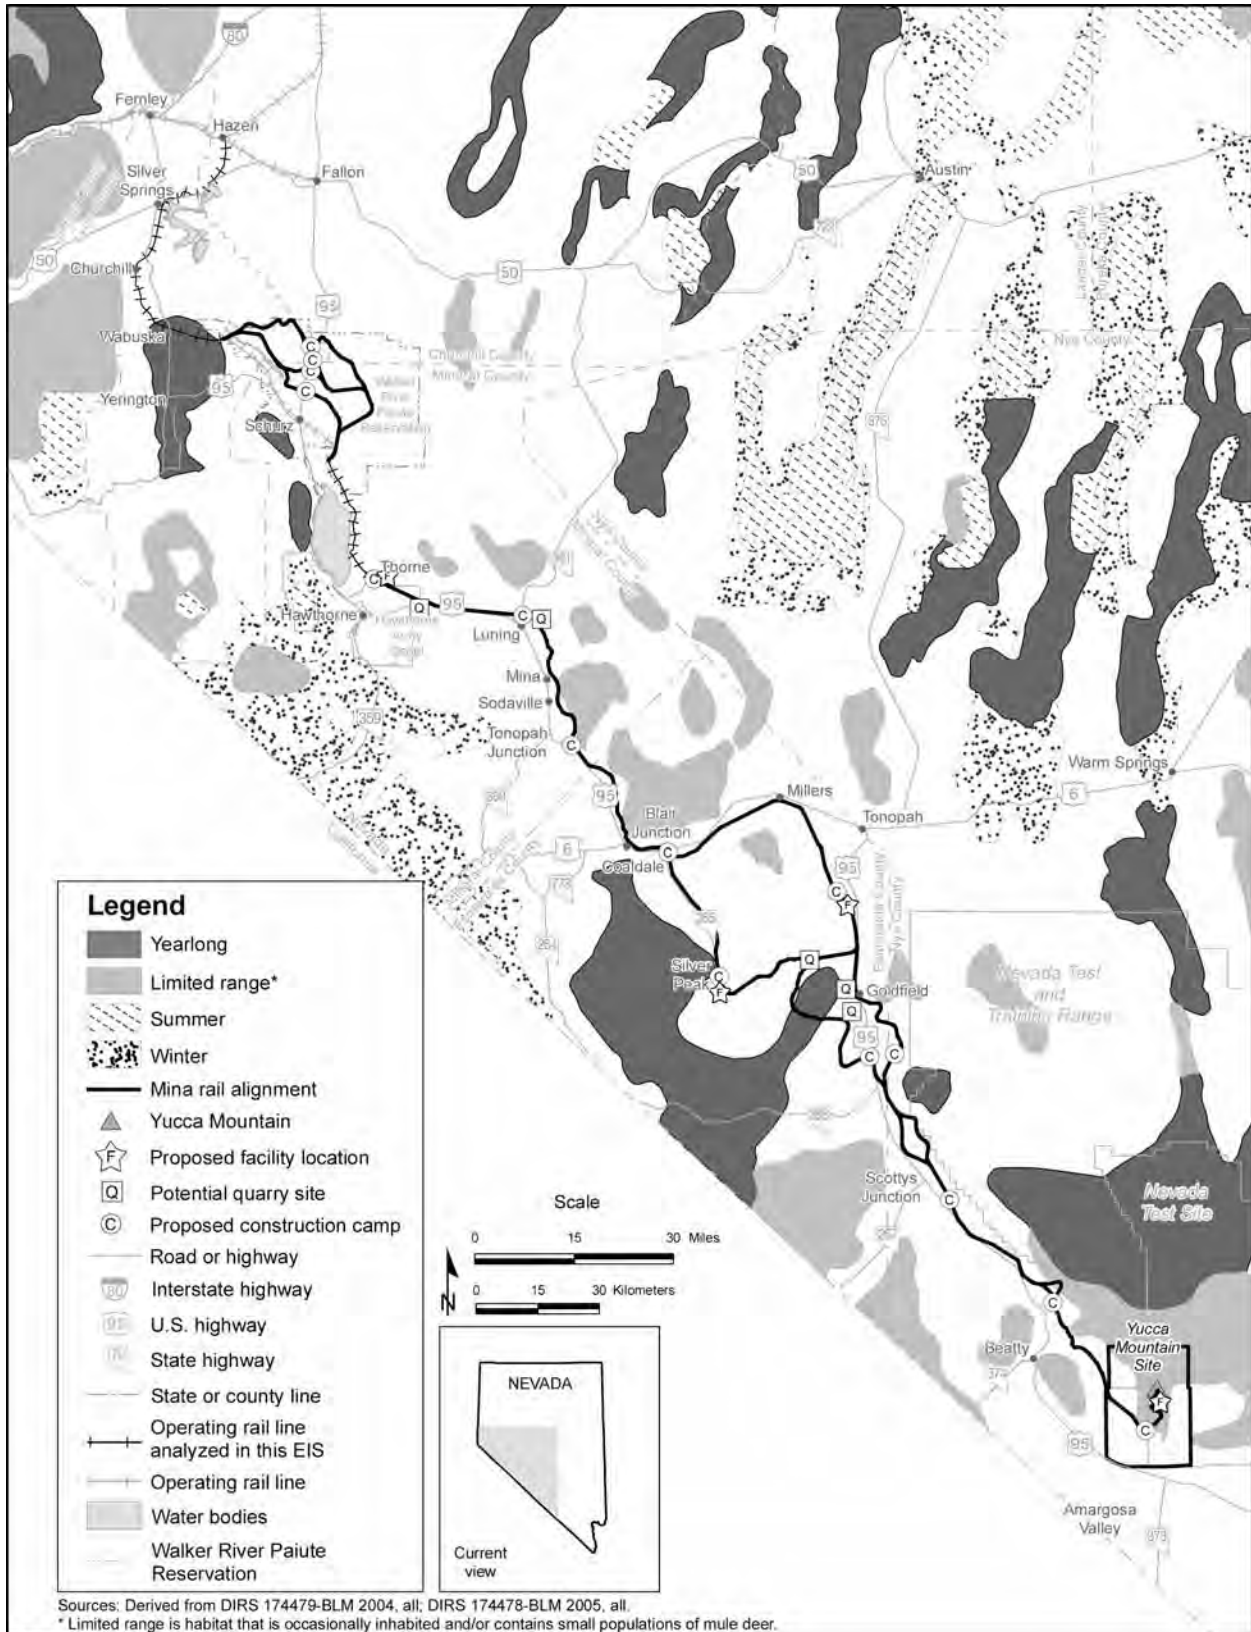


Figure 3-222. Mule deer habitat along the Mina rail alignment.

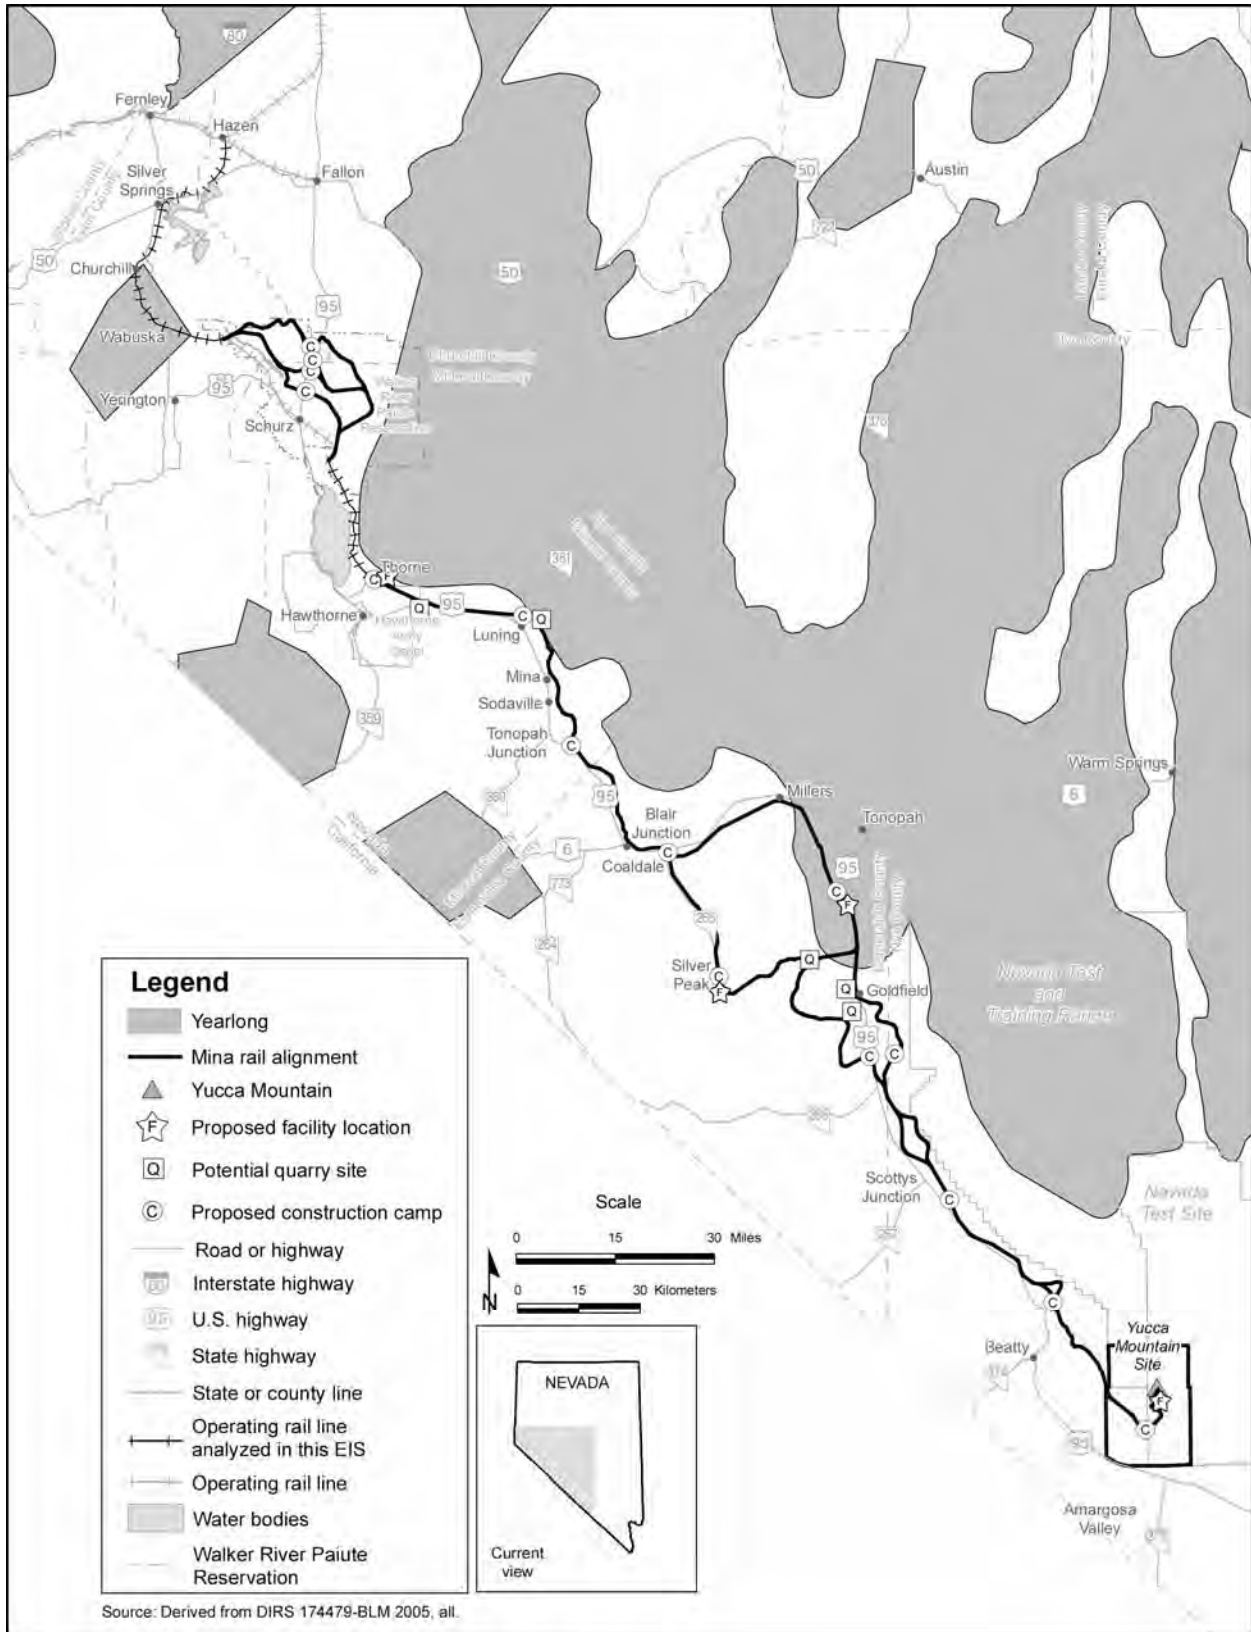


Figure 3-223. Pronghorn antelope habitat along the Mina rail alignment.

Table 3-134. Herd management areas the Mina rail alignment would cross.^a

Herd management area	Location ^b	Area (square kilometers) ^c	Appropriate management level	Segment that would cross area
Horse Mountain	North of Schurz	193	0	Schurz alternative segment 6
Pilot Mountain	North-northeast of U.S. Highway 95, from Thorne to Blaire Junction	1,937	346 horses 0 burros	Mina common segment 1
Silver Peak	East of Silver Peak	970	61 horses 15 burros	Montezuma 1
Goldfield	East of Goldfield	260	125 horses 50 burros	Montezuma 2
Montezuma Peak	West of Goldfield	310	146 horses 10 burros	Montezuma alternative segments 1, 2, and 3
Stonewall	West of Lida Junction and south of Goldfield	100	50 horses 25 burros	Mina common segment 2; Bonnie Claire alternative segments 2 and 3
Bullfrog	Surrounds Beatty	520	12 horses 185 burros	Oasis Valley alternative segments 1 and 3; common segment 6

a. Sources: DIRS 174047-Bennett 2005; DIRS 174046-Bennett 2005; DIRS 174479-BLM 2003; DIRS 174478-BLM 2005; DIRS 174329-BLM n.d.; DIRS 174333-BLM n.d.; DIRS 174332-BLM n.d.; DIRS 174330-BLM n.d.; DIRS 173064-BLM 2007; DIRS 173063-BLM 2005; DIRS 173062-BLM 2005; DIRS 173061-BLM 2005; DIRS 173060-BLM 2005; DIRS 173059-BLM [n.d.]; DIRS 173057-BLM 2005; DIRS 174518-BLM 2005, DIRS 181843 Axtell 2007.

b. To convert kilometers to miles, multiply by 0.62137.

c. To convert square kilometers to acres, multiply by 247.10.

3.3.8 NOISE AND VIBRATION

This section describes existing noise and vibration in the Mina rail alignment region of influence. Section 3.3.8.1 describes the region of influence; Section 3.3.8.2 describes general regional characteristics for noise and vibration; and Section 3.3.8.3 describes the existing noise and vibration in more detail for the Mina rail alignment alternative segments and common segments.

Noise is considered a source of pollution because it can be a human health hazard. Potential health hazards range from hearing impairment at very high noise levels to annoyance at moderate to high noise levels. Sound waves are characterized by frequency and measured in *hertz*; sound pressure is expressed as *decibels* (dB). Appendix I, Noise and Vibration Assessment Methodology, provides more information on the fundamentals of analyzing noise.

With the exception of prohibiting nuisance noise, neither the State of Nevada nor local governments have established numerical noise standards. Nevertheless, many federal agencies use *day-night average noise levels* (DNL) as guidelines for land-use compatibility and to assess the impacts of noise on humans.

For the operation of trains during proposed railroad construction and operations, DOE analyzed noise impacts under established STB criteria. The STB has environmental review regulations for noise analysis (49 CFR 1105.7e(6)), with the following criteria:

- An increase in noise exposure as measured by DNL of 3 *A-weighted decibels* (dBA) or more.
- An increase to a noise level of 65 DNL or greater.

If the estimated noise level increase at a location exceeds either of these criteria, the STB then estimates the number of affected noise-*sensitive receptors* (such as schools, libraries, residences, retirement communities, nursing homes). The two components (3 dBA increase, 65 DNL) of the STB criteria are implemented separately to determine an upper bound of the area of potential noise impact. However, current noise research indicates that both criteria components must be met to cause an adverse impact from noise (DIRS 173225-STB 2003, p. 4-82). That is, noise levels would have to be greater than or equal to 65 DNL and increase by 3 dBA or more for an adverse noise impact to occur.

Day-night average noise level (DNL):

The energy average of A-weighted decibels (dBA) sound level over 24 hours; includes an adjustment factor for noise between 10 p.m. and 7 a.m. to account for the greater sensitivity of most people to noise during the night. The effect of nighttime adjustment is that one nighttime event, such as a train passing by between 10 p.m. and 7 a.m., is equivalent to 10 similar events during the day.

A-weighted decibels (dBA):

A measure of noise level used to compare noise from various sources. A-weighting approximates the frequency response of the human ear.

There are three potential ground-borne vibration (vibration propagating through the ground) impacts of general concern: annoyance to humans, damage to buildings, and interference with vibration-sensitive activities. To evaluate potential impacts of vibration from construction and operations activities, DOE used Federal Transit Administration building vibration damage and human annoyance criteria. Under these criteria, if vibration levels exceeded 80 VdB (human annoyance criterion for infrequent events) or if the vibration levels (measured as *peak particle velocity*) exceeded 0.20 inches per second for fragile buildings or 0.12 inches per second for extremely fragile historic buildings, then there could be an impact from vibration (DIRS 177297-Hanson, Towers, and Meister 2006, all). Appendix I provides more information on the vibration metrics used in this study.

3.3.8.1 Region of Influence

Ambient noise: The sum of all noise (manmade and natural) at a specific location over a specific time is called ambient noise.

The region of influence for noise and vibration for construction and operation of a rail line along the Mina rail alignment includes the construction right-of-way out to variable distances, depending on several analytical factors (*ambient noise* level, train speed, number of trains per day, and number of railcars). Similarly, the region of influence for the railroad construction and operations support facilities depends on the magnitude of noise that would be generated and ambient noise levels, which would affect how far away the noise might be heard.

The region of influence for the Mina rail alignment also includes the existing Union Pacific Hazen Branchline from Hazen to Wabuska and the existing Department of Defense Branchlines (North, through Schurz, and South) from Wabuska to Hawthorne. These existing rail lines are included in the region of influence because under the Proposed Action, rail traffic on these lines would increase substantially above existing levels. STB regulations at 49 CFR Part 1105.7(e)(6) require analysis of potential noise impacts where a proposed action would result in an increase in rail traffic of at least 100 percent (measured in gross ton miles annually).

In areas with low ambient noise conditions along the Mina rail alignment, project-related noise might be heard farther away. Therefore, the region of influence varies along the rail alignment. In addition, DOE has reviewed recent aerial photographs along the entire rail alignment to identify the locations of receptors in the region of influence that might be affected by noise, vibration, or both.

3.3.8.2 General Regional Characteristics for Noise and Vibration

The Mina rail alignment is primarily in a quiet desert environment where natural phenomena such as wind, rain, and wildlife account for most of the ambient noise. Manmade noise in some areas of the region of influence is caused by vehicles traveling along public highways and high altitude commercial jets. At present, there is train activity on the existing Union Pacific Hazen Branchline from Hazen to Wabuska and on the existing Department of Defense Branchline from Wabuska to Hawthorne. Baseline noise conditions vary somewhat along the rail alignment and are site-specific. Most of the region of influence for the Mina rail alignment is typical of other desert environments in which the DNL values range from 14 decibels on a calm day to 38 decibels on a windy day (DIRS 102224-Brattstrom and Bondello 1983, p. 170). Areas within the region of influence are sparsely populated and, in general, ambient noise levels are low. The noise level at a specific location depends on nearby and distant sources of noise. Noise levels in populated areas tend to be higher than in unpopulated areas because of human activity and higher levels of transportation noise (Figure 3-224).

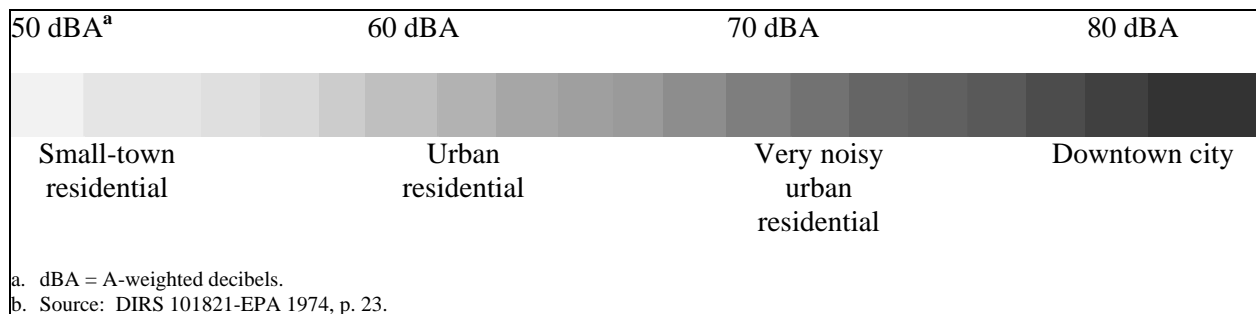


Figure 3-224. Typical DNLs for residential areas.^b

Ground-borne vibration occurs as a result of both natural phenomena (such as seismic activity) and manmade activities (such as construction and transportation activities). Human activities that can create

perceptible levels of ground-borne vibration are important when sensitive sites, structures, or activities could be affected. Background vibration exists as a component of the overall effects of ground-borne vibration, higher in areas with more human activity, lower in areas more distant from human activities. Vibration levels in populated areas tend to be higher than in unpopulated areas because of human activity and higher levels of transportation vibration. Background levels of ground-borne vibration along the Mina rail alignment are low.

3.3.8.3 Existing Environments for Noise and Vibration at Four Measurement Locations along the Mina Rail Alignment

DOE evaluated existing noise and vibration conditions along the Mina rail alignment and compiled the detected ranges of noise and vibration levels at different locations under different conditions. Up to four trains per week travel on the existing track in Silver Springs and two trains per week in Schurz.

Locomotive horns are currently sounded at three grade crossings in Silver Springs. Because existing rail traffic volume is low, DOE measured existing noise and vibration to represent existing conditions. Most of the region of influence for the rail alignment is sparsely populated and, in general, ambient noise levels are low and there are no detectable vibrations. DOE measured ambient noise and vibration levels from March 5 to March 6, 2007, at two locations along the Mina rail alignment (Silver Peak and Mina) and two locations along the existing Union Pacific Hazen Branchline and Department of Defense Branchlines (Schurz and Silver Springs). DOE had also taken ambient noise and vibration measurements at Goldfield on January 12, 2005. DOE selected these locations for ambient noise and vibration measurements because they are representative of the few populated areas within the region of influence. The ambient noise measurements at these representative locations along the rail alignment ranged from 34 to 48 DNL and ambient vibration levels were so low that they were essentially unmeasurable for Silver Springs, Schurz, Mina, and Silver Peak. The measured ambient vibration level in Goldfield was 25 VdB. Table 3-135 summarizes the measured ambient noise levels in Goldfield, Silver Peak, Mina, Schurz, and Silver Springs.

Table 3-135. Ambient noise measurements along the Mina rail alignment.

Location	DNL dBA ^a
Silver Springs	47
Schurz	48
Mina	44
Silver Peak	34
Goldfield	47

a. DNL dBA = day-night average noise level in A-weighted decibels.

3.3.8.3.1 Silver Peak

DOE took noise measurements for a 24-hour period in Silver Peak, Nevada, on March 5, 2007. The measured DNL was 34 dBA. Because there was almost no observable human activity in this area during the measurements, noise levels were very low. Measured noise levels at Silver Peak are substantially lower than the “small-town residential” category shown on Figure 3-224.

Figure 3-225 shows measured noise levels taken at Silver Peak over a 24-hour period. Hourly *equivalent sound levels* ranged from 17 to 39 dBA. There was little observable human activity during the measurements, except for very infrequent car passbys and occasional high-altitude commercial jet aircraft. Figure 3-226 shows the location where DOE took the ambient noise measurements in Silver Peak.

Equivalent sound level (Leq): A single value of sound level for any desired duration (such as 1 hour), which includes all of the time-varying sound energy in the measurement period. Leq correlates reasonably well with the effects of noise on people, even for wide variations in environmental sound levels and time patterns. It is used when only the durations and levels of sound, and not their times of occurrence (day or night), are relevant.

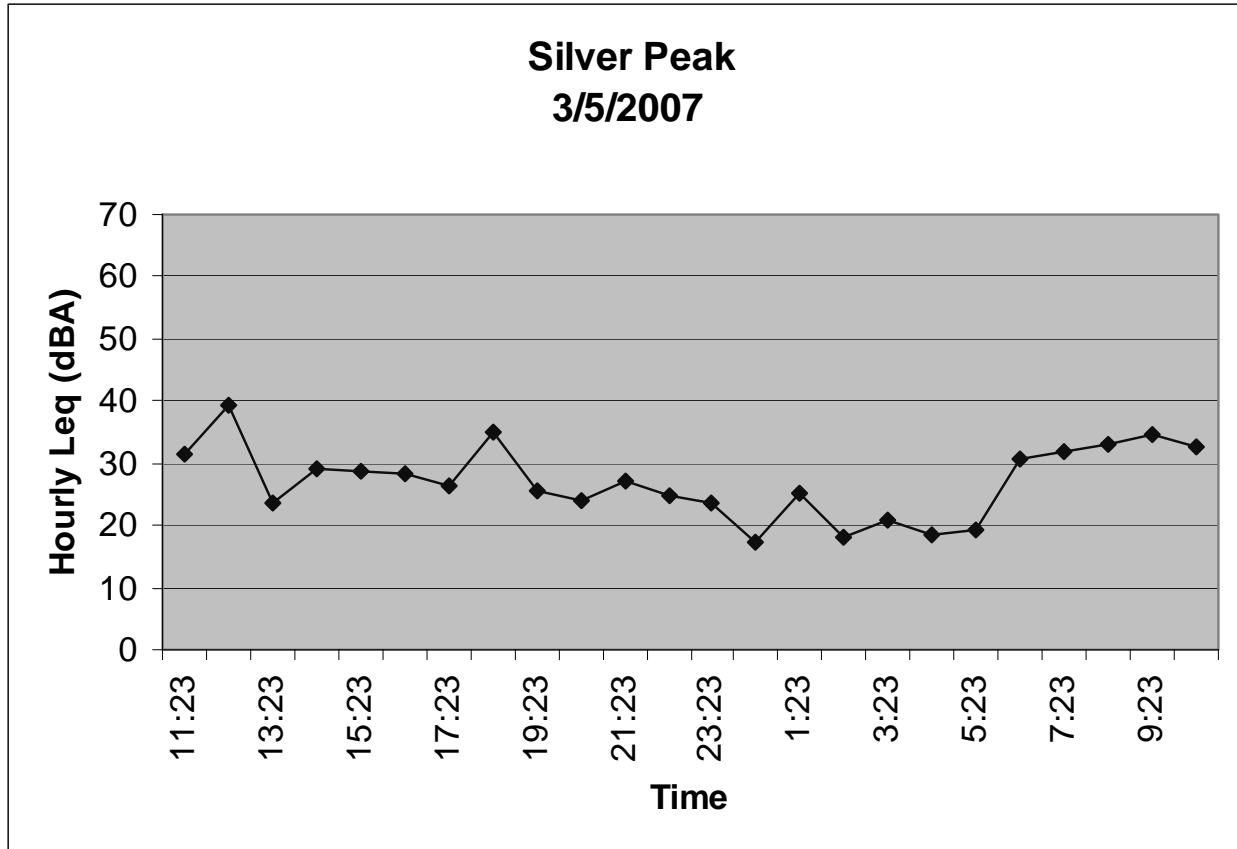


Figure 3-225. Measured noise levels over a 24-hour period in Silver Peak, Nevada.

DOE also took ambient ground-borne vibration measurements at Silver Peak on March 5, 2007. Ground-borne vibration was not measurable at this location because the vibration level was very low. Ambient vibration levels were very low at this location because of the lack of vibration producing activities. Ambient vibration levels of this magnitude are lower than human perception levels.

3.3.8.3.2 Mina

DOE took noise measurements for 24 hours on March 6, 2007, in Mina, Nevada. Hourly equivalent sound level values ranged from 30 to 40 dBA, as shown on Figure 3-227. Noise sources included occasional traffic on U.S. Highway 95, which passes through Mina. Figure 3-228 shows where DOE took the ambient noise measurements in Mina. The measured DNL in Mina was 44 dBA, which is lower than the “small town residential” category shown on Figure 3-224.

DOE also took ambient ground-borne vibration measurements at Mina on March 5, 2007. Ground-borne vibration was not measurable at this location because the vibration level was very low. Ambient vibration levels were very low at this location because of the lack of vibration producing activities. Ambient vibration levels of this magnitude are lower than human perception levels.

3.3.8.3.3 Schurz

DOE measured noise in Schurz near the existing Department of Defense Branchline on the Walker River Paiute Reservation for 24 hours on March 5, 2007. Hourly equivalent sound level values ranged from 32 to 56 dBA, as shown on Figure 3-229.

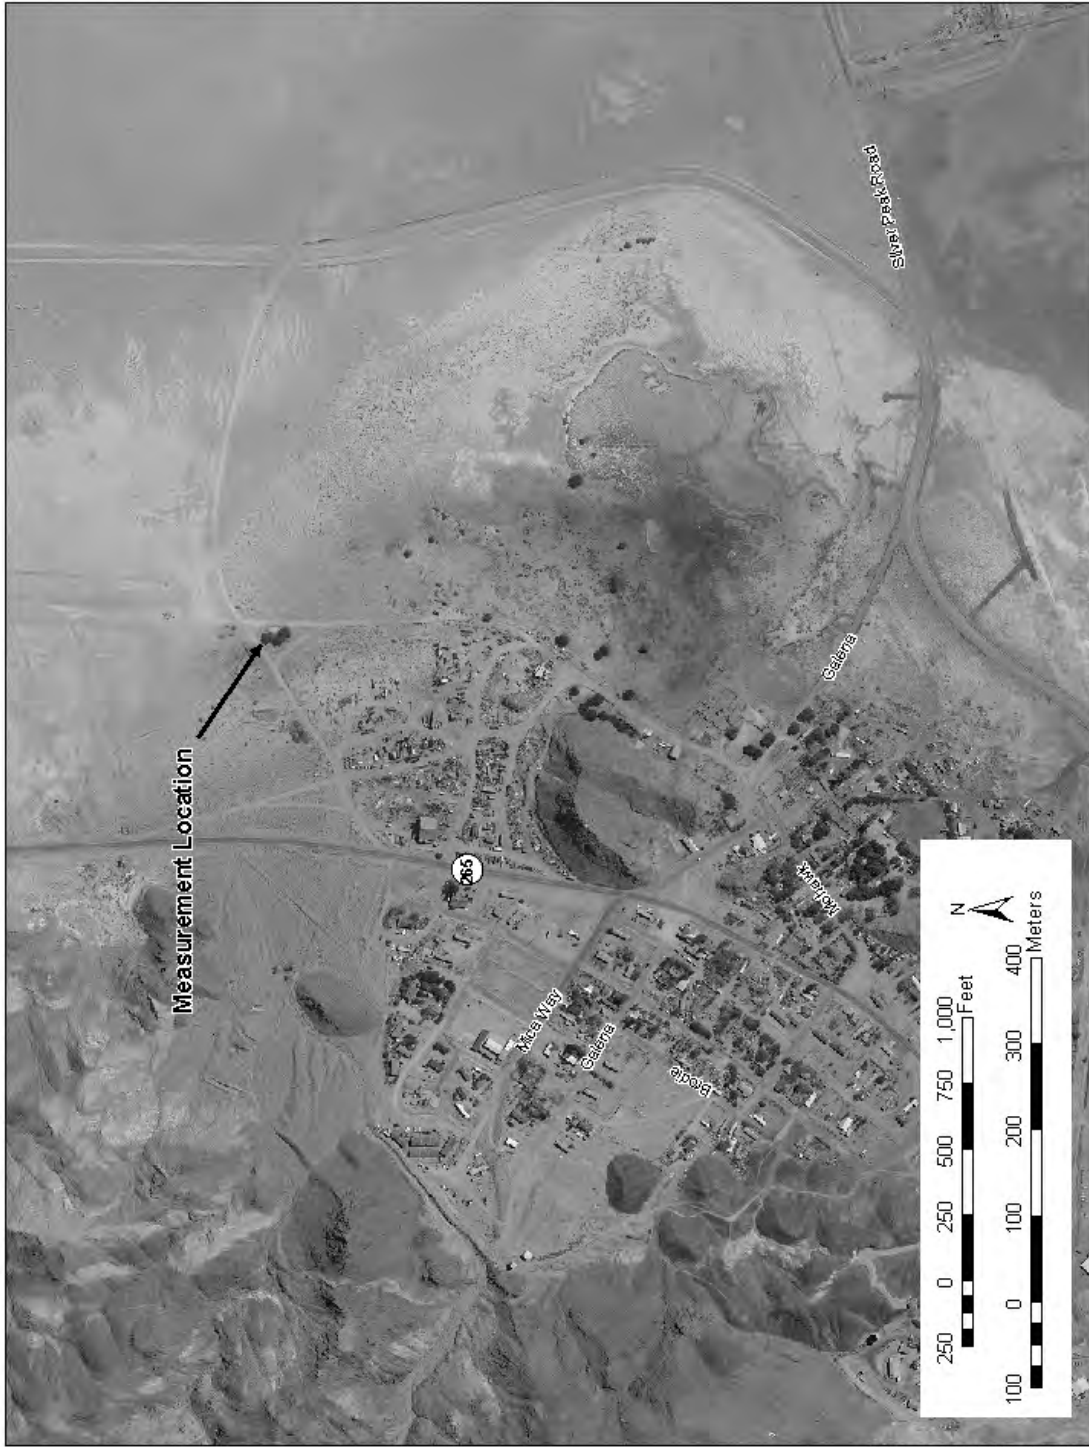


Figure 3-226. Ambient noise monitoring location at Silver Peak, Nevada.

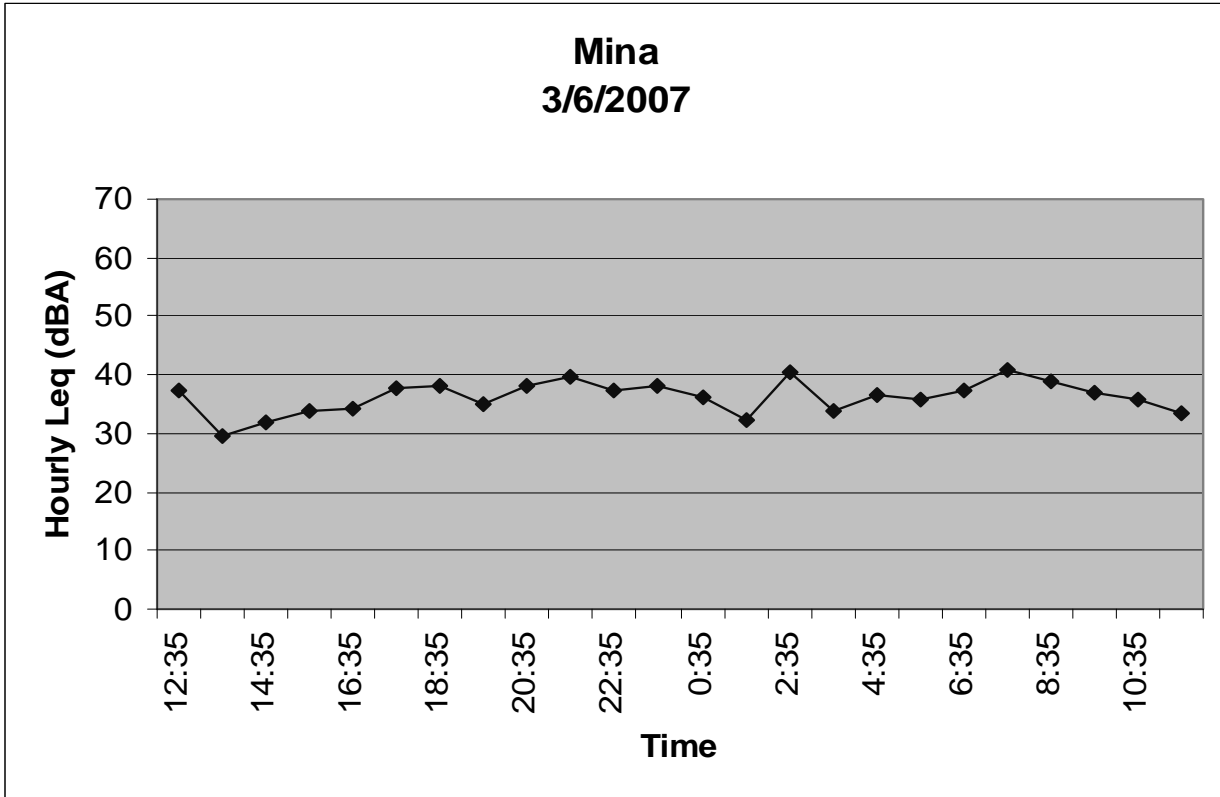


Figure 3-227. Measured noise levels over a 24-hour period in Mina, Nevada.

Noise sources included traffic on nearby local streets, and horses, dogs, and other animals on a nearby farm. Figure 3-230 shows where DOE took the ambient noise measurements in Schurz. The measured DNL in Schurz was 48 dBA, which is very close to the “small-town residential” category shown on Figure 3-224.

DOE also took ambient ground-borne vibration measurements at Schurz on March 5, 2007. Ground-borne vibration was not measurable at this location because the vibration level was very low. Ambient vibration levels were very low at this location because of the lack of vibration-producing activities. Ambient vibration levels of this magnitude are lower than human perception levels.

3.3.8.3.4 Silver Springs

DOE took noise measurements near the existing Union Pacific Hazen Branchline in Silver Springs for 24 hours on March 5, 2007. Hourly equivalent sound level values ranged from 23 to 60 dBA, as shown on Figure 3-231. Noise sources included traffic on local streets. Figure 3-232 shows where DOE took the ambient noise measurements in Silver Springs. The measured DNL in Silver Springs was 47 dBA, which is lower than the “small-town residential” category shown on Figure 3-224.

DOE also took ambient ground-borne vibration measurements at Silver Springs on March 5, 2007. Ground-borne vibration was not measurable at this location because the vibration level was very low. Ambient vibration levels were very low at this location because of the lack of vibration-producing activities. Ambient vibration levels of this magnitude are lower than human perception levels.

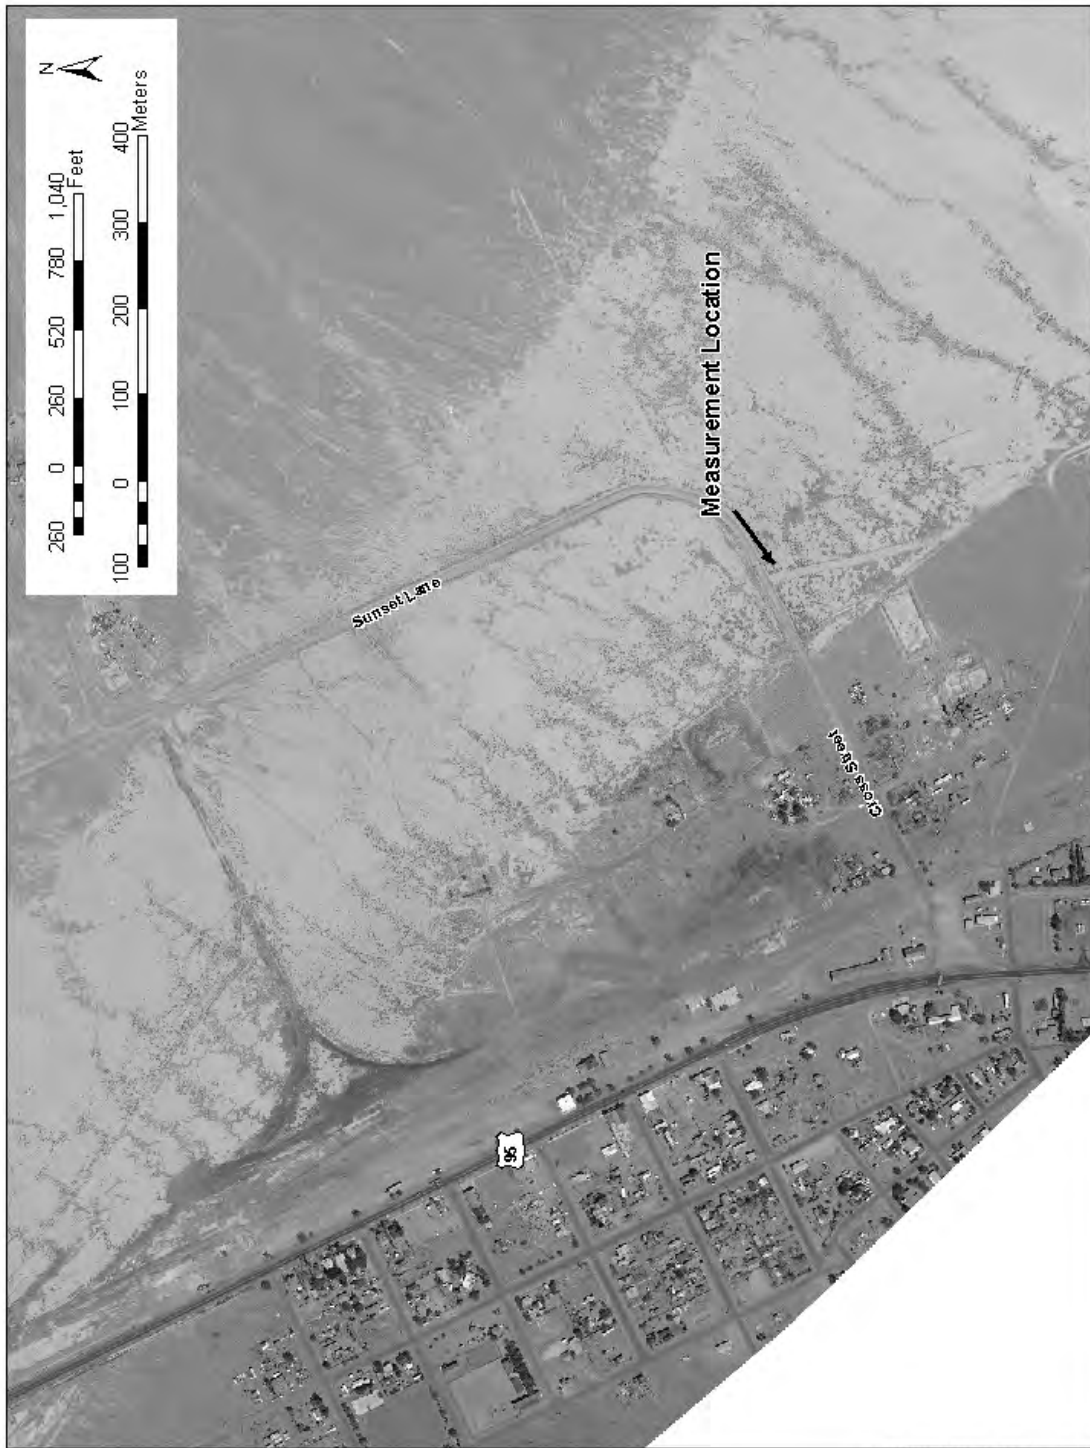


Figure 3-228. Ambient noise monitoring location at Mina, Nevada.

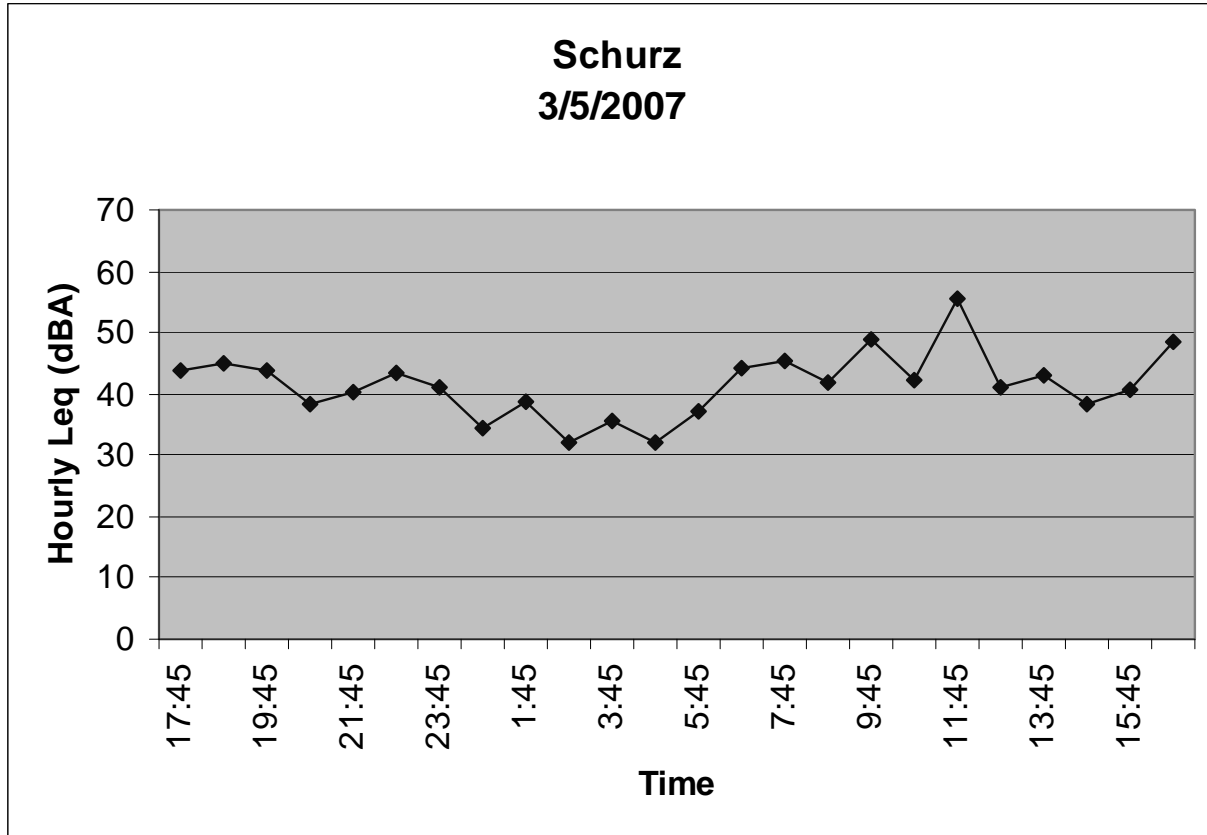


Figure 3-229. Measured noise levels over a 24-hour period in Schurz, Nevada.

3.3.8.3.5 Goldfield

DOE conducted noise measurements for 24 hours in Goldfield on January 12, 2005. Hourly equivalent sound level values ranged from 30 to 44 dBA, as shown on Figure 3-233. The DNL at this location measured 47 dBA. Noise sources included occasional vehicular traffic on U.S. Highway 93, barking dogs, wind, and occasional front-end-loader noise from the U.S. Department of Transportation maintenance station. Figure 3-234 shows where DOE took ambient noise measurements in the

Goldfield area. Measured noise levels at Goldfield are lower than values associated with the “small-town residential” category, which is consistent with the low population density and desert environment. DOE also took ambient ground-borne vibration measurements at Goldfield on January 12, 2005. The ground-borne vibration measurement was 25 VdB. Ambient vibration levels are low because of low population density and the resulting lack of *ground vibration*-producing activity. Ambient vibration levels of this magnitude are lower than human perception levels.

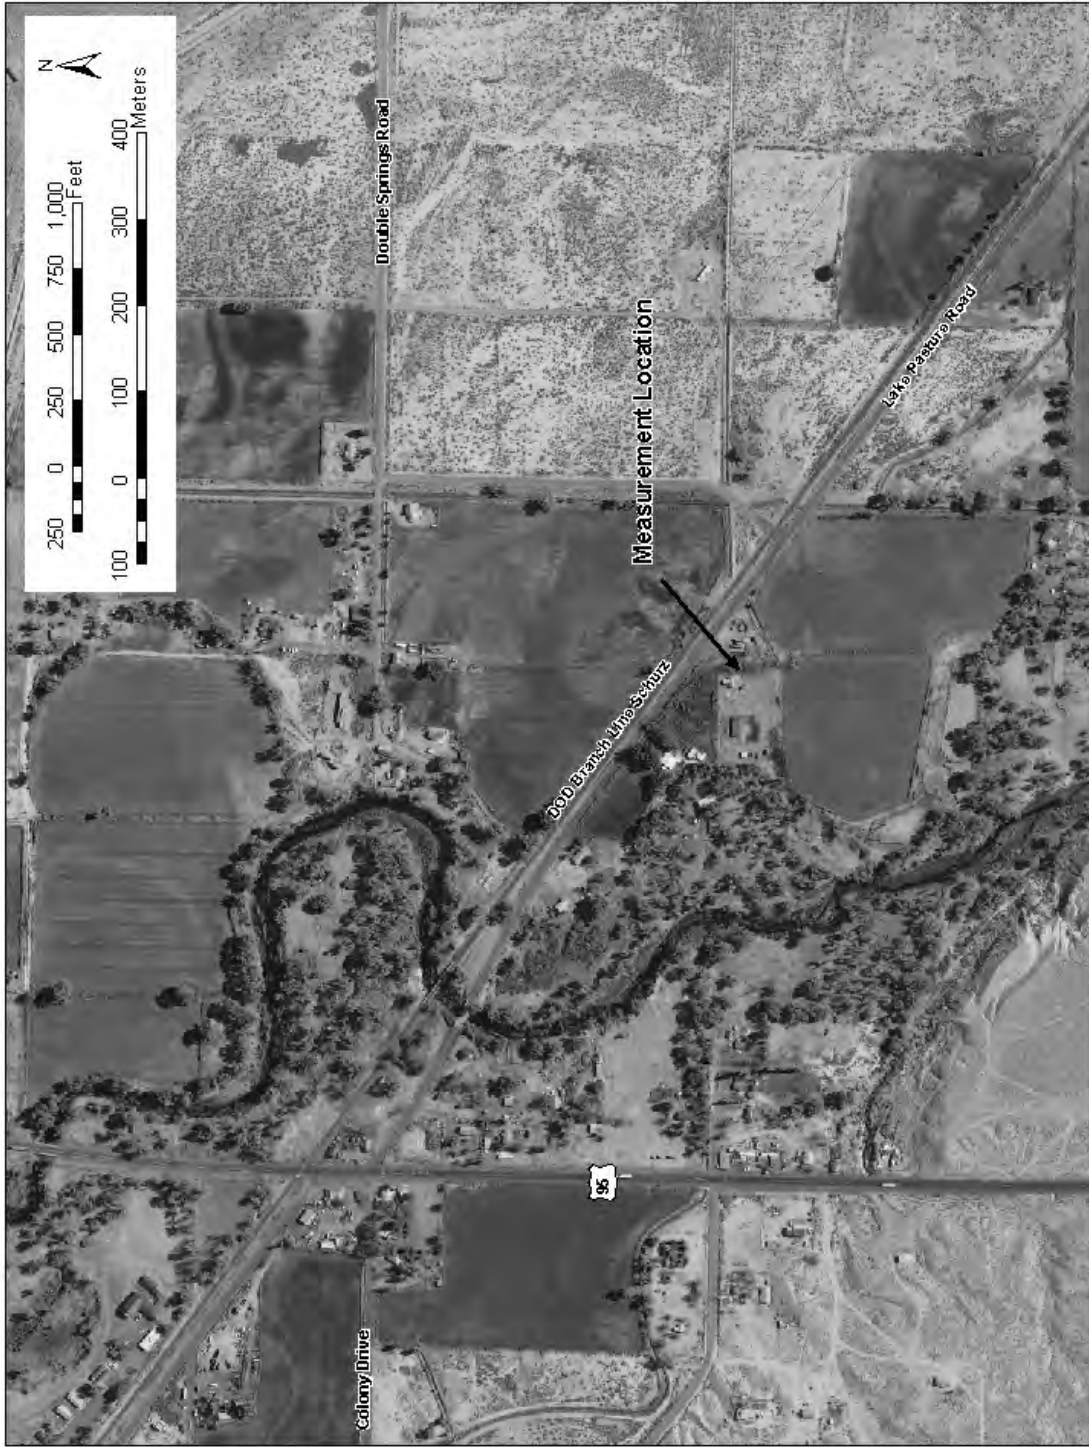


Figure 3-230. Ambient noise monitoring location at Schurz, Nevada.

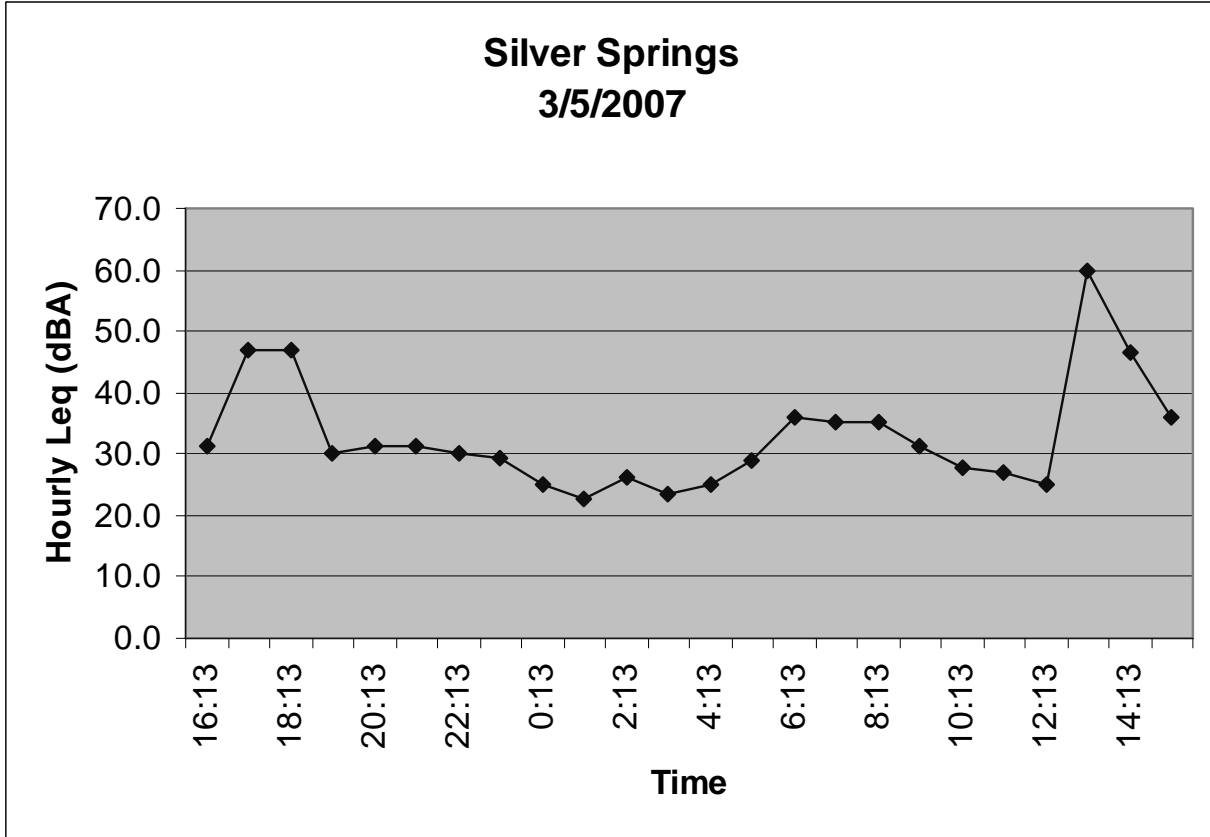


Figure 3-231. Measured noise levels over a 24-hour period in Silver Springs, Nevada.



Figure 3-232. Ambient noise monitoring location at Silver Springs, Nevada.

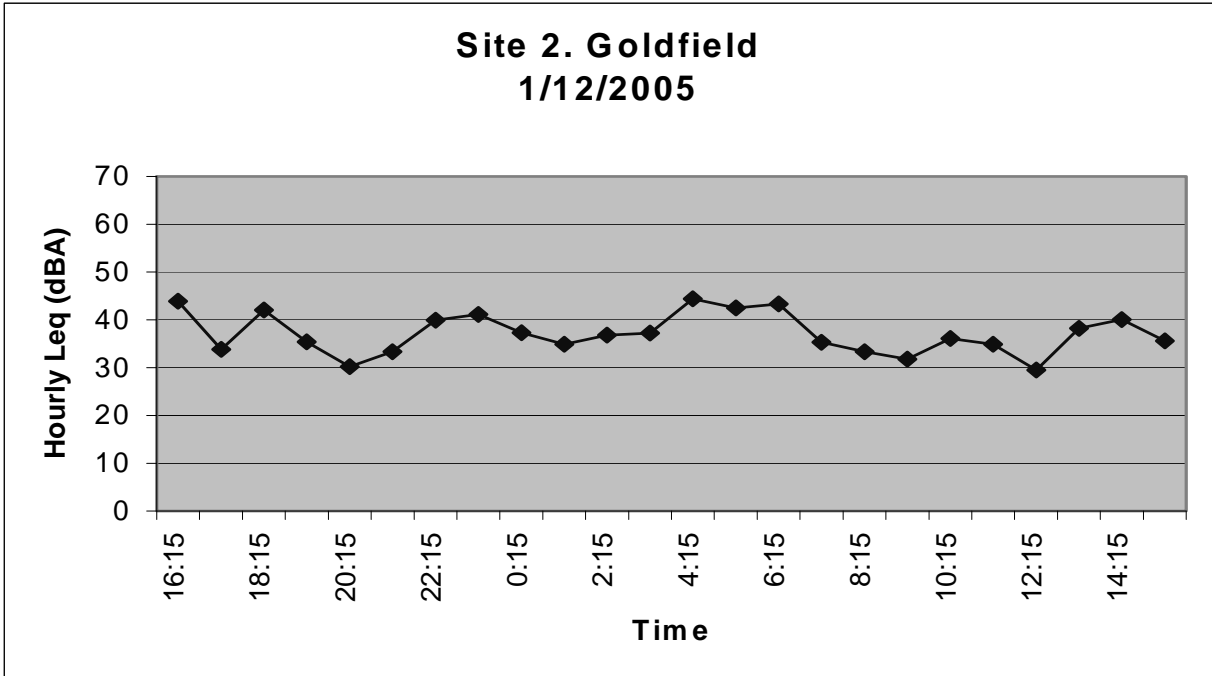


Figure 3-233. Measured noise levels over a 24-hour period in Goldfield, Nevada.

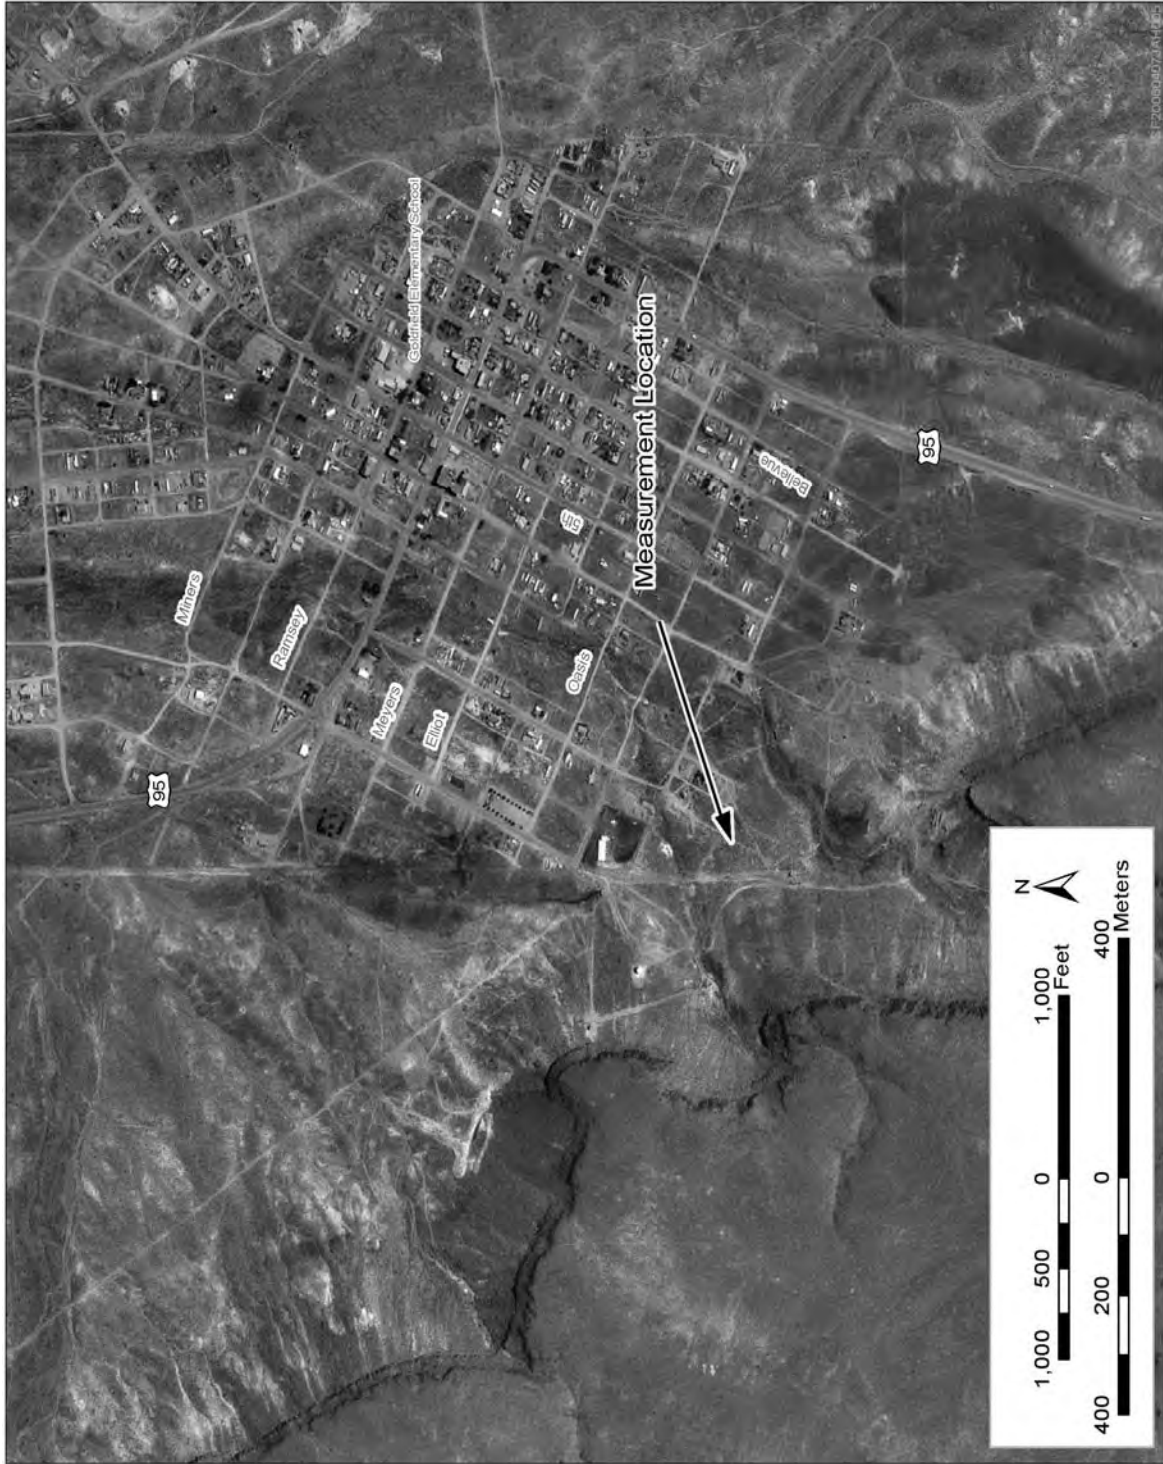


Figure 3-234. Ambient noise monitoring location on the southwestern edge of Goldfield, Nevada.

(Source: Basemap derived from DIRS 174497-Keck 2004, filename 37117F21.sid.)

3.3.9 SOCIOECONOMICS

This section describes the existing socioeconomics conditions (population, housing, employment and income, public services, and transportation) along the Mina rail alignment. Section 3.3.9.1 defines the region of influence for socioeconomics; Section 3.3.9.2 summarizes the method DOE used to establish baseline socioeconomic conditions in the region of influence; and Section 3.3.9.3 describes general regional socioeconomic characteristics.

3.3.9.1 Region of Influence

The region of influence for the Mina rail alignment socioeconomics analysis is Lyon, Mineral, Nye, Esmeralda, and Clark Counties, and the Walker River Paiute Reservation (Figure 3-235). The figure also shows Washoe County and Carson City as part of the region of influence, for reasons described below.

Construction and operation of a railroad along the Mina rail alignment could affect social and economic activities and public services in these areas. This section examines baseline socioeconomic conditions for the counties and selected communities in the counties that would likely be affected during construction and operation of the proposed railroad. This socioeconomics analysis does not include Churchill County, except for transportation effects, because DOE expects that Churchill County would not experience any other noticeable socioeconomic impacts during construction and operation of the proposed railroad. The main analysis presents some socioeconomics detail for Clark County because, even though the rail line would not cross Clark County, construction workers for construction of the rail and associated facilities (except those in Nye County) are assumed to come from Clark County. This is because Clark is the only county with a sufficient workforce. DOE assumes that 80 percent of construction and operations workers for facilities in Nye County would reside in Clark County and 20 percent would reside in Nye County, reflecting historical patterns.

DOE also considers an alternative analysis in which the Department assumes that half of the construction workers for the Mina rail alignment reside in the combined Washoe County-Carson City area, and the other half reside in Clark County. DOE considered this alternative analysis because Washoe County and Carson City might be more likely than Clark County to supply construction workers for the northern portions of the Mina rail alignment. Therefore, for the purposes of this alternative analysis this section presents some socioeconomic detail for Washoe County and Carson City.

Operations workers for facilities outside Nye County are assumed to reside in the county of the facility. Furthermore, Clark County medical facilities could receive medical cases from the construction camps and construction sites. The region of influence does not extend beyond these counties in Nevada because there is no indication of a regional or national socioeconomic effect from goods and services purchased outside the region of influence, and demand for goods and services would not be likely to adversely affect regional or national supplies. The Yucca Mountain FEIS examined the possibility that socioeconomic effects from purchasing construction materials could be felt beyond the region of influence and concluded that there would be little or no impact (DIRS 155970-DOE 2002, Section 4.1.11.2, p. 4-77).

The region of influence for the analysis of transportation resources includes public roadways in the vicinity of the Mina rail alignment, and the rail alignment itself.

During rail line construction, new access roads to construction camps, quarries, and water wells would originate from nearby intersections with existing public roadways. Most of the rail alignment would be within Nevada Department of Transportation District 1, crossing Nye and Esmeralda Counties, with a portion in District 2 crossing Churchill County, Lyon County and Mineral County northwest of Luning.

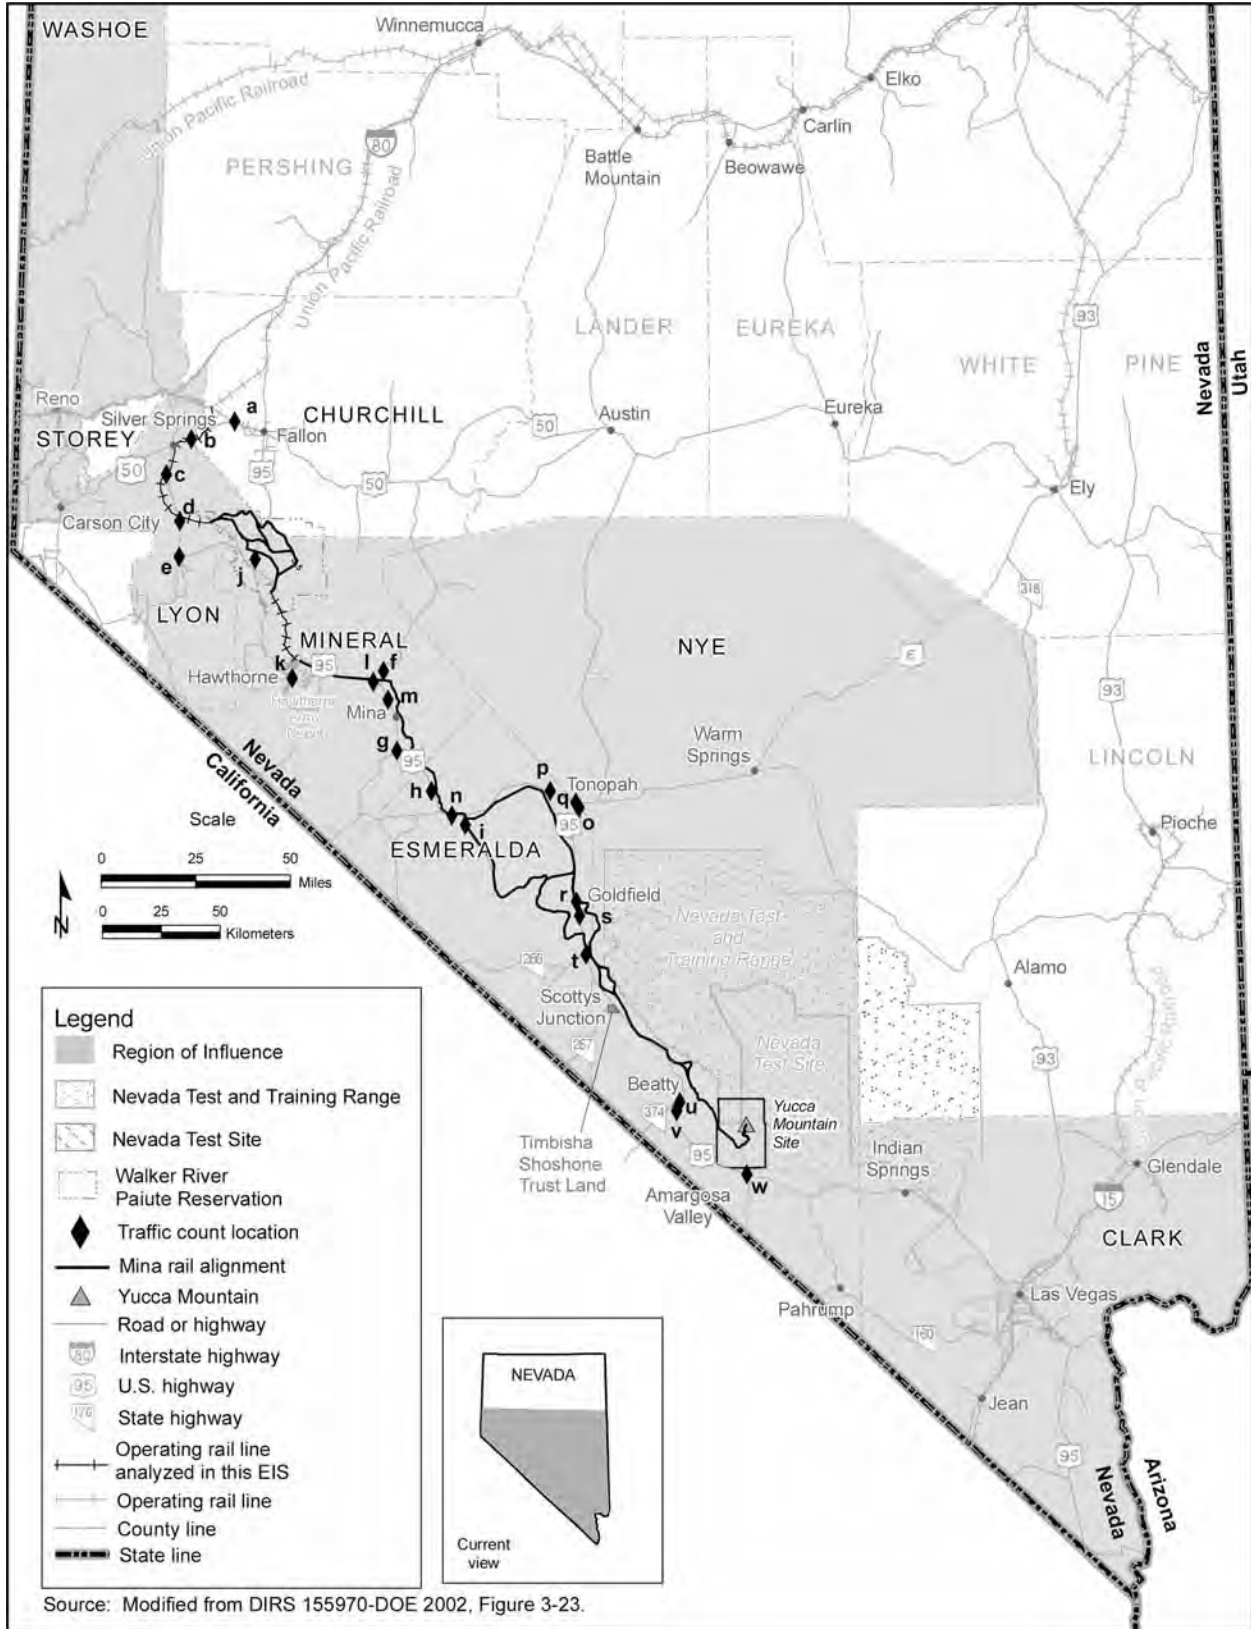


Figure 3-235. Mina rail alignment socioeconomics region of influence.

There are two operating railroads along the Mina rail alignment: the Union Pacific Railroad Hazen Branchline and branchlines operated by the Department of Defense from near Wabuska to Hawthorne. Churchill County is included in the transportation region of influence because it has grade crossings that would be affected by the additional rail traffic along the existing Union Pacific Railroad Hazen and Department of Defense Branchlines from Hazen to Hawthorne.

3.3.9.2 Methodology for Determining Existing Socioeconomic Conditions

DOE characterized socioeconomic activities and resources in the region of influence with a particular emphasis on community-level resources, as appropriate.

For this analysis, DOE used the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Chapter 3) as a basic source of data, and supplemented that data where possible with current community-level data for the Walker River Paiute Reservation and Lyon, Mineral, Nye, and Esmeralda Counties. DOE used an economic-demographic forecasting model known as *Policy Insight*, developed by Regional Economic Models, Inc. (DIRS 178610-Bland 2007, all), to generate employment, *real disposable income*, and *gross regional product* data for Lyon, Mineral, Clark, Nye, Esmeralda and Washoe Counties and Carson City. *Policy Insight* is an eight-region model, six of the regions being Lyon, Mineral, Clark, Nye, Esmeralda Counties and Washoe County-Carson City. Due to a limitation in the structure of the model, Carson City and Washoe County are considered as a single economic entity. Therefore, the analysis presents the *Policy Insight* data for these areas as one, combined result. The model forecast for Mineral County includes the Walker River Paiute Reservation. Due to data limitations, the model is unable to provide a forecast for the Walker River Paiute Reservation alone. Appendix J, Socioeconomics, contains the results of the *Policy Insight* model runs.

The description of existing economic conditions in the region of influence of the Mina Rail Alignment and the forecast values of populations, gross regional product, and real disposable income draw on data from version 9.0 of *Policy Insight* (DIRS 182251-REMI 2007, all). The description includes revenue from DOE's Payments Equal to Taxes program, described in detail in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 3-90), and the Repository SEIS. Revenue from this program is not described separately. Because the model is based on nationally collected data for which there is a lag between collection and issuance by the national agencies, and another lag before the data are incorporated into the *Policy Insight* model, there is always a gap of approximately 2 to 3 years between the current year and the last history year. The year 2004 is the last history year for the *Policy Insight* model (version 9.0) used in this baseline forecast. To compensate for this time lag, the model's employment update feature is specifically designed to accommodate new historical data provided by users, which update the model's growth-rate assumptions. *Policy Insight* version 9.0 uses an employment update module that relies on years 2004 to 2006 data from the Nevada Department of Education, Training, and Rehabilitation (DIRS 180712-NDETR 2006, all; DIRS 180740-DETR [n.d.], all; DIRS 180741-DETR 2005, all; DIRS 180742-DETR [n.d.], all). This version also incorporates information from the latest Clark County population projections prepared by the University of Nevada, Las Vegas (DIRS 178806-CBER 2006, all) and the latest population projections developed by the Nevada State Demographer (DIRS 178807-Hardcastle 2006, all).

Data for the affected environment (both those taken from the Yucca Mountain FEIS and supplemental information included here) come from various state, federal, community, and proprietary sources. Current and historical population data were drawn from a report prepared for the Nevada Small Business Development Center (DIRS 177656-Nevada State Demographer's Office 2006, all). The Department obtained housing data, including information on housing stock, vacancy rates, median housing values, and gross rents, from the Nevada Small Business Development Center, which compiled the information from U.S. Census Bureau data (DIRS 180476-Nevada Small Business Development [n.d.], all;

DIRS 180475-Nevada Small Business Development Center [n.d.], all; DIRS 180477-Nevada Small Business Development Center [n.d.], all; DIRS 180478-Nevada Small Business Development Center 2003, all; DIRS 180479-Nevada Small Business Development Center [n.d.], all; DIRS 173564-Nevada Small Business Development Center 2003, all; DIRS 173566- Nevada Small Business Development Center 2003, all; DIRS 173567-Nevada Small Business Development Center 2003, all). DOE uses the U.S. Census Bureau housing data because county-collected housing data can be inconsistent across counties due to unique county assessment practices. In addition, the Census Bureau's housing data contain characteristics that county housing data sources do not, such as whether a property is a rental property or owner-occupied and whether a property is occupied or vacant.

Income, poverty, and unemployment data come from the U.S. Census Bureau (DIRS 176856-U.S. Census Bureau 2003, all). DOE obtained current values for employment, real disposable income, and gross regional product for Lyon, Mineral, Nye, Esmeralda, and Clark Counties from the *Policy Insight* model, as previously described. DOE compiled business-establishment data from the *Nevada Workforce Informer, Data Analysis* (DIRS 173545-Nevada Department of Employment, Training & Rehabilitation 2005, all; DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all). DOE obtained data on public services mainly from interviews with county representatives in the region of influence and from the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Chapter 3), augmented in some instances with information from other sources cited in the text herein. Yucca Mountain Oversight Office in Esmeralda County provided contact information for county agencies and suggested data sources for this section. The County Manager provided similar assistance for Nye County. DOE obtained health data from the Nevada State Health Division (DIRS 173560-State of Nevada [n.d.], all); education data from Nevada District Accountability Reports (DIRS 180463-Lyon County School District [n.d.], all; DIRS 180465-Mineral County School District [n.d.], all; DIRS 177759-Nye County School District [n.d.], all; DIRS 177760-Esmeralda County School District [n.d.], all); and law enforcement data from the Department of Public Safety (DIRS 173399-State of Nevada 2004, all; DIRS 177747-State of Nevada 2005, all; DIRS 177748-State of Nevada 2006, all).

DOE based the description of the affected transportation environment on existing traffic volumes on the roadways (measured as average daily traffic counts) and on the Union Pacific Railroad Hazen Branchline. The Department obtained traffic volumes for roads from the Nevada Department of Transportation traffic report for 2005 (DIRS 178749-NDOT [n.d.], all), and then estimated levels of service for the affected roadways using the Highway Capacity Manual guidelines (DIRS 176524-Transportation Research Board 2001, all). DOE based rail traffic estimates on personal communication with Union Pacific Railroad and U.S. Army representatives (DIRS 178017-Holder 2006, all).

3.3.9.3 General Regional Socioeconomic Characteristics

DOE examined baseline socioeconomic conditions for selected communities within the region of influence that would likely be affected by railroad construction and operations. These communities include Yerington in Lyon County; Hawthorne, Mina, and Luning in Mineral County; Schurz on the Walker River Paiute Reservation; Tonopah, Beatty, the Town of Amargosa Valley, and Pahrump in Nye County; and Goldfield in Esmeralda County. Baseline conditions for Clark County are presented at the county level, primarily in relation to economic measures and health-care capacity. DOE assumes that there would be an overall income effect on Clark County from the workers residing there and commuting to work on the proposed railroad project, but because of the large population of Clark County, the effect would be minimal. For the alternative analysis, baseline conditions for the combined area of Washoe County-Carson City are presented.

3.3.9.3.1 Employment and Income

Due to the lack of data, DOE is unable to characterize the local economy of the Walker River Paiute Reservation.

Lyon County's economy is smaller than Nye County's, with a total estimated employment count of 15,591 in 2007, according to the *Policy Insight* (DIRS 181908-Bland 2007, all) baseline projections listed in Table 3-136. As discussed in Section 3.3.9.2, these projections are from county and state baseline data sources, together with employment-trend information also taken from county and state sources. The three largest employment sectors in Lyon County are services (with 34 percent of the employed population), retail trade (16 percent), and state and local government (14 percent). Construction is also an important employment sector, with 12 percent of the employed population. According to *Policy Insight* baseline projections, the gross regional product of the county in 2007 is projected to be \$840.1 million, and the real disposable income \$1.04 billion. Large employers include Amazon.com, which employs between 1,000 and 1,499 people in the area, and local government agencies such as the Lyon County School District (DIRS 181908-DETR [n.d.], all).

Mineral County's economy is the second smallest in the region of influence, with a total estimated employment count of 2,352 projected for 2007, according to the *Policy Insight* (DIRS 178610-Bland 2007, all) baseline projections listed in Table 3-136. The three largest employment sectors in Mineral County are services (with 42 percent of the employed population), state and local government (22 percent), and retail. Major employers include the Day and Zimmerman Hawthorne Corporation, which employs between 400 and 499 people; El Capitan Casino, which employs between 100 and 199 people; and local government, such as the Mineral County School District (DIRS 181907-DETR [n.d.], all).

Mina County's economy is the second smallest in the region of influence, with a total estimated employment count of 2,352 in 2007, according to the *Policy Insight* (DIRS 178610-Bland 2007, all) baseline projections listed in Table 3-136. The three largest employment sectors in Mineral County are services (with 42 percent of the employed population), state a local government (22 percent), and retail trade (10 percent). According to *Policy Insight* baseline projections, the gross regional product of the county in 2007 was \$131.0 million, and the real disposable income was \$108.8 million.

Nye County has the third largest economy in the region of influence. Total estimated employment in Nye County in 2007 is projected to be 18,184 people (Table 3-136). The largest employment sectors were services (44 percent of the employed population), followed by retail trade (12 percent), and then transportation warehousing, information, and finance and insurance (11 percent collectively). State and local government and construction are also important sectors. The importance of construction reflects the county's population growth rates from 1990 to 2003 because new residents and businesses require construction materials and labor, and a range of services. Large employers include National Security Technologies, LLC (NSTec), the management and operating contractor for DOE at the Nevada Test Site, which employs between 1,000 and 1,500 people in the area, although many Nevada Test Site employees live in Clark County (DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all). Local government agencies such as the Nye County School District and Nye County, and mining companies such as the Round Mountain Gold Corporation, are also major employers (DIRS 173544-Nevada Department of Employment, Training & Rehabilitation 2005, all).

Nye County employment rebounded after a 15 percent decrease between 1990 and 1995 (DIRS 155970-DOE 2002, p. 3-87). According to *Policy Insight* baseline projections, the gross regional product of Nye County in 2007 will be \$1.16 billion, and the real disposable income will be \$1.12 billion.

Table 3-136. Lyon, Mineral, Esmeralda, Nye, and Clark County employment by industry, 2007.^{a,b}

Industry sector	County					
	Lyon	Mineral	Nye	Esmeralda	Clark	Washoe-Carson City
<i>Private sector</i>						
Forestry and fisheries	53	6	67	3	306	320
Mining	249	150	1,094	84	1,420	2,607
Construction	1,814	61	1,793	32	124,771	27,805
Utilities	84	26	185	0	3,798	1,067
Manufacturing	582	18	342	1	28,737	17,997
Wholesale trade	722	37	186	12	26,567	12,843
Retail trade	2,439	237	2,140	30	121,883	32,992
Transportation and warehousing, information, and finance and insurance	1,304	210	1,975	23	158,506	45,084
Farm	717	16	283	67	312	599
Services	5,329	987	8,088	112	577,086	129,099
<i>Public sector</i>						
Federal Government–civilian	72	77	161	6	11,409	3,852
Federal Government–military	95	12	79	4	12,663	887
State and local government	2,132	515	1,792	101	83,135	33,470
Totals^c	15,591	2,352	18,184	475	1,150,594	308,623

a. Source: DIRS 178610-Bland 2007, all.

b. Model does not discriminate non-county regions, such as the Walker River Paiute Reservation.

c. Totals might differ from sums of values due to rounding.

Esmeralda County has the smallest economy of the other counties in the region of influence. The county's three largest employment sectors are services, state and local government, and mining, which account for 24, 21, and 18 percent of the employed population, respectively (Table 3-136). Employers include government agencies such as the State of Nevada and the Esmeralda County School District, and mining companies such as the Chemetall Foote Corporation, which runs Silver Peak Mine and Lode Star Gold, Inc. (DIRS 173545-Nevada Department of Employment, Training & Rehabilitation 2005, all). According to *Policy Insight* baseline projections, the gross regional product of Esmeralda County in 2007 will be \$25.7 million, and the real disposable income will be \$29.3 million.

Clark County's economy dominates southern Nevada. The largest employment sectors are services (50 percent of the employed population; 46 percent of services employment is within the Accommodations and Food Services sectors); transportation warehousing, information, and finances and insurance (14 percent); construction (11 percent); and retail trade (11 percent). According to *Policy Insight* baseline projections, Clark County surpasses the other counties with a gross regional product of \$95.4 billion, which is more than 80 times that of Nye County. According to *Policy Insight* baseline projections, Clark County residents had \$60.7 billion in *real disposable personal income* in 2007.

Washoe County-Carson City's largest employment sectors are services; transportation and warehousing, information, and finance and insurance; and state and local government. These sectors account for 42, 15, and 11 percent of the employed population, respectively. According to *Policy Insight* baseline

projections, the gross regional product of Washoe County-Carson City in 2007 will be \$24.4 billion, and the real disposable income will be \$16.8 billion.

3.3.9.3.1.1 Mining and Agriculture. This section describes existing conditions for mining and agricultural activities, because a railroad along the Mina rail alignment would be likely to affect these interests more than other economic activities.

Mining In 2007, the mining industry employed nearly 18 percent of the 475 workers in Esmeralda County and 6 percent of workers in Nye County. Mining also constitutes a large part of the total personal income generated in the region of influence counties. In Esmeralda County in 2002, almost 18 percent of personal income came from mining, making it the single largest source of personal income in the County (DIRS 173546-BEA 2004, Table CA05N). Almost 7 percent of personal income in Nye County came from the mining industry in 2002 (DIRS 173548-BEA 2005, Table CA05N).

Mined minerals in the study area include gold, silver, aggregate (consisting of crushed stone, natural sands, and gravel), salt, and a wide range of other nonmetallic minerals. Gold is central to Nevada's mining industry, and at \$2.4 billion in revenue (DIRS 169127-Driesner and Coyner 2003, all; DIRS 173554-Price and Meeuwig 2003, all), it brings in more revenue than any other type of mining. Silver production is also important and was Nevada's fourth leading mineral commodity in 2002, valued at \$62 million.

The Mina rail alignment would cross some mining areas and districts in Mineral, Nye, and Esmeralda Counties. Schurz alternative segment 1 would pass through the very southern portion of the Calico Hills Mining District. Schurz alternative segment 4 would pass through the Calico Hills, Double Springs Marsh, and Buckley Mining Districts. Schurz alternative segment 5 would pass through the Benway, Calico Hills, Double Springs Marsh, and Buckley Mining Districts. Schurz alternative segment 6 would pass through the Holy Cross, Double Springs Marsh, and Buckley Mining Districts.

Mina common segment 1 would pass through the Santa Fe, Rock Hill, and Coaldale Mining Districts. The construction right-of-way would also intersect the outermost boundaries of the Pilot Mountains, Rhodes Marsh, and Candelaria Mining Districts.

Montezuma alternative segment 1 would pass through the Silver Peak Marsh, Montezuma, and Cuprite Mining Districts. Montezuma alternative segment 2 would pass through the Goldfield and Stonewall Mining Districts. Montezuma alternative segment 3 would pass through the Montezuma and Cuprite Mining Districts.

Mina common segment 2, the Bonnie Claire alternative segments, common segment 5, and the Oasis Valley alternative segments would not cross any mining districts.

Common segment 6 would cross the northeastern portion of the Bare Mountain Mining District, although the vast majority of past mining activity occurred more than 3 kilometers (2 miles) south of this common segment. The district contains gold-bearing veins, and some veins contain silver. The district also contains a variety of minerals and semi-precious stones, including opal, malachite, galena, pyrite, hematite, fluorite, fluorspar, and gypsum.

Agriculture The primary agricultural activity that would be intersected by the Mina rail alignment would be grazing. As discussed in Section 3.3.2, Land Use and Ownership, there are 12 active grazing allotments, and three inactive allotments along the proposed rail alignment. In Section 3.3.2, Land Use and Ownership, Tables 3-84 and -85 list and describe these grazing allotments, and Figures 3-143 through 3-152 show the locations of the allotments.

The permitted grazing operations support employment and provide income for ranchers and their workers, and income for the respective counties. BLM-issued grazing permits authorize these operations, and specify the total number of animal unit months apportioned (an animal unit month represents enough dry forage for one mature cow for 1 month). For those allotments with information available (see Table 3-85), animal unit months range from 303 to 7,900, and land area ranges from 21 to 2,074 square kilometers (5,124 to 512,000 acres). The BLM established the property base for each allotment based on land or water rights.

In addition to grazing, farming is an important source of both income and employment for the counties in the region of influence. As discussed in Section 3.3.1.2.3, less than 1 percent of soils along the proposed rail alignment are classified as prime farmlands. Less than 1 percent, or approximately 0.04 square kilometer (9.2 acres), of the entire Mina rail line construction right-of-way contains soils the Natural Resources Conservation Service considers prime farmland (see Section 3.3.1, Physical Setting, Figure 3-128). The prime farmland soils the proposed alignment would cross are concentrated on the Walker River Paiute Reservation, which has a total of 5.5 square kilometers (1,400 acres) of prime farmland soil.

3.3.9.3.1.2 Personal Income, Poverty, and Unemployment. As shown in Table 3-137, Washoe and Clark Counties have the highest median income in the region of influence, followed by Carson City, Lyon, Nye, Esmeralda, and Mineral Counties and the Walker River Paiute Reservation. While Washoe, Lyon, Nye, and Clark Counties and Carson City showed the highest incomes and the lowest percentage of residents in poverty in 1999 (see note on Table 3-137 for information on poverty thresholds), the unemployment rates in these counties were higher than Esmeralda County in 2000. The unemployment rates in Lyon, Mineral, Clark, Washoe, and Nye Counties decreased between 2000 and 2005, while Esmeralda County's unemployment rate increased over the same period. The Walker River Paiute Reservation had the highest unemployment rate in the region of influence in 2000.

At the community level, Beatty has the highest median income (\$41,076), although its poverty rate (13 percent) is third highest after Yerington in Lyon County (18 percent) and the Town of Amargosa Valley (15 percent). Schurz, on the Walker River Paiute Reservation, has the highest unemployment rate (15.8 percent) of all communities in the region of influence. Tonopah and Beatty in Nye County have higher median incomes, and lower poverty and unemployment rates, than Yerington in Lyon County.

3.3.9.3.2 Population

Table 3-138 lists the county and community populations in the Mina rail alignment region of influence in 1990, 2000, and 2005.

According to Census data from 2000, the Walker River Paiute Reservation had a population of 850. The Reservation's population increased by 5 percent between 1990 and 2000.

According to the Nevada State Demographer's Office Nevada 2000 census data (DIRS 180476-Nevada Small Business Development Center [n.d.], p. 1), Lyon County is approximately 50-percent rural. It has a population density of only 6.7 people per square kilometer (17.3 people per square mile). Yerington is the largest Lyon County town that is close to the Mina rail alignment. The population of Yerington in 2005 was 2,980.

Mineral County has the second smallest county in the region of influence. In 2005, Mineral County's population was 4,629. Mineral County has a population density of 0.54 people per square kilometer (1.4 people per square mile). Thirty-one percent of the population in Mineral County is considered rural, according to population estimates and rural figures from the Nevada State Demographer's Office.

Table 3-137. County and place-level personal income, poverty, and unemployment.^a

County, city/community	Median household income in 1999 (dollars) ^b	Poverty in 1999 (percent) ^b	Unemployment in 2000 (percent) ^b	Unemployment in 2005 (percent) ^c
Walker River Paiute Reservation	24,412	33	22.6	Not available
<i>County</i>				
Lyon	40,699	10	6.9	5.3
Mineral	32,891	15	12.9	5.9
Esmeralda	33,203	15	3.3	5.3
Nye	36,024	11	7.1	5.2
Clark	44,616	11	6.6	4.0
Washoe County	45,815	10	4.9	4.0
Carson City	41,809	10	4.6	4.7
<i>City/community</i>				
Schurz	24,265	27	15.8	Not available
Yerington	31,151	18	9.1	Not available
Hawthorne	34,413	11	11.1	Not available
Tonopah	38,029	11	7.9	Not available
Pahrump	35,313	9	7.5	Not available
Goldfield	32,969	12	3.2	Not available
Amargosa Valley	34,432	15	3.2	Not available
Beatty	41,076	13	5.6	Not available

a. The U.S. Census Bureau defines poverty based on estimates of how much money families need to meet their nutritional needs for 1 year. Poverty thresholds and a more thorough definition of poverty are available from the U.S. Census Bureau at <http://www.census.gov/acs/www/UseData/Def/Poverty.htm>, all.

b. Source: DIRS 176856-Census Bureau 2003, Tables 7, 13, 15, 36, 37, and 40.

c. Source: DIRS 177755-BLS [n.d.], all.

Table 3-138. County and community populations, Mina rail alignment, 1990 to 2005^a (page 1 of 2).

County	City/ community	1990 population ^b	2000 population	2005 population	1990 to 2000 change (percent)	2000 to 2005 change (percent)
Walker River Paiute Reservation		811	850	Not available	5	Not available
	Schurz	617	711 ^c	Not available	15	Not available
Lyon		20,590	35,685	48,860	73	37
	Yerington	2,380	2,938	2,980	23	1
Mineral		6,470	5,071	4,629	-22	-9
	Hawthorne	4,162	3,134	2,956	-25	-6
	Mina	484	307	276	-37	-10
	Luning	Not available	86	87	Not available	1

Table 3-138. County and community populations, Mina rail alignment, 1990 to 2005^a (page 2 of 2).

County	City/ community	1990 population ^b	2000 population	2005 population	1990 to 2000 change (percent)	2000 to 2005 change (percent)
Nye		18,190	32,978	41,302	81	25
	Tonopah	3,616	2,833	2,607	-23	-8
	Amargosa Valley	761	1,167	1,383	61	19
	Beatty	1,623	1,152	1,032	-31	-10
	Pahrump	7,424	24,235	33,241	226	37
Esmeralda		1,350	1,061	1,276	-21	20
	Goldfield	672	424	438	-37	3
	Silver Peak	Not available	161	126	Not available	-22
Clark		770,280	1,394,440	1,815,700	81	29
Washoe County		257,120	341,935	396,844	33	16
Carson City		40,950	53,208	57,104	30	7

a. Source: DIRS 177656-Nevada State Demographer's Office 2006, all.

b. 1990 estimates for Tonopah, Amargosa Valley, Beatty, Pahrump, and Goldfield were not available through the Nevada State Demographer's Office; therefore, subdivision-level data for these locations were taken from the U.S. Census DP-1 (DIRS 179132-Bureau of Census [n.d.], all). The Census data reflect a different time series than the Governor's Certified Estimates.

c. Schurz is on the Walker River Paiute Reservation. However, the Nevada State Demographer and the U.S. Census Bureau categorize the town's population within Mineral County.

The largest town in Mineral County is Hawthorne, with a 2005 population of 2,956, which accounts for more than 60 percent of the population in Mineral County. Mineral County also includes Schurz, Mina, and Luning, which are along the Mina rail alignment. Schurz, on the Walker River Paiute Reservation, is the most populated of these communities.

Nye County is the second most populous county in the region of influence. According to the U.S. Bureau of Census (DIRS 173530-Bureau of Census 2005, all), in 2005 the county had a population density of 0.69 people per square kilometer (1.8 people per square mile); according to population estimates and rural figures from the Nevada State Demographer's Office (DIRS 173564-Nevada Small Business Development Center 2003, p. 1), 55 percent of the population is considered rural. The largest town in Nye County is unincorporated Pahrump, which accounts for 80 percent of the county's population. Although Pahrump is not in the immediate vicinity of the Mina rail alignment, it is reasonably foreseeable that some construction and operations workers would live in Pahrump, based on historical and current patterns of workers at the Nevada Test Site and the Yucca Mountain Site. Nye County also includes the communities of Tonopah, Beatty, and the Town of Amargosa Valley, all of which are near the Mina rail alignment. Tonopah is the most populated of these communities.

Esmeralda County is the least populated of the counties in the Mina rail alignment region of influence. Esmeralda is also the least densely populated county, with a density of 0.11 people per square kilometer (0.3 people per square mile) (DIRS 173534-Bureau of Census 2005, all) and a 100-percent rural population (DIRS 173566-Nevada Small Business Development Center 2003, p. 1). The community of Goldfield is close to the Mina rail alignment, and its population accounts for more than one-third of Esmeralda County's population.

Clark County, which includes Las Vegas, is the most populated county in Nevada. It has a population density of 67 people per square kilometer (173.9 people per square mile) (DIRS 173533-Bureau of Census 2005, all), and a rural population of only 2 percent (DIRS 173567-Nevada Small Business

Development Center 2003, p. 1). No part of the Mina rail alignment is in or near Clark County; the closest part of the alignment would be common segment 6, 48 kilometers (30 miles) west of the Clark County boundary, in Nye County. However, a substantial proportion of the railroad construction workforce would probably come from Clark County.

In terms of population change, southern Nevada has been and continues to be among the fastest-growing areas in the United States (DIRS 155970-DOE 2002, p. 3-84). In the region of influence, Lyon and Nye Counties both experienced population increases from 1990 to 2000, with Nye County's growth of 81 percent being similar to Lyon County's growth of 73 percent. The populations of Esmeralda and Mineral Counties decreased between 1990 and 2000 by 21 and 22 percent, respectively. The growth and overall population count of Clark County is substantial, with an increase of 81 percent during the same years.

Communities within these counties have also been undergoing population changes, though these shifts have not necessarily been in the same direction as the respective county. For example, Nye County experienced a substantial population increase of 8,324 people (25 percent) between 2000 and 2005. The increase was largely fueled by population growth in Pahrump, while Tonopah's population declined by 226 people (8 percent), and Beatty's declined by 120 people (10 percent) during the same period. The population of Goldfield in Esmeralda County increased by 14 people (3 percent) between 2000 and 2005, which is consistent with the county's increase in population of 215 people (20 percent).

According to *Policy Insight* model baseline projections shown in Table 3-139, most of the counties in the region of influence are expected to grow through 2067, independent of potential project-related effects. These projections assume that current trends continue and incorporate county and state (Nevada State Demographer's Office) demographic and economic data sources. Population projections for Lyon, Mineral, Nye, and Esmeralda Counties through 2026 are from the Nevada State Demographer's Office (DIRS 178807-Hardcastle 2006, all); population projections for these areas after 2026 assume constant growth at 2026 rates. Clark County projections to 2035 are from the University of Nevada Las Vegas Center for Business and Economic Research projections (DIRS 178806-CBER 2006, all), and projections to 2067 assume constant growth at 2035 rates. Because these projections assume a constant rate of growth over the period, rather than a growth rate that increases at a decreasing rate (which would be expected for population projections for Clark and Nye Counties), the projected populations are high estimates.

This is a conservative assumption when analyzing for total radiological *dose* to resident populations, which is another use of the projections by the Yucca Mountain Project. By 2067, the population of Nye County is projected to increase to 131,074 people (187 percent over 2007 levels). Lyon County's population is also projected to increase during the same period, to 172,376 people (220 percent increase over 2007 levels). Esmeralda County's population is projected to decline to 1,083 people by 2067 (11 percent decrease from 2007 levels). Mineral County's population is expected to decrease to 3,715 people (20 percent decrease from 2007 levels). Clark County is projected to increase to approximately 5 million people (151 percent increase over 2007 levels). Washoe County-Carson City's combined population is expected to increase by approximately 625,737 people (132 percent increase over 2007 levels).

3.3.9.3.3 Housing

Table 3-140 lists housing characteristics in the Mina rail alignment region of influence in 2000. The housing stock in Lyon County is 14,279 units, consisting mostly of single-family homes. In Yerington, single-family, multiple-family, and mobile (manufactured) homes make up 65 percent, 22 percent, and 14 percent of the total housing units, respectively. More than 10 percent of the housing in Yerington is vacant.

Table 3-139. Projected values for population, employment, and economic variables, 2010 to 2067^{ab} (page 1 of 3).

Economic parameter	Year															
	2007	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2067		
<i>Population</i>																
Lyon County	53,832	60,939	71,795	80,930	88,548	95,811	103,724	112,292	121,567	131,609	142,480	154,249	166,990	172,376		
Mineral County	4,626	4,667	4,759	4,566	4,398	4,309	4,224	4,140	4,058	3,977	3,898	3,898	3,744	3,715		
Nye County	45,737	51,971	60,803	67,707	73,155	78,364	84,005	90,053	96,535	103,484	110,933	118,919	127,480	131,074		
Clark County	1,990,481	2,258,748	2,652,070	2,946,350	3,169,797	3,358,455	3,544,362	3,739,880	3,946,181	4,163,863	4,393,553	4,635,913	4,891,642	4,997,841		
Esmeralda County	1,215	1,147	1,069	1,012	997	1,007	1,016	1,027	1,038	1,048	1,058	1,068	1,079	1,083		
Washoe County-Carson City	475,172	508,629	565,044	615,124	657,701	698,856	743,091	790,139	840,182	893,410	950,008	1,010,192	1,074,189	1,100,909		
All of Nevada	2,745,469	3,064,179	3,539,284	3,902,058	4,185,507	4,431,901	4,680,591	4,943,171	5,221,096	5,515,255	5,826,285	6,155,203	6,503,050	6,647,735		
<i>Employment</i>																
Lyon County	15,591	16,697	18,273	19,411	20,435	21,490	22,739	24,323	26,040	28,087	30,407	32,919	35,638	36,787		
Mineral County	2,352	2,407	2,460	2,339	2,295	2,267	2,253	2,256	2,254	2,259	2,214	2,170	2,127	2,110		
Nye County	18,184	19,194	20,585	21,683	22,628	23,706	24,923	26,310	27,732	29,274	31,381	33,640	36,062	37,079		
Clark County	1,150,594	1,239,364	1,325,133	1,391,701	1,453,024	1,524,248	1,601,285	1,692,833	1,778,852	1,860,856	1,963,506	2,071,818	2,186,105	2,233,566		
Esmeralda County	475	466	451	442	436	434	432	435	438	443	447	452	456	458		
Washoe County-Carson City	315,776	332,279	356,087	370,019	382,854	397,125	412,807	432,986	452,149	472,506	502,440	534,270	568,116	582,248		
All of Nevada	1,609,884	1,719,682	1,834,877	1,918,883	1,996,005	2,085,078	2,182,024	2,299,188	2,409,726	2,518,704	2,659,417	2,808,145	2,965,352	3,030,717		

Table 3-139. Projected values for population, employment, and economic variables, 2010 to 2067^{ab} (page 2 of 3).

Economic parameter	Year													
	2007	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2067
<i>Gross regional product^{b,c}</i>														
Lyon County	0.840	0.956	1.165	1.358	1.557	1.775	2.026	2.328	2.672	3.081	3.335	3.611	3.909	4.034
Mineral County	0.131	0.140	0.159	0.163	0.176	0.191	0.208	0.228	0.249	0.271	0.266	0.261	0.256	0.254
Nye County	1.164	1.302	1.550	1.798	2.052	2.340	2.664	3.037	3.447	3.903	4.184	4.485	4.808	4.943
Clark County	95.392	109.494	131.517	151.836	172.974	197.204	224.494	256.596	291.013	327.876	345.963	365.047	385.184	393.546
Esmeralda County	0.026	0.027	0.029	0.032	0.035	0.039	0.042	0.046	0.050	0.056	0.057	0.057	0.058	0.058
Washoe County-Carson City	24.39	27.70	33.94	39.29	44.82	50.97	57.79	65.77	74.26	83.59	88.89	94.52	100.51	103.01
All of Nevada	129.036	147.283	177.133	204.369	232.647	264.813	300.888	343.229	388.550	437.450	461.921	487.785	515.120	526.484
<i>Government spending^{c,d}</i>														
Lyon County	0.208	0.242	0.303	0.355	0.398	0.443	0.490	0.544	0.598	0.652	0.706	0.764	0.827	0.854
Mineral County	0.037	0.039	0.041	0.041	0.041	0.041	0.041	0.041	0.041	0.041	0.040	0.039	0.039	0.038
Nye County	0.174	0.202	0.252	0.291	.323	0.356	0.390	0.427	0.466	0.503	0.539	0.578	0.620	0.637
Clark County	7.269	8.460	10.543	12.146	3.427	14.617	15.780	17.043	18.266	19.411	20.482	21.612	22.804	23.299
Esmeralda County	0.007	0.007	0.007	0.007	.007	0.007	0.008	0.008	0.008	0.008	0.008	0.008	0.008	0.008
Washoe County-Carson City	1.98	2.17	2.56	2.89	.17	3.46	3.77	4.10	4.43	4.74	5.04	5.36	5.70	5.85
All of Nevada	10.592	12.085	14.762	16.841	8.541	20.159	21.769	23.523	25.226	26.830	28.335	29.925	31.607	32.307

Table 3-139. Projected values for population, employment, and economic variables, 2010 to 2067^{a,b} (page 3 of 3).

Economic parameter	Year															
	2007	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2067		
<i>Real disposable income^{b,c}</i>																
Lyon County	1.040	1.169	1.367	.547	.737	1.938	2.177	2.465	2.788	3.194	3.458	3.744	4.053	4.184		
Mineral County	0.109	0.116	0.122	.119	.122	0.125	0.128	0.132	0.136	0.144	0.141	0.138	0.135	0.134		
Nye County	1.117	1.250	1.439	.605	.775	1.969	2.203	2.466	2.768	3.132	3.358	3.599	3.858	3.967		
Clark County	60.731	68.974	79.836	19.500	9.788	111.517	124.864	140.518	156.612	173.027	182.571	192.642	203.269	207.682		
Esmeralda County	0.029	0.030	0.033	1.035	.037	0.041	0.043	0.047	0.050	0.054	0.054	0.055	0.055	0.056		
Washoe County- Carson City	16.81	18.52	21.29	3.64	6.19	28.84	31.70	35.13	38.60	42.43	45.12	47.98	51.02	52.29		
All of Nevada	85.032	95.636	110.205	23.098	36.861	152.183	169.418	189.600	210.290	232.015	245.035	258.799	273.350	279.400		

a. Sources: DIRS 178610-Bland 2007, all; DIRS 178806- CBER 2006, all; DIRS 178807- Hardcastle 2006, all.

b. Model does not discriminate non-county regions, such as the Walker River Paiute Reservation.

c. Values from *Policy Insight* (DIRS 182251-REMI 2007, all), converted to 2006 dollars using the ratio of the 2000 annual Consumer Price Index (CPI) and the annual CPI from 2006.

d. 2006 dollars in billions.

Table 3-140. Housing characteristics in the Mina rail alignment region of influence, 2000.^a

Geographic area	Total housing units	Single-family homes	Multiple-family homes	Mobile homes	Occupied housing units	Vacant housing units	Vacancy rate (percent)	
							Homeowner	Rental
Walker River Paiute Reservation ^b	348	308	6	34	304	44	NA ^c	NA
Schurz Census Designated Place ^d	320	280	6	34	276	44	0.5	6.7
Lyon County ^e	14,279	8,046	1,161	5,072	13,007	1,272	3.0	11.5
Yerington City ^f	1,328	861	286	181	1,182	146	2.3	14.0
Mineral County ^g	2,866	1,803	307	756	2,197	669	3.6	28.1
Hawthorne Census Designated Place ^h	1,813	1,177	219	417	1,470	343	3.8	28.6
Nye County ⁱ	15,934	6,383	1,014	8,537	13,309	2,625	3.4	17.9
Tonopah Census County Division ^j	1,608	766	385	457	1,152	456	3.6	32.3
Beatty Census County Division ^k	746	181	97	468	548	198	2.6	33.0
Amargosa Census County Division ^l	536	73	7	456	422	114	2.4	17.9
Pahrump ^m	8,206	3,660	479	4,067	7,234	972	3.2	11.8
Esmeralda County ⁿ	833	269	121	443	455	378	4.4	40.5
Goldfield Census County Division ^o	429	162	61	206	224	205	5.7	43.8
Clark County ^p	559,799	321,801	203,411	34,587	512,253	47,546	2.6	9.7
Washoe County	143,908	84,327	46,735	12,386	132,084	11,824	NA	NA
Carson City	21,283	12,872	5,364	2,985	20,171	1,112	NA	NA

a. Total Housing Units, Occupied Housing Units, and Vacant Housing Units counts were taken from Summary File 1 U.S. Census Bureau data, and Single Family Homes, Multiple Family Homes, and Mobile Homes counts were taken from Summary File 3 U.S. Census data. Because Summary File 1 data are collected from all households, while Summary File 3 data are compiled from a sample of approximately 19 million housing units (approximately 1 in 6 households), total housing counts differ slightly from the sum of "Single Family Homes, Multiple Family Homes, and Mobile Homes."
 b. Source: DIRS 176856-U.S. Census Bureau 2003, Tables 41 and 43.
 c. NA = not available.
 d. Source: DIRS 180475-Nevada Small Business Development Center [n.d.], p. 55.
 e. Source: DIRS 180476- Nevada Small Business Development Center [n.d.], p. 55.
 f. Source: DIRS 180479-Nevada Small Business Development Center [n.d.], p. 55.
 g. Source: DIRS 180477-Nevada Small Business Development Center [n.d.], p. 55.
 h. Source: DIRS 180478-Nevada Small Business Development Center 2003, p. 55.
 i. Source: DIRS 173564-Nevada Small Business Development Center 2003, p. 55.
 j. Source: DIRS 173535-Bureau of Census 2000, all.
 k. Source: DIRS 173566-Nevada Small Business Development Center 2003, p. 55.
 l. Source: DIRS 173567-Nevada Small Business Development Center 2003, p. 55.

Compared to Lyon County, Mineral County has a much smaller housing stock at 2,866 units (DIRS 180477-Nevada Small Business Development Center [n.d.], p. 55). Most of these units are single-family homes (63 percent). The Hawthorne Census Designated Place consists of 1,813 housing units with single-family homes, multiple-family homes, and mobile (manufactured) homes totaling 65 percent, 12 percent, and 23 percent of the housing stock, respectively. The Schurz Census Designated Place has 320 housing units which are predominantly single-family homes. The Walker River Paiute Reservation's housing stock is nearly identical to Schurz. In Hawthorne, nearly 30 percent of the rental units are vacant.

Nye County has similar housing stock to Lyon County, with 15,934 units, as indicated by Census 2000 data (DIRS 173564-Nevada Small Business Development Center 2003, all). Most of these units are mobile homes; the housing stock in the Beatty Census County Division and the Amargosa Census County Division consists of 63 percent and 85 percent mobile homes, respectively (DIRS 173564-Nevada Small Business Development Center 2003, all). In Tonopah, almost one-third of the housing units are vacant, particularly in the rental segment.

Esmeralda County has the smallest housing stock. More than half of the county's 833 units are in Goldfield, where 48 percent are mobile homes, and 49 percent of all units were vacant in 2000. The housing stock of Clark County in 2000 was 559,799, which reflects an increase of slightly more than 75 percent over the 1990 count (DIRS 173531-Bureau of Census 2000, Table DP-5 STF3). This increase is accounted for by the large population and employment growth in Clark County, which has spurred housing construction. Vacancy rates in both the homeowner and rental segments in Clark County tend to be lower than the rates in the other counties in the region of influence.

The housing stock in Washoe County in 2000 was 143,908. Only 8 percent of these housing units are vacant. Similarly, the occupancy rate in Carson City's housing stock is relatively low. Only 1,112 housing units are vacant, or just over 5 percent. As shown in Table 3-141, the median values of housing on the Walker River Paiute Reservation (\$57,300), in Mineral County (\$59,500), and Esmeralda County (\$75,600), as listed by the U.S. Census Bureau in 2000, were considerably below the median values in Lyon County (\$119,200), Nye County (\$122,100), Carson City (\$136,300), Clark County (\$139,500), and Washoe County (\$149,500). Similarly, rent levels in Mineral and Esmeralda Counties were approximately half those for Clark County and approximately two-thirds those of Nye County. Additionally, housing values in all of Southern Nevada rose rapidly since the 2000 Census. A Las Vegas-based housing research firm, Home Builders Research Inc., reported that the median price of the recorded new homes in the area in November 2005 was \$301,519, which was a 5.9 percent annual increase. Omitting apartment conversions, the median price for new homes was \$336,645, or an 18.2 percent annual increase (DIRS 176007-Home Builders Research 2005, all).

There are lodging options along U.S. Highway 95 in and around Yerington, Hawthorne, Walker Lake, Mina, Goldfield, Beatty, and Town of Amargosa Valley. In Yerington, there are four hotels with 118 total rooms and four recreational vehicle parks with 109 total spaces.

Visitors to Hawthorne may stay at any of the eight hotels (which have a total of 243 rooms). In addition, Hawthorne has two recreational vehicle parks with a total of 46 spaces. Walker Lake, Nevada, has one hotel with 20 rooms, while Mina has one recreational vehicle park with 26 spaces. Visitors to Goldfield can stay in the Goldfield recreational vehicle park, which has 20 spaces (DIRS 182379-Nevada Commission on Tourism 2007, all). Beatty has a much higher accommodation capacity. The town has six motels with a total 275 rooms, and three recreational vehicle parks with a total 63 spaces (DIRS 182381-Nevada Commission on Tourism 2007, all; DIRS 182384-Nevada Commission on Tourism 2007, all).

Table 3-141. Median housing values and gross rents in the region of influence, 2000.^a

Geographic area	Median value (dollars) ^b	Median monthly gross rent (dollars)
Walker River Paiute Reservation	57,300	200
Schurz Census Designated Place	56,800	200
Lyon County	119,200	591
Yerington City	99,200	436
Mineral County	59,500	398
Hawthorne County Designated Place	58,700	426
Nye County	122,100	541
Tonopah Census County Division	78,200	478
Beatty Census County Division	93,700	368
Amargosa Valley Census County Division	80,800	380
Pahrump	135,100	614
Esmeralda County	75,600	381
Goldfield Census County division	71,300	389
Clark County	139,500	716
Washoe County	149,500	675
Carson City	136,300	650

a. Source: DIRS 176856-U.S. Census Bureau 2003, Tables 25, 29, 45, and 47.

b. Median value applies to owner-occupied units.

Town of Amargosa Valley features a combined 60-room hotel and 51-space recreational vehicle park, one additional motel (17 rooms), and one additional recreational vehicle park (97 spaces) (DIRS 182380-Nevada Commission on Tourism 2007, all; DIRS 182383-Nevada Commission on Tourism 2007, all).

3.3.9.3.4 Public Services

This section summarizes conditions for health care, education, fire protection, and law enforcement. Section 3.3.11, Utilities, Energy, and Materials, describes utilities-related public services.

3.3.9.3.4.1 Health Care. While Lyon, Mineral, Nye, and Esmeralda Counties have some health care facilities, all four counties are federally designated as health professional shortage areas for primary, dental, and mental health care (DIRS 180466-State of Nevada 2005, all; DIRS 180467-State of Nevada 2005, all; DIRS 173559-State of Nevada [n.d.], all; and DIRS 173560-State of Nevada [n.d.], all). Health care services in the region of influence are concentrated in Clark County, particularly in the Las Vegas area.

There is a public health clinic on the Walker River Paiute Reservation in Schurz. This clinic is staffed full time with a doctor and a nurse (DIRS 180118-Gormsen and Merritt 2007, all). This facility also has emergency medical services and emergency medical technicians (DIRS 180118-Gormsen and Merritt 2007, all).

Lyon County is served by four rural community health offices (DIRS 180153-Gormsen 2007, all). One of the health offices is in Yerington and has full-time public health services, such as family planning, sexually transmitted disease clinics, and immunization clinics. Yerington's community health office is the only provider of immunizations in the Smith Valley and Mason Valley region (DIRS 180153-Gormsen 2007, all).

Lyon County is also served by the South Lyon Medical Center in Yerington. The facility has 63 hospital beds and a 24-hour emergency room (DIRS 178100-State of Nevada 2006, p. v).

Mineral County has a community health nurse who provides immunizations, conducts general health checks (such as checking blood pressure), and examines ears, eyes, noses, and throats when those services are within the community health nurse’s scope of practice (DIRS 180118-Gormsen and Merritt 2007, all). The community health nurse visits a Senior Care and Share center in Mina once a month to provide these public health services. Mina also has emergency medical team services available (DIRS 180118-Gormsen and Merritt 2007, all).

Mineral County is also served by Mount Grant Hospital in Hawthorne. This 35-bed facility offers a wide range of services, including acute, long-term, and emergency care (DIRS 180692-Mineral County Nuclear Projects Office 2004, p. 21). The hospital has a surgical suite for minor elective surgery (orthopedic, podiatry, and ophthalmology) (DIRS 180692-Mineral County Nuclear Projects Office 2004, p. 22).

According to a Nye County assessment, emergency service (county-wide medical and Pahump’s fire protection) personnel are currently overextended (DIRS 174548-Abaris Group 2004, pp. 2 and 3). Nye County medical services are distributed widely and consist of a mixture of public and private clinics. The communities of Beatty, Pahump, and Town of Amargosa Valley all have access to ambulance service, and are served by preventative care clinics staffed by physician assistants or community health nurses. These clinics focus on women’s health and immunizations. They are funded in part by the State Rural Health Division (DIRS 174736-Arcaya 2005, all). Pahump has a pediatric physician who runs a separate clinic in the community, a Veterans Administration clinic, and several private dermatologists, dentists, and chiropractors (DIRS 174736-Arcaya 2005, all; DIRS 174972-Arcaya 2005, all).

Additionally, Desert View Regional Medical Center (DVRMC), Pahump’s first hospital, opened in April 2006. The hospital has 24 beds and a 24-hour emergency room. The facility has a maternity ward, full-service lab and radiology services, as well as physical therapy services (DIRS 181897-Desert View Regional Medical Center 2007, all).

Nye County is also served by the Nye Regional Medical Center, a small, private hospital in Tonopah that has ambulance services. The center has 44 beds, 26 of which are long-term-care beds reserved for the hospital’s nursing-home wing. Two full-time-equivalent physicians provide coverage for both the 24-hour emergency room and all other patients. The hospital’s nursing home maintains 24-hour coverage consisting of one registered nurse and one certified nursing assistant. The Nye Regional Medical Center is able to perform diagnostic imagery and to provide services from its on-site laboratory, pharmacy, and outpatient clinic. However, the facility is not licensed for surgery. Nye County patients in need of more advanced care than can be provided at Tonopah’s hospital are transported by helicopter to Reno or Las Vegas by Flight for Life, a medical air service (DIRS 174732-Arcaya 2005, all).

Although Nye County continues to be a medically underserved area and a health professional shortage area, Table 3-142 shows that the capacity of the health care system in Nye County improved between 1995 and 2000, with increases in the average number of beds and the number of beds per 1,000 residents.

Table 3-142. Hospital use in Nye County.^a

County	1995	1998	2000
Average number of beds	21	10	44
Beds per 1,000 residents	0.86	0.33	1.3
Patient days	1,900	560	No data available

a. Source: DIRS 174732-Arcaya 2005, all.

Esmeralda County had no practicing doctors or dentists in 2005 (DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7). The U.S. Health Resources and Services Administration designated Esmeralda County as both a health professional shortage area and a medically

underserved population for primary health, dental, and mental-health care for 2004 (DIRS 173560-State of Nevada [n.d.], all). Because Esmeralda County has no health-care facilities, the county has submitted a proposal to fund a new facility (DIRS 175507-McCorkel et al. 2005, all).

Clark County has 13 general acute care medical centers with a combined total of 3,439 beds (1.9 beds per 1,000 residents) and 2,729 active, licensed physicians practicing throughout the county in 2005 (DIRS 178100-State of Nevada 2006, p. v; DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7). Sunrise Hospital and Medical Center, in Las Vegas, is the largest hospital in Nevada with 701 beds (DIRS 178100-State of Nevada 2006, p. v). It is also capable of providing all medical services and staffs a 24-hour emergency room. Of the remaining 12 hospitals in Clark County, eight (Desert Springs Hospital, Mountain View Hospital, North Vista Hospital, Southern Hills Hospital and Medical Center, Spring Valley Hospital Medical Center, Summerlin Hospital and Medical Center, University Medical Center, and Valley Hospital and Medical Center) are in Las Vegas, two (Saint Rose Dominican Hospital and Saint Rose Siena Campus) are in Henderson, one (Boulder City Hospital) is in Boulder City, and one (Mesa View Regional Hospital) is in Mesquite (DIRS 178100-State of Nevada 2006, p. v).

Washoe County has five general acute care hospitals with a combined total of 1,066 beds and 952 active, licensed physicians practicing throughout the county in 2005 (DIRS 178100-State of Nevada 2006, p. v; DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7). According to 2005 data, Carson City has one general acute care hospital with 144 beds and 143 active, licensed physicians (DIRS 178100-State of Nevada 2006, p. v; DIRS 177749-Nevada State Board of Medical Examiners [n.d.], p. 7).

3.3.9.3.4.2 Education. Lyon County has a total of 16 elementary, middle, and high school facilities. During the 2005 to 2006 school year, Lyon County schools had a total enrollment of 8,688 students and a graduation rate for the class of 2005 of 83 percent (DIRS 180463-Lyon County School District [n.d.], pp. 2 and 10). The average student-to-teacher ratio for kindergarten through eighth grades is 21 to 1 (DIRS 180463-Lyon County School District [n.d.], p. 9). This is slightly higher than the 2003 national average student-to-teacher ratio of 16 to 1 across elementary and secondary grades levels (DIRS 177757-Snyder, Tan, and Hoffman 2006, Table 62). Lyon County is the fastest growing school district in Nevada (DIRS 180463-Lyon County School District [n.d.], p. 1). The school district hired more than 100 teachers for the 2005-2006 school year and will open new elementary schools in Fernley and Dayton for the 2006-07 and 2007-08 school years, respectively (DIRS 180463-Lyon County School District [n.d.], p. 1).

Mineral County has a total of three elementary, middle, and high school facilities. During the 2005 to 2006 school year, Mineral County schools had a total enrollment of 624 students and a graduation rate for the class of 2005 of 73 percent (DIRS 180465-Mineral County School District [n.d.], pp. 2 and 7). The average student-to-teacher ratio for kindergarten through eighth grades is 16 to 1 (DIRS 180465-Mineral County School District [n.d.], p. 6). This is consistent with the 2003 national average student-to-teacher ratio of 16 to 1 across elementary and secondary grades levels (DIRS 177757-Snyder, Tan and Hoffman 2006, Table 62).

During the 2005 to 2006 school year, Nye County had approximately 6,088 students. The county's 2005 graduation rate was approximately 60 percent (DIRS 177759- Nye County School District [n.d.], p. 11). The average student-to-teacher ratio for kindergarten through fifth grades is 20 to 1 (DIRS 177759-Nye County School District [n.d.], p. 10). Tonopah has elementary, middle, and high school facilities.

Nye County's school system saw an approximate 10 percent increase in enrollment in the 2004-2005 school year over the previous year. Most of this growth was due to increases in Pahrump's population. Pahrump is home to four elementary schools, one middle school, and one high school. Table 3-143 lists enrollment for each school. All of these schools are functioning at or above maximum design capacity

(that is, they are all serving as many or more students than they were originally built to accommodate). To alleviate

overcrowding, all six schools were scheduled to receive modular units over the summer of 2005 that would each hold two additional classes. A bond for a new elementary school is also under consideration for the area, with a timeline of roughly 18 months for discussion and a decision on the bond. The new elementary school would likely be designed to hold between 400 and 600 students, making it roughly equal in size to the four existing elementary schools (DIRS 174737-Arcaya 2005, all).

In Nye County, the Community College of Southern Nevada has a campus in Pahrump that provides postsecondary school education. The facility offers courses to fulfill general education requirements, with 4-year degree programs planned (DIRS 174737-Arcaya 2005, all). Some of these programs are also offered as distance learning courses that can be accessed at a secondary facility in Tonopah equipped for videoconferencing (DIRS 174737-Arcaya 2005, all). The nearest major university to southern Nye County is the University of Nevada, Las Vegas, 105 kilometers (65 miles) from Pahrump. The University of Nevada, Reno, is the closest major university to northern Nye County. In addition, the University of Nevada, Reno, has a Cooperative Extension Center in Pahrump.

In Esmeralda County, 86 students were enrolled in school during the 2005-2006 school year (DIRS 177760-Esmeralda County School District [n.d.], p. 3). Three schools in the county serve kindergarten through eighth grade students. These schools are in Dire, Silver Peak, and Goldfield. The average student-to-teacher ratio is 12 to 1 (DIRS 177760-Esmeralda County School District [n.d.], p. 7). The county employs seven certified teachers and one certified literacy coordinator (DIRS 174970-Arcaya 2005, all). There is no high school in Esmeralda County; high-school students from Esmeralda County attend school in Tonopah, Nye County (DIRS 155970-DOE 2002, p. 3-156).

3.3.9.3.4.3 Fire Protection. Lyon County is divided into four fire districts to meet fire suppression needs: North Lyon County Fire District, Central Lyon County Fire District, Mason Valley Fire District, and Smith Valley Fire District. In total, there are 31 career firefighters and 117 volunteer firefighters spread across these fire districts (DIRS 180693-Gormsen 2007, all). The Central Lyon, Mason Valley, and Smith Valley Fire Districts are part of a quad-county partnership with Douglas County, Storey County, and Carson City. These fire districts are weapons-of-mass-destruction and hazardous-materials certified, and will provide assistance to events in any of the four partner counties. All four of the fire districts have received at least one Fire Act grant in the last 3 years. In addition, the county receives sporadic grants from state agencies (DIRS 180693-Gormsen 2007, all).

Mineral County has four fire departments: Hawthorne Volunteer Fire Department, Mina Volunteer Fire Department, Luning Volunteer Fire Department, and Walker Lake Volunteer Fire Department. Among these four departments, the county has a total of 43 volunteer and three career firefighters. Hawthorne Volunteer Fire Department uses three Type 1 fire apparatuses, and the other three departments use one Type 1 apparatus each.

Nye County has 11 volunteer fire departments, including one in Beatty and one in Town of Amargosa Valley. The county’s only paid fire department is in Pahrump. The county recently spent \$2.5 million to upgrade its fire trucks and has adequate fire protection in all areas of the county except for Pahrump, which is overextended (DIRS 174731-Arcaya 2005, all). A 2004 audit of the Pahrump Valley Fire-Rescue Service commissioned by the Pahrump Town Board found that “the community is currently

Table 3-143. Enrollment in Pahrump area schools, 2004-2005.^a

School Name	Type	2004-2005 Enrollment
Pahrump Valley	High school	987
Rosemary Clark	Middle school	1,122
Hafen	Elementary school	560
JG Johnson	Elementary school	555
Mt. Charleston	Elementary school	574
Manse	Elementary school	478

a. Source: DIRS 174737-Arcaya 2005, all.

underserved by fire suppression and emergency medical services operational staff” and suggested that staff be added to the service, specifically an additional daily three-person team (DIRS 174548-Abaris Group 2004, p. 3). The audit also noted that Pahrump has no overall fire suppression and emergency medical services master plan, and recommended that one be developed.

Currently, the Nevada Test Site provides fire protection services to the Yucca Mountain Site. The Nevada Test Site has two active fire departments that operate 24 hours a day, 7 days a week. One of the fire departments is in Mercury, Nevada (Area 23), and the other is in Area 6 on the Nevada Test Site. The Yucca Mountain Site has two paramedics, a small medical facility, and an ambulance for emergency response. The site also has two fully trained underground rescue teams available any time underground work is underway (DIRS 177762-Gormsen 2006, all).

The BLM Las Vegas and Battle Mountain Field Offices supplement Nye County’s fire-protection resources by providing wildfire suppression services to all the public lands within Nye County that are managed by BLM and the U.S. Forest Service (DIRS 177867-Gormsen 2006, all; DIRS 177925-Gormsen 2006, all). The Las Vegas Field Office provides fire suppression resources for wildfires during peak fire season, which is generally from April through October. The Battle Mountain Field Office provides fire suppression support from three locations in northern Nye County: Austin, Eureka, and Battle Mountain. In addition to firefighters, the fire suppression resources available through these locations include Type-4 and Type-3 wildfire engines, a Type-3 helicopter, Type-3 incident commanders, and single engine air tanker and air attack bases (DIRS 177867-Gormsen 2006, all; DIRS 177925-Gormsen 2006, all).

In Esmeralda County, Goldfield has nine volunteer firefighters and three fire trucks; Gold Point has eight volunteer firefighters and three fire trucks; Silver Peak has six volunteer firefighters and three fire trucks; and Fish Lake Valley has 16 volunteer firefighters and three fire trucks (DIRS 180977-Gormsen 2007, all). The community fire departments have access to the county’s road department vehicles, if needed.

3.3.9.3.4.4 Law Enforcement. The Walker River Paiute Reservation has a police department with four law enforcement officers (DIRS 181594- Zuber, 2007). This yields a ratio of 3.4 officers per 1,000 residents.

The Lyon County Sheriff’s Office has 78 sworn officers, 13 of whom are assigned to the detention facility. This yields a ratio of 1.6 sworn personnel per 1,000 residents (DIRS 180693-Gormsen 2007, all).

The Mineral County Sheriff’s Office is currently staffed with 18 sworn officers to provide administrative, communications, detention, and patrol services in the county (DIRS 180221-Gormsen and Merritt 2007, all). This yields a ratio of 3.9 sworn officers per 1,000 residents.

The Nye County Sheriff’s Office has 105 sworn officers, 85 who conduct street patrols, and 20 who are corrections and detention officers (DIRS 174974-Arcaya 2005, all). This yields a ratio of 2.2 patrol officers per 1,000 residents. The Nye County Sheriff’s Office receives some funding in the form of occasional grants from state and federal agencies (DIRS 177756-Gormsen 2006, all).

The Esmeralda County Sheriff’s Office has 14 employees: six officers who handle patrol (one sheriff, one sergeant, two resident deputies, and two full-time street deputies), three corrections officers, four full-time dispatchers, and one part-time civilian dispatcher (DIRS 174753-Arcaya 2005, all). This yields a ratio of 5 officers per 1,000 residents in Esmeralda County. By comparison, the national officer-to-population ratio is 2.4 officers per 1,000 residents (DIRS 155970-DOE 2002, p. 3-92). The Esmeralda County Sheriff’s Office receives limited state and federal support in the form of occasional equipment grants (DIRS 178094-Arcaya 2006, all). The county does not receive ongoing grant support or training administered by state or federal agencies.

As Table 3-144 shows, crime rates for Lyon, Mineral, Nye, Esmeralda Counties and Carson City are below the national average, and, with the exception of Mineral County, have decreased between 2003 and 2005.

Table 3-144. Crime rates in the Mina rail alignment region of influence, 2003 to 2005.

Area	Crime rate ^a (percent)		
	2003 ^b	2004 ^c	2005 ^d
Lyon County	23	22	21
Mineral County	12	13	16
Nye County	35	35	31
Esmeralda County	13	10	7
Clark County	51	51	51
Washoe County	51	47	46
Carson City	38	35	31
National	45	44	Not available

a. The crime rate is based on the occurrence of an offense per 1,000 residents.

b. Sources: DIRS 173399-State of Nevada 2004, all; DIRS 177747-State of Nevada 2005, all; DIRS 177748-State of Nevada 2006, all.

3.3.9.3.5 Transportation Infrastructure

This section describes the public roadways and mainline railroads in the area around the Mina rail alignment.

3.3.9.3.5.1 Public Roadways. Because the Mina rail alignment region of influence for transportation resources is primarily in remote and rural areas, the rail line would cross paved highways and roads with low traffic, and low-usage unpaved roads, including county roads, private roads, and off-road vehicle trails. While many of the unpaved roads are important to the daily activities of landowners and ranchers in the area, these roads are not heavily traveled. The exception is the existing Union Pacific Railroad Hazen Branchline between Hazen and Wabuska, which crosses public roads with moderate traffic (such as U.S. Highway 50A in Hazen, U.S. Highway 50 in Silver Springs, and U.S. Highway 95A in Churchill and Wabuska). Section 4.3.10, Occupational and Public Health and Safety, describes safety issues concerning rail line crossings of public roads, and road traffic related to construction and operation of the proposed railroad.

In addition to the state and federal roads discussed below, there are three paved roads with rail-public highway crossings on the Union Pacific Railroad Hazen Branchline: First Avenue, Fifth Street, and Ninth Street in Silver Springs. There are also three paved roads the Mina rail alignment would intersect and would require rail-highway crossings: Silver Peak Road in Silverpeak and two Nevada Test and Training Range access roads (one approximately 19 kilometers [12 miles] east of Tonopah off U.S. Highway 6 and the other off U.S. Highway 95 between Scottys Junction and Beatty).

Generally, the main roads within the region of influence are two-lane highways with very little daily traffic. Table 3-145 lists annual average daily traffic volumes along primary roads in the region of influence, which DOE obtained from the Nevada Department of Transportation's 2005 annual traffic report (DIRS 178749-NDOT [n.d.], all). These traffic volumes indicate that roadways near the Mina rail alignment are not congested.

All references to levels of service of roads shown in Table 3-145 are defined by the Highway Capacity Manual 2000, which is an industry standard for traffic engineering published by the Transportation Research Board (DIRS 176524-Transportation Research Board 2001, all). This manual defines six levels of service that reflect the level of traffic congestion and qualify the operating conditions of a roadway.

The six levels are given letter designations ranging from A to F, with A representing the best operating conditions (free flow, little delay) and F the worst (congestion, long delays) (DIRS 176524-Transportation Research Board 2001, all). Various factors that influence the operation of a roadway or intersection include speed, delay, travel time, freedom to maneuver, traffic interruptions, comfort, convenience, and safety. The Highway Capacity Manual describes the *levels of service* as follows:

- Level of service A describes completely free-flow conditions. Individual drivers are virtually unaffected by the presence of other vehicles in the traffic stream.
- Level of service B also indicates free flow, but the presence of other vehicles becomes more noticeable. Freedom to select desired speeds is relatively unaffected, but there is a slight decline in the freedom to maneuver within the traffic stream from Level of Service A.
- Level of service C is in the range of stable flow, but marks the beginning of the range of flow in which operation of individual drivers becomes significantly affected by interactions with others in the traffic stream. The selection of speed is now affected by others and maneuvering requires substantial vigilance on the part of the driver.
- Level of service D represents high density but stable flow. Speed and freedom to maneuver are severely restricted, and the driver experiences a generally poor level of comfort and convenience.
- Level of service E represents operating conditions at or near capacity. All speeds are reduced to a low, but relatively uniform, value.
- Level of service F is used to define breakdown of traffic flow or stop-and-go traffic. This condition exists wherever the amount of traffic approaching a point exceeds the amount that can cross the point. Queues form behind such locations. Operations within the queue are characterized by stop and-go waves, and they are extremely unstable.

Levels of service A, B, and C are typically considered good operating conditions in which motorists experience minor or tolerable delays of service. Based on the traffic counts listed in Table 3-145, State Routes 361, 360, and 265 are operating at a level of service A. Most of U.S. Highway 95 and 95A within the region of influence are operating at a level of service B, except for a portion that is operating at a level of A, and another at level C. The section of U.S. Highway 50 within the region of influence operates at a level of service B, while U.S. Highway 50A operates at a level of service C. Sections 3.3.10 and 4.3.10, Occupational and Public Health and Safety, discuss highway accidents and fatalities.

3.3.9.3.5.2 Mainline Railroads. Two major freight railroads, both Class I, serve Nevada: the Union Pacific Railroad and the Burlington Northern and Santa Fe Railway. Union Pacific is the dominant carrier of the two in terms of tonnage of freight hauled and miles of track. The Union Pacific Railroad mainlines consist of two northern routes and one southern route that cross Nevada east to west. The region of influence for rail transportation includes the Union Pacific Railroad Hazen Branchline, and the Department of Defense Branchlines from near Wabuska to Hawthorne.

Union Pacific Railroad Hazen Branchline shipments totaled 1,419 railcars in 2005 (DIRS 178017-Holder 2006, all), which can generate from one to five trains per week. Of the 1,419 railcars, 98 railcars were shipped to the Hawthorne Army Depot. For purposes of analysis in this Rail Alignment EIS, DOE assumes that the existing rail traffic on the Union Pacific Railroad Hazen Branchline consists of an average of four trains per week (two Union Pacific trains plus two U.S. Army trains). Since the Union Pacific Railroad trains only operate as far as the end of the Union Pacific Railroad Hazen Branchline near Wabuska, DOE assumes that the existing rail traffic on the Department of Defense Branchlines averages two trains per week.

Sections 3.3.10 and 4.3.10, Occupational and Public Health and Safety, discuss rail transportation in relation to public safety.

Table 3-145. Annual average daily traffic counts in southern and western Nevada (2005)^a.

Roadway and location of traffic count station	Legend in Figure 3-235	Vehicles per day ^b	Level of service
<i>U.S. Highway 50A</i>			
0.8 kilometer (0.5 mile) west of the junction of U.S. Highway 50 (Churchill County)	a	7,900	C
<i>U.S. Highway 50</i>			
2.4 kilometers (1.5 miles) east of U.S. Highway 95A (Lyon County)	b	2,200	B
<i>U.S. Highway 95A</i>			
13 kilometers (8 miles) south of Silver Springs (Lyon County)	c	NA ^c	A
1 kilometer (0.6 mile) south of the railroad crossing at Wabuska (Lyon County)	d	2,850	B
0.16 kilometer (0.1 mile) east of Miley Road (Lyon County)	e	1,800	B
<i>State Route 361 (Gabbs Valley Road)</i>			
32 kilometer (0.2 mile) north of U.S. Highway 95 in Luning (Mineral County)	f	120	A
<i>State Route 360 (Mina-Basalt Cutoff Road)</i>			
0.4 kilometer (0.25 mile) west of U.S. Highway 95 south of Sodaville (Mineral County)	g	690	A
<i>U.S. Highway 6 and U.S. Highway 95</i>			
76.2 meters (250 feet) west of State Route 265 to Silver Peak (Esmeralda County)	n	2,000	B
<i>State Route 265 (Silver Peak Road)</i>			
0.16 kilometer (0.1 mile) south of U.S. Highway 6 and U.S. Highway 95 (Esmeralda County)	i	90	A
<i>U.S. Highway 95</i>			
61 meters (200 feet) north of railroad grade crossing in Schurz (Mineral County)	j	2,550	B
0.40 kilometer (0.25 mile) south of State Route 362 (Hawthorne Truck Bypass Road) (Mineral County)	k	2,850	B
0.40 kilometer (0.25 mile) north of State Route 361 to Gabbs (Mineral County)	l	2,300	B
6.6 kilometers (4.1 miles) north of Mina (Mineral County)	m	2,300	B
1 kilometer (0.6 mile) north of U.S. Highway 6 (Esmeralda County)	h	1,700	B
0.3 kilometer (0.2 mile) south of U.S. Highway 6 in Tonopah (Nye County)	q	5,550	C
20.3 kilometers (12.6 miles) west of the Nye-Esmeralda county line (Esmeralda County)	p	2,050	B
At the Nye-Esmeralda county line south of Tonopah (Esmeralda County)	o	2,100	B
Just south of the town of Goldfield (Esmeralda County)	r	1,950	B
South of Goldfield at mp ES-8.8 (Esmeralda County)	s	200	A
0.16 kilometer (0.1 mile) south of State Route 266 at Lida Junction (Esmeralda County)	t	2,150	B
1.6 kilometers (1 mile) north of State Route 374 (Death Valley Road) (Nye County)	u	2,400	B
0.2 kilometer (0.1 mile) south of State Route 374 (Death Valley Road) (Nye County)	v	3,400	B
0.3 kilometer (0.2 mile) north of State Route 373 (Nye County)	w	2,600	B

a. Source: DIRS 178749-NDOT [n.d.], all.

b. See Figure 3-235 for location of traffic counts.

c. NA = not available.

3.3.10 OCCUPATIONAL AND PUBLIC HEALTH AND SAFETY

This section describes the affected environment for occupational and public health and safety related to construction and operation of a railroad along the Mina rail alignment. Section 3.3.10.1 describes the nonradiological, radiological, and transportation regions of influence; Section 3.3.10.2 describes the nonradiological health and safety environment; Section 3.3.10.3 describes the radiological health and safety environment; Section 3.3.10.4 describes *background radiation* in the vicinity of the Yucca Mountain Site; and Section 3.3.10.5 describes the nonradiological transportation health and safety environment.

The radiological health and safety environment discussion is related to the impact analyses of public and occupational *exposure to radiation*. The nonradiological health and safety environment discussion is related to the occupational health and safety impact analysis, including occupational incidents affecting construction and operations workers resulting from workplace physical hazards, exposure to nonradiological *hazardous chemicals*, and exposure to other nonradiological hazards (such as biological hazards). The nonradiological transportation health and safety environment discussion relates to the nonradiological transportation impact analysis, which includes impacts to workers and the public from roadway and railway transportation *accidents* other than accidents involving releases of *radiation*.

3.3.10.1 Region of Influence

3.3.10.1.1 Nonradiological Region of Influence

The region of influence for occupational nonradiological impacts includes:

- The nominal width of the Mina rail alignment construction right-of-way between Wabuska and the Rail Equipment Maintenance Yard. There would be no new construction along the existing Union Pacific Branchline between Hazen and Wabuska; the region of influence for the existing rail line between Hazen and Wabuska applies only to the operations phase, not to the construction phase.
- The *operations right-of-way* of the existing Union Pacific Hazen Branchline between Hazen and Wabuska and the operations right-of-way of the Mina rail alignment between Wabuska and the Rail Equipment Maintenance Yard.
- Public roads in Washoe, Carson City, Douglas, Storey, Churchill, Mineral, Lyon, Nye, and Esmeralda Counties and the Walker River Paiute Reservation that the proposed railroad workforce would use during railroad construction and operations.
- The railroad construction and operations support facilities including access roads, water wells, and quarries where workers would perform construction, operations, or maintenance activities. Railroad operations support facilities within the region of influence include the following:
 - Staging Yard (including interchange tracks) at Hawthorne
 - Maintenance-of-Way Facility
 - Rail Equipment Maintenance Yard
 - Cask Maintenance Facility
 - *Nevada Railroad Control Center* and National Transportation Operations Center
- Construction support facilities include the following:
 - Quarries
 - Concrete batch plant
 - Construction camps
 - Water wells

The region of influence for occupational nonradiological impacts includes public roads upon which the proposed workforce would travel and the rail line right-of-way and construction and operations support facilities where the proposed workforce would work.

3.3.10.1.2 Radiological Region of Influence

The region of influence for radiological impacts to members of the public during *incident-free transportation* includes the area 0.8 kilometer (0.5 mile) on either side of the centerline of the Mina rail alignment, which, for purposes of analysis, includes operation of cask trains and other trains along the existing Union Pacific Railroad Hazen Branchline to the Staging Yard and operation of cask trains and repository construction and supplies trains from the Staging Yard to the Rail Equipment Maintenance Yard.

The region of influence for occupational radiological impacts during incident-free operation includes the physical boundaries of railroad operations support facilities, where workers would perform activities involving the transportation of *spent nuclear fuel* and *high-level radioactive waste*. Railroad operations support facilities within the radiological region of influence include only the Staging Yard, the Rail Equipment Maintenance Yard, and the Cask Maintenance Facility because DOE anticipates that the potential for workers to be exposed to *ionizing radiation* from *radioactive* materials will occur only at those facilities. Radioactive materials would not be handled at the Nevada Railroad Control Center and National Transportation Operations Center, or the Maintenance-of-Way Facility.

For purposes of this Rail Alignment EIS, the affected environment for radiological impacts to members of the public in relation to incident-free transportation includes:

- Residents within the region of influence of the Mina rail alignment, including persons who live within 0.8 kilometer (0.5 mile) of either side of the centerline of the Union Pacific Railroad Hazen Branchline, from Hazen to the Rail Equipment Maintenance Yard. For the public radiological impact analysis, DOE evaluated four specific alignments: the alignment with the highest exposed population, the shortest alignment, the longest alignment, and the alignment with the lowest population (Table 3-146). Affected populations for the four alignments would include:
 - Populations of the public within 0.8 kilometer of either side of the centerline of the rail alignment. These populations are based on 2000 Census data.
 - Populations of Tribal members within 0.8 kilometer of either side of the centerline of the rail alignment. These populations are also based on 2000 Census data.
 - Populations within 0.8 kilometer of the Staging Yard. Based on the location of the Staging Yard at Hawthorne and 2000 Census data, DOE anticipates that there would be no members of the public within 0.8 kilometer of the Staging Yard footprint.
 - Individuals at locations such as residences or businesses located near the rail alignment.
 - Populations within the region of influence for radiological impacts for potential public exposure related to accidents and sabotage. This includes the area 80 kilometers (50 miles) on either side of the centerline of the rail line. These populations are based on 2000 Census data.

For radiological accidents and sabotage, the populations within the region of influence are based on the population within 80 kilometers (50 miles) on either side of the centerline of the proposed rail alignment. DOE based this region of influence on that described in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, p. 6-24).

Table 3-146. Mina rail alignments evaluated for radiological impacts to members of the public.^a

Alignment with the largest population		Alignment with the smallest population		Longest alignment	Shortest alignment
941 people	878 people	901 people	904 people		
339 miles	347 miles	354 miles	323 miles		
Union Pacific Railroad Hazen Branchline ^b	Union Pacific Railroad Hazen Branchline ^b	Union Pacific Railroad Hazen Branchline ^b	Union Pacific Railroad Hazen Branchline ^b	Union Pacific Railroad Hazen Branchline ^b	Union Pacific Railroad Hazen Branchline ^b
Department of Defense Branchline North	Department of Defense Branchline North	Department of Defense Branchline North	Department of Defense Branchline North	Department of Defense Branchline North	Department of Defense Branchline North
Schurz alternative segment 5	Schurz alternative segment 4	Schurz alternative segment 6	Schurz alternative segment 1	Schurz alternative segment 1	Schurz alternative segment 1
Department of Defense Branchline South	Department of Defense Branchline South	Department of Defense Branchline South	Department of Defense Branchline South	Department of Defense Branchline South	Department of Defense Branchline South
Mina common segment 1	Mina common segment 1	Mina common segment 1	Mina common segment 1	Mina common segment 1	Mina common segment 1
Montezuma alternative segment 2	Montezuma alternative segment 3	Montezuma alternative segment 3	Montezuma alternative segment 3	Montezuma alternative segment 1	Montezuma alternative segment 1
Mina common segment 2	Mina common segment 2	Mina common segment 2	Mina common segment 2	Mina common segment 2	Mina common segment 2
Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 3	Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 2	Bonnie Claire alternative segment 2
Common segment 5	Common segment 5	Common segment 5	Common segment 5	Common segment 5	Common segment 5
Oasis Valley alternative segment 3	Oasis Valley alternative segment 1	Oasis Valley alternative segment 3	Oasis Valley alternative segment 3	Oasis Valley alternative segment 5	Oasis Valley alternative segment 5
Common segment 6	Common segment 6	Common segment 6	Common segment 6	Common segment 6	Common segment 6

a. Populations based on 2000 Census data.

b. The Union Pacific Railroad Hazen Branchline is part of the region of influence only for the purposes of the radiological impact assessment; the Union Pacific Railroad Hazen Branchline is not part of the Mina rail alignment.

3.3.10.1.3 Transportation Region of Influence

The region of influence for transportation includes public roadways in the vicinity of the Mina rail alignment, as well as the Mina rail alignment itself. The region of influence for public nonradiological transportation impacts includes public roads and the rail line right-of-way in relation to potential roadway and railway nonradiological transportation accidents that could involve the public. The region of influence for transportation is primarily in remote and rural areas, and there are two operating railroads between Hazen and Thorne. The existing Union Pacific Hazen Branchline from Hazen to Wabuska, and the Department of Defense Branchline from Wabuska to Thorne both carry very low rail volumes, with an average of two trains per week on the Union Pacific Railroad Hazen Branchline and two trains per week on the Department of Defense Branchline. Although the existing Union Pacific Railroad Mainline that services west-central Nevada is used as a point of comparison in Section 4.3.10, this Rail Alignment EIS does not assess impacts to the Union Pacific Railroad Mainline.

During railroad construction, new access roads to construction camps, quarries, and water wells would originate from nearby intersections with existing public roadways. The Mina rail alignment would be within Nevada Department of Transportation Districts 1 and 2, and the rail alignment would cross Churchill, Lyon, Mineral, Nye, and Esmeralda Counties and the Walker River Paiute Reservation. The region of influence focuses on the vicinity of the Mina rail alignment, but also includes other roadways that DOE could use to supply materials, equipment, and workers during the construction phase. DOE recognizes that during construction, completed segments of the rail line could be used to transport goods and services to construction sites and camps.

3.3.10.2 Nonradiological Health and Safety Environment

Nonradiological occupational health and safety considers potential recordable incidents, lost-time accidents, and worker fatalities resulting from potential exposure of workers to physical hazards and nonradiological hazardous chemicals in their work environment during railroad construction and operations. The affected environment for nonradiological occupational health and safety also includes potential occupational health effects from exposure to exhaust emissions from vehicles and heavy equipment, including, for example, earth-moving equipment.

Nonradiological public health and safety addresses potential exposure of members of the public to nonradiological chemical hazards and vehicle emissions that would result from railroad construction and operations. Section 3.3.4, Air Quality and Climate, and Section 3.3.8, Noise and Vibration, describe the affected environments for potential public exposure to criteria and nonradiological *hazardous air pollutants*, including vehicle emissions, and potential exposure to noise and vibration generated from construction and operation of the proposed railroad.

The types of potential nonradiological health and safety hazards to construction workers and operations and maintenance workers under the Proposed Action include:

- Incidents resulting from physical hazards, including occupational injuries and illnesses resulting in total *recordable cases*, *lost workday cases*, and fatalities. Fatalities could occur on or off the work site as a result of an incident or illness experienced on the work site. Physical hazards could include the potential for falls, excavation and confined-space entry hazards, mechanical hazards, electrical hazards, ergonomic hazards, and heavy construction equipment (not passenger vehicles) hazards, and illnesses related to workplace exposure to chemical hazards.
- Off-site vehicle emissions-related health effects, including health effects related to off-site vehicular emissions from transportation of construction workers, equipment, and materials and wastes to and from the construction sites.

- On-site vehicle and heavy equipment-related health effects, including effects related to diesel engine exhaust emissions from vehicles and heavy-equipment operated by construction workers on the construction sites. These health effects encompass workers who could be exposed to vehicular and heavy equipment emissions.
- Incidents resulting from other nonradiological chemical hazards, including occupational exposure to chemicals (such as solvents and lubricants), dust (such as silica dust), and other nonradiological substances from railroad construction and operations. The U.S. Department of Labor Bureau of Labor Statistics incident rates include occupational illnesses and fatalities that could result from nonradiological chemical exposure. However, the Bureau of Labor Statistics incident rates do not include a breakdown by incident type (DIRS 179129-BLS 2007, all; DIRS 179131-BLS 2006, all).
- Unexploded ordnance hazards, including potential encounters by rail line construction workers with unexploded ordnance. The U.S. Army has identified and mapped an area of potential unexploded ordnance along the existing Department of Defense Branchline right-of-way south of Schurz. This area is bordered by the southeastern shoreline of Walker Lake, the existing Department of Defense Branchline, and the Hawthorne Army Depot.
- Noise hazards, including short-term or long-term occupational exposure to noise that could impair hearing.
- Biological hazards that workers could encounter, such as venomous animals, West Nile Virus, Valley Fever, Hantavirus, and rabies.

3.3.10.3 Radiological Health and Safety Environment

There are ambient levels of radiation in the vicinity of the Mina rail alignment, just as there are around the world. All people are inevitably exposed to the three sources of ionizing radiation: sources of natural origin unaffected by human activities, sources of natural origin but affected by human activities (called enhanced natural sources), and manmade sources. Natural sources (natural background radiation) include *cosmic radiation* from space, *cosmogenic radionuclides* produced when cosmic radiation interacts with matter in the atmosphere or ground, and naturally occurring, long-lived *primordial radionuclides* in the Earth's mantle. Enhanced natural sources include those that can increase exposure as a result of human actions, deliberate or otherwise. For example, a mill tailings pile from a uranium extraction process probably would contain concentrated levels of naturally occurring *radionuclides*. A variety of radiation exposures, generally smaller than those caused by natural sources, result from manmade sources including nuclear medicine, medical X-rays, and consumer products.

Sources of Radiation Exposure

Nationwide, on average, members of the public are exposed to approximately 360 millirem per year from natural and manmade sources. The relative contributions by radiation source to people living in the United States are (DIRS 155970-DOE 2002, p. F-4):

- Radon in homes and buildings: 200 millirem per year
- Medical radiation: 53 millirem per year
- Internal radiation from food and water: 40 millirem per year
- Terrestrial (external radiation from rocks and soil): 28 millirem per year
- Cosmic (external radiation from outer space): 27 millirem per year
- Consumer products: 10 millirem per year
- Other sources: Less than 1 millirem per year

Radiation: Radiation is energy traveling through space. Radiation can be non-ionizing, like radio waves, ultraviolet radiation, or visible light, or ionizing, depending on its effect on atomic matter. In this Rail Alignment EIS, the word "radiation" refers to ionizing radiation. Ionizing radiation has enough energy to ionize atoms or molecules while non-ionizing radiation does not. Radioactive material is a physical material that emits ionizing radiation.

Cosmic radiation: A variety of high-energy particles including protons that bombard the Earth from outer space. They are more intense at higher altitudes than at sea level where the Earth's atmosphere is most dense and provides the greatest protection.

Cosmogenic radionuclides: Radioactive nuclides generated when the upper atmosphere interacts with many of the cosmic radiations. Despite their short half-lives, they are found in nature because their supply is always being replenished.

Decay product: A nuclide resulting from the radioactive decay of a parent isotope or precursor nuclide. The decay product might be stable or it might decay to form a decay product of its own.

Decay series: The succession of elements initiated in the radioactive decay of a parent, as thorium or uranium, each of which decays into the next until a stable element, usually lead, is produced.

Effective dose equivalent: Often referred to simply as dose, it is an expression of the radiation dose received by an individual from external radiation and from radionuclides internally deposited in the body.

Natural background radiation is the largest contributor to the average radiation dose of individuals. The natural occurrence of cosmic radiation, cosmogenic radionuclides, and primordial radionuclides varies throughout the world depending on such factors as altitude and geology. External radiation comes from all three of these natural sources, but cosmic radiation and radiation from primordial radionuclides are the largest contributors to dose. Cosmic radiation consists of charged particles (primarily protons from extraterrestrial sources) that have sufficiently high energies to generate secondary particles that have direct and indirect ionizing properties. The three main primordial radionuclide contributors to external terrestrial gamma radiation are potassium-40 and the members of the thorium and uranium *decay series*. Most external terrestrial gamma radiation comes from the top 20 centimeters (8 inches) of soil, with a small contribution from airborne radon *decay* products.

Internal radiation dose from natural sources comes primarily from the primordial radionuclides and their *decay products*. The largest individual source of internal dose comes from the inhalation of radon-222 and its decay products, which are all members of the uranium-238 decay series. This exposure comes mainly from inhalation of these radionuclides in indoor air, coming from the soil underneath buildings. All of the primordial radionuclides are in the body in various concentrations, incorporated by ingesting or inhaling these radionuclides in air, water, and all types of food products. Although of smaller importance to natural internal dose than the other mechanisms, four cosmogenic radionuclides, tritium (hydrogen-3), beryllium-7, sodium-22, and carbon-14, produce quantifiable internal doses.

Table 3-147 lists estimated radiation doses to individuals from natural sources in the region of influence and other locations in the United States. The radiation doses shown in the table are in terms of *effective dose equivalent*, which is an expression of the radiation dose received by an individual from external radiation and from radionuclides internally deposited in the body. Effective dose equivalent has units of *rem*.

Table 3-147. Radiation exposure from natural sources.

Source ^b	Annual dose in millirem (effective dose equivalent)							
	National	Tonopah	Las Vegas	Reno	Beatty	Amargosa Valley	Goldfield	Yucca Mountain
Cosmic and terrestrial	55	143	88 ^a	131 ^a	150 ^a	107 ^a	130 ^a	160 ^a
Radon in homes (inhaled) ^c	200	200	200	200	200	200	200	200
Naturally occurring radiation In body	39	39	39	39	39	39	39	39
Totals^d	300	382	327	370	389	346	369	399

a. Combined cosmic and terrestrial radiation sources.

b. Sources: DIRS 100473-National Research Council 1990, Table 1-3, p. 18; DIRS 181387-University of Nevada-Reno 2006, p. B-8, Table B4-1; DIRS 179137-CEMP 2006, all; DIRS 179138-CEMP 2006, all; DIRS 179139-CEMP 2006, all; DIRS 179140-CEMP 2006, all; DIRS 179141-CEMP 2006, all; DIRS 179142-CEMP 2006, all.

c. Value for radon is an average for the United States.

d. Totals might differ from sums of values due to rounding.

Table 3-147 lists background radiation results for Tonopah, Las Vegas, Goldfield, Beatty, Reno, and Town of Amargosa Valley. DOE obtained cosmic and terrestrial background radiation for these Nevada locations based on radiological monitoring data from September 1999 through 2006 from the Desert Research Institute Community Environmental Monitoring Program (DIRS 179137-CEMP 2006, all; DIRS 179138-CEMP 2006, all; DIRS 179139-CEMP 2006, all; DIRS 179140-CEMP 2006, all; DIRS 179141-CEMP 2006, all; DIRS 179142-CEMP 2006, all). DOE obtained background radiation data for Reno from the Environmental Health and Safety University of Nevada, Reno 2006 Annual Report (DIRS 181387-University of Nevada, Reno 2006, Page B-8, Table B4-1). The average background radiation for the United States, including terrestrial and cosmic radiation, radon exposure, and natural radiation in the body, is 300 millirem per year, with radon exposure comprising 200 millirem per year, cosmic and terrestrial radiation comprising 55 millirem per year, and natural body radiation comprising 39 millirem per year (DIRS 100473-National Research Council 1990). The background radiation for Las Vegas (the closest large city to the Mina rail alignment region of influence) is 328 millirem per year, with cosmic and terrestrial radiation doses resulting in a slightly higher total annual dose than the average for the United States (DIRS 179142-CEMP 2006, all). The background radiation for the reported locations within the region of influence range from 328 millirem per year to 390 millirem per year. Background data include background radiation resulting from fallout.

3.3.10.4 Background Radiation at the Yucca Mountain Site

Ambient radiation levels from cosmic and terrestrial sources in the Yucca Mountain region are higher than the United States average. The higher elevation at Yucca Mountain results in higher levels of cosmic radiation because there is less *shielding* by the atmosphere. The United States average for cosmic and terrestrial radiation exposures is 55 millirem per year (DIRS 100473-National Research Council 1990, Table 1-3, p. 18). The exposures at the Yucca Mountain ridge and Yucca Mountain surface facilities are about 160 and 150 millirem per year, respectively. Moreover, there are higher amounts of naturally occurring radionuclides in the soil and parent rock of this region than in some other regions of the United States, which also results in higher radiation doses.

The Yucca Mountain FEIS includes a detailed discussion (DIRS 155970-DOE 2002, pp. 3-95 to 3-101) of the natural radiation levels, mineral-related radiation risks, and historical activities in the Yucca Mountain region that might have resulted in radiation effects to workers and the public.

3.3.10.5 Transportation Health and Safety Environment

3.3.10.5.1 Public Roadways

Because the region of influence includes public roads primarily located in remote and rural areas, the Mina rail alignment would cross areas with relatively low traffic volumes. The exception is the existing Union Pacific Railroad Hazen Branchline, which crosses public roads with moderate traffic (such as Alternate U.S. Highway 50 in Hazen, U.S. Highway 50 in Silver Springs, and Alternate U.S. Highway 95 in Churchill and Wabuska). Section 3.3.9, Socioeconomics, describes the public road infrastructure and *baseline* traffic conditions along the Mina rail alignment in more detail. In summary, the Mina rail alignment would cross paved highways with low to moderate traffic volumes and unpaved roads with low traffic volumes. While many of the unpaved roads are important to the daily activities of landowners and ranchers in the area, these unpaved roads are not heavily traveled.

Table 3-148 lists the paved highways and the Union Pacific Railroad Hazen Branchline the Mina rail alignment would cross. Figure 2-12 shows the locations of these crossings (DIRS 180872-Nevada Rail Partners 2007, Table C-1). Additionally, the primary paved highways in the project vicinity are Alternate U.S. Highway 50, U.S. Highways 50 and 95, and Alternate U.S. Highway 95 in the northern portion; State Routes 359, 360, and 361 and U.S. Highway 95 in the central portion; and U.S. Highways 6 and 95 and State Routes 265, 266, and 267 in the southern portion.

Overall highway safety statistics for Nevada show that the fatality rate per 100 million vehicle-miles traveled is approximately 1.28 (1.65 in rural areas). The national average is approximately 40 percent lower at 0.91 fatalities per 100 million vehicle-miles traveled (1.42 in rural areas) (DIRS 180484-FHWA 2005, p. 1, Section V, Tables FI-20 and VM-2).

Table 3-148. Potential rail line crossings of main highways.

Segment	Highway	County/Reservation
Union Pacific Railroad Hazen Branchline ^a	Alt.U.S. Highway 50	Churchill
Union Pacific Railroad Hazen Branchline ^a	Alt.U.S. Highway 50	Lyon
Union Pacific Railroad Hazen Branchline ^a	Alt. U.S. Highway 95 (at two locations)	Lyon
Schurz alternative segment 1	U.S. Highway 95	Walker River Paiute Reservation
Schurz alternative segment 4	U.S. Highway 95	Walker River Paiute Reservation
Schurz alternative segment 5	U.S. Highway 95	Walker River Paiute Reservation
Schurz alternative segment 6	U.S. Highway 95	Walker River Paiute Reservation
Mina common segment 1	State Route 361	Mineral
Mina common segment 1	U.S. Highway 6 / 95	Esmeralda
Montezuma alternative segment 1	U.S. Highway 95	Esmeralda
Montezuma alternative segment 2	U.S. Highway 95	Esmeralda
Montezuma alternative segment 3	U.S. Highway 95	Esmeralda

a. The Union Pacific Railroad Hazen Branchline is part of the region of influence for the purposes of the transportation impact assessment, but is not part of the Mina rail alignment.

3.3.10.5.2 Railroad Accidents

This section describes the general characteristics of railroad accidents in the United States and in the State of Nevada. DOE commissioned a railroad study – *The Nevada Railroad System: Physical, Operational, and Accident Characteristics* (the Nevada railroad study), which covers the period between 1979 and 1988 (DIRS 104735-YMP 1991, all). Because the number of annual rail-related accidents and incidents in Nevada is very small, it is difficult to draw conclusions about how the safety of rail operations in Nevada has changed since 1988. However, the study is the most comprehensive and relevant rail accident study to date regarding the State of Nevada and it provides some insights into the general characteristics of rail accidents in Nevada and the United States. The study presented information on types, causes, and frequency of railroad accidents; accident locations; and some of the more significant accidents from 1979 through 1988. The important findings of the Nevada railroad study were:

- Numbers and types of accidents. During the study period, the numbers of reported rail accidents in Nevada and the entire United States were 208 and 48,256, respectively. The most common accident types for Nevada and the rest of the United States were derailment and rail–highway crossing collision.
- Causes of rail accidents. Track/roadbed conditions caused proportionately more accidents in the rest of the United States than in Nevada, and mechanical/electrical failure caused proportionately more accidents in Nevada than in the rest of the United States. Nevada showed a higher proportion of its reported accidents in the higher speed ranges than did the rest of the Nation.
- Speeds at times of accidents. In general, most rail accidents happened at very low speeds. Approximately half of all reported accidents in Nevada occurred at speeds of 16 kilometers (10 miles) per hour or less, and 40 percent of all accidents in Nevada were at 8 kilometers (5 miles) per hour or less. Nationally, 73 percent of all accidents occurred at 16 kilometers per hour or less, and 53 percent of all rail accidents occurred at 8 kilometers per hour or less.
- Elapsed time on duty. The Nevada railroad study showed that about 45 percent of all accidents occurred within the first 4 hours on duty, approximately 41 percent occurred between 4 to 8 hours on duty, and approximately 14 percent occurred after 8 hours on duty.
- Weather and time of day. In Nevada, approximately 73 percent of all accidents reported occurred in clear weather, while approximately 9 percent occurred in cloudy weather. Rain, fog, and snow accounted for lower proportions. In Nevada, approximately half (49 percent) of all rail accidents occurred at night. Nationally, approximately 42 percent of all accidents occurred at night.
- Locations of accidents. The Nevada railroad study revealed that accidents occur at slightly higher rates at switchyard tracks.
- Rail–highway at-grade crossing accidents. Excluding the switching and handling incidents, rail accidents seemed to occur at random locations. The notable exception was rail–highway at-grade crossings. In the United States, rail–highway at-grade crossings in general were a higher accident location.
- Fatal rail accidents. Fewer accidents occurred at the higher speeds, but the chance that an accident, once it did occur, produced a fatality increased as speed increased. Comparing the total number of accidents at each speed interval to the total number of fatal accidents at each speed interval revealed that an accident occurring at above 97 kilometers (60 miles) per hour was 31 times more likely to cause a fatality than an accident occurring at 8 kilometers (5 miles) per hour or less.

With the exception of accident causes, the Nevada railroad study (DIRS 104735-YMP 1991, all) found that rail-accident characteristics in Nevada were not markedly different from rail-accident characteristics

in the rest of the United States. The most apparent differences related to the relatively large proportion of Nevada rail lines that were in open country where higher operating speeds are maintained, compared to the United States as a whole. Most rail accidents, both in Nevada and in the rest of the United States, occurred at very low speeds. Nevada showed a slightly higher number of high-speed accidents compared to the national average. The Nevada railroad study also showed that Nevada had a larger percentage of accidents caused by equipment failure and human factors. The Nevada railroad study also found that for accidents involving only rail equipment, there were no classical “high” accident locations as there typically are with highway transport. Instead, minor accidents tended to occur in rail yards and during switching operations. More severe accidents, occurring at higher speeds on open track, seemed to happen at random.

Railroads are required by law to submit accident/incident reports within 30 days after the month to which they pertain. The Federal Railroad Administration annually publishes *Railroad Safety Statistics* which contains statistical data, tables, and charts based on railroad accident reporting requirements. In this publication, the terms “accidents” and “incidents” are used to describe the entire list of reportable events, which includes collisions, derailments, and other events involving the operation of on-track equipment and causing reportable damage above an established threshold; impacts between railroad on-track equipment and highway users at crossings; and all other incidents or exposures that cause a fatality or injury to any person, or an occupational illness to a railroad employee. As defined in *Railroad Safety Statistics*, accidents/incidents are divided into three major groups for reporting purposes:

- Train accident. A safety-related event involving on-track rail equipment (both standing and moving), causing monetary damage to the rail equipment and track above a prescribed amount.
- Highway–rail grade crossing incident. Any impact between a rail and highway user (both motor vehicles and other users of the crossing) at a designated crossing site, including walkways, sidewalks, etc., associated with the crossing.
- Other incident. Any death, injury, or occupational illness of a railroad employee that is not the result of a train accident or highway-rail incident.

Table 3-149 summarizes rail accident data from the *Railroad Safety Statistics – Annual Report 2004* for the five-year period 2000 through 2004 (DIRS 178016-DOT 2005, pp. 13 and 17). Accident and incidents rates are not available for Nevada because train mile data is only available on a nationwide basis.

The data listed in Table 3-149 reflect rail operations involving general freight service. *Dedicated train* service, which would be used to move cask railcars to the Yucca Mountain repository, would follow stringent safety regulations. Additionally, dedicated train service has increased control and command capabilities, because shorter trains allow better visual monitoring from the locomotive and the escort car. Therefore, accident and incident rates for dedicated train service are expected to be lower than the ones listed in Table 3-149.

3.3.10.5.3 Transportation of Munitions

The U.S. Army currently transports munitions to and from the Hawthorne Army Depot by rail. Munitions *shipments* pass to and from the Depot through the town of Schurz along the existing Department of Defense Branchline. The Army assesses hazards associated with transportation of munitions using a risk assessment code *matrix* evaluation of the potential accident probability and potential hazard severity, as illustrated in Table 3-150 (DIRS 181032-Dillingham 2007, all).

Table 3-149. Rail accidents in Nevada and the United States (2000 through 2004).^a

	2000	2001	2002	2003	2004
<i>Train accidents</i> (excluding highway–rail crossing incidents – see below)					
Nevada	12	14	9	8	17
United States	2,983	3,023	2,738	2,997	3,296
<i>Train accidents rate (accidents per train mile)</i> (excluding highway–rail crossing incidents)					
Nevada	NA ^b	NA	NA	NA	NA
United States	4.1×10^{-06}	4.2×10^{-06}	3.8×10^{-06}	4.0×10^{-06}	4.3×10^{-06}
<i>Total highway–rail incidents at public crossings</i> ^c					
Nevada	1	2	1	1	2
United States	3,032	2,843	2,709	2,610	2,644
<i>Total highway–rail incident rates (incidents per train mile) at public crossings</i> ^c					
Nevada	NA	NA	NA	NA	NA
United States	4.2×10^{-06}	4.0×10^{-06}	3.7×10^{-06}	3.5×10^{-06}	3.4×10^{-06}

a. Source: DIRS 178016-DOT 2005, pp. 13 and 17.

b. NA = not applicable.

c. Any impact, regardless of severity, between railroad on-track equipment and any user of a public or private crossing site must be reported to the U.S. Department of Transportation, Federal Railroad Administration, on Form F 6180.57. The crossing site includes sidewalks and pathways at, or associated with, the crossing. Counts of fatalities and injuries include motor vehicle occupants, people not in vehicles or on the trains, and people on the train or railroad equipment.

Table 3-150. Risk assessment code matrix.^a

Hazard severity	Accident probability				
	A	B	C	D	E
I	1	1	2	3	5
II	1	2	3	4	5
III	2	3	4	5	5
IV	3	4	5	5	5

a. Source: DIRS 181032-Dillingham 2007, all.

B-1. Hazard Severity: Category Description

I Catastrophic - Death or permanent disability or major property damage

II Critical - Permanent partial disability or extensive property damage

III Marginal - Lost workday due to injury or minor property damage

IV Negligible - First aid injury or minimal property damage

B-2. Accident Probability:

A Frequent - Occurs very often, continuously experienced

B Likely - Occurs several times

C Occasional - Occurs sporadically

D Seldom - Remotely possible; could occur at some time

E Unlikely - Can assume will not occur, but not impossible

The overall rating of a transportation route using the Army methodology is the combination of B-1 (Hazard Severity) and B-2 (Accident Probability) in the matrix. According to Department of Defense guidelines, a 1 rating or a 2 rating is not acceptable for shipment of munitions. A rating of 3 is acceptable for shipment of munitions only after higher-level review and approval from the military headquarters. Final ratings of 4 or 5, after controls are implemented, are acceptable for shipment of munitions. After

application of controls, the Army has rated the existing *rail route* through the town of Schurz as 5 (corresponding to Risk Assessment Matrix Code 1-E) (DIRS 181032-Dillingham 2007, all).

The Army also uses quantity-distance calculations to provide an assessment of the Distance to Public Traffic Routes and Distance to Inhabited Buildings for storage or transportation of munitions. Public traffic route distances give consideration to the transient nature of the exposure and are calculated as 60 percent of the Inhabited Building Distance (DIRS 181032-Dillingham 2007, all).

According to Table 5-1 of Department of the Army Pamphlet 385-64, a Distance to Public Traffic Route of 725 meters (2,380 feet) or a Distance to Inhabited Building of 1,210 meters (3,970 feet) apply to munitions shipments of the types that may be made along the existing rail line. This methodology indicates that there should be an easement of at least 725 meters on either side of the tracks (no building) along the entire route. This is based on 60 percent of Inhabited Building Distance (IBD) of 1,210 meters (DIRS 181032-Dillingham 2007, p. 1). However, there are inhabited buildings within this distance for the existing Department of Defense Branchline through Schurz. Also, as shown in the Figure 3-236, there are nine grade crossings within the town of Schurz along the Department of Defense Branchline.

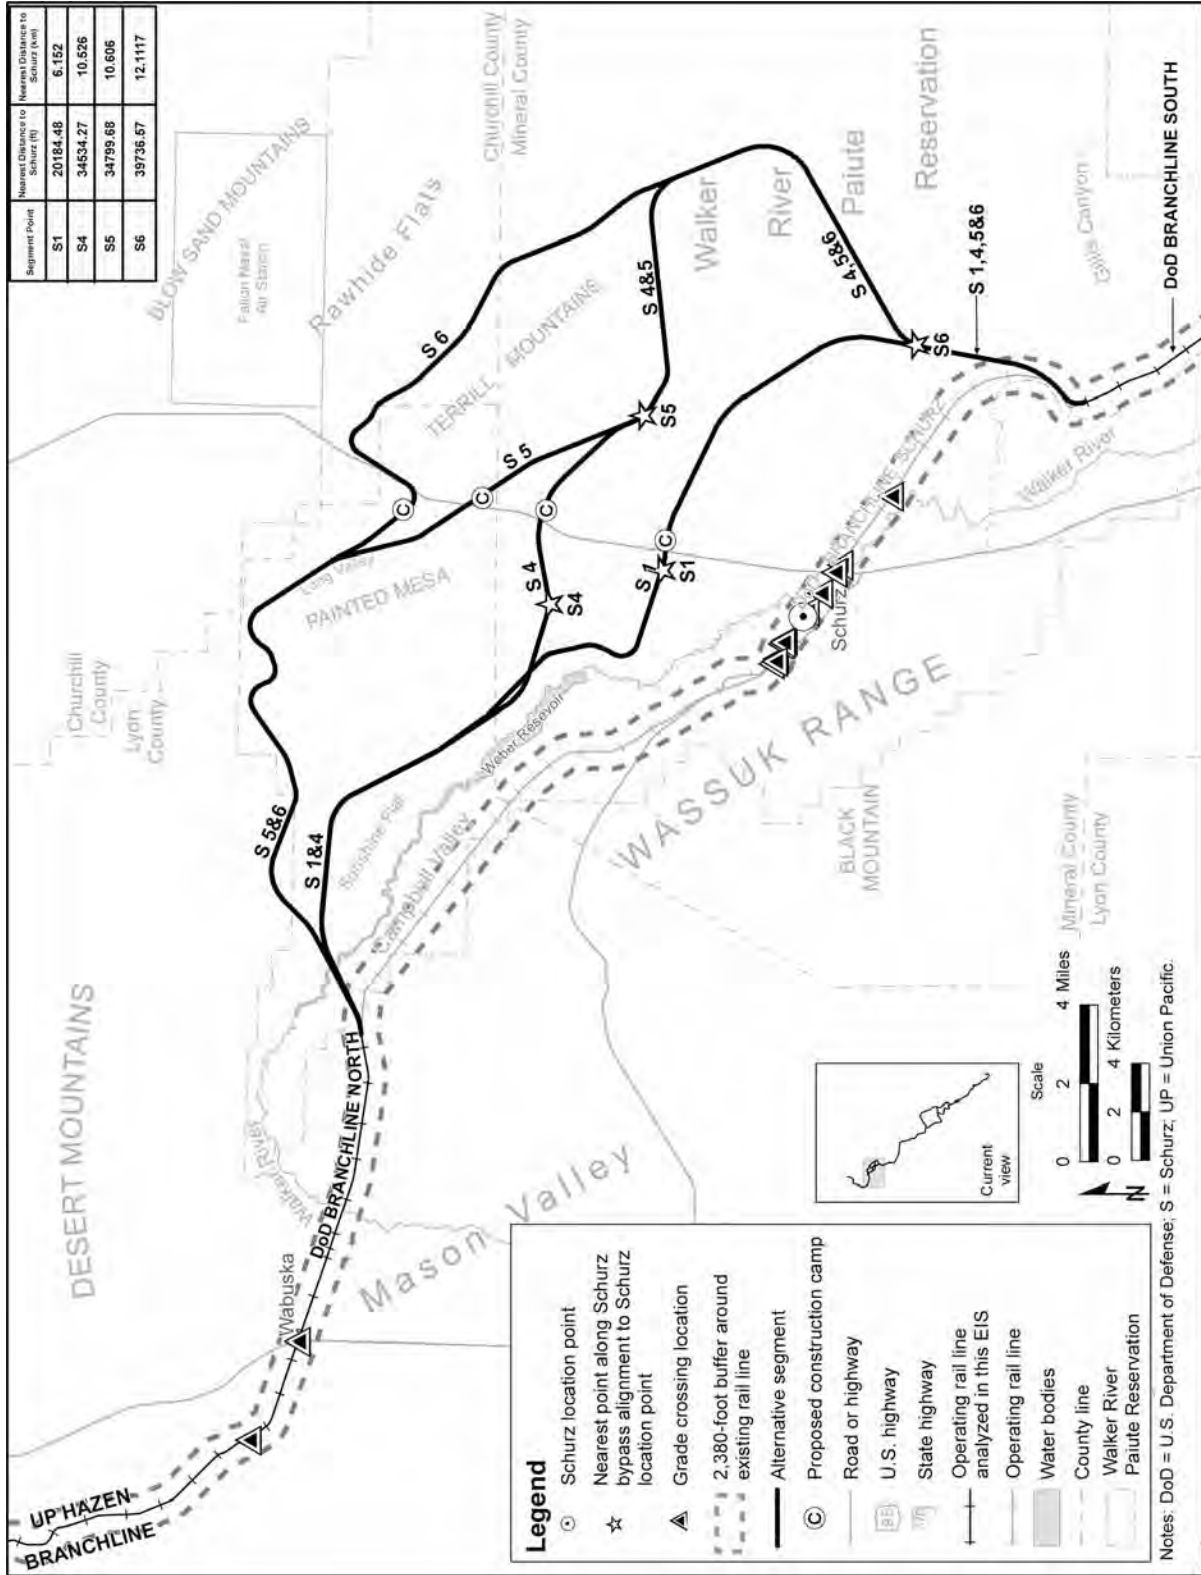


Figure 3-236. Inhabited building distance for existing Department of Defense Branchline.

3.3.11 UTILITIES, ENERGY, AND MATERIALS

This section describes the affected environment for public-service utilities (water, wastewater treatment, telecommunications, and electricity), energy (fossil fuels), and construction materials within the Mina rail alignment region of influence.

Section 3.3.11.1 describes the regions of influence for utilities, energy resources, and construction materials; Section 3.3.11.2 describes public-service utilities in the region of influence; Section 3.3.11.3 describes energy resources (not related to public-service utilities) in the region of influence; and Section 3.3.11.4 describes resources for construction materials in their regions of influence.

3.3.11.1 Regions of Influence

3.3.11.1.1 Regions of Influence for Utilities

The regions of influence for public water systems, wastewater treatment, telecommunications, and electricity differ and are described below.

- **Public water systems:** The region of influence for public water systems is Lyon, Mineral, Esmeralda, and Nye Counties, communities within those counties, and the Walker River Paiute Reservation, the bulk of which lies within Mineral County with smaller portions in Lyon and Churchill Counties.
- **Wastewater treatment:** The region of influence for wastewater transported offsite for treatment and disposal is the existing permitted treatment facilities in Lyon, Mineral, Esmeralda, and Nye Counties and communities within those counties, and the Walker River Paiute Reservation, the bulk of which lies within Mineral County with smaller portions in Lyon and Churchill Counties. (Note: For wastewater treated using other methods [for example, on-site portable wastewater-treatment facilities], treated wastewater would be recycled, and there is no associated region of influence.)
- **Telecommunications:** The region of influence for telephone and fiber-optic telecommunications is the southern Nevada region serviced by Nevada Bell Telephone Company (AT&T Nevada), Citizens Telecommunications Company of Nevada, and Verizon.
- **Electricity:** The region of influence for electric-power resources includes areas serviced by the southern Nevada electrical grid operated by Nevada Power Company; Sierra Pacific Power Company; and Valley Electric Association, Inc.

3.3.11.1.2 Region of Influence for Energy Resources (Fossil Fuels)

The description of the affected environment for energy resources focuses on consumption of fossil fuels. For purposes of this analysis, the region of influence for fossil fuels is limited to regional suppliers within the State of Nevada.

3.3.11.1.3 Regions of Influence for Construction Materials

Construction materials include concrete, ballast, subballast, steel, steel rail, and general building materials. The region of influence for each material is defined by the distribution networks and suppliers of that material to the general project area.

The region of influence for cast-in-place concrete and subballast is limited to the State of Nevada. Subballast, sand, and gravel would be generated from available sources within the rail roadbed earthwork area, overburden at quarries, and borrow sites near the rail alignment. DOE forecasts that no surplus sand

and gravel would be available for roadbed construction from excavation cuts along the rail line. Therefore, DOE plans to obtain sand and gravel from gravel pits along the alignment or nearby U.S. Highway 95, using existing pits, new pits sited nearby, or elsewhere. DOE would determine the exact locations of gravel pits during final design and construction planning. DOE would use some of the natural sand and gravel excavated from cuts and crushed rock from the quarries to make concrete aggregate (DIRS 176034-Shannon & Wilson 2006, pp. 24 to 26).

DOE would obtain ballast rock from potential quarry sites close to the rail line construction right-of-way during the construction phase and from commercial quarry sites in southern Utah and in California during the operations phase. Therefore, the region of influence for obtaining ballast rock would encompass the State of Nevada during the construction phase, and Utah and California during the operations phase.

Other materials, including steel, steel rail, general building materials, concrete ties, and other precast concrete could be procured and shipped on a national level. Therefore, the region of influence for these materials is national.

3.3.11.2 Utilities

3.3.11.2.1 Utility Corridors and Rights-of-Way

Section 3.3.2, Land Use and Ownership, describes the major utilities and utility corridor networks in the Mina rail alignment region of influence.

3.3.11.2.2 Public Water Systems

Figure 3-237 shows the locations of *public water systems* in Lyon, Mineral, Esmeralda, and Nye Counties and on the Walker River Paiute Reservation. There are 140 regulated public water systems in these counties and on the Walker River Paiute Reservation (which lies primarily in Mineral County) including the 46 *community water systems* listed in Table 3-151.

Public water system: A water system that provides water for human consumption for an average of at least 25 persons per day (or 15 or more service connections) and is in use for at least 60 days each year.

Community water system: A public water system that serves at least 15 service connections used by year-round residents or regularly serves at least 25 year-round residents.

Non-transient, non-community water system: A public water system that is not a community water system and that regularly serves at least 25 of the same persons over 6 months per year.

Source: 40 CFR 141.2.

Within the Mina rail alignment region of influence, public water systems are generally located in or near Hawthorne, Mina, and the unincorporated towns of Beatty, Pahrump, and Town of Amargosa Valley. In addition, although not a community water system, the Yucca Mountain Site has a regulated public water system (NV0000867). This system is classified as a *non-transient, non-community public water system*.

3.3.11.2.3 Wastewater-Treatment Facilities

DOE would treat wastewater using municipal wastewater-treatment facilities, on-site portable wastewater-treatment facilities (*package plants*), or a combination of the two.

Municipalities with wastewater-treatment facilities include Mason, Yerington, Hawthorne, Schurz, Goldfield, Beatty, Gabbs, Tonopah, and Round Mountain. Table 3-152 lists the capacity of each system and the existing load.

In Hawthorne in Mineral County, a future design capacity of 1,700,000 liters (450,000 gallons) per day is specified.

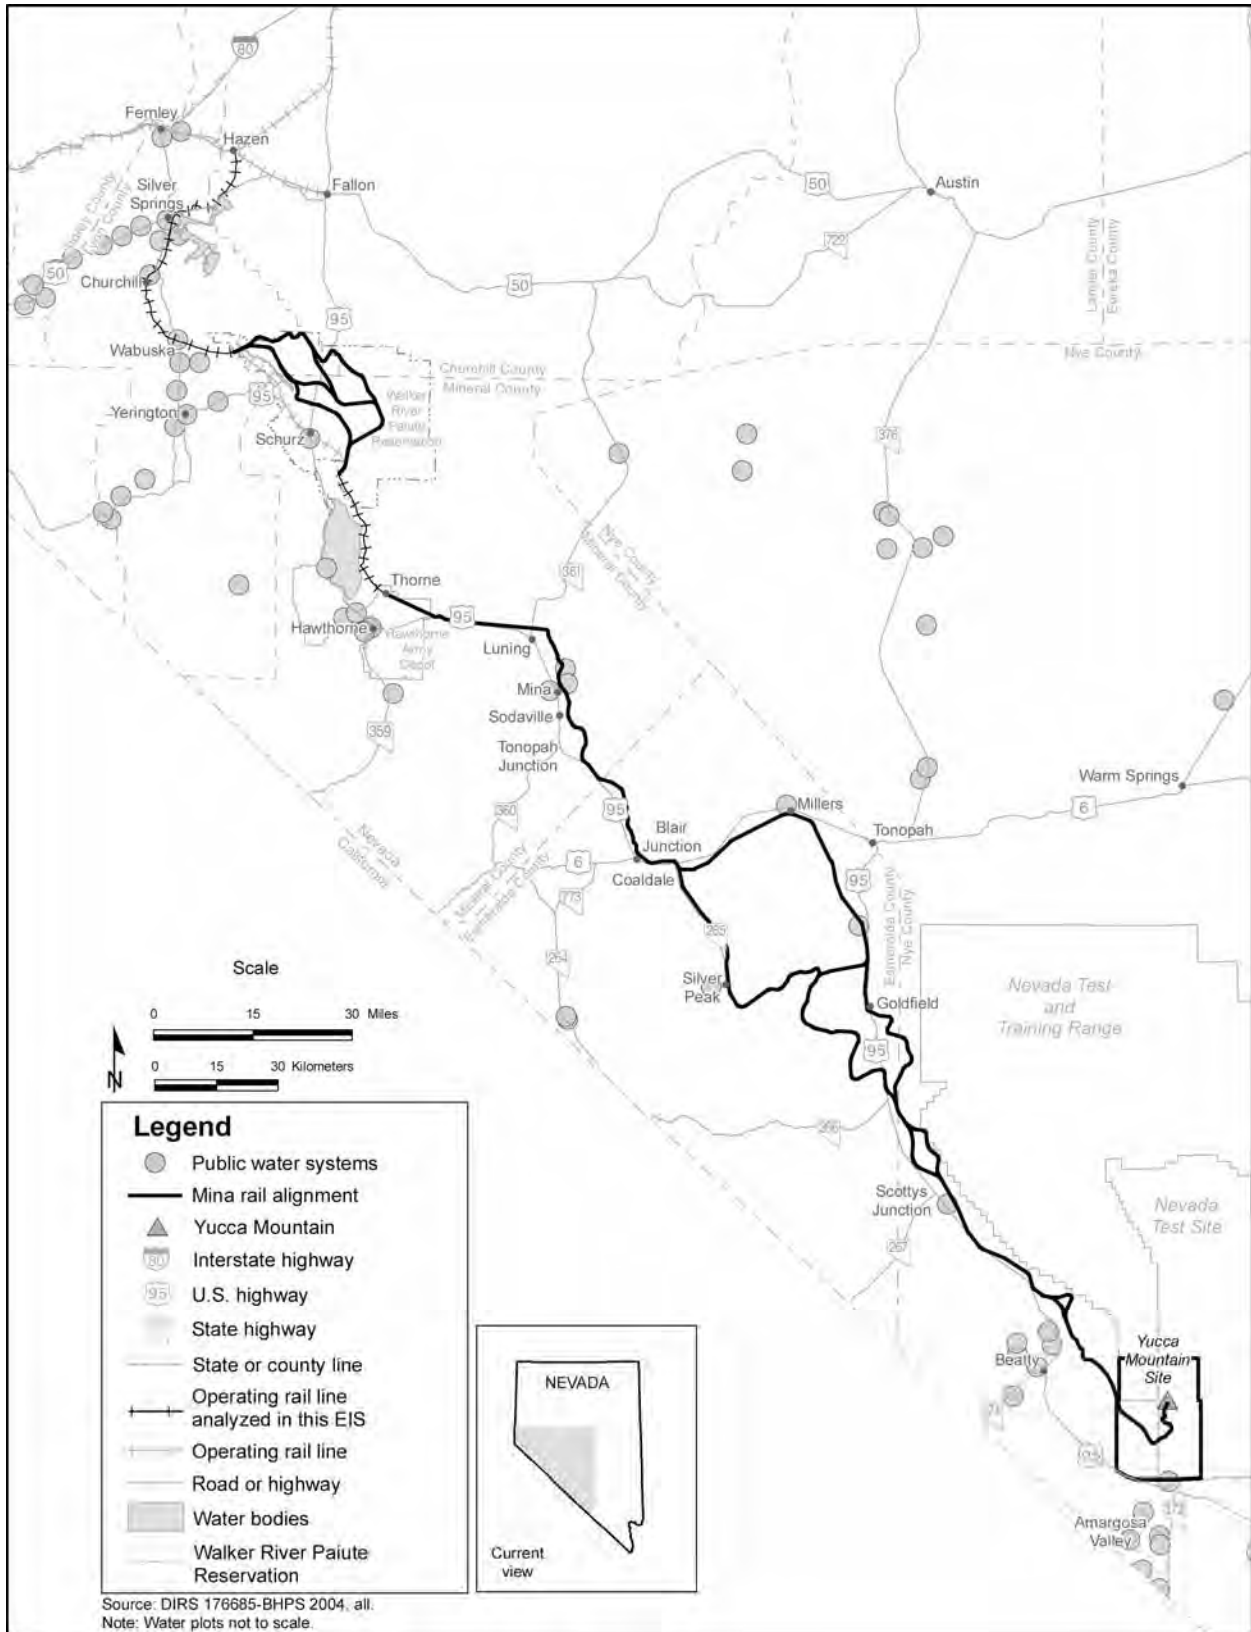


Figure 3-237. Public water systems in Lyon, Mineral, Esmeralda, and Nye Counties.

Table 3-151. Community water systems in Lyon, Mineral, Esmeralda, and Nye Counties^a (page 1 of 2).

County	Public water supply identification number	Name
Lyon	NV0000813	Churchill Ranchos Estates
	NV0000361	Crystal Clear Water Company
	NV0000032	Dayton Town Utilities
	NV0000366	Dayton Valley Estates Water
	NV0000033	Dayton Valley Mobile Home Park
	NV0000062	Fernley Public Works
	NV0002516	Five Star Mobile Home Park
	NV0000838	Moundhouse Water System
	NV0000029	Rosepeak Water System
	NV0000267	Silver Springs Mobile Home Park
	NV0000223	Silver Springs Mutual Water Company
	NV0000224	Stagecoach General Improvement District
	NV0000242	Weed Heights Development
	NV0000256	Willowcreek General Improvement District
NV0000255	Yerington, City of	
Mineral	NV0000357	Hawthorne Army Depot
	NV0000073	Hawthorne Utilities
	NV0000074	Mina Luning Water System
	NV0000302	Walker Lake Apartments
	NV0000268	Walker Lake General Improvement District
Esmeralda	NV0000072	Goldfield Town Water
	NV0000363	Silver Peak Water System
Nye	NV0002558	Amargosa Valley Water Association
	NV0005033	Anchor Inn Mobile Home Park
	NV0000009	Beatty Water and Sanitation District
	NV0000362	Big Five Parks
	NV0000369	Big Valley Mobile Home Park
	NV0002538	C Valley Mobile Home Park
	NV0002589	Calvada North, Utilities Inc. of Central Nevada
	NV0000218	Carver's Smoky Valley Recreational Vehicle and Mobile Home Park
	NV0005032	Country View Estates, Utilities Inc. of Central Nevada
	NV0000831	Desert Mirage Home Owners Association

Table 3-151. Community water systems in Lyon, Mineral, Esmeralda, and Nye Counties^a (page 2 of 2).

County	Public water supply identification number	Name
Nye (continued)	NV0000300	Desert Utilities
	NV0002552	Escapee Co-Op of Nevada
	NV0000063	Gabbs Water System
	NV0004074	Hadley Subdivision
	NV0000926	Hafen Ranch Estates
	NV0000175	Manhattan Town Water
	NV0000920	Mountain Falls Water System
	NV0005067	Mountain View Mobile Home Park, Utilities Inc. of Central Nevada
	NV0000183	Pahrump Mobile Home Park
	NV0005028	Shoshone Estates Water Company
	NV0000359	Shoshone Water Company
	NV0005066	Sunset Mobile Home Park
	NV0000237	Tonopah Public Utilities
	NV0000270	Utilities Inc. of Central Nevada

a. Source: DIRS 176686-BHPS 2004, all.

Table 3-152. Municipal wastewater-treatment facilities in the Mina rail alignment region of influence.

Location	Capacity (liters per day) ^a	Existing load (liters per day)
Mason, Lyon County	227,000 ^b	189,000 ^b
Yerington, Lyon County	2,040,000 ^b	1,210,000 ^b
Hawthorne, Mineral County	1,480,000 ^b	1,550,000 ^b
Schurz, Mineral County	189,000 ^b	76,000 ^b
Goldfield, Esmeralda County	170,000 ^b	114,000 ^b
Beatty, Nye County	570,000 ^b	420,000 ^b
Gabbs, Nye County	190,000 ^b	190,000 ^b
Tonopah, Nye County	3,800,000 ^b	1,600,000 ^b
Round Mountain (Hadley Subdivision), Nye County	610,000 ^c	260,000 ^c

a. To convert liters to gallons, multiply by 0.26418.

b. Source: DIRS 178590-EPA 1999, all.

c. Source: DIRS 178697-Kaminski 2003, all.

In Esmeralda County, Goldfield's sewage collection system was built in the 1940s and 1950s, and some of the system's original terra-cotta pipes are deteriorating. There are two lagoons, each 4,000 square meters (1 acre) in area, and a rapid infiltration system 1.6 kilometers (1 mile) north of Goldfield. The community has recently been awarded a \$3 million grant under the Water Resource Development Act of 2000 (114 Stat. 2472) to renovate and upgrade the system. These renovations will allow Esmeralda County to increase the number of users served by its sewer system (DIRS 174751-Arcaya 2005, all).

Most communities in southern Nye County rely primarily on individual dwelling or small communal wastewater-treatment systems, with the exception of Beatty, which has municipal sewer service. For example, Pahrump has no community-wide wastewater-treatment system. Several wastewater-treatment units serve parts of the town, such as the dairy and the jail, but most households have septic tank and drainage-field systems, which are likely to be typical of the small communities in southern Nye County.

3.3.11.2.4 Telecommunications Services

Local telephone service in the Mina rail alignment region of influence is provided by Verizon (Lyon County), Nevada Bell Telephone Company (AT&T Nevada) (Mineral County, part of Esmeralda County, and Nye County), and Citizens Telecommunications Company of Nevada (part of Esmeralda County) (DIRS 173401-Nevada Telecommunications Association 2005, all). One or more broadband providers (such as Comcast Cable and Bandwidth T1) serve Schurz, Mina, Silver Peak, Tonopah, Goldfield, and Town of Amargosa Valley (DIRS 176453-FCC 2005, pp. 348 to 350).

3.3.11.2.5 Electrical Services

Nevada Power Company is the electric utility serving most customers in Southern Nevada, covering a territory of 12,000 square kilometers (4,600 square miles). Its customer base includes approximately 630,000 residential and 84,000 commercial or industrial accounts (DIRS 172302-Nevada Power Company 2004, all). The utility has 2,200 megawatts of generating capacity and purchases additional power to meet peak load demands of 5,800 megawatts. Nevada Power Company forecasts a 1.8 percent average annual rate of growth in peak-load demand through 2020. Total electricity sales in 2005 were 19 million megawatt-hours (DIRS 173383-Nevada State Office of Energy 2005, p. 23).

Sierra Pacific Power Company serves 330,000 electricity customers in a 130,000-square-kilometer (50,000-square-mile) territory that encompasses Carson City, Reno, Winnemucca, Elko, and Tonopah in Nevada, as well as the Lake Tahoe area in northeastern California (DIRS 173382-Sierra Pacific Power 2005, all). The utility has 1,100 megawatts of generating capacity and purchases additional power to meet peak load demands of 1,900 megawatts. Sierra Pacific Power Company forecasts a 1.6 percent average annual rate of growth in peak-load demand through 2020. Total electricity sales in 2005 were 8.8 million megawatt-hours (DIRS 173383-Nevada State Office of Energy 2005, p. 9). Both Nevada Power Company and Sierra Pacific Power Company are wholly owned subsidiaries of Sierra Pacific Resources.

Valley Electric Association, Inc., distributes power to southern Nye County, including the Pahrump Valley, Amargosa Valley, Beatty, and the Nevada Test Site. The Western Area Power Administration allocates a portion of the lower-cost hydroelectric power from the Colorado River dams to Valley Electric Association, Inc. The private power market supplies the supplemental power necessary to meet the needs of the members. Valley Electric Association, Inc., sells about 400,000 megawatt-hours to more than 15,000 members (DIRS 173383-Nevada State Office of Energy 2005, p. 39).

Table 3-153. Sales of distillate fuel oils in Nevada, 1997 through 2004.

Year	Annual sales of distillate fuel oils (millions of liters) ^a
1997	1,640 ^b
1998	1,530 ^b
1999	1,580 ^c
2000	1,620 ^c
2001	1,550 ^d
2002	1,580 ^d
2003	1,510 ^e
2004	1,810 ^e

a. To convert liters to gallons, multiply by 0.26418.

b. Source: DIRS 178588-EIA 1999, Table 4

c. Source: DIRS 178609-EIA 2001, Table 4.

d. Source: DIRS 173384-EIA 2003, Table 4.

e. Source: DIRS 176397-EIA 2005, Table 4.

Nevada supply chain for construction materials.

The region of influence for cast-in-place concrete is the State of Nevada, where annual production in 2004 equaled approximately 16 million metric tons (18 million tons) (DIRS 173400-NRMCA 2004, p. 2).

Precast concrete is available nationally, and the annual national production in 2003 equaled approximately 15 million metric tons (17 million tons) (DIRS 173392-van Oss 2003, Table 15). Annual national production of pre-cast concrete railway ties was about 720,000 ties in 2004 and is projected to grow to about 1,180,000 ties by 2007 (DIRS 173573-Gauntt 2004, p. 17).

Ballast for rail roadbed construction is generally obtained locally because of the costs associated with transporting large volumes of these materials. Within the region of influence there are large areas of public lands that contain materials suitable for use as ballast. DOE has identified five potential quarry sites near the Mina rail alignment for use during the construction phase (see Chapter 2, Table 2-16). Following construction, the DOE-developed quarries would be closed. During the operations phase, DOE would obtain ballast for track maintenance commercially. The nearest active quarries to the region of influence are at Oroville, California, approximately 320 kilometers (200 miles) west-northwest of Mina, and at Milford, Utah, approximately 500 kilometers (310 miles) east of Mina. The Milford Quarry is on the Union Pacific Railroad route that travels from Salt Lake City, Utah, to Los Angeles, California, and processes much of the high-quality ballast for the Union Pacific Railroad lines throughout the southwest. Suitable sands and gravels would likely be available along cuts for the proposed rail line and from overburden at potential quarry rock and borrow sites. If needed, DOE could also establish sand and gravel borrow sites at various points along the Mina rail alignment, possibly adjacent to existing Nevada Department of Transportation gravel pits. Approximately 55 surplus pit locations are available adjacent to Nevada Department of Transportation materials sources and additional nearby sites could be developed (DIRS 180857-Nevada Rail Partners 2007, Section 3.1.2).

The steel market is worldwide in scope, but the region of influence DOE considered for steel supply is national. Raw production of carbon steel in the United States in 2003 equaled 86 million metric tons (95 million tons) (DIRS 173387-Fenton 2003, Table 1). Steel rail production equaled 540,000 metric tons (600,000 tons) in 2002 and 520,000 metric tons (570,000 tons) in 2003 (DIRS 173387-Fenton 2003, Table 3).

3.3.11.3 Energy

Existing fossil-fuel supplies in the Mina rail alignment region of influence are available from nearby communities, mainly from relatively highly populated towns such as Hawthorne and Tonopah, and along the well-traveled U.S. Highway 95 connecting the metropolitan areas of Reno and Las Vegas. The regional supply system can respond flexibly to demand. Table 3-153 shows sales of distillate fuel oils (diesel fuel) in Nevada from 1997 through 2004. Fuel consumption remained fairly constant through 2003. The recent upward trend reflects current population growth in southern Nevada as a key determinant of total energy consumption closely linked to rising demand for housing, services, and travel.

3.3.11.4 Construction Materials

Most of the Mina rail alignment would be along the U.S. Highway 95 corridor and would be within the southern

3.3.12 HAZARDOUS MATERIALS AND WASTE

This section describes existing facilities in Nevada that could receive and dispose of *hazardous waste* derived from hazardous materials, *low-level radioactive wastes*, and nonhazardous waste associated with constructing and operating the proposed railroad along the Mina rail alignment. Section 3.3.12.1 describes the region of influence for hazardous materials and wastes. Section 3.3.12.2 describes landfills for the disposal of nonhazardous, nonrecyclable, nonreusable wastes; Section 3.3.12.3 describes disposal facilities for hazardous wastes; and Section 3.3.12.4 describes the disposal of low-level radioactive wastes. Hazardous materials DOE might use during construction and operation of the proposed railroad are described throughout Section 4.3.12.

Hazardous waste: Waste designated as hazardous by U.S. Environmental Protection Agency or State of Nevada regulations. Hazardous waste, defined under the Resource Conservation and Recovery Act of 1976 (42 U.S.C. 6901 *et seq.*), is waste that poses a potential hazard to human health or the environment when improperly treated, stored, or disposed of. Hazardous wastes appear on special Environmental Protection Agency lists or possess at least one of the following characteristics: ignitability, corrosivity, toxicity, or reactivity.

Low-level radioactive waste: Radioactive waste that is not classified as high-level radioactive waste, transuranic waste, or byproduct tailings containing uranium or thorium from processed ore. Usually generated by hospitals, research laboratories, and certain industries (42 U.S.C. 108).

3.2.12.1 Region of Influence

The region of influence for the use of hazardous materials and the generation of hazardous and nonhazardous wastes includes the nominal width of the rail line construction right-of-way, and the locations of railroad construction and operations support facilities.

The region of influence for the disposal of hazardous wastes includes the entire continental United States because commercial hazardous waste disposal vendors could utilize facilities throughout the country.

The region of influence for the disposal of nonhazardous waste includes the disposal facilities in Mineral, Nye, Esmeralda, and Clark Counties in Nevada.

The region of influence for the disposal of low-level radioactive wastes includes DOE low-level waste disposal sites, sites in *Agreement States*, and U.S. Nuclear Regulatory Commission-licensed sites.

3.3.12.2 Nonhazardous Waste Disposal

Industrial and special wastes: Construction debris and other *solid waste*, such as tires, that have specific management requirements for permitted landfill disposal.

Solid waste: For purposes of this analysis, defined as nonhazardous general household waste.

DOE would dispose of nonhazardous, nonrecyclable, nonreusable wastes in municipal landfills in Nevada. Nevada has 24 operating municipal landfills that combined accept more than 12,700 metric tons (14,000 tons) of waste per day (DIRS 174663-State of Nevada 2005, Slide 5; DIRS 174664-State of Nevada 2005, all). According to the *Draft Solid Waste Management Plan* (DIRS 174041-State of Nevada 2004, p. 7), Nevada municipalities have ensured landfill capacity for decades into the future. Table 3-154 lists the capacities the Nevada Division of Environmental Protection reported in 2002 (DIRS 174041-State of Nevada 2004, Appendixes 2 and 3) for

the active landfills in Mineral, Nye, Esmeralda, and Clark Counties. All of these landfills have permits to accept *industrial and special wastes*.

DOE would utilize a contractor for the disposition of recyclable materials.

Table 3-154. Capacities of active landfills in Mineral, Nye, Esmeralda, and Clark Counties.^a

County	Facility name ^b	Operator	Capacity (cubic meters) ^c	Per day disposal rate (metric tons) ^d	Projected closure (year)
Mineral	Hawthorne Class I	Mineral County	1,270,000	25	2041
Nye	Round Mountain Class I Expansion	Nye County	540,000	10	2028
	Tonopah Class II	Nye County	120,000	15	2011
Esmeralda	Goldfield Class I	Esmeralda County	210,000	4	2023
Clark	Apex Regional Classes I and III	Republic Silver State	61,900,000	8,000	2147
	Laughlin Class I	Silver State Services	4,600,000	85	2019
Totals			68,640,000	8,139	

a. Source: DIRS 174041-State of Nevada 2004, Appendixes 2 and 3.

b. Class I landfills receive 18 metric tons or more of waste per day; Class II landfills receive less than 18 metric tons of waste per day; and Class III landfills receive only industrial waste. Each of these landfills accepts solid and industrial and special wastes.

c. To convert cubic meters to cubic yards, multiply by 1.3079.

d. To convert metric tons to tons, multiply by 1.1023.

3.3.12.3 Hazardous Waste Disposal

The U.S. Ecology Treatment and Disposal Site in Beatty, Nevada, is a Nevada-permitted hazardous waste disposal site (DIRS 173918-American Ecology 2005, all). This facility treats and disposes of hazardous wastes and nonhazardous industrial wastes. Safety-Kleen Systems, Inc., operates a hazardous waste-permitted treatment, storage, and disposal facility in North Las Vegas, Nevada, and Philip Services Corporation operates a similar facility in Fernley, Nevada (DIRS 177662-NDEP 2006, all). Hazardous waste disposal capacity in western states has been estimated to be 50 times the demand for landfills and 7 times the demand for incineration until at least 2013 (DIRS 103245-EPA 1996, pp. 32, 33, 36, 46, 47, and 50).

3.3.12.4 Low-Level Radioactive Waste Disposal

Low-level radioactive wastes would be generated during operation of the Cask Maintenance Facility. DOE would control and dispose of site-generated low-level radioactive waste in a DOE low-level waste disposal site, a site in an Agreement State, or in a U.S. Nuclear Regulatory Commission-licensed site.

3.3.13 CULTURAL RESOURCES

Section 106 of the National Historic Preservation Act of 1966 (16 U.S.C. 470), as amended, requires federal agencies to take into account the effects of their undertakings on historic properties. The procedures established by the Advisory Council on Historic Preservation, described in 36 CFR Part 800, define how federal agencies meet these statutory responsibilities. The section 106 process seeks to accommodate historic preservation concerns with the needs of federal undertakings through consultation between the agency official and other parties with an interest in the effects of the undertaking on historic properties, commencing at the early stages of project planning. The goal of consultation is to identify historic properties potentially affected by the undertaking, assess its effects, and seek ways to avoid, minimize, or mitigate any adverse effects on historic properties.

Identification of sites eligible for listing on the *National Register of Historic Places* is a primary component of historical preservation work. The evaluation of both historic and archeological sites, to determine eligibility for National Register listing, is accomplished through the application of eligibility criteria as identified in 36 CFR Part 60.4, as follows:

The quality of significance in American history, architecture, archeology, and culture is present in districts, sites, buildings, structures, and objects of state and local importance that possess integrity of location, design, setting, material, workmanship, feeling and association and

- (a) that are associated with events that have made a significant contribution to the broad patterns of our history; or
- (b) that are associated with the lives of persons significant in our past; or
- (c) that embody the distinctive characteristics of a type, period, or method of construction, or that represent the work of a master, or that possess high artistic values, or that represent a significant and distinguishable entity whose components may lack individual distinction; or
- (d) that have yielded, or may be likely to yield, information important in prehistory or history.

Prehistoric archaeological sites are most often found eligible under criterion (d), while archaeological sites containing historical deposits and some prehistoric sites are also often considered under other criteria. For example, ordinarily, cemeteries, birthplaces or graves of historical figures, properties owned by religious institutions or used for religious purposes, structures that have been moved from their original locations, reconstructed historic buildings, properties primarily commemorative in nature, and properties that have achieved significance within the past 50 years shall not be considered eligible for the National Register. However, such properties will qualify if they are integral parts of districts that do meet the criteria or if they fall within the following categories: (a) a religious property deriving primary significance from architectural or artistic distinction or historical importance; (b) a building or structure removed from its original location but which is significant primarily for architectural value, or which is the surviving structure most importantly associated with an historic person or event; (c) a birthplace or grave of an historical figure of outstanding importance if there is no appropriate site or building directly associated with his productive life; (d) a cemetery which derives its primary significance from graves of persons of transcendent importance, from age, from distinctive design features, or from association with historic events; (e) a reconstructed building when accurately executed in a suitable environment and presented in a dignified manner as part of a restoration master plan, and when no other building or structure with the same association has survived; (f) a property primarily commemorative in intent if design, age, tradition, or symbolic value has invested it with its own exceptional significance; or (g) a property achieving significance within the past 50 years if it is of exceptional importance.

Likewise, historic structures (as opposed to archaeological sites) are assessed under a variety of National Register criteria.

While nearly all sites have the potential to yield information useful in addressing a limited number of research questions, this limited potential is not considered sufficient to qualify a site for inclusion on the National Register under criterion (d). By establishing guidelines, agencies have clearly set the precedent that not all information is important, and thus, not all sites are important. Federal guidelines encourage the use of a set of research questions that are generally recognized as important research goals as a means of evaluating significance. If a site contains information that is demonstrably useful in answering such questions, it can be considered an important site. National Register evaluation guidelines state that a site must retain integrity to be considered eligible under one or more of the criteria.

The *National Register of Historic Places* describes historic resources as standing or collapsed buildings, structures, objects, sites, and districts that are at least 50 years old, or have achieved significance within the past 50 years. Archaeological resources are prehistoric or historic remains of human lifeways or activities that are at least 100 years old, and include artifact concentrations or scatters, whole or fragmentary tools, rock carvings or paintings, and buildings or structures. Resources that incorporate geographic areas, including both cultural and natural features, and that are associated with historic events or other cultural values include *traditional cultural properties*, cultural landscapes (DIRS 174501-Birnbaum 1994, all), *ethnographic landscapes* (DIRS 155897-Parker and King 2002, all), rural historic landscapes (DIRS 155896-McClelland et al. 1990, all), and historic mining landscapes (DIRS 175489-Noble and Spude 1997, all).

For purposes of analysis in this Rail Alignment EIS, DOE has completed a sample inventory of the Mina rail alignment alternative segments and common segments, which provides a thorough characterization of the nature and distribution of resources along the rail alignment. The Department would perform an intensive cultural-resource inventory before starting construction of any specific alternative segment or common segment, and would compile a data recovery plan that would include prudent and feasible practices and measures to avoid or reduce potential adverse impacts to archaeological and historical resources.

This section focuses on cultural resources in the Mina rail alignment region of influence, including those associated with the American Indian culture. Section 3.4 further identifies and discusses American Indian interests in the region. This section summarizes information obtained through a review of available data from federal, state, and local agencies, and findings of data-gathering efforts and field investigations.

Section 3.3.13.1 describes the region of influence for cultural resources along the Mina rail alignment; Section 3.3.13.2 describes the methodology DOE used to identify such sources; Section 3.3.13.3 is a general description of the cultural resources setting and characteristics; Section 3.3.13.4 describes site-specific cultural resources; and Section 3.3.13.5 describes cultural resources for each Mina alternative segment and common segment, including those associated with American Indian culture.

3.3.13.1 Region of Influence

The region of influence for the cultural resources analysis includes two levels of coverage that incorporate areas where construction or other land disturbances could directly or indirectly affect cultural resources:

- Level I – The first level of coverage is the nominal width of the construction right-of-way, the area where ground disturbance could have direct or *indirect impacts* on cultural resources. Under Section 106 of the National Historic Preservation Act, the Level I region of influence would comprise the project's Area of Potential Effect.
- Level II – The second level of coverage is a 3.2-kilometer (2-mile)-wide area centered on the rail alignment, and includes the area of potential disturbances that could have indirect impacts on cultural resources. Unless otherwise noted, references in the text that follow refer to the Level II region of

influence. For example, impacts could extend beyond this area where railroad operations and maintenance activities could have an aesthetic, auditory, or visual impact on a potentially significant historic or *ethnographic* vista.

3.3.13.2 Methodology

DOE prepared cultural resource documents to support the description of the affected environment and the impacts assessments for the Mina rail alignment. For this analysis, the Department used the following methods to evaluate known and potential resources in the Mina rail alignment region of influence:

- **Class I inventory.** Reviewing existing cultural resource files, examining the literature, and interviewing knowledgeable people to identify potentially significant resources within the Level II region of influence of the alternative segments and common segments. DOE compiled the results into an historic context baseline report on cultural resources (DIRS 174688-AGEISS 2005, all; DIRS 182774 Kellyard Stegner 2007, all) that establishes the basis for the analytical methodology and the results of the site-file and literature reviews. This report also lists all published and unpublished documents and archival sources DOE consulted during the analysis. The Desert Research Institute provided a supplementary Class I update in April 2007.
- **Class II inventory.** Conducting a statistical sample field survey (DIRS 174691-BLM 1990, all) of the Level I region of influence for the common segments and alternative segments. The Class II inventory involved intensive inspection of 103 sample units that measured 120 meters (400 feet) by 800 meters (2,600 feet), centered on the rail alignment. This inventory was guided by a research design prepared in consultation with the BLM and State Historic Preservation Office and was designed to provide a 20-percent sample of the length of common segments and alternative segments. The results of this effort provide a predictive view of the possible types of cultural resources that might be expected to occur along the common segments and alternative segments and an evaluation of the possible significance of potential historic properties. The Class II survey report summarizes the results of this effort.
- Consultation with American Indians with regional ties. Interactions with American Indian tribes and organizations that have traditional ties to the region to identify traditional cultural places within the Level I and II regions of influence that are important to American Indian cultural and religious values and beliefs, and to identify other resources, such as plants and animals, that might have historic or current uses.

As previously noted, DOE prepared cultural resource reports to support the description of the affected environment and the impacts assessments for this Rail Alignment EIS. The reports include detailed information about the methods and investigative approaches DOE utilized and about evaluation of the findings. Preparation of the baseline resource reports involved consulting and citing a large number of published and unpublished sources, and contacting knowledgeable persons, institutions, and offices holding relevant data.

DOE is using a phased cultural-resource identification and evaluation approach, as described in 36 CFR 800.4(b)2, to identify specific cultural resources along a final alignment. Under this approach, DOE has completed Class I and Class II inventories of Mina rail alignment alternative and common segments. The Department would perform final field surveys (BLM Class III intensive inventories) of the actual right-of-way and centerline, as provided in the programmatic agreement between DOE, the BLM, the STB, and the Nevada State Historic Preservation Office (DIRS 176912-Wenker et al. 2006, p. 15). In the interim, 20-percent Class II inventories have provided information to characterize the nature and distribution of cultural resources along the Mina rail alignment common segments and alternative segments. Before starting any ground-disturbing activities that could affect cultural resources, the Department would

perform the intensive *Class III inventory* of the selected segments, site evaluations, impacts assessments, and implement impact reduction or prevention measures, as appropriate.

3.3.13.3 General Environmental Setting and Characteristics

Sections 3.3.13.3.1 through 3.3.13.3.4 summarize the prehistoric, American Indian, and Euroamerican cultural history of southern Nevada. Additional detail, including sources and references, is presented in the historic context report prepared to support this Rail Alignment EIS. (DIRS 174688-AGEISS 2005, all; DIRS 182291-Desert Research Institute 2007, all; URS 2007, all)).

3.3.13.3.1 Prehistoric Period

Native people inhabited the region that encompasses the Mina rail alignment for thousands of years and left artifacts and traces of their settlement and subsistence patterns and religious beliefs. The prehistoric archaeological record in the vicinity of the Mina rail alignment is subdivided into the following three cultural periods:

- Pre-Archaic (11,500 to 7,500 years before present). The Pre-Archaic cultural period is marked by relatively few people, who traveled in small bands hunting game and gathering food. Archaeological sites dating to this period are commonly preserved on gravel bars and other landforms associated with *pluvial lakes*, marshes, and riparian zones. These sites and their artifacts indicate a reliance on wetlands, with an emphasis on hunting large game. Isolated finds of distinctive fluted points associated with the Clovis and Folsom groups of people have a wide but sporadic distribution throughout the region.
- Early to Middle Archaic (7,500 to 1,500 years before present). During the Early to Middle Archaic cultural period, a shift occurred to a wider use of the environment, including sites near springs, perennial streams, caves, and rockshelters. A gradual increase in populations was marked by the use of plant seeds and nuts, along with hunting small game. Twelve rockshelters dating to this period and the Late Archaic period have been investigated in the vicinity of the Mina rail alignment.
- Late Archaic (1,500 to 150 years before present). Hallmarks of the Late Archaic cultural period include ceramics and small projectile points, along with the bow and arrow. Settlement patterns and subsistence practices continued from the earlier period, with sites in a variety of settings but clustered around permanent springs and riparian settings.

3.3.13.3.2 American Indian Historic Period

The Mina rail alignment would cross lands historically occupied by two indigenous ethnic groups, the Northern Paiute and the Western Shoshone. Other neighboring groups, such as the Owens Valley Paiute and Shoshones from adjacent regions, had strong kinship ties and occasionally visited the region.

Both the Northern Paiute and the Western Shoshone were characterized by local subgroups, defined by slight language or dialectical differences, traditional centers of residential occupation, more or less regular home ranges or districts, and closeness of kin ties. Local subgroups clustered around small oases scattered throughout the desert where springs and flowing streams could be found. Mountains and surrounding valleys were important resource collection areas, but seasonal changes in food availability prevented areas from being occupied year-round. Figure 3-238 shows areas occupied by these groups.

The Mina rail alignment would cross or be adjacent to the territories of several American Indian subgroups. Northern Shoshone areas include the *Agá idökadö* District north and east of Walker Lake and the *Pakwidökadö* District south of Walker Lake. Western Shoshone subgroups include bands based in the Lida-Goldfield area.

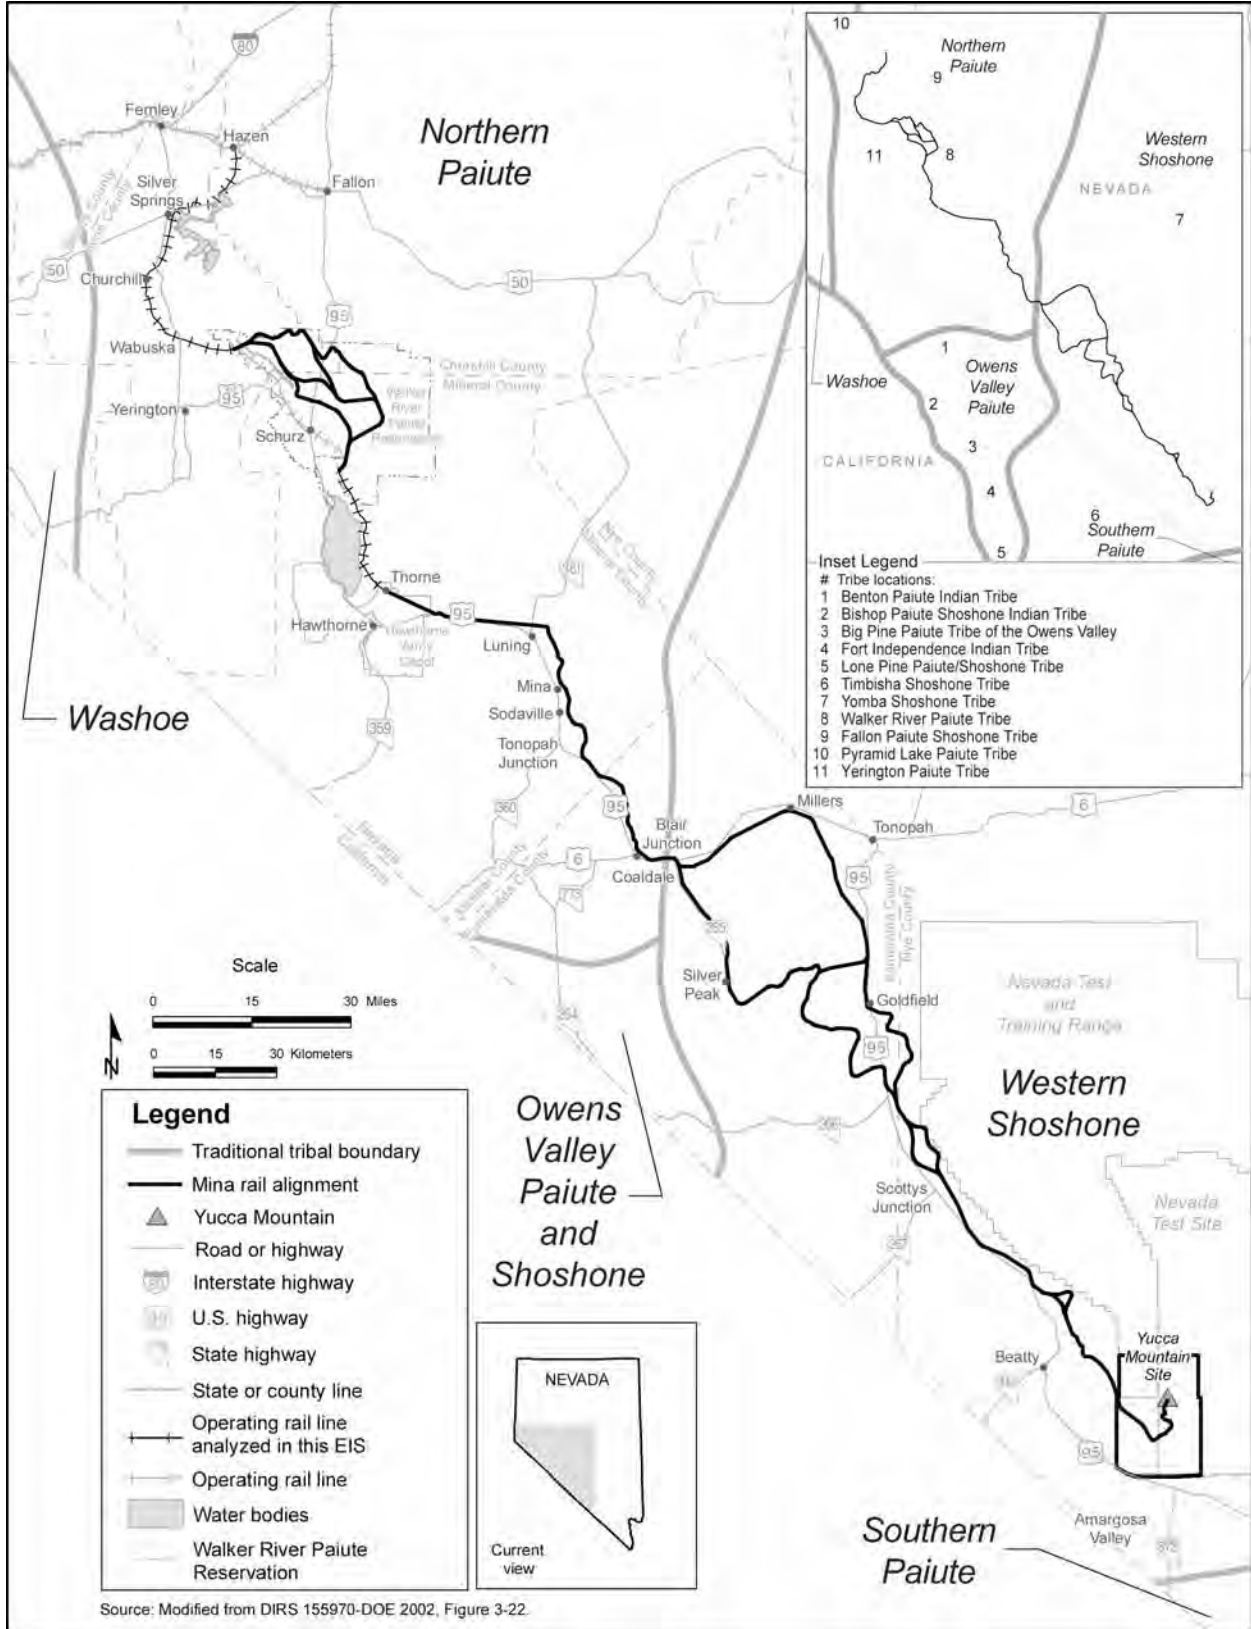


Figure 3-238. Traditional boundaries and locations of federally recognized tribes.

Following initial contact by European Americans in the early to middle 1800s, native people in central and southern Nevada began to adapt to changing conditions as settlement and development by miners, prospectors, and ranchers rapidly encroached on the landscape. As their essential resources were being lost to the Euroamerican expansion, both the Western Shoshone and the Northern Paiute were forced to confine their activities to selected reservations carved out of small portions of their traditional lands. Given the difficulties of making a living on these restricted areas, many responded by providing labor and other services to mining and ranching ventures, often living in mining towns or at ranches. In the vicinity of the region of influence, American Indian encampments are known to have been present at mining communities in the Goldfield and Tonopah areas.

3.3.13.3 Euroamerican Historic Period

Euroamerican incursion into the Great Basin was considerably slower than in other regions of North America. Consequently, American Indian groups in the intermontane West were able to survive early contact better than many other tribes and bands. During the first decades of contact, they were able to develop responses to the pressures exerted by Euroamericans on American Indian culture. By the reservation period of the 1860s, they had adopted means of resistance and acculturation that permitted the survival of much of their traditional lifeways.

Present-day Nevada remained largely unexplored by Euroamericans prior to 1826, at which time American and British trapping and trading parties began entering the Great Basin from the east and the northwest. Foremost among these was Peter Skene Ogden, who led a series of four expeditions into the northern Basin and Snake River plateau between 1826 and 1830, locating the Humboldt River and Humboldt Sink, as well as traveling south to Walker Lake and the Owens Valley. Specifically, on his 1829-1830 expedition, Ogden and his party retraced their steps of the previous year from the Columbia River to the Humboldt Sink, continued south to the Carson Sink and on to the Walker River which they followed down to Walker Lake. Continuing south and southwest past the location of present Hawthorne, Nevada, the party eventually reached the Owens River and Lake, following the Owens Valley south to the Mojave Desert. In 1833, an American party under the leadership of Joseph Reddeford Walker followed the Humboldt River and crossed the Sierra Nevada, returning the next year via the Owens Valley, Walker Lake, and the Walker River. On both trips, Walker and his men clashed with Northern Paiute in the vicinity of the Humboldt Sink.

The trails established by trappers and traders across the Great Basin eventually became heavily traveled overland routes to the Pacific coast. Explorers, migrants, and eventually the transcontinental railroad all made their way across the Basin. Two of the earliest groups, the Bidwell-Bartleson party of 1841 and the Walker-Chiles party of 1843, in part followed the trail established along the Walker River to the vicinity of Walker Lake before continuing on to California.

The surge of travelers along the Overland Trail corridor peaked after the discovery of gold in California in 1848, placing increasing pressure on resources along the Humboldt River, all of which were heavily relied upon by American Indian inhabitants. In the face of these destructive forces, many native inhabitants were forced to withdraw from former habitations along the river.

The United States officially acquired the territory of the Great Basin as a result of the Treaty of Guadalupe Hidalgo in 1848, which concluded the Mexican-American War. The first Euroamericans to settle in the Basin were the Mormons, who sought refuge in the Salt Lake Valley in 1847, then a remote part of Mexican territory. The Mormons were the first to arrive in the Great Basin with the intent of settlement and quickly established a number of missions throughout the territory. Among the first of these was Mormon Station, later renamed Genoa, located on the Humboldt River trail from Salt Lake City to Sacramento via Carson Pass, about 60 miles south of present-day Reno, settled in 1851.

Following in the footsteps of the Mormons, small farms and ranches began appearing in some of the more well-watered portions of the Great Basin. But it was the discovery of silver at the Comstock Lode that spurred major migration to western Nevada in the 1850s and 1860s.

As the population in the Virginia City and Carson Valley areas expanded, conflicts with native inhabitants also increased, as American Indian populations were forced out of traditional homelands and the already scarce resources upon which their livelihood depended were exhausted. Settlers demanded protection, and in 1860, the U.S. Army established Fort Churchill on the Carson River. Eventually, American Indian peoples were forced to confine their activities to selected reservations carved out of small portions of their traditional lands.

In addition to a military presence, the discovery and extraction of various ores and minerals in western Nevada, primarily gold and silver, necessitated the construction of new transportation operations. In 1880, the Carson and Colorado (C&C) Railroad Company was formed. Construction of the C&C rail line began in 1880 and ran from Carson City south along the east side of Walker Lake and extended south to Keeler, California, near the northern shore of Owens Lake. By 1900 the gold mining boom had waned in the Carson City area, but shortly thereafter gold deposits in Tonopah were discovered and the rail line continued to deliver supplies from Owens Valley to the Nevada mining operations.

To the north, in Nye, Lincoln, and Esmeralda Counties, mining remained the major economic interest. By 1870, a number of mining districts and communities were established throughout south-central Nevada. Precious metals were discovered in Tonopah in 1900 and Goldfield in 1902, and companies were formed to develop railroads and improve transportation to and from these economic centers. In 1905 a narrow gauge rail line was constructed to run from borax mines near Gold Center, Nevada, south through the Mojave Desert to Ludlow, California. The new railroad, operated under the name Tonopah and Tidewater Railroad Company, ran as both a passenger train and supply train from 1905 to 1940.

3.3.13.3.4 Cultural Landscapes

Based on the literature review of the cultural history of the region of influence, DOE identified several examples of potential cultural landscapes reflecting significant ethnographic, mining, and railroading activities within the Level II region of influence that might be eligible for listing on the *National Register of Historic Places* (DIRS 174688-AGEISS 2005, all). These include:

- Ethnographic historic period Northern Paiute settlements in the Walker River and Lake area, and Western Shoshone villages and surrounding use areas in Oasis Valley and the Goldfield area.
- Several historic mining districts, including the Santa Fe Mining District on the west slope of the Gabbs Valley Range east of Luning; the Mina or Silver Star Mining District in the Excelsior Mountains southwest of Mina; the Sodaville Mining District in the south end of the Pilot Range east of Sodaville; the Silver Peak Mining District in the Clayton Valley area; and the Goldfield area.
- Historic railroad activities in the Luning, Mina, Sodaville, Silver Peak, and Goldfield areas.

3.3.13.4 Site-Specific Cultural Resources

The corridor through which the rail alignment would pass demonstrates a history of diverse prehistoric and historic land-use patterns. Native peoples occupied this area for many thousands of years, as exhibited by the archaeological sites identified in the area. These sites include campsites, rockshelters, *lithic scatters*, quarries, rock rings and alignments, and rock-art sites. Euroamerican presence in the area is largely limited to the past 150 years or so, and is characterized by diverse activities represented at a wide variety of site types. Recorded and anticipated sites include early transportation features such as

wagon and stage roads; railroads and railroad camps and sidings; homesteads; and mines, mills, and mining camps (Figure 3-239). Isolated features and artifacts related to all of these activities can also be anticipated. This section presents data on both previously recorded cultural resources and known, but unrecorded, properties along the Mina rail alignment. This section first presents the results of the Class I site-file search of the Level II region of influence and the Class II inventory (field survey) of the Level I region of influence for the entire alignment, including alternative segments. The results are followed by a segment-by-segment discussion for each of the common segments and alternative segments. DOE based individual segment analyses on three data sources: (1) the known-site file search and literature review (DIRS 182290-Desert Research Institute 2007, all); (2) the Class II inventory and (3) information from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, all). All references consulted or used in the different analyses can be found in those reports.

3.3.13.4.1 Previously Recorded Prehistoric Resources

A Class I site-file search for archaeological sites within the Level II region of influence identified 426 prehistoric recorded sites and *isolates* (Table 3-155). Of this total, 85 (20 percent) are isolated artifacts that were previously assigned archaeological site numbers. Although isolates are generally considered not eligible for listing on the *National Register of Historic Places*, they indicate, along with other types of sites, the presence of prehistoric people in the region of influence. In addition to the sites containing only

Table 3-155. Previously recorded prehistoric archaeological sites in the Level II region of influence^a.

Site type	Number of sites and isolates	Eligible ^b	Not eligible	Unevaluated
Rockshelters	13	4	0	9
Specialized activity areas (campsites)	9	6	0	3
Specialized activity areas (lithic scatters)	289	10	221	58
Rock-art sites	5	2	0	3
Toolstone sources and quarry sites	15	2	8	5
Isolates ^c	85	0	84	1
Other:				
Rock ring	4	0	3	1
Rock features	5	0	2	3
Tinaja (water storage feature)	1	0	1	0
Totals	426	24	319	83

a. Source: Data from a site-file search conducted by Desert Research Institute (DIRS 182290-Desert Research Institute 2007, all).

b. Eligibility determinations taken from archaeological site forms on file, as evaluated against significance criteria for potential eligibility for the *National Register of Historic Places*.

c. Isolates include artifact occurrences that have been given a site number in the Nevada statewide archaeological recording system. Isolates are generally considered ineligible for listing on the *National Register of Historic Places*.

prehistoric components, there are 42 multi-component sites containing both prehistoric and historic components; these are listed in Table 3-156. There are no prehistoric sites within the project area that are listed on the *National Register of Historic Places*. Resources that might be eligible for listing on the National Register have been identified as being either within or adjacent to the Mina rail alignment Level II region of influence. These include three toolstone procurement sites; 19 lithic scatters and/or camps; three sites characterized by rock art, including two *petroglyph* sites; and six rockshelter or cave habitation sites.

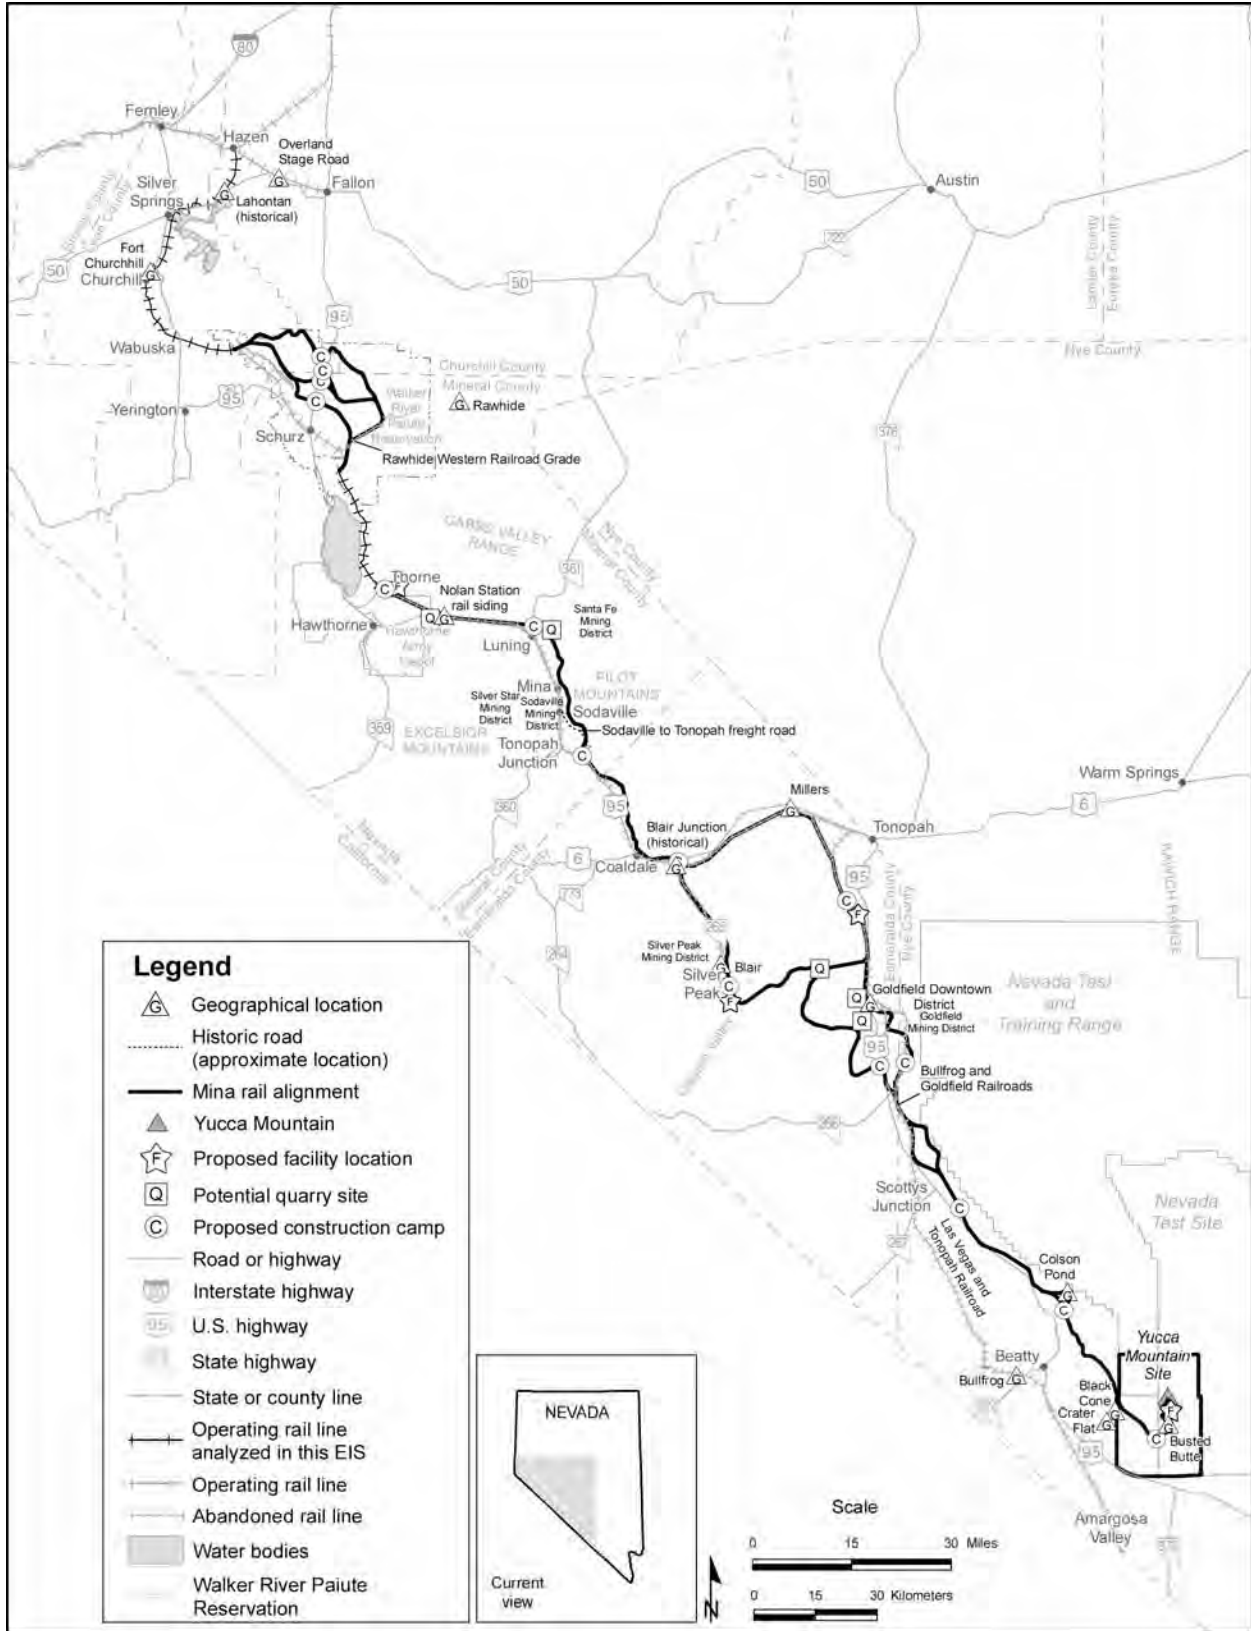


Figure 3-239. Major historic and geographical locations along the Mina rail alignment.

Table 3-156. Previously recorded historic Euroamerican sites in the Level II region of influence.^a

Site type	Number of sites	Eligible ^b	Not eligible	Unevaluated
Historic ranching sites	0	0	0	0
Historic debris scatters (other)	46	2	40	4
Historic cemetery/graves	5	0	2	3
Historic railways	27	12	8	7
Campsite (mining or ranching, military, railroad)	3	2	1	0
Historic mining sites	31	8	15	8
Historic ranching sites (habitation)	1	1		0
Historic town sites	8	5 Goldfield downtown district listed on the <i>National Register of Historic Places</i>	1	2
Historic roads	4	1	0	3
Isolates ^c	7	0	6	1
Prehistoric/historic	42	5	28	9
Other	5	1	0	4
Unknown	2			2
Totals	181	37	101	43

a. Source: Data from site-file search conducted by Desert Research Institute (DIRS 182290-Desert Research Institute 2007, all).

b. Eligibility determinations taken from archaeological site forms on file, as evaluated against significance criteria for potential eligibility for the *National Register of Historic Places*.

c. Isolates include artifact occurrences that have been given a site number in the Nevada statewide archaeological recording system.

Site-type terminology reflects the site classification system employed in the BLM Draft Ely District Resource Management Plan (DIRS 174518-BLM 2005, Section 3.9).

3.3.13.4.2 Previously Recorded Historic Euroamerican Resources

A Class I site-file and literature search identified previously recorded historical Euroamerican sites within the Level II region of influence (see Table 3-156). One of these, the Goldfield downtown district, is listed on the *National Register of Historic Places*. Other historic resources that might be eligible for listing on the National Register have been identified as being either within or adjacent to the Mina rail alignment Level II region of influence. These resources include the following:

- Oasis Valley. Beatty Cattle Company Ranch and Colson Ranch, with associated Western Shoshone villages, both within the proposed rail alignment region of influence.
- Historic railroads, including segments of the Carson and Colorado, Las Vegas and Tonopah, Tonopah and Goldfield, and Southern Pacific railroads. The proposed rail line would follow various lengths of some of these lines between Hawthorne and Tonopah Junction, south toward Silver Peak, and intersect or follow many segments of the Las Vegas and Tonopah line along the 12 kilometers (7.2 miles) of Mina common segment 2, south of Goldfield. In these locations, DOE would refurbish the

historic rail beds for use with the proposed rail line. Eligible or unevaluated resources associated with the railroads include stations, abandoned grades, construction-related features, and workers' encampments, and resources associated with Luning, Mina, Coaldale, and other towns established along the rail lines.

- Goldfield. The downtown district of Goldfield is listed on the *National Register of Historic Places*. The town dump and a cemetery (evaluated as eligible for listing on the National Register) would be within the Montezuma alternative segment 2 region of influence. There are also potential contributing features and sites within the region of influence for this alternative segment.
- Historic roads. Segments of the Sodaville to Tonopah freight road and of the Overland Stage Road have been identified.

3.3.13.4.3 Known American Indian Resources

Previous American Indian studies and consultations associated with the Yucca Mountain Project, the Nevada Test Site, the Nevada Test and Training Range, and other projects have yielded significant information on the concerns of modern-day American Indians regarding traditional and cultural values. These concerns include evidence of their ancestors' occupation and use of traditional homelands, and their feelings about natural resources and geologic formations in the region, such as plants, animals, and natural landforms that mark important locations. Opportunities for the identification of traditional cultural properties and additional places of concern to American Indians will remain open through the consultation process. Based on past studies and research for this Rail Alignment EIS, DOE has obtained information regarding the following potentially eligible historic properties that could be of cultural value for American Indians:

- Medicine rock sites, Walker River Paiute Reservation.
- Rabbit Spring rockshelter camp near Goldfield. Within the Level II region of influence.
- Winter village, probable site of a Western Shoshone village named Matsum in the Willow Springs vicinity. Within the Level II region of influence.
- Beatty area petroglyphs. Within the Level II region of influence.
- Western Shoshone Ogwe'pi District, a cluster of winter villages along the upper Oasis Valley and the headwaters of the Amargosa River, including two probable villages. Within the Level II region of influence.
- Black Cone site, a place of religious significance near Crater Flat. Within the Level II region of influence.
- Significant crossroad where numerous traditional American Indian trails came together near Fortymile Wash. Within the Yucca Mountain Site boundary.
- Rock art near Busted Butte. Within the *Yucca Mountain Site boundary*.

3.3.13.5 Cultural Resources by Alternative Segments and Common Segments

Sections 3.3.13.5.1 through 3.3.13.5.11 describe the cultural resources for each of the Mina rail alignment common segments and alternative segments, including data from the previously recorded Class I site-file and literature search (DIRS 182290-Desert Research Institute 2007, all), the results of the Class II inventory, and associated American Indian consultations (DIRS 174205-Kane et al. 2005, all).

3.3.13.5.1 Union Pacific Railroad Hazen Branchline

The Class I site-file search revealed that 21 cultural resources have been recorded within the Level I region of influence of the existing Union Pacific Railroad Hazen Branchline. These resources include seven prehistoric sites, 10 historic sites, one site with both prehistoric and historic components, and three unknown site types. Six of the cultural properties are considered eligible or potentially eligible for the *National Register of Historic Places*, including several that are part of the National Register-listed Lahontan Dam historic district (DIRS 182290-Desert Research Institute 2007, all). Eligible or potentially eligible resources include a large prehistoric residential base camp, a portion of the Overland Stage Road, the Newlands Waterworks at Lahontan City, a Lahontan City construction townsite and railroad station, a railroad *berm* and debris scatter, and a multi-component site with eligible historic elements including a telephone line and debris scatter. In addition, the existing rail line passes through Fort Churchill State Historic Park, site of an important 1860-1869 U.S. Army post.

3.3.13.5.2 Department of Defense Branchline North

Department of Defense Branchline North is an existing rail line that begins east of Wabuska. It trends east through a valley just south of Parker Butte and north of the Mason Valley Wildlife Management Area. In total, Department of Defense Branchline North is about 8 kilometers (5 miles) long.

The Class I site-file search did not identify any cultural resources recorded within the Level I region of influence. No Class II inventory has been conducted.

3.3.13.5.3 Schurz Alternative Segments

At present, the Department of Defense operates a branch rail line that runs south from the end of the Union Pacific Railroad Hazen Branchline at Wabuska, directly through Schurz on the Walker River Paiute Reservation, to the Hawthorne Army Depot. DOE is considering four alternative segments to bypass Schurz to the east and connect the proposed rail line to existing Department of Defense Branchline North east of Wabuska. These four alternative segments are referred to as Schurz 1, 4, 5, and 6.

Schurz alternative segment 1 would begin at the end of the existing Department of Defense Branchline North, would cross the Walker River, and would trend east and then southeast, roughly parallel to the Walker River for approximately 10 kilometers (6 miles). From the Walker River, Schurz alternative segment 1 would continue in a southeasterly and then easterly direction for approximately 6 kilometers (4 miles). It would trend to the south through Sunshine Flat for approximately 19 kilometers (12 miles). After crossing U.S. Highway 95 with a grade-separated crossing, the rail line would pass south of the Calico Hills. Schurz alternative segment 1 would continue south for another 6 kilometers before joining the existing Department of Defense Branchline South. Schurz alternative segment 1 would be about 52 kilometers (32 miles) long.

The Class I site-file search revealed that five cultural resources have been recorded along Schurz alternative segment 1, including two within the Level I region of influence and three within the Level II region of influence. Previously recorded sites include one prehistoric site, three historic sites, and one multi-component prehistoric and historic site. None of the five resources has been evaluated for eligibility to the *National Register of Historic Places*.

DOE surveyed 15 sample units during the Class II effort, a total of 12 kilometers (7.5 miles). Eight resources were recorded, including five prehistoric sites, all characterized by lithic scatters, and three historic sites, including two railroads and one trash deposit. One prehistoric lithic scatter and one historic railroad are potentially eligible for listing on the *National Register of Historic Places*. The other six resources appear ineligible for listing.

Schurz alternative segment 4 would begin at the end of the existing Department of Defense Branchline North, would cross the Walker River, and would trend east and then southeast, roughly parallel to the Walker River for approximately 10 kilometers (6 miles). From the Walker River, the rail line would trend generally southeast and east for about approximately 12 kilometers (7.5 miles) and would cross U.S. Highway 95 with a grade-separated crossing. Between the Terrill Mountains and Calico Hills, it would run due east for about 11 kilometers (7 miles). It would then trend southwest for approximately 16 kilometers (10 miles) and would continue in a roughly southern direction for about 6 kilometers (4 miles) before joining the existing Department of Defense Branchline South. Schurz alternative segment 4 would be about 64 kilometers (40 miles) long.

The Class I site-file search revealed that one historic cultural resource, the Rawhide Western Railroad grade, has been recorded along Schurz alternative segment 4, within the Level I region of influence. National Register-eligibility of this resource has not been determined.

DOE surveyed four sample units during the Class II effort, totaling 3.2 kilometers (2 miles). Eight prehistoric resources were recorded, including lithic and groundstone scatters, and a quarry. Three of the sites are considered potentially eligible for listing on the *National Register of Historic Places*, two are considered not eligible, and three of the sites have not been evaluated.

Schurz alternative segment 5 would begin at the end of the existing Department of Defense Branchline North, would cross the Walker River, and would run east for approximately 14 kilometers (9 miles). This alternative segment would briefly cross into Churchill County before turning southeast and traveling through Long Valley across U.S. Highway 95 with a grade-separated crossing. Between the Terrill Mountains and Calico Hills, it would run due east for about 11 kilometers (7 miles). It would then trend southwest for approximately 16 kilometers (10 miles). It would continue in a roughly southern direction for about 6 kilometers (4 miles) before joining the existing Department of Defense Branchline South. Schurz alternative segment 5 would be about 71 kilometers (44 miles) long.

The Class I site-file search revealed that four cultural resources have been recorded along Schurz alternative segment 5, including two within the Level I region of influence and two within the Level II region of influence. These include three historic sites and one multi-component prehistoric and historic site. The multi-component site, Double Spring, is considered eligible for listing on the *National Register of Historic Places* and is located in the Level II region of influence; the historic sites have not been evaluated.

DOE surveyed 10 sample units during the Class II effort, totaling 8 kilometers (5 miles). Four resources were recorded, including three prehistoric lithic scatters, all unevaluated for eligibility, and one historic site, a trash deposit that is recommended not eligible for listing on the National Register.

Schurz alternative segment 6 would begin at the end of existing Department of Defense Branchline North, cross the Walker River, and would run east for approximately 14 kilometers (9 miles). This alternative segment would briefly cross into Churchill County before turning southeast and traveling through Long Valley before turning sharply northeast and crossing U.S. Highway 95. After following U.S. Highway 95 for about 4 kilometers (2.5 miles), the rail line would then turn southeast and run along the eastern edge of the Terrill Mountains for approximately 16 kilometers (10 miles). It would then trend southwest for approximately 16 kilometers. The rail line would continue south for about 6 kilometers (4 miles) before joining the existing Department of Defense Branchline South. Schurz alternative segment 6 would be about 72 kilometers (45 miles) long.

The Class I site-file search revealed that nine cultural resources have been recorded along Schurz alternative segment 6, including five within the Level I region of influence and four within the Level II region of influence. Of these nine, seven are prehistoric or have a prehistoric component, and two are

historic resources. Prehistoric resources include one isolate, two lithic scatters, one rock alignment with possible burials, one petroglyph site, and one site considered eligible for listing on the National Register that has a medicine rock, cairns, hunting blinds, and petroglyphs. The isolate and one of the lithic scatters are considered not eligible; eligibility status of the remaining prehistoric sites has not been determined. The sites within the Level I region of influence include a lithic scatter, the isolate, and the rock alignment. The two historic sites falling along Schurz alternative segment 6 are found within the Level I region of influence and include the Rawhide Western Railroad grade and the Reese River Road stage route. Eligibility status of these resources has not been determined.

DOE surveyed two sample units during the Class II effort, totaling 1.6 kilometers (1 mile). One resource, a prehistoric lithic scatter, was recorded. This site has not been evaluated for listing on the *National Register of Historic Places*.

3.3.13.5.4 Department of Defense Branchline South

Department of Defense Branchline South is existing track that starts where the Schurz alternative segments would end, about 13 kilometers (8 miles) south of Schurz. The rail line trends generally south for 10 kilometers (6 miles) before leaving the Walker River Paiute Reservation, and continues generally south for another 24 kilometers (15 miles) on the east side of Walker Lake. Department of Defense Branchline South ends near Hawthorne, where it would join Mina common segment 1. Department of Defense Branchline South is approximately 35 kilometers (22 miles) long.

The Class I site-file search revealed that three cultural resources have been recorded within 0.15 kilometer (500 feet) of the existing rail line, including an historic pier piling, the historic Nolan Station rail siding, and a boulder containing cupule-style rock art (DIRS 182290-Desert Research Institute 2007, all). The historic pier piling is considered not eligible, and the other two sites have not been evaluated for eligibility. Because this line passes through or is adjacent to the Hawthorne Army Depot, first established as a U.S. Navy ammunition storage facility in 1928, historic structures associated with the depot might lie within the region of influence. No such structures were identified during Class I or Class II inventories. Any structures identified within the Level I region of influence during future studies, however, would require recordation and evaluation.

3.3.13.5.5 Mina Common Segment 1 (Soda Spring Valley Area)

Mina common segment 1 would begin north of the city of Hawthorne and would trend southeast before turning east at U.S. Highway 95. It would trend east along U.S. Highway 95 through Soda Springs Valley for approximately 40 kilometers (25 miles). Continuing to parallel U.S. Highway 95, the rail line would cross State Route 391 and turn south for approximately 64 kilometers (40 miles). It would pass the communities of Luning and Mina, which are along U.S. Highway 95 and would be approximately 1.5 to 3 kilometers (1 to 2 miles) to the east of the rail alignment. The rail line would then turn east before crossing U.S. Highway 95 with a grade-separated crossing in the area of Blair Junction and continuing for about 1.5 kilometers (1 mile) before joining the selected Montezuma alternative segment. Mina common segment 1 would be approximately 120 kilometers (72 miles) long.

The Class I site-file search revealed that 56 cultural resources have been recorded along Mina common segment 1, including 18 within the Level I region of influence and 38 within the Level II region of influence. Within the Level I region of influence, previously recorded resources include two prehistoric lithic scatters (one site is considered not eligible, one site has not been evaluated), 14 historic sites (five sites are considered eligible, two sites are considered not eligible, and seven sites have not been evaluated), and two multi-component sites (one site is not eligible, one site has not been evaluated). Types of eligible resources falling within the Level I region of influence include the Sodaville to Tonopah Freight Road, railroad workers' camps, and a railroad grade. Within the Level II region of influence,

there are 24 prehistoric sites (15 sites are considered not eligible, and nine have not been evaluated), and 14 historic sites (four are considered eligible, six are considered not eligible, and four have not been evaluated). The prehistoric sites consist of a rockshelter, lithic scatters, and isolates. Most of the historic sites are associated with railroad construction and operation, including camps, stations, and grades. Mining sites and the townsites of Redlich and Mina also fall within the region of influence of Mina common segment 1.

DOE surveyed 29 sample units during the Class II effort, totaling 23.3 kilometers (14.5 miles). A total of 19 resources were recorded, including 14 prehistoric sites (13 lithic scatters and one quarry), three historic trash deposits, and two historic railroads. One historic railroad and the prehistoric quarry site are both considered eligible for listing on the *National Register of Historic Places*. Seven of the prehistoric lithic scatters are considered not eligible, and six have not been evaluated for eligibility. The three historic trash deposits and the additional historic railroad are considered not eligible.

3.3.13.5.6 Montezuma Alternative Segments

DOE is considering three alternative segments in the Montezuma area, referred to as Montezuma alternative segments 1, 2 and 3. Montezuma alternative segment 1 would depart Mina common segment 1 just southeast of Blair Junction. It would trend roughly southeast along State Route 265 through part of the Big Smoky Valley and west of the Weepah Hills for approximately 37 kilometers (23 miles), passing to the east of the Silver Peak in Clayton Valley. It would then turn to the northwest through Clayton Valley and run through a pass between Clayton Ridge and Paymaster Ridge close to Silver Peak Road. It would then trend south for the next 11 kilometers (7 miles) between Clayton Ridge on the west and Montezuma Peak on the east before turning east for about the next 13 kilometers (8 miles), passing to the south of Montezuma Peak. The rail alignment would again turn roughly south for approximately 11 kilometers, traveling to the west of the Goldfield Hills. It would then travel northwest, cross U.S. Highway 95, and turn south before joining Mina common segment 2 near Lida Junction. Montezuma alternative segment 1 would be approximately 120 kilometers (73 miles) long.

3.3.13.5.6.1 Montezuma Alternative Segment 1. The Class I site-file search revealed that 43 cultural resources have been recorded along Montezuma alternative segment 1, including five within the Level I region of influence and 38 within the Level II region of influence. Within the Level I region of influence, two prehistoric sites, including a quarry site of unknown eligibility status and a small lithic scatter that is considered not eligible, and three historic sites (two sites, a railroad grade and telephone line, are considered eligible and one site, a trash dump, has not been evaluated) are present.

Within the Level II region of influence, previously recorded resources include 27 prehistoric sites (one site is considered eligible, 17 sites are considered not eligible, and nine have not been evaluated), 10 historic sites (three are considered eligible, four are considered not eligible, and three have not been evaluated), and one multi-component site that is considered not eligible. The majority of the prehistoric sites consist of lithic scatters and isolates, though cave and quarry sites are also present; historic sites include railroad grades, a dump, a wagon road, mining sites, and the townsite of Blair.

DOE surveyed 25 sample units during the Class II effort, totaling 20.1 kilometers (12.5 miles). Twenty resources were recorded, including 17 prehistoric lithic scatters, two historic trash deposits, and one historic mining site. One lithic scatter is considered eligible for listing on the *National Register of Historic Places*; three scatters are considered not eligible, and the remaining 13 prehistoric sites have not been evaluated for eligibility. Of the historic sites, one trash deposit and the mining site are considered not eligible; the other trash deposit has not been evaluated.

3.3.13.5.6.2 Montezuma Alternative Segment 2. Montezuma alternative segment 2 would depart Mina common segment 1 just southeast of Blair Junction. It would trend northeast for about 35 kilometers (22 miles) just south of U.S. Highway 95. Northeast of Lone Mountain, it would turn south into Montezuma Valley and run south for 49 kilometers (31 miles) before turning east and crossing U.S. Highway 95 south of Goldfield. It would then trend south for about 37 kilometers (23 miles) before joining Mina common segment 2 near Lida Junction. Montezuma alternative segment 2 would be approximately 120 kilometers (74 miles) long.

The Class I site-file search revealed that 226 cultural resources have been recorded along Montezuma alternative segment 2, including 39 within the Level I region of influence and 187 within the Level II region of influence. Within the Level I region of influence, previously recorded resources include 11 prehistoric sites (10 are considered not eligible, one has not been evaluated), 17 historic sites (one site, the townsite of Goldfield, is listed on the *National Register of Historic Places*, nine sites are considered eligible, and seven are considered not eligible), and 11 multi-component sites (one site is considered eligible, nine are considered not eligible, and one has not been evaluated). Eligible site types include railroad grades, Millers townsite, a mining camp and miner's cabin, the Goldfield Junction Station and Goldfield Dump, a feed lot with corrals, and a multi-component site with mining structures and rock art. An unrecorded American Indian settlement is also reported within the Montezuma alternative segment 2.

Within the Level II region of influence, recorded resources include 112 prehistoric sites (four sites are considered eligible, 73 are considered not eligible, and 35 have not been evaluated), 58 historic sites (14 sites are considered eligible, 42 are considered not eligible, and two have not been evaluated), and 17 multi-component sites (14 are considered not eligible, and three have not been evaluated). The majority of the prehistoric sites consist of small lithic scatters and isolates; a variety of historic sites is found, primarily associated with mining and railroad activities. Historic sites also include the townsite of Millers, cemeteries, historic dumps, and military encampments, as well as sites and features potentially contributing to the National Register-listed Goldfield townsite.

DOE surveyed 24 sample units during the Class II effort, totaling 19 kilometers (12 miles). A total of 39 resources were recorded, including 28 prehistoric lithic scatters and one quarry, four historic trash deposits, three historic railroad sites, one historic homestead site, one historic mining site, and one multi-component site.

Two of the lithic scatters are considered eligible for listing on the *National Register of Historic Places*, and seven are considered not eligible; 19 lithic scatters and the quarry have not been evaluated for eligibility. The four historic trash deposits, two of the railroads, and the mining site are considered not eligible; one railroad, the homestead, and the multi-component site have not been evaluated.

3.3.13.5.6.3 Montezuma Alternative Segment 3. Montezuma alternative segment 3 would depart Mina common segment 1 just southeast of Blair Junction. It would trend northeast for about 35 kilometers (22 miles) just south of U.S. Highway 95. Northeast of Lone Mountain, it would turn south into Montezuma Valley and trend south for 37 kilometers (23 miles). North of Goldfield, it would turn west and trend along the northern portion of the Montezuma Range for 12 kilometers (7.5 miles). It would then trend south for the next 11 kilometers (7 miles) between Clayton Ridge on the west and Montezuma Peak on the east before turning east for about the next 13 kilometers (8 miles), passing to the south of Montezuma Peak. The rail alignment would again turn roughly south for approximately 11 kilometers, traveling to the west of the Goldfield Hills. It would then travel northwest, cross U.S. Highway 95, and turn south before joining Mina common segment 2 near Lida Junction. Montezuma alternative segment 3 would be approximately 140 kilometers (88 miles) long.

The Class I site-file search revealed that 84 cultural resources have been recorded along Montezuma alternative segment 3, including eight within the Level I region of influence and 76 within the Level II

region of influence. Within the Level I region of influence, there is one prehistoric site (considered not eligible) and seven historic sites (six are considered eligible, and one is considered not eligible). The eligible resources include two railroad grades, Millers townsite, the Goldfield Junction Station, a mining camp, and a feed lot with corrals.

Within the Level II region of influence, previously recorded resources include 55 prehistoric sites (35 sites are considered not eligible, and 20 have not been evaluated), 18 historic sites (four sites are considered eligible, 12 are considered not eligible, and two have not been evaluated), and three multi-component sites that are considered not eligible. The majority of the prehistoric sites consist of small lithic scatters and isolates; a rockshelter is also present. Historic sites are primarily associated with mining and railroad activities, and include camps, dumps, mining features, and railroad grades and stations.

DOE surveyed 30 sample units during the Class II effort, totaling 24 kilometers (15 miles). A total of 46 resources were recorded, including 36 prehistoric lithic scatters and one quarry, three historic trash deposits, three historic railroad sites, one historic homestead site, one historic mining site, and one multi-component site.

Two of the lithic scatters are considered eligible for listing on the *National Register of Historic Places*, and eight are considered not eligible; 26 lithic scatters and the quarry have not been evaluated for eligibility. The three historic trash deposits, two of the railroads, and the mining site are considered not eligible; one railroad, the homestead, and the multi-component site have not been evaluated.

3.3.13.5.7 Mina Common Segment 2 (Lida Junction Area)

Mina common segment 2 would begin at the end of the Montezuma alternative segments and run roughly southeast for about 3.4 kilometers (2.1 miles) before joining one of the Bonnie Claire alternative segments.

The Class I site-file search revealed that one prehistoric cultural resource, the Twin Buttes Rockshelters, is recorded along Mina common segment 2 within the Level II region of influence. This site has not been formally evaluated for eligibility, but is likely to be considered eligible. No cultural resources have been previously identified within the Level I region of influence.

No Class II effort has been conducted along this short segment.

3.3.13.5.8 Bonnie Claire Alternative Segments

DOE is considering two alternative segments in the area north of Scottys Junction – Bonnie Claire alternative segments 2 and 3.

3.3.13.5.8.1 Bonnie Claire Alternative Segment 2. Bonnie Claire alternative segment 2 would depart Mina common segment 2 as the easternmost alternative segment where it skirts the western border of the Nevada Test and Training Range. The Class I site-file search identified one cultural resource along Bonnie Claire alternative segment 2. The site includes both prehistoric and historic components (a lithic scatter and mining prospects and debris). The prehistoric component was evaluated as being eligible for listing on the *National Register of Historic Places*.

The Class II survey examined five sample units, a total of 4 kilometers (2.5 miles). Two sites and five isolates were recorded. The sites include a prehistoric campsite with a lithic and ground stone scatter, evaluated as being eligible for listing on the *National Register of Historic Places*, and a lithic scatter for which eligibility is under review. The American Indian Resource Document (DIRS 174205-Kane et

al. 2005, all) does not identify any known areas of importance to American Indians along this alternative segment.

3.3.13.5.8.2 Bonnie Claire Alternative Segment 3. Bonnie Claire alternative segment 3 would run west of Bonnie Claire alternative segment 2, closer to U.S. Highway 95, and generally follow an abandoned rail line grade for part of its length. The Class I site-file search revealed four previously recorded but unevaluated prehistoric sites. One of these is a rockshelter, and the other three are extractive sites located in areas of obsidian cobble occurrences. The Class II survey inspected four sample units along this segment, a total of 3.2 kilometers (2 miles). One site and 24 isolates were recorded. The site is an historic rail line construction camp along the abandoned combined Bullfrog and Goldfield/Las Vegas and Tonopah rail bed, recommended as eligible for listing on the *National Register of Historic Places*. The American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) does not identify specific resources for this alternative segment.

3.3.13.5.9 Common Segment 5 (Sarcobatus Flat Area)

Common segment 5 would begin 4 kilometers (2.5 miles) north of Scottys Junction and trend generally southeast through the Sarcobatus Flat area, approximately 100 meters (330 feet) east of U.S. Highway 95 at its closest point. Common segment 5 would end approximately 6 kilometers (4 miles) north of Springdale, where it would connect to one of the Oasis Valley alternative segments. Common segment 5 would be about 40 kilometers (25 miles) long (DIRS 176165-Nevada Rail Partners 2006, p. E-13).

The Class I site-file search identified 33 cultural resources within common segment 5. These resources include 20 prehistoric sites (14 lithic scatters and six quarry extractive sites), four historic sites (a Tolicha mining district campsite, two debris scatters, and a railroad segment), seven isolates, and two unknown sites. Of these sites, one lithic scatter has been recommended as eligible for listing on the *National Register of Historic Places*; 11 are not eligible, and 14 remain unevaluated.

DOE surveyed 10 sample units along this segment for the Class II effort, a total of 8 kilometers (5 miles). Four prehistoric sites (three lithic scatters and one campsite) and 33 isolates were recorded. Of these sites, the campsite was recommended as eligible for listing on the *National Register of Historic Places*, and the three lithic scatters are not eligible.

3.3.13.5.10 Oasis Valley Alternative Segments

The Class I site-file search identified three cultural resources along Oasis Valley alternative segments 1 and 3. These resources include one prehistoric campsite (recommended as eligible for nomination to the *National Register of Historic Places*) and two sites with both prehistoric and historic components (unevaluated ethnographic village sites).

3.3.13.5.10.1 Oasis Valley Alternative Segment 1. The Class II survey looked at three sample units along Oasis Valley 1, totaling 2.4 kilometers (1.5 miles). Two prehistoric sites (lithic scatters) and one historic mine site were recorded.

Oasis Valley alternative segment 1 would pass to the east of the historic ranch known today as the Beatty Cattle Company Ranch. In addition to being an unrecorded historic ranch, the area adjacent to the ranch is known to be the location of an early historic Western Shoshone winter camp. This camp has been partially recorded but has not been evaluated.

The American Indian Resource Document notes the presence of the early Western Shoshone camp and also states that, because of its abundant water supply and large variety of culturally important plants and animals, American Indian people extensively used the entire valley (DIRS 174205-Kane et al. 2005,

Section 2.3). Recent ethnographic studies on the nearby Nevada Test and Training Range revealed cultural links to Oasis Valley. The Oasis Valley area is both a potential ethnographic and historic ranching cultural landscape. In later historic times, these landscapes overlapped, as American Indian people collocated with and supplied labor for the ranches.

3.3.13.5.10.2 Oasis Valley Alternative Segment 3. Oasis Valley alternative segment 3 would cross Oasis Valley farther to the east than Oasis Valley 1, but because of proximity, much of the discussion for Oasis Valley 1 applies to this alternative segment. During the Class II survey, DOE inspected four sample units, a total of 3.2 kilometers (2 miles); five sites and 28 isolates were recorded. These resources include five prehistoric sites (four lithic scatters and one campsite with a lithic scatter and cleared rock rings). The campsite has been determined eligible for listing on the *National Register of Historic Places*.

Oasis Valley 3 would also be near a historic ranch (noted as the Colson Ranch or Indian Camp on some maps). Similar to the Beatty Cattle Company Ranch, the Colson Ranch is an unrecorded historic property that has been identified as a Western Shoshone winter camp.

3.3.13.5.11 Common Segment 6 (Yucca Mountain Approach)

The Yucca Mountain area has been heavily analyzed in conjunction with repository site characterization studies. Intensive cultural resource studies related to the development of the repository site have been completed; consequently, a large number of archaeological sites are known to exist along common segment 6. This is due more to the intensive nature of past studies than actual site density characteristics.

A Class I site-file search identified a total of 204 cultural resources along common segment 6. These resources include 152 prehistoric sites, 3 historic sites, one site with both prehistoric and historic components, and 49 isolates. Prehistoric sites include eight rockshelters (four eligible), two eligible rock-art sites, 13 campsites (five eligible), six quarry sites (two eligible), four rock features and two rock rings, and 117 lithic scatters (one eligible). Historic sites include two debris scatters and one rail segment.

The Class II survey for common segment 6 did not extend inside the Yucca Mountain Site boundary. DOE inspected thirteen sample units, a total of 11 kilometers (7 miles). Seven sites (two prehistoric lithic scatters, four eligible sites with both prehistoric and historic components, and one historic debris scatter) and 52 isolates were recorded.

To provide additional information on cultural resources along common segment 6, Desert Research Institute conducted a supplementary field survey along the section of proposed rail alignment inside the Yucca Mountain Site boundary. This survey investigated a 150-meter (500-foot)-wide corridor centered on the rail alignment for an approximate length of 5.9 kilometers (3.7 miles). This land comprised acreage that had not been previously surveyed during repository site characterization activities. Desert Research Institute identified eight cultural resources (two prehistoric sites, five isolates, and one historic site) during the Class III survey. All were evaluated as ineligible for National Register listing.

Based primarily on previous ethnographic studies, the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) identifies several areas of cultural significance for American Indians along this segment. Several of these fall within the Yucca Mountain Site boundary, including the Busted Butte rock-art site, Fortymile Wash, and Alice Hill. The American Indian Writers Subgroup also notes the cultural importance of the Beatty Wash rock-art site and Crater Flat, specifically the Black Cone geological feature in Crater Flat, which would be within 0.8 kilometer (0.5 mile) of common segment 6.

3.3.14 PALEONTOLOGICAL RESOURCES

Paleontology is a science that uses *fossil* remains to study life in past geological periods. DOE, the BLM, and other federal agencies recognize paleontological resources as a fragile and nonrenewable scientific

Fossil: Fossils include the body remains, traces, and imprints of plants or animals that have been preserved in the Earth's crust since some past geologic or prehistoric time. Generally, to be considered a fossil, the remains must be older than recent in age (older than 10,000 years). Fossils are found in **sedimentary rock**.

Sedimentary rock: Rock formed from material deposited by water, wind, or glaciers.

record of the history of life on earth and consider them a critical component of America's natural heritage. Once such resources are damaged, destroyed, or improperly collected, their scientific and educational value could be greatly reduced or forever lost.

The BLM manages and protects paleontological resources under the

Federal Land Policy and Management Act of 1976 (43 U.S.C. 1701 *et seq.*), and in accordance with 43 CFR 8365 and 43 CFR 3622. The BLM has developed policies and management actions to protect and manage paleontological resource areas of high scientific value consistent with the *Carson City Field Office Consolidated Resource Management Plan* (DIRS 179560-BLM 2001, all) and the *Tonopah Resource Management Plan and Record of Decision* (DIRS 173224-BLM 1997, all), while allowing casual and academic collecting of invertebrate (animals without backbones) fossils within the regulatory framework. Because of their relative rarity and scientific importance, vertebrate (animals with backbones) fossils may only be collected with a BLM permit and remain the property of all Americans in museums or other public institutions (DIRS 180122-BLM [n.d.], all).

Section 3.3.14.1 describes the region of influence for paleontological resources along the Mina rail alignment; and Section 3.3.14.2 describes the paleontological resources within the region of influence, including the identification of previously recorded important fossil resources and the approaches for managing those resources.

3.3.14.1 Region of Influence

The region of influence for paleontological resources along the Mina rail alignment is the nominal width of the rail line construction right-of-way, and the footprints of railroad construction and operations support facilities.

3.3.14.2 Affected Environment

The BLM has established a classification system to rank areas according to their potential to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils (*Paleontological Resource Management and General Procedural Guidance for Paleontological Resource Management*). The BLM uses these rankings (called **Condition 1**, **Condition 2**, and **Condition 3**) in land-use planning and to identify areas that might warrant special management or special designation (DIRS 176085-BLM 1998, all; DIRS 176084-BLM 1998, all).

BLM ranking of areas for their potential to contain paleontological resources (DIRS 176084-BLM 1998, pp. II-2 and II-3):

Condition 1 - Areas that are known to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

Condition 2 - Areas with exposures of geological units or settings that have high potential to contain vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

Condition 3 - Areas that are very unlikely to produce vertebrate fossils or noteworthy occurrences of invertebrate or plant fossils.

To determine the affected environment for paleontological resources along the Mina rail alignment, DOE consulted the BLM and reviewed existing documentation of paleontological resources, including applicable BLM resource management plans and the National Science Foundation's website *The Paleontology Portal*.

The Mina rail alignment would cross large areas of volcanic rock and granite, alternating with basins filled with deposits from erosion of the mountains. North of the Montezuma Range, there are some exposures of sedimentary rock in alluvial fans and playa areas. Fossils are likely found in sedimentary rock; however, there are no known occurrences of paleontological resources within the Mina rail alignment region of influence.

Although the proposed rail alignment would not cross any known fossil-rich rock outcrops, the possibility exists that beds containing fossils could be uncovered during construction of the proposed railroad.

3.3.15 ENVIRONMENTAL JUSTICE

To support the assessment of the potential for *disproportionately high and adverse impacts* on *minority* and *low-income* communities, this section provides the information on minority and low-income *populations* and communities in the Mina rail alignment region of influence. Section 3.2.15.1 describes the region of influence, Section 3.2.15.2 describes the methodology DOE used to determine population groups, and Section 3.2.15.3 describes regional population characteristics for environmental justice considerations.

Minority individuals are members of the following population groups: American Indian or Alaskan Native, Asian or Pacific Islander, Black, and Hispanic.

A **low-income** household is one for which the household income is below the U.S. Census Bureau poverty thresholds.

Source: DIRS 155970-DOE 2002, Section 3.1.13.1.

Executive Order 12898, *Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations*, directs federal agencies to make achieving environmental justice part of their missions by identifying and addressing, as appropriate, disproportionately high and adverse human health or environmental effects of its programs, policies, and activities on minority and low-income populations, and provide access to public information on, and an opportunity for public participation in, matters relating to human health or the environment. Executive Order 12898 also directs agencies to provide opportunities for public input on the incorporation of environmental justice principles into federal agency programs or policies. Executive Order 12898, and associated implementing guidance, establishes the framework for characterizing existing conditions related to environmental justice. For this analysis, DOE uses the terms minority and low-income in the context of environmental justice as described in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Section 3.1.13.1) and *Poverty Thresholds* (DIRS 174625-Census Bureau 2005, all).

3.3.15.1 Region of Influence

The Mina rail alignment region of influence for environmental justice encompasses the regions of influence for all other resource areas because impacts in other resource areas could result in environmental justice impacts. Section 3.3 describes the regions of influence for the *environmental resource areas* analyzed in this Rail Alignment EIS. For some resource areas, the relevant region of influence is an area extending a given distance from the centerline of the rail alignment. For others, the relevant region of influence is not so precisely definable, but generally includes the landscape the rail line would cross. However, the most inclusive region of influence is that defined for hazardous materials and waste (see Section 3.3.12), which considers a nationwide region of influence.

In addition to the regions of influence delineated via direct physical proximity to the Mina rail alignment, the environmental justice region of influence includes populations that could be affected by the project that have cultural or religious ties in the area, even though the population may not have a physical presence. For a discussion of American Indian populations, and resulting cultural region of influence, see Section 3.4, American Indian Interests.

3.3.15.2 Methodology

Following the Council on Environmental Quality guidance (DIRS 103162-Council on Environmental Quality 1997, all) and the approach used in the Yucca Mountain FEIS (DIRS 155970-DOE 2002, Section 3.1.13), DOE considered that a minority population exists where either: (a) the minority population of the affected area exceeds 50 percent; or (b) the minority population percentage of the affected area is

meaningfully greater than the minority population percentage in the general population or other appropriate unit of geographic analysis (DOE used both the United States and the State of Nevada minority populations).

DOE used the Council on Environmental Quality definition of low-income and the annual statistical poverty thresholds from the U.S. Census Bureau. A low-income community exists when the low-income population percentage in the area of interest is meaningfully greater than the low-income population in the general population. For purposes of the analysis of low-income communities, DOE applied the U.S. Nuclear Regulatory Commission guidance of a 20-percent threshold above the state average of 11 percent (that is, 31 percent) for low-income populations (69 FR 52040).

To identify low-income populations, DOE used U.S. Census Bureau data for census block groups. The census block group, which typically consists of between 600 and 3,000 people with an optimum size of 1,500 people, is the smallest census unit for which the Census Bureau releases income data (to protect confidentiality). Block groups on American Indian reservations, off reservation trust lands, and special places must contain a minimum of 300 people. (Special places include correctional institutions, military installations, college campuses, workers' dormitories, hospitals, nursing homes, and group homes.) To identify minority populations, DOE used U.S. Census Bureau data for *census blocks*. The census block is the smallest census unit for which the Census Bureau collects 100-percent data. The Department assessed the population within 3 kilometers (1.8 miles) on either side of the centerline of the Mina rail alignment, to be consistent with the Yucca Mountain FEIS.

DOE developed these analyses by creating Geographic Information System (GIS) representations of the Mina rail alignment alternative segments and common segments and creating a computer program to extract specific census data based on the 3-kilometer buffer distance. The specific census data required to develop the analyses included:

- Total population and number of minority persons by census block
- Total population and number of individuals below the poverty level by census block group

For Census 2000, the Census Bureau used two forms, one short and one long. The Bureau sent the short form to every household, and sent the long form, containing the seven 100-percent questions plus the sample questions, to only a limited number of households. Generally, about one in every six households nationwide received the long form. The rate varied from one in two households in some smaller areas, to

A **census block** is a subdivision of a census tract (or, prior to 2000, a block numbering area). A block is the smallest geographic unit for which the Census Bureau tabulates 100-percent data.

A **census county division (CCD)** is a subdivision of a county that is a relatively permanent statistical area established cooperatively by the Census Bureau and state and local government authorities. It is used for presenting decennial census statistics in those states that do not have well-defined and stable minor civil divisions that serve as local governments.

A **census block group** is a subdivision of a census tract (or, prior to 2000, a block numbering area). A block group is the smallest geographic unit for which the Census Bureau tabulates sample data. A block group consists of all the blocks within a census tract with the same beginning number.

A **census tract** is a small, relatively permanent statistical subdivision of a county delineated by a local committee of census data users for the purpose of presenting data. Designed to be relatively homogeneous units with respect to population characteristics, economic status, and living conditions at the time of establishment, census tracts average about 4,000 inhabitants.

Sources: DIRS 181904-U.S. Census Bureau 2007; DIRS 181905-U.S. Census Bureau [n.d].

one in eight households for more densely populated areas. The long form requests information on the numbers and ages of members of each household and income received during the previous full year. From this information, the Bureau makes a determination of the poverty status of the individuals living in the household. The Census Bureau additionally uses school districts, child protective services, and social services to supplement the census data to develop estimates that more fully represent actual poverty status among all populations.

3.3.15.3 Regional Characteristics

3.3.15.3.1 Minority and Low-Income Populations

The Mina rail alignment would affect portions of five counties in Nevada (Churchill, Lyon, Mineral, Esmeralda, and Nye). Table 3-157 summarizes Census 2000 data on minority and low-income populations within these general areas. The table includes specific county subdivisions and small population centers within or near the Mina rail alignment. For comparison, the table includes statewide and countywide minority and poverty data.

Based on the data in Table 3-157, seven of the county subdivisions and small population centers that would encompass the Mina rail alignment have a higher proportion of minority residents than the associated countywide proportion of minority residents. The Schurz population center and the Walker River *Census County Division*, both in Mineral County, are the two extreme cases with the widest percentage difference of 89-percent and 80-percent minority populations, respectively, compared to a 30-percent minority population for Mineral County as a whole. These two areas exceed the 50-percent threshold described in Section 3.3.15.2.

As shown in Table 3-157, poverty rates in the affected county subdivisions tend to be higher than the associated countywide poverty percentages, except in the following county subdivisions:

- Hawthorne subdivision, where the poverty rate is lower than the Mineral County percentage
- Goldfield subdivision, where the poverty rate is lower than the Esmeralda County percentage (DIRS 176856-U.S. Census Bureau 2003)

In all cases, poverty rates in the county subdivisions are higher than the statewide figure of 11 percent.

Population centers are often assessed in relation to the county in which they are located. As shown in Table 3-157, compared to Nye County, Beatty has a lower minority population rate but a higher poverty rate. With 89 percent, Schurz has a higher minority population rate than the established 50-percent threshold and a higher poverty rate (26 percent), although it is below the established threshold of 20 percent above the state average (11 percent), which combined is a threshold of 31 percent.

To illustrate minority concentrations, Figure 3-240 shows the distribution of census block groups with minority population percentages that are more than 50 percent. It also includes federally recognized American Indian lands, because American Indians are included in the definition of minority populations. Based on Census 2000 estimates, the population living within 3 kilometers (1.8 miles) on either side of the Mina rail alignment is 5,907 (DIRS 174625-Census Bureau 2005, all). Of that population, approximately 1,100 (19 percent) are minority populations. Two block groups in Lyon County, block groups 1 and 2 of census tract 9602, comprise approximately half of the minority populations in the region of influence for environmental justice.

To illustrate low-income concentrations, Figure 3-241 shows the distribution of census block groups with low-income rates that are more than 20 percentage points above the state average of 11 percent. Based on

Census 2000 estimates, the population within 3 kilometers (1.8 miles) on either side of the centerline of the Mina rail alignment for whom poverty status is determined is 3,600. Of these, 530, or 15 percent, are living below the poverty level. This percentage is higher than the percent of the population living in poverty for the State of Nevada as a whole (11 percent) and is generally similar to the population living in poverty in the counties along the Mina rail alignment (8.6 percent to 15 percent) (see Table 3-157). There is one census county division with a poverty rate of more than 20 percent above the state average of 11, the Walker River Census County Division, with a 32-percent poverty rate.

3.3.15.3.2 American Indian Perspectives

Section 3.4 describes American Indian perspectives related to the Proposed Action, including environmental justice concerns.

Table 3-157. Minority and low-income populations in the jurisdictions potentially affected by construction and operation of the proposed rail line – Mina rail alignment.^a

Areas	Population	Percent minority	Percent low-income
State of Nevada	2,000,000 ^b	35	11
<i>Counties</i>			
Churchill County	24,000	18	9
Lyon County	32,500	13	10
Mineral County	5,070	30	15
Nye County	33,000	15	11
Esmeralda County	970	19	15
<i>County subdivisions</i>			
Silver Springs Census County Division, Lyon County, Nevada	6,700	8	13
Hawthorne Census County Division, Mineral County, Nevada	4,000	16	11
Mina Census County Division, Mineral County, Nevada	240	0.1	22
Walker River Census County Division, Mineral County, Nevada ^c	870	80	32
Amargosa Valley Census County Division, Nye County, Nevada	1,100	28	15
Beatty Census County Division, Nye County, Nevada	1,090	11	13
Tonopah Census County Division, Nye County, Nevada	2,900	18	11
Goldfield Census County Division, Esmeralda County, Nevada	450	3	12
Silverpeak Census County Division, Esmeralda County, Nevada	520	22	18
<i>Small population centers</i>			
Schurz (Mineral County) ^c	710	89	26
Beatty (Nye County)	1,090	11	13

a. Source: DIRS 176856-U.S. Census Bureau 2003, all.

b. The state population was rounded to 2 million for consistent analysis.

c. Encompasses the Walker River Paiute Tribe.

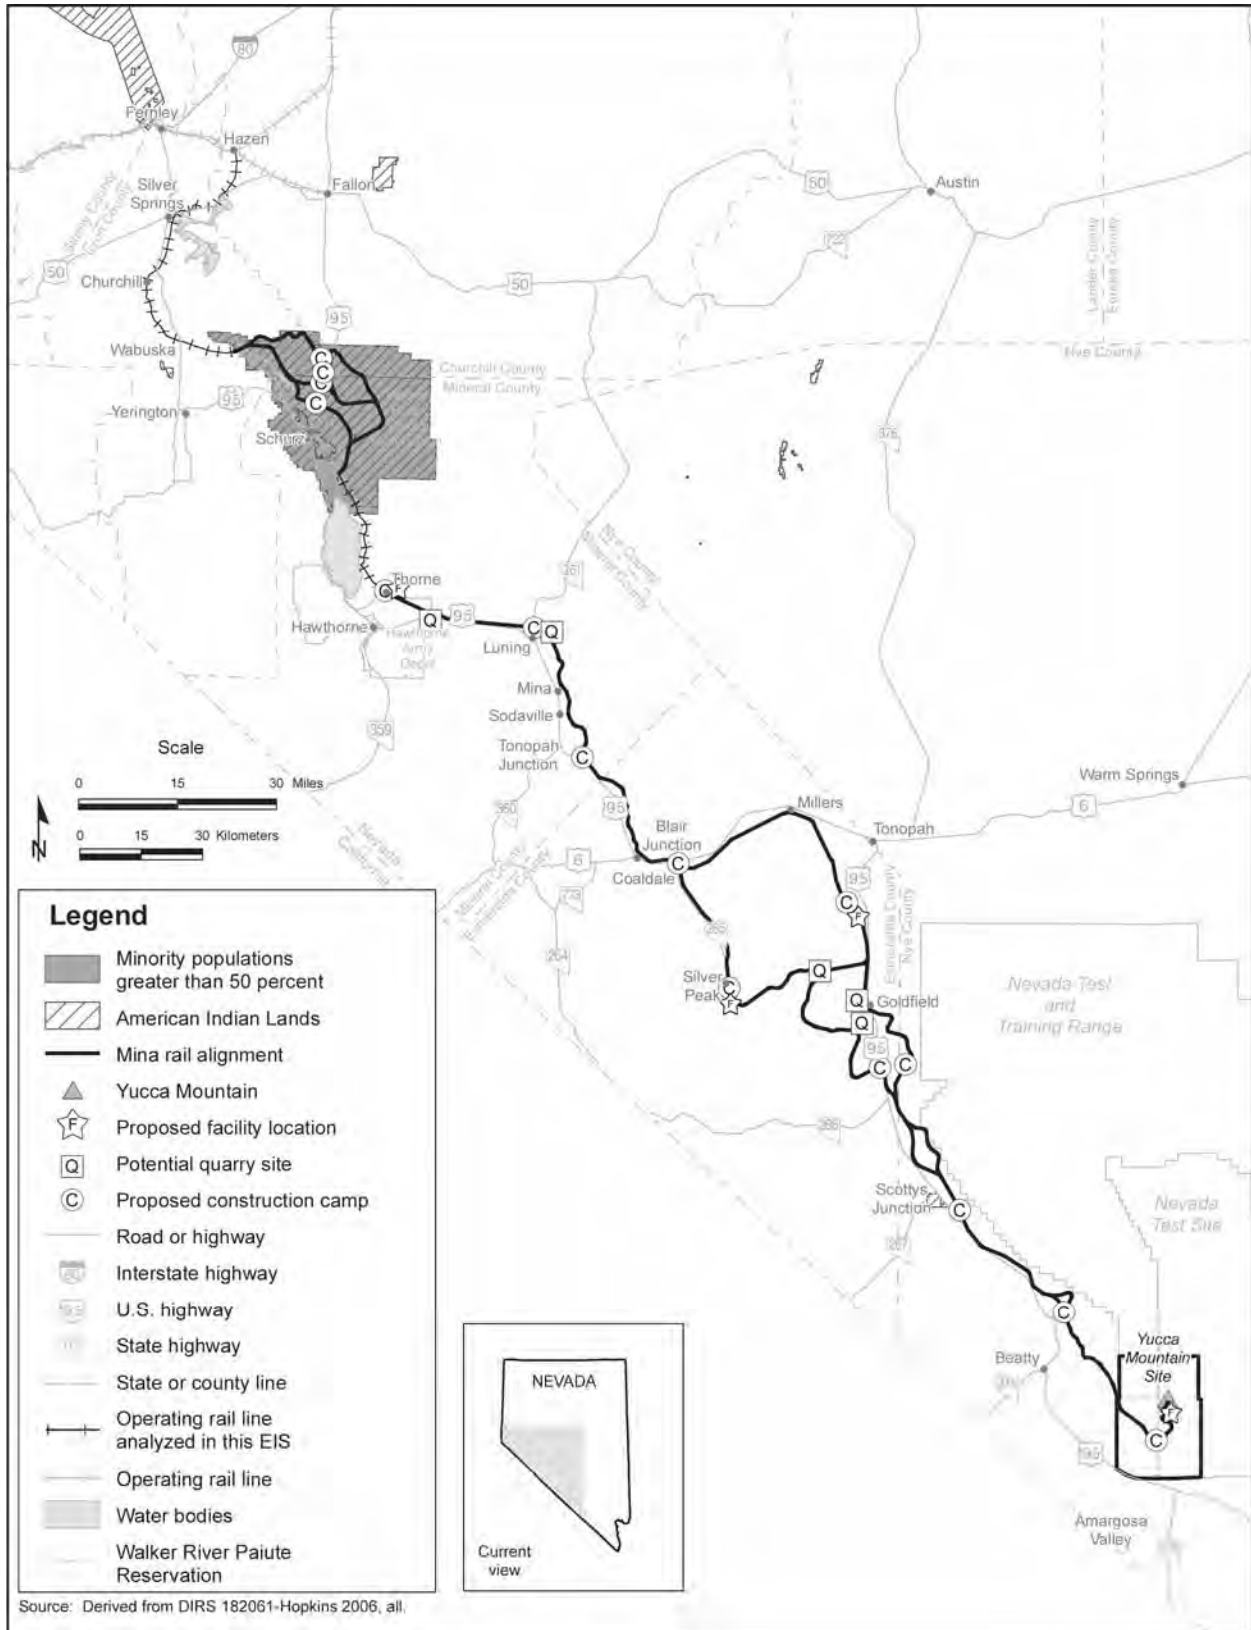


Figure 3-240. Minority populations greater than 50 percent along the Mina rail alignment.

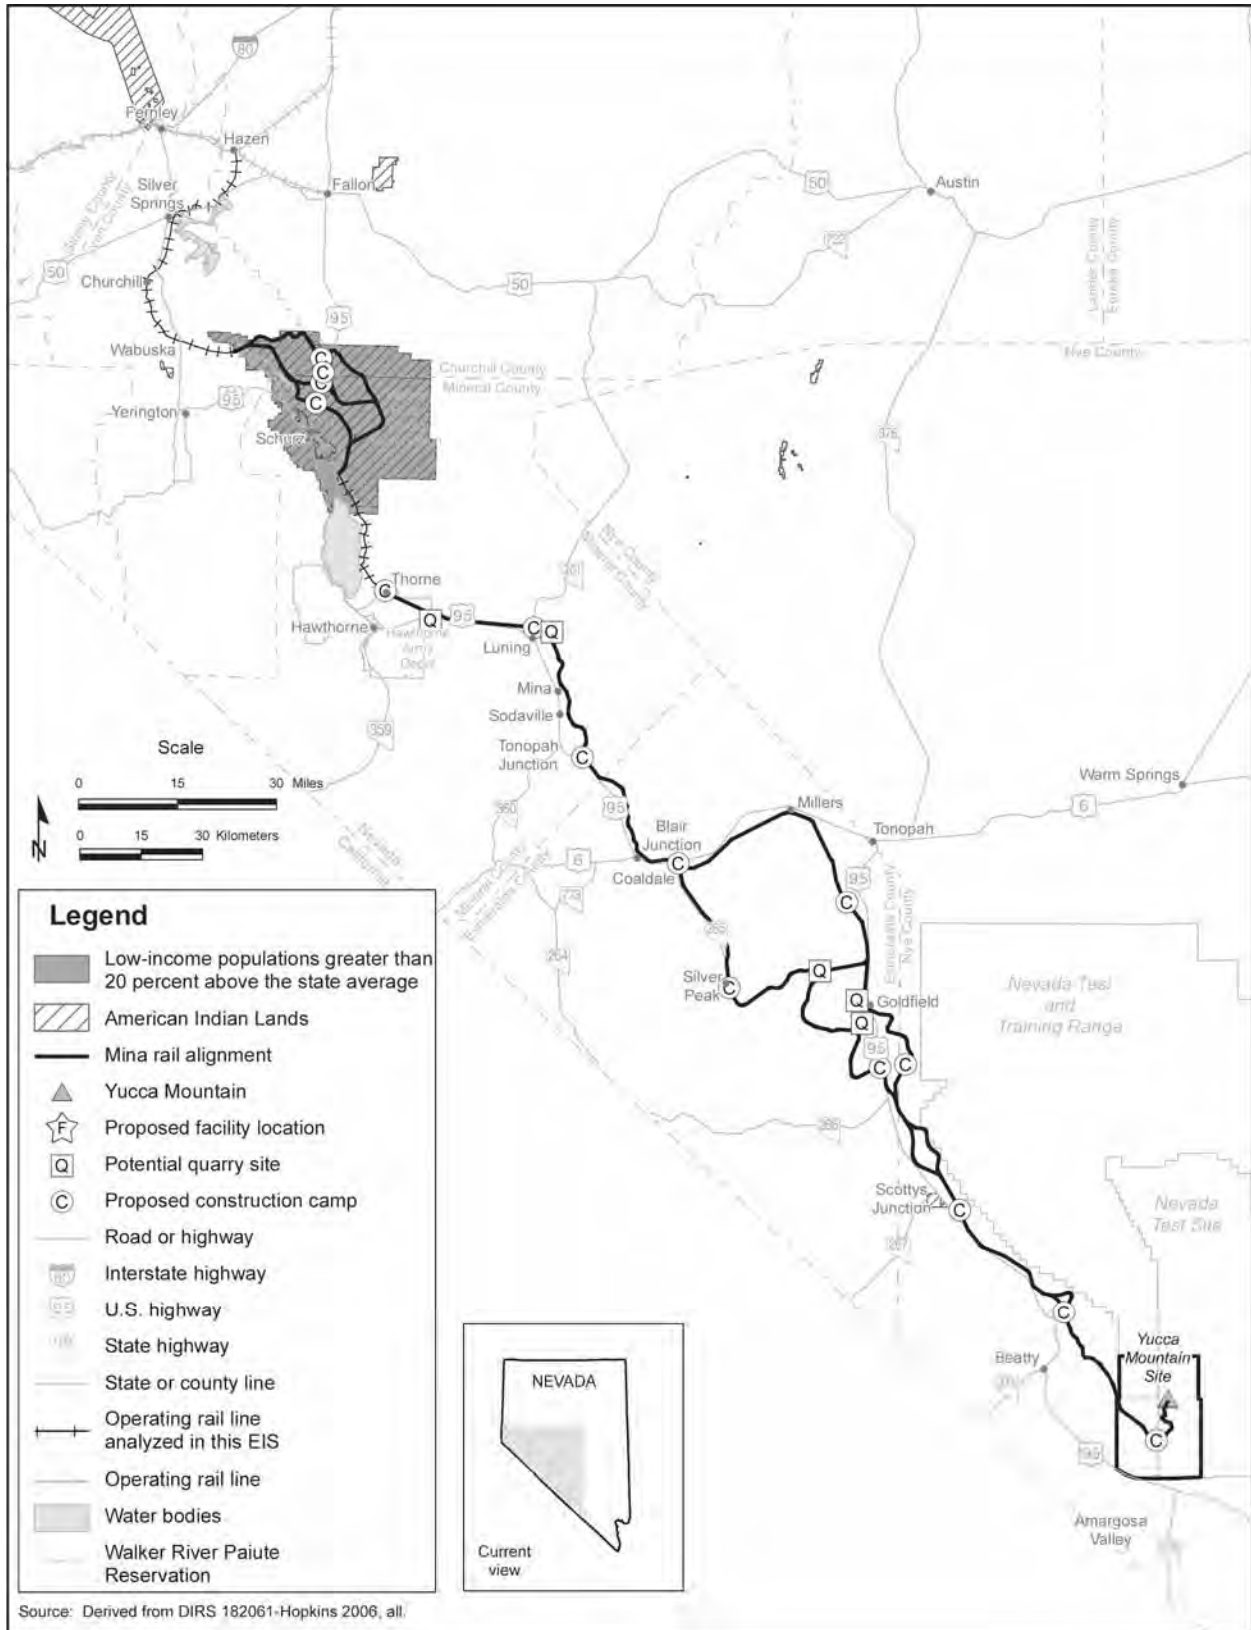


Figure 3-241. Low-income populations greater than 20 percent above the state average along the Mina rail alignment.

3.4 American Indian Interests in the Proposed Action

This section summarizes the interests and concerns expressed by various American Indian tribes and organizations within or near the Caliente and Mina rail alignment regions of influence. Sections 3.2.13 and 3.3.13, Cultural Resources, provide additional information on American Indian cultural resources.

American Indian interests regarding environmental resources are not limited to archaeological or historical sites, but include natural resources and geological formations present throughout the region. Natural resources constitute critical components of American Indian daily life and religious beliefs, while plants and animals are sources of food, raw materials, and medicines, and are components of ritual practices. Natural landforms mark locations that are significant for keeping the historic memory of American Indian people alive and for teaching children about their culture and history (DIRS 174205-Kane et al. 2005, p. 9).

In 1987, DOE initiated the Native American Interaction Program to solicit input from tribes and organizations on the characterization of the Yucca Mountain Site and the possible construction and operation of a repository for spent nuclear fuel and high-level radioactive waste. These tribes and organizations – Southern Paiute; Western Shoshone; and Owens Valley Paiute and Shoshone people from Arizona, California, Nevada, and Utah – have declared traditional ties to the Yucca Mountain area and to portions of the larger region that includes the Caliente and Mina rail alignments. As part of the scoping process for this Rail Alignment EIS, DOE held a Yucca Mountain tribal interactions meeting in June 2004 to take comments from tribal representatives about the proposed rail line along the Caliente rail alignment. In October 2004, a small group of designated tribal representatives participated in a field reconnaissance trip along the alignment, followed by a meeting of the larger consolidated group in late November 2004. Based on these efforts, the American Indian Writers Subgroup prepared a resource document, *American Indian Perspectives on the Proposed Rail Alignment Environmental Impact Statement for the U.S. Department of Energy's Yucca Mountain Project* (the American Indian Resource Document) (DIRS 174205-Kane et al. 2005, all), that provides insight into American Indian interests along the Caliente rail alignment.

At the time of these discussions, the Mina rail alignment was not under consideration as an **implementing alternative**, and Northern Paiute peoples who traditionally occupied lands north of Goldfield and Tonopah did not participate in preparation of the American Indian Resource Document. As a consequence, the document does not present an American Indian perspective on the area from Blair Junction north to Hazen, along the Mina rail alignment. DOE obtained some information on Northern Paiute views during discussions with the Walker River Paiute Tribe, including a meeting with the Tribe in November 2006 to discuss the Mina rail alignment, but the Tribe did not complete the full environmental review process. Therefore, this section of this Rail Alignment EIS is based largely on the American Indian Resource Document prepared for the Caliente rail alignment.

The DOE Native American Interaction Program concentrates on the protection of cultural resources at Yucca Mountain and contributes to government-to-government interactions with the American Indian tribes and organizations. The program helps DOE comply with various federal laws and regulations, including the American Indian Religious Freedom Act (42 United States Code [U.S.C.] 1996 *et seq.*); the Archaeological Resources Protection Act of 1979 (16 U.S.C. 470aa *et seq.*); the National Historic Preservation Act (16 U.S.C. 470 *et seq.*); the Native American Graves Protection and Repatriation Act (25 U.S.C. 3001 *et seq.*); DOE Order 1230.2, *American Indian Tribal Government Policy*; Executive Order 13007, *Indian Sacred Sites*; Executive Order 13175, *Consultation and Coordination with Indian Tribal Governments*; and the *DOE Office of Congressional Affairs, American Indian and Alaska Natives Tribal Government Policy, January 2006* (DIRS 176994-Bodman 2006, all). These laws and Executive Orders, and the DOE policy mandate the protection of archaeological sites and cultural items and require

agencies to include American Indians and federally recognized tribes in discussions and interactions on major federal actions. Additional guidance is provided in DOE information brief DOE/EH-41-0019/1204, *Consultation with Native Americans*.

Of the 17 tribal groups who participate in the Native American Interaction Program, 15 are federally recognized. The Pahrump Paiute Indian Tribe, which consists of a group of Southern Paiutes living in Pahrump, Nevada, is not a federally recognized tribe. In addition, the Las Vegas Indian Center is also not a federally recognized tribe, but DOE has included it in the Native American Interaction Program because the Center represents the urban American Indian population of the City of Las Vegas and of Clark County, Nevada (DIRS 103465-Stoffle et al. 1990, p. 7).

The 17 tribes and organizations have formed the Consolidated Group of Tribes and Organizations, which is a forum consisting of tribally approved representatives who are responsible for presenting their respective tribal concerns and perspectives to DOE. The Consolidated Group of Tribes and Organizations has provided DOE with valuable insights into American Indian cultural and religious values and beliefs. These interactions have produced several reports that record the history of American Indian people and the interpretation of American Indian cultural resources in the Yucca Mountain region (DIRS 104958-DOE 1989, pp. 30 to 74; DIRS 103465-Stoffle et al. 1990, pp. 11 to 25; DIRS 104959-DOE 1990, pp. 23 to 49). DOE is committed to continued interaction and consultation with the tribes and organizations throughout the environmental review process.

3.4.1 REGION OF INFLUENCE

The region of influence for American Indian interests along the Caliente and Mina rail alignments is the area to which American Indians have historic ties.

Initial DOE studies of the region identified three tribal groups – the Southern Paiute, the Western Shoshone, and the Owens Valley Paiute and Shoshone – whose cultural heritage includes the Yucca Mountain region. Additional ethnographic efforts eventually identified 17 American Indian tribes and organizations with tribal resources in the region. Figures 3-242 and 3-243 show the traditional boundaries and locations of federally recognized tribes and their relationships to the Caliente and Mina rail alignments.

3.4.2 AMERICAN INDIAN VIEWS ON THE AFFECTED ENVIRONMENT

American Indians believe that they have inhabited their traditional homelands since the beginning of time. Archaeological surveys have found evidence that American Indians used the lands through which the Caliente rail alignment would pass on a temporary or seasonal basis (DIRS 103465-Stoffle et al. 1990, p. 29). American Indians emphasize that a lack of abundant artifacts and archaeological remains does not mean that their people did not use an area or that the land is not an integral part of their cultural ecosystem. American Indians assign meanings to places involved with their creation as a people, with religious stories, burials, and important secular events. The traditional stories of the Southern Paiute, Western Shoshone, and Owens Valley Paiute and Shoshone peoples identify such places.

The following paragraphs, excerpted from the American Indian Resource Document (DIRS 174205-Kane et al. 2005, pp. 9 and 10), are representative of the American Indian interests in and attachment to the area that would be affected by construction and operation of the proposed railroad along the Caliente rail alignment:

For many centuries the YMP [Yucca Mountain Project] study area and the proposed rail corridor lands have been important to the lives of American Indians. These lands contain traditional gathering, ceremonial, and recreational areas for Indian people. From antiquity to contemporary

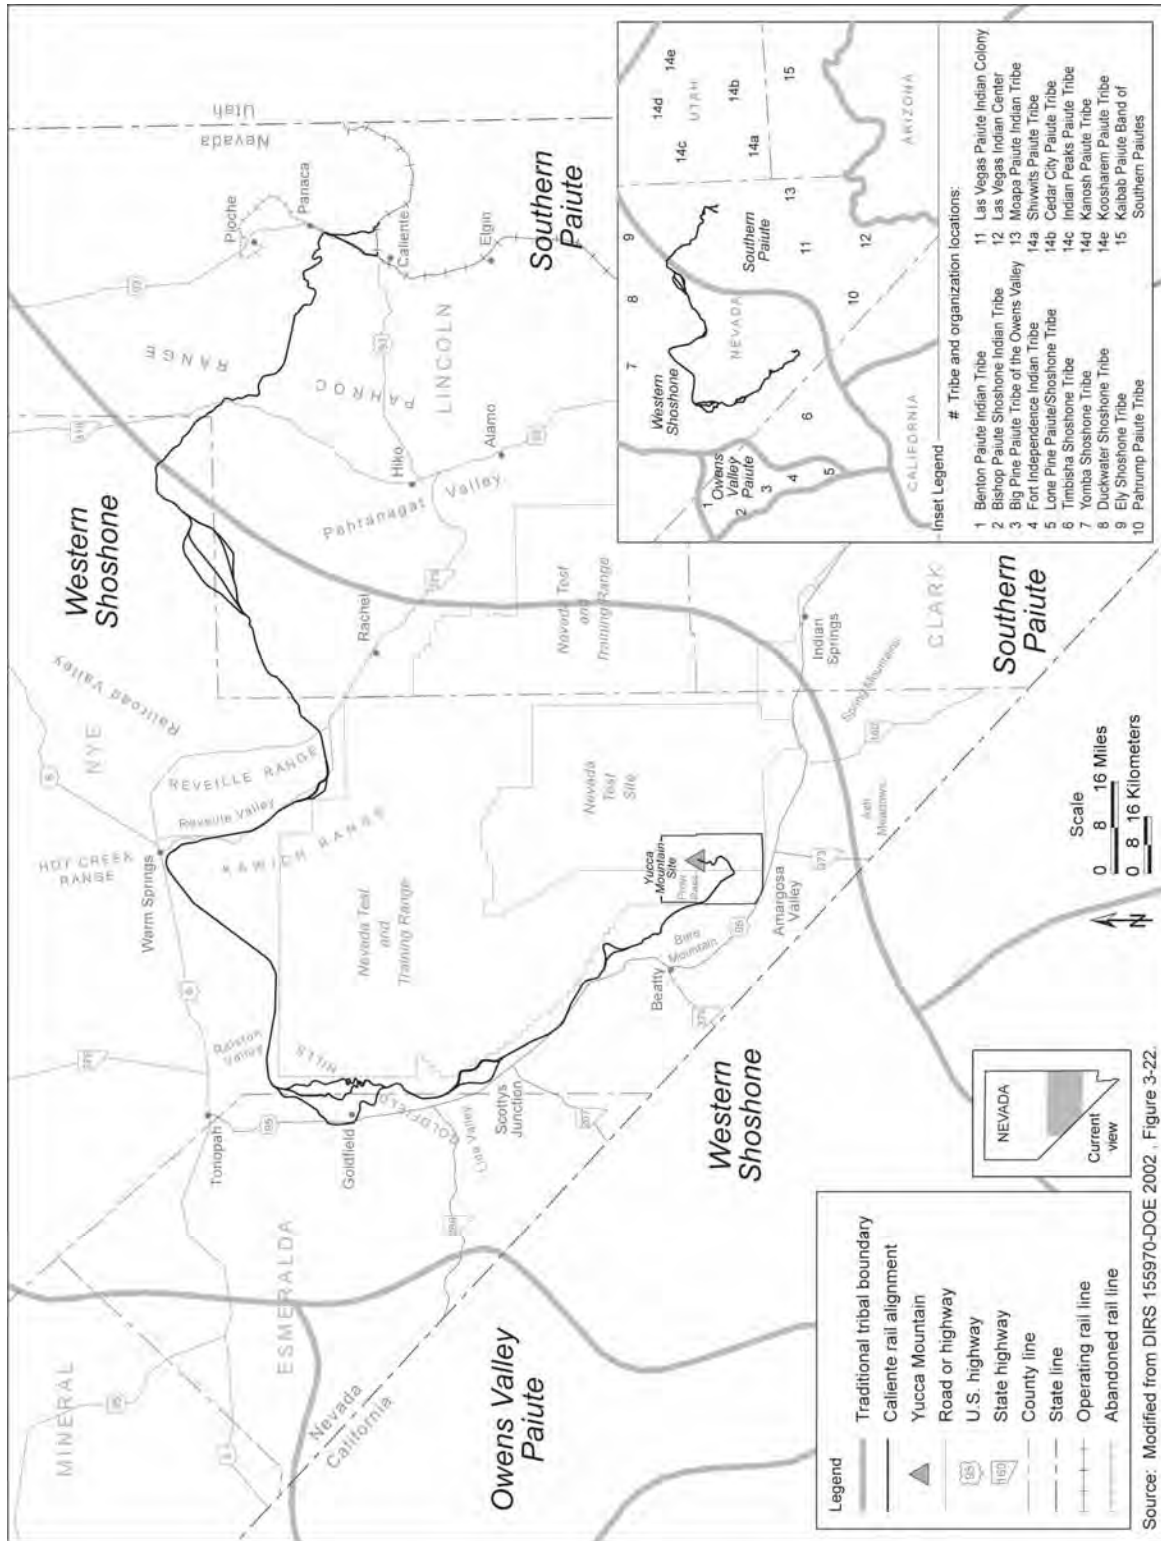


Figure 3-242. Traditional boundaries and locations of federally recognized tribes in the Caliente rail alignment region of influence.

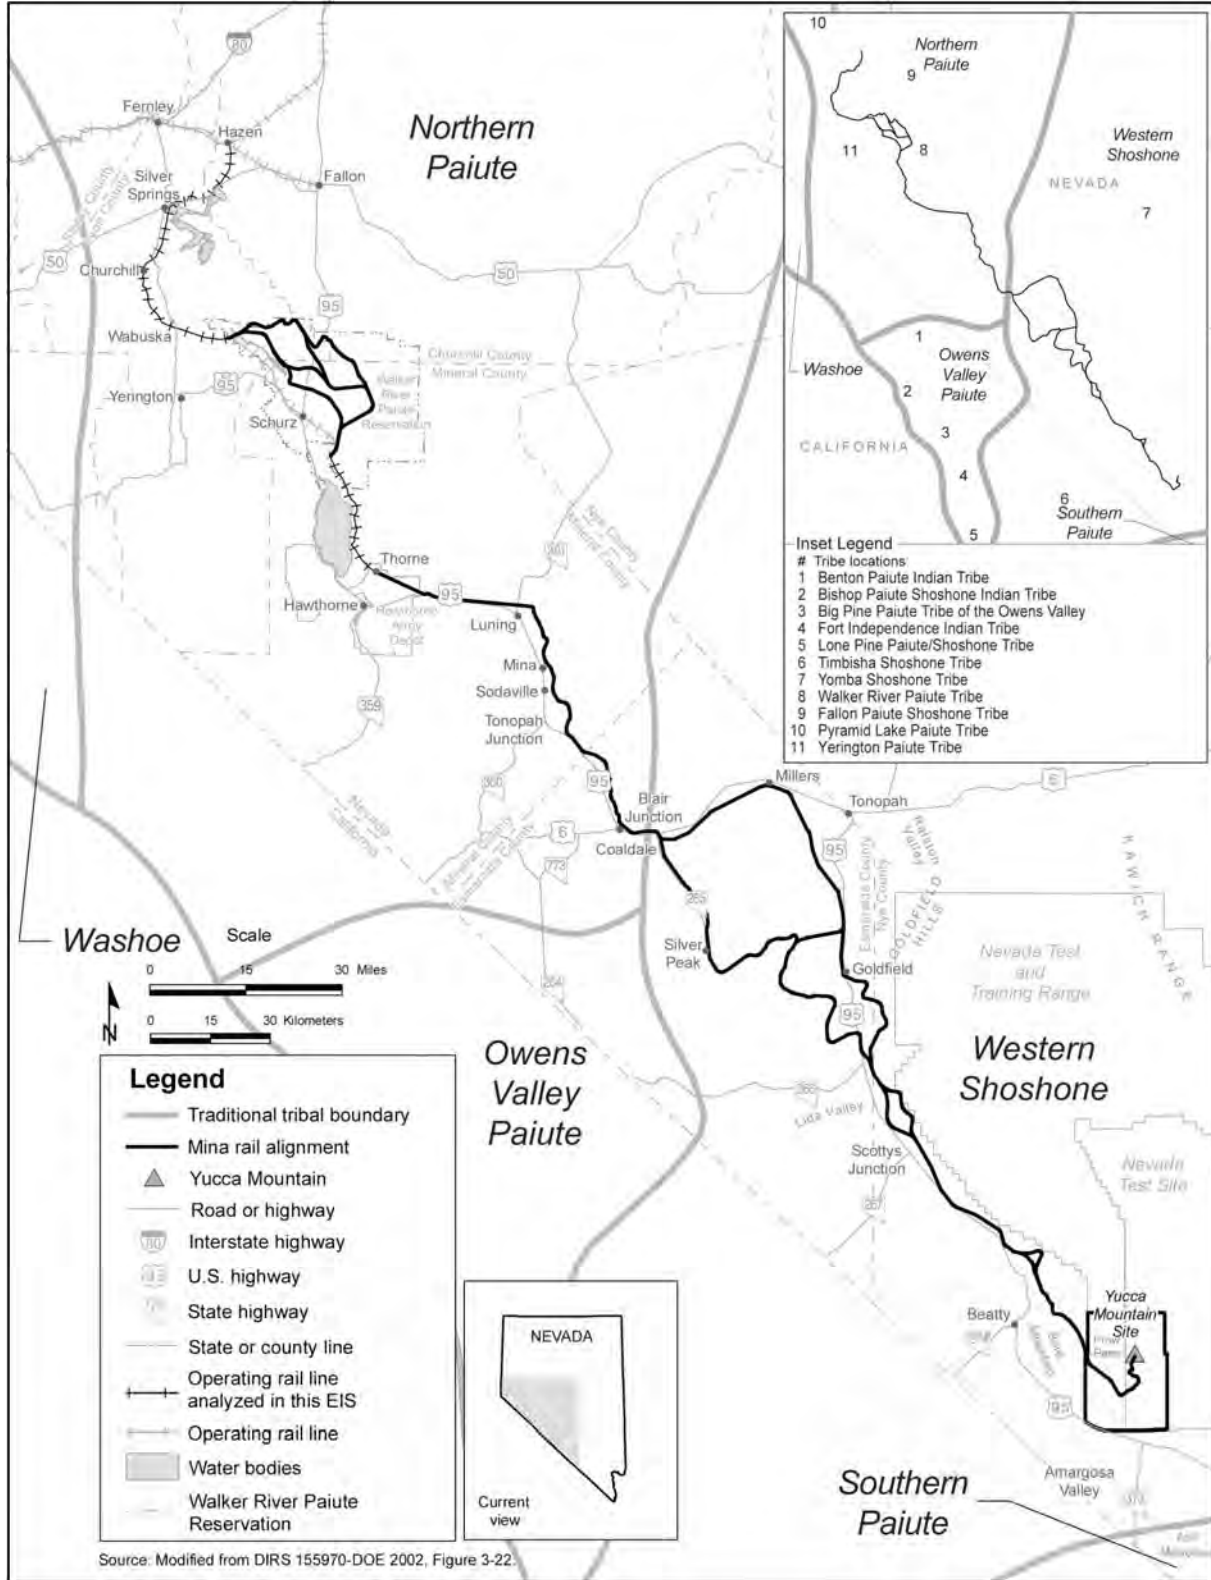


Figure 3-243. Traditional boundaries and locations of federally recognized tribes in the Mina rail alignment region of influence.

times, this area has been used continuously by many tribes. It contains numerous ceremonial resources and power places that are crucial for the continuation of American Indian culture, religion, and society. Until the mid-1900s, traditional festivals involving religious and secular activities attracted Indian people to the area from as far away as San Bernardino, California. Similarly, groups came to the area from a broad region during the hunting season and used animal and plant resources that were crucial for their survival and cultural practices. Many non-Indian people hold a different view of these lands. For example, the federal government has maintained the perception that the YMP is located in a remote area with a very low population density and other characteristics that make it ideal for the siting of a potential repository to be accessed by a newly constructed rail system. Because of this 'wasteland perception,' YMP lands were withdrawn by the federal government for the Atomic Energy Commission's nuclear testing site. The federal agency was renamed the DOE who named the land the NTS [Nevada Test Site]; a portion of the land was later designated for the YMP and the potential repository site.

Despite the loss of some traditional lands to destruction and reduced access, Indian people have neither lost their ancestral ties to, nor have forgotten the abundant cultural resources in the YMP area, or along the proposed rail corridor. Indian people have cared for the resources in these areas and will continue to do so. These strong beliefs and the presence of resources confirm the continuity in the American Indian use of and broad cultural ties to the YMP and the proposed rail alignment area.

Indian people believe that the proposed rail alignment falls within a cultural landscape and corresponding viewshed that extends many miles in all directions. Because this land is a part and not the whole, it is essential that determinations of cultural affiliation, ancestral ties, and impacts from YMP actions and programs on traditional Indian culture, religion, and society be made according to the broad regional use of lands linked around Yucca Mountain.

The extensive information compiled through long-term research involving the CGTO [Consolidated Group of Tribes and Organizations] demonstrates that American Indian cultural resources are not limited to archaeological or historical remains of native ancestors, but include all natural resources, as well as geological formations contained throughout the region. Natural resources constitute critical components of American Indian daily life and religious beliefs. Plants and animals are a source of food, raw materials, and medicine. Ritual practices cannot be properly carried out without plants and animals. Similarly, natural landforms mark locations that are significant for keeping the historic memory of American Indian people alive and for teaching children about their culture and history.

This land and its resources are well-known by American Indian people, who consider the YMP and the proposed rail corridor areas as central parts of their cultural landscape. This knowledge has allowed them to be self-sufficient and to transfer all their cultural values and practices to future generations to this day.

Based on the collective knowledge of American Indian culture and previous American Indian studies in the region, the American Indian Resource Document identifies a number of resources that are important to historical and traditional use in the region through which the proposed rail line would pass. These include several categories of resources, including biological (both plant and animal), geological, hydrological, and what non-American Indian investigators commonly refer to as archaeological and historical sites (DIRS 174205-Kane et al. 2005, p. 13).

American Indians believe that they have the responsibility to protect with care, and teach the young, the relationship of the existence of a non-destructive life on Mother Earth. This belief is the foundation of our holistic view of cultural resources, i.e., water, animals, plants, air, geology, sacred sites, TCPs [traditional cultural properties], and artifacts. Everything is considered to be interrelated and dependent on each other to sustain existence. Indian people believe that through proper respect and understanding, this complex relationship can be better understood and allow for existing and future generations to be better prepared for the care of these things.

Sections 3.4.2.1 through 3.4.2.4 briefly describe American Indian views on some of the existing resources; for more detailed information refer to the American Indian Resource Document (DIRS 174205-Kane et al. 2005, all) and *American Indian Perspectives on the Yucca Mountain Site Characterization Project and the Repository Environmental Impact Statement* (DIRS 102043-AIWS 1998, all).

3.4.2.1 Plants and Animals

Past studies by American Indians have identified about 107 plants, 46 species of mammals, and 35 species of birds that occur in the region and have either traditional use or importance. *Native Plants of Southern Nevada: An Ethnobotany* presents a detailed discussion of plants important to American Indian inhabitants of southern Nevada.

3.4.2.2 Water Resources

The American Indian Resource Document (DIRS 174205-Kane et al. 2005, p. 11) observes that American Indians are concerned about all water sources along the proposed rail alignment. Surface water exists in areas along the rail alignment (see Sections 3.2.5.1 and 3.3.5.1) and is found at springs, seeps, the Amargosa River (an ephemeral stream), and in temporary collection basins (“Pohs” or “tinajas”), which are important for storing water for everyday or ceremonial use (see sections 3.2.5 and 3.3.5, Surface-Water Resources). Other locations, known as hydrological areas, contain a wide range of important cultural resources including plants, animals, archaeological sites, minerals, traditional cultural places such as “power places,” sacred sites, and intellectual properties. The American Indian perspective is that water sources, including those along the proposed rail alignment, are the homes of supernatural beings who live in the area and protect the springs and water resources.

3.4.2.3 Archaeological and Historical Places

Although not considered all-inclusive, the American Indian Resource Document (DIRS 174205-Kane et al. 2005, Section 2.3) identifies 24 known locations of archaeological resources that fall within or near one or more of the Caliente and Mina rail alignments alternative segments and common segments. Four of these, however, including Bare Mountain, Prow Pass, Ash Meadows, and the Spring Mountains, are well outside the Caliente and Mina rail alignments regions of influence. Section 3.2.13, Cultural Resources, describes the others.

3.4.2.4 Environmental Justice

American Indians have identified environmental justice issues in the vicinity of Yucca Mountain, and in association with development of both the Yucca Mountain Repository and the proposed railroad. In 2005, the American Indian Writers Subgroup expressed the following concerns (DIRS 174205-Kane et al. 2005, pp. 29 and 30):

Holy Land Violations

American Indian people that belong to the CGTO [Consolidated Group of Tribes and Organizations] consider that much of the land along the proposed rail corridor to be as central in their lives today as these lands have been since the creation of these people. The proposed impact area(s) are a part of the traditional holy lands of Western Shoshone, Southern Paiute and Owens Valley Paiute and Shoshone peoples. These holy lands and their resources have been subjected to exorbitant amounts of damage by long-term nuclear testing activities involving the NTS [Nevada Test Site] and site characterization activities associated with the YMP [Yucca Mountain Project]. The CGTO believes that the past, present, and future pollution of these holy lands constitutes both

Environmental Justice and equity violations. No other people have had their holy lands impacted by YMP-related activities.

Cultural Survival-Access Violations

One of the most detrimental consequences of YMP operations on the survival of American Indian culture, religion, and society has been the denial of free access to their traditional lands and resources. Loss of access to traditional foodstuffs and medicine has greatly contributed to undermining the cultural well being of Indian people. These Indian people have experienced, and will continue to experience, breakdowns in the process of cultural transmission due to lack of access to YMP lands and resources. The construction and use of the proposed rail corridor will add to such impacts to the land and the perpetuation of Indian culture. No other people have experienced or been subjected to similar cultural survival impacts attributed to access limitations within the YMP area.

3.4.3 AMERICAN INDIAN TREATY ISSUE

Of special concern to the Western Shoshone people is the Ruby Valley Treaty of 1863. The Western Shoshone people maintain that the treaty gives them rights to 97,000 square kilometers (24 million acres) in Nevada, including the Yucca Mountain region (DIRS 102216-*Western Shoshone National Council v. United States of America*, 1998, all). The legal dispute over the land began in 1946 when the Indian Claims Commission Act (60 Stat. 1049) gave tribes the right to sue the Federal Government for treaty promises that are not kept. If a tribe were to win a claim against the government, the Indian Claims Commission Act specifies that the tribe could receive only a monetary award and not land or other remunerations.

The Western Shoshone people filed a claim in the early 1950s alleging that the government had taken their land. The Indian Claims Commission found that Western Shoshone title to the Nevada lands had gradually been extinguished and set a monetary award as payment for the land. In 1976, the Commission entered its final award to the Western Shoshone people, who dispute the findings of the Commission and have not accepted the monetary award for the lands in question (the U.S. Treasury has been holding these monies in an interest-bearing account). The Western Shoshone people maintain that a settlement has not been reached. In 1985, the U.S. Supreme Court ruled that even though the money has not been distributed, the United States has met its obligations with the Commission's final award and, as a consequence, the aboriginal title to the land had been extinguished (DIRS 148197-*United States v. Dann et al.*, 1985, all).

On February 6, 2003, the Western Shoshone National Council sent a letter to members of the U.S. House of Representatives Resources Committee and the Senate Indian Affairs Committee, expressing opposition to any attempt to re-introduce legislation aimed at forcing a distribution of monies from Docket 326-K of the Indian Claims Commission to the Western Shoshone. The Council letter enclosed a report, *Failure of the United States Indian Claims Commission to File a Report with Congress in the Western Shoshone Case* (Docket 326-K), prepared by the Indigenous Law Institute on behalf of the Council, which asserted that the U.S. Indian Claims Commission never completed its action in Docket 326-K. The Council therefore asserted that there is no legal basis for a distribution bill and reiterated its position that negotiations between the Western Shoshone and the United States are the preferred way to resolve this ongoing conflict. On February 25, 2003, Representative Jim Gibbons (Nevada) introduced H.R. 884, a bill "to provide for the use and distribution of the funds awarded to the Western Shoshone identifiable group under Indian Claims Commission Docket Numbers 326-A-1, 326-A-3, and 326-K, and for other purposes." The bill became Public Law 108-270 in July 2004.

On March 4, 2005, the Western Shoshone National Council filed a lawsuit against the United States, DOE, and the U.S. Department of the Interior in federal district court in Las Vegas, Nevada. The complaint sought an injunction to stop federal plans for the use of Yucca Mountain as a repository based on the five established uses of the land within the boundaries of the 1863 Ruby Valley Treaty. On May 17, 2005, the U.S. District Court rejected a request from the Western Shoshone National Council for a preliminary injunction to stop DOE from applying for a license for the Yucca Mountain Project.

In 2006, a contingent of Western Shoshones sued Union Pacific Railroad, BNSF Railroad Company, Newmont Gold Company, Barrick Goldstrike Mines Inc., Glamis Gold Inc., Nevada Land Resource Company, Sierra Pacific Power Company, and Idaho Power Company in federal court in Reno, Nevada. The lawsuit claims that the companies violated the Ruby Valley Treaty by possessing land transferred from the U.S. Government.

Although this American Indian treaty issue involves land along the Caliente and Mina rail alignments, none of the alternative segments or common segments would encroach on federally recognized American Indian lands.

3.4.4 AMERICAN INDIAN VIEWS ON CONSTRUCTING AND OPERATING THE PROPOSED RAILROAD

Previous studies (DIRS 102043-AIWS 1998, all; DIRS 174205-Kane et al. 2005, all; DIRS 103465-Stoffle et al. 1990, all) have delineated American Indian sites, areas, resources, and other interests within or adjacent to the Caliente rail alignment region of influence (DIRS 102043-AIWS 1998, Chapter 2; DIRS 174205-Kane et al. 2005, Chapter 2). Comparable studies have not been completed for the Mina rail alignment region of influence, but similar views can be anticipated. The Consolidated Group of Tribes and Organizations has consistently opposed the siting and operation of a repository at Yucca Mountain and transportation of spent nuclear fuel and high-level radioactive waste to such a repository. *American Indian Perspectives on the Proposed Rail Alignment Environmental Impact Statement for the U.S. Department of Energy's Yucca Mountain Project* (the Native American Resource Document) (DIRS 174205-Kane et al. 2005, pp. 33 and 34) summarizes the views and concerns of the Consolidated Group of Tribes and Organizations. The “CGTO has continually stated its opposition to the siting and transportation of spent nuclear fuel and high-level waste to a repository at Yucca Mountain” and strongly believes that “any disturbance to cultural, biological, botanical, geological, and hydrological resources, including viewscapes, songscapes, storyscapes, and traditional cultural properties will cause adverse impacts” (DIRS 174205-Kane et al. 2005, p. 33). Some of the American Indian views expressed in the American Indian Resource Document regarding potential impacts under the Proposed Action include the following (DIRS 174205-Kane et al. 2005, p. 9):

Despite the loss of some traditional lands to destruction and reduced access, Indian people have neither lost their ancestral ties to, nor have forgotten the abundant cultural resources in the YMP [Yucca Mountain Project] area, or along the proposed rail corridor. Indian people have cared for the resources in these areas and will continue to do so. These strong beliefs and the presence of resources confirm the continuity in the American Indian use of and broad cultural ties to the YMP and the proposed rail alignment area.

Indian people believe that the proposed rail alignment falls within a cultural landscape and corresponding viewshed that extends many miles in all directions. Because this land is a part and not the whole, it is essential that determinations of cultural affiliation, ancestral ties, and impacts from YMP actions and programs on traditional Indian culture, religion, and society be made according to the broad regional use of lands linked around Yucca Mountain.

The Consolidated Group of Tribes and Organizations has stated that no systematic evaluations of traditional sacred sites or places along the Caliente rail alignment have been made by American Indian people that allowed for an opportunity for all members of the American Indian Writers Subgroup to fully evaluate the proposed rail alignment. Without proper studies and consultation, no specific statements about impacts to particular locations can be provided by the tribal representatives. Furthermore, establishment of the Yucca Mountain protected area boundaries and construction of the proposed repository and rail line would continue to restrict the free access of American Indians to these areas (DIRS 174205-Kane et al. 2005, p. 30).

There would be a potential for indirect impacts to American Indian interests from construction activities and the presence of additional workers, particularly impacts to the physical evidence of past use of the cultural landscape (artifacts, cultural features, archaeological sites, etc.) important to American Indian people.

Shared-Use Options would involve ground-disturbing activities for the construction of commercial access sidings for access to the rail line. In all likelihood, any shared-use projects would result in potential impacts to American Indian interests similar to those under the Proposed Action without shared-use. American Indians would also view the operation of a shared-use rail line as having adverse effects on American Indian interests and tribal resources.

3.4.5 SUMMARY

Perceptions about the types and magnitudes of potential impacts along the Caliente and Mina rail alignments vary among the various stakeholders with interests in the proposed railroad because of different beliefs, goals, responsibilities, and values. American Indians are concerned that the proposed railroad could cause substantial and high adverse impacts to a number of American Indian interests within and adjacent to the Caliente and Mina rail alignment regions of influence.

The Proposed Action includes best management practices that would avoid, minimize, or otherwise reduce impacts to American Indian interests to the greatest extent practicable. DOE would also consider mitigation measures for any remaining impacts to American Indian interests. Relevant best management practices and potential measures to mitigate impacts, if they occur, include:

- Continue to solicit input from American Indians to identify the potential to impact American Indian cultural resources, discuss potential solutions, and avoid adverse impacts.
- Comply with all regulatory requirements that protect American Indian interests (Executive Order 13175, *Consultation and Coordination with Indian Tribal Governments*).
- Consult with American Indian tribes and protect their access to public lands that contain American Indian cultural resources (American Indian Religious Freedom Act of 1978; Executive Order 13007, *Indian Sacred Sites*).

