

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-01:
Expert Report of Current Energy Group



CURRENT
ENERGY GROUP

Resource Adequacy in the Pacific Northwest

An Assessment of Resource Adequacy Studies Following the Planned Retirement of Centralia

Prepared for Earthjustice, Sierra Club, and
Environmental Defense Fund

Authors

Brad Cebulko

Erik B. Olson

Ed Burgess

Laura Burford

© January 2026, Current Energy Group. All
rights reserved.

Contents

Executive Summary.....	1
What is Resource Adequacy?	4
Introduction.....	4
How Resource Adequacy is Assessed.....	5
Who Conducts Resource Adequacy Planning.....	8
Summary and Interpretation	11
Analysis of PNW Resource Adequacy Reports and Findings.....	11
Introduction to Analysis Section	11
Analysis of Short-Term (2026) Findings	11
2025/2026 NERC Winter Reliability Assessment Short-Term Findings.....	12
2024 Western Electricity Coordinating Council's Western Assessment of Resource Adequacy Short-Term Findings	13
E3 Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results, Short-Term Findings	16
Bonneville Power Administration and Puget Sound Energy Planning Documents Short-Term Findings.....	23
Analysis of Medium-Term (2027-2031) Findings.....	24
Western Electricity Coordinating Council's Western Assessment of Resource Adequacy Medium-Term Results	25
E3 Study Medium-Term Results	27
Northwest Power and Conservation Council's Medium-Term Results.....	28
BPA/Puget Sound Energy Medium-Term Results	30
Review of Recent Washington State Assessment.....	32
DOE's July Resource Adequacy Report	34
Balancing Authorities and Real-Time System Operations	36
Disclaimer	39

Executive Summary

On December 16, 2025, the U.S. Department of Energy (DOE) issued Order 202-25-11 under its authority under section 202(c) of the Federal Power Act to prevent the planned retirement of Unit 2 of the Centralia Power Plant on grounds of “a shortage of electric energy, a shortage of facilities for the generation of electric energy, and other causes” in the Western Electricity Coordinating Council (WECC) Northwest region.¹ In support of this determination, DOE relied heavily on findings from the North American Electric Reliability Corporation (NERC) and Energy + Environmental Economics (E3).

As of 2025, WECC-Northwest includes Washington, Oregon, Montana, and parts of northern California and northern Idaho. The following map shows the WECC subregions.²

Figure 1: Map of the WECC subregions



¹ U.S. Department of Energy (DOE). “Order No. 202-25-11,” December 16, 2025. <https://www.energy.gov/documents/order-number-202-25-11>.

² “2025–2026 Winter Reliability Assessment Western Overview,” WECC, Subregion Reliability Highlights, November 2025, <https://feature.wecc.org/seasonal-assessment-western-overview/index.html>.

In this report, Current Energy Group (CEG), evaluates the resource adequacy and reliability findings contained in the studies relied upon by DOE, as well as several other prominent regional resource adequacy studies, and places them in broader regional planning context. CEG did not conduct a new or independent resource adequacy model. Rather, this assessment reviews, synthesizes, and interprets the results of existing national, regional, and utility-level studies to examine:

- The extent to which RA best practices have been followed,
- The geographic scope covered by the analyses,
- How load growth has been incorporated into RA analyses,
- If/how analyses planned for Centralia's retirement (and repowering)

Based on this review, CEG assesses whether the findings support the conclusion that WECC-Northwest faces an imminent or emergency-level resource adequacy crisis. As discussed below, no study supports the conclusion that WECC-Northwest faces a resource adequacy crisis, including the studies on which DOE relied. Any risk identified in the studies is more appropriately characterized as a medium-term planning challenge of the type regularly addressed by state, regional, and utility planning processes.

Near-Term Findings (2026)

All of the planning studies—those upon which DOE relied and the ones DOE does not discuss—assume Centralia Unit 2's retirement on December 31, 2025. Across the studies most directly relied upon by DOE, particularly NERC's 2025/2026 Winter Reliability Assessment and E3's Phase 1 results, the record does not support a finding of a resource adequacy crisis in 2026 or early 2027. The same goes for the other prominent planning studies.

NERC concludes that the region has sufficient capacity to meet expected peak demand this winter. NERC also does not identify violations of key probabilistic reliability metrics under normal assumptions. NERC identifies only one type of extreme scenario presenting risk, which is characterized as “[a]bove-normal peak demand combined with high generator outages in extreme conditions.”³ But the risk presented is only whether the region will maintain its reserve margin (*i.e.*, its buffer of additional resources above that necessary to meet demand), and NERC expressly concludes that the risk is addressed through imports.⁴ In fact, NERC emphasizes that “[o]perating reserve margins are expected to be met after imports in all winter scenarios.”⁵ NERC's classification falls short of the “high risk” designation reserved for conditions in which operating reserve requirements cannot be met under expected conditions.

E3 also recently examined resource adequacy in Washington, Oregon, Montana, Idaho, Utah, and Wyoming, a somewhat different region than WECC-Northwest. In the area it examined, E3

³ “2025–2026 Winter Reliability Assessment,” page 37, NERC, November 2025, https://www.nerc.com/globalassets/our-work/assessments/nerc_wra_2025.pdf.

⁴ “2025–2026 Winter Reliability Assessment,” page 37, NERC.

⁵ “2025–2026 Winter Reliability Assessment,” page 37, NERC.

estimates that in 2026 resources will be slightly (approximately 380 MW) below 50,737 MW, the amount E3 estimates is needed to secure a full margin above peak demand and meet obligations under an international treaty. E3 does not identify this shortfall as an emergency, nor do we consider it an emergency. E3's modeled loss-of-load expectation is approximately 0.15, which represents a small deviation from commonly used planning thresholds (0.1 loss-of-load expectation) and does not indicate a material increase in the risk of load loss in 2026. E3's analysis, moreover, relies on conservative estimates of the region's import capabilities that are lower than levels observed during recent extreme events and assumptions for hydropower that do not reflect current hydrological conditions. When accounting for in-development resources, observed regional import performance during recent extreme events, and current hydrological conditions, the identified shortfall—which is less than 1 percent—would likely evaporate.

Other regional and utility-level planning studies, including those from the Western Electricity Coordinating Council, Bonneville Power Administration (BPA), and Puget Sound Energy (PSE), do not identify a shortfall. These entities thus further reinforce the conclusion that WECC-Northwest does not face a near-term reliability crisis.

Table 1: Summary of Short-Term Resource Adequacy Findings

Organization	Study	Sufficient Resources to Meet Peak Demand with Full Reserve Margin in 2026?	Assumed Centralia Coal Retirement?	Considered Multiple Reliability Metrics?
NERC	2025/2026 Winter Reliability Assessment	Yes	Yes	Yes
Western Electricity Coordinating Council	2024 Western Assessment of Resource Adequacy	Yes	Yes	Yes
Puget Sound Energy	2023 Update to Puget IRP	Yes	Yes	Yes
Bonneville Power Administration	BPA Resource Program (2024) and White Book (2025)	Yes	Yes	Yes
E3	Phase 1 Results	No*	Yes	Yes

*As discussed below, E3's study relied on several conservative assumptions that understate the contributions of existing and expected resources, including assumptions related to import capacity, planned resource additions, and Canadian hydropower entitlements.

Medium-Term Findings (2027–2031)

The studies reviewed by CEG consistently identify growing resource adequacy gaps in the latter part of the decade, driven primarily by potential rapid load growth, particularly from potential data center development, rather than by coal or other resource retirements. E3 projects a substantial resource gap by 2030 under its modeled assumptions, and this finding should be taken seriously as an indication that additional resources, transmission, and demand-side measures will be required. Notably, E3 explains that the entire resource gap is addressed by completion of projects that utilities have identified in their Integrated Resource Plans.

The reviewed studies—including from E3, NERC, Western Electricity Coordinating Council, the Northwest Power and Conservation Council, BPA, and Puget Sound Energy—do *not* characterize these medium-term challenges as an immediate reliability crisis. Instead, they present the emerging gap as a planning signal intended to inform timely action through established state and regional resource planning, procurement, and coordination processes. The studies emphasize the importance of accelerating resource development, refining load forecasts and reliability assumptions, expanding transmission capability, and strengthening regional coordination. The studies do not support a proposition that extraordinary federal interventions into established processes are necessary to address the challenges in the latter part of the decade. Rather, federal intervention sends mixed and counterproductive signals to the market that undermine existing planning and procurement practices.

Overall Conclusions

Taken together, the body of regional and national planning evidence does not support the conclusion that the Pacific Northwest faces an imminent or emergency-level resource adequacy crisis. The retirement of Centralia Unit 2 is a long-planned transition that is fully reflected in regional planning analyses and is not identified as a driver of either near-term or medium-term reliability risk.

The emergence of larger modeled shortfalls toward 2030 is an important finding, but one that reflects the normal function of resource adequacy planning: to identify risks early enough for state, regional, and utility processes to respond through deliberate, coordinated action, as they have done for decades.

What is Resource Adequacy?

Introduction

Electric resource adequacy and energy system reliability are among the most important, discussed, and analyzed energy challenges among utility practitioners, regulators, and policymakers. Both resource adequacy and reliability practices and requirements have evolved over time with the growth of the electricity system, advancements in economic and regulatory theory, and in response

to prominent grid failures like the Northeast blackouts of 1965 and 2003.⁶ This has led to a layered planning and regulatory framework for the bulk power system involving national entities (the North American Electric Reliability Corporation and the Federal Energy Regulatory Commission), regional reliability organizations, and state regulators, each of which conducts ongoing assessments and planning studies. These layers intentionally overlap, with assessments from different organizations analyzing different geographies or using different methodologies and time horizons. Collectively, these resource adequacy and reliability planning efforts create a robust record with which to evaluate DOE's claims of a reliability and resource adequacy crisis.

Resource Adequacy describes the situation where an electric system has enough capacity available to meet customer demand, plus a reserve margin on top, in most hours under most conditions based on a chosen standard.^{7,8} The National Laboratory of the Rockies (formerly National Renewable Energy Laboratory) defines a power system as being resource adequate "if it has procured sufficient resources (including supply, transmission, and responsive demand) such that it runs a sufficiently low risk of invoking emergency measures (such as involuntary load shedding) due to resource unavailability or deliverability constraint."⁹ The level of risk deemed sufficient is typically defined by a resource adequacy standard (e.g., the "1-in-10" standard discussed below) set by planners based on engineering judgement and acceptable cost. Because no system can ever be perfectly reliable, planners must determine how to appropriately balance incremental cost and risk reduction. Put simply, resource adequacy measures how much generation and other resources are available to meet load.

Resource adequacy and power system reliability are closely related but distinct concepts. Reliability refers to the ability of the electric system to deliver electricity to customers in real time, encompassing generation, transmission, and distribution. Even where the bulk power system is resource adequate and reliable, customers may still experience outages, primarily due to distribution-level issues, such as a downed residential line caused by a fallen tree.

How Resource Adequacy is Assessed

Resource adequacy planning is a well-established practice across the country where multiple entities independently produce resource adequacy assessments for each region, generally according to a centralized standard. These assessments often will complement or overlap but may use different methodological approaches or metrics. As there is no "national standard" for resource

⁶ "Reliability Explainer," Federal Energy Regulatory Commission, accessed December 21, 2025, <https://www.ferc.gov/reliability-explainer>; "Resource Adequacy: History and Catalog of Metrics," Electric Power Research Institute, December 31, 2018, <https://www.epri.com/research/products/000000003002013734>.

⁷ "Reliability Explainer," Federal Energy Regulatory Commission, accessed December 16, 2025, <https://www.ferc.gov/reliability-explainer>.

⁸ "Resource Adequacy Basics," National Renewable Energy Laboratory, archived October 20, 2025, accessed December 16, 2025. <https://web.archive.org/web/20251020042833/https://www.nrel.gov/research/resource-adequacy>.

⁹ "Probabilistic Resource Adequacy Suite (PRAS) v0.6 Model Documentation," National Renewable Energy Laboratory (now National Laboratory of the Rockies), May 2021, <https://docs.nrel.gov/docs/fy21osti/79698.pdf>.

adequacy, each state and grid operator (often the local utility) establishes its own approach. The collection of multiple, overlapping but independently produced studies help operators, policymakers, and the many vested stakeholders make decisions to ensure the adequacy of the bulk electric system.

The context of each study is important. Because each study is a product of its underlying methodology, assumptions, and goals, any reliance on a given study must be based on consideration of the study's particular context. A study's findings cannot be relied upon without due consideration of the context, including the underlying methodology, assumptions, and goals.

An essential component of each study is the metric or metrics used to measure resource adequacy. There are several metrics used across North America to capture different dimensions of resource adequacy. These metrics can be broadly categorized as deterministic or probabilistic.¹⁰ Deterministic metrics were historically more common because they are relatively simple to calculate and rely on fixed assumptions about load, resource availability, and reserve margins. In recent years, however, many planning entities have increasingly relied on probabilistic metrics, which evaluate the distribution of possible outcomes across a wide range of system conditions. Probabilistic metrics are better suited to capturing uncertainty and risk and are generally viewed as more informative than deterministic metrics for assessing resource adequacy.

- **Loss of Load Expectation (LOLE).** This metric measures the expected number of loss-of-load event-days over the study's planning period. An event-day is usually defined as any single day in which electricity demand is not met at least once because system resources were not sufficient to meet demand, whether the event lasts 5 minutes or 5 hours. A single event that spans two days is counted as two event-days. In general, $LOLE = \frac{\text{Number of Event-Days}}{\text{Total Time Period}}$. The most common LOLE standard is "1-in-10," which refers to an expectation that there is no more than 1 event-day (resulting from insufficient resources) in a 10-year period. The 1-in-10 standard equates to a LOLE of 0.1, calculated as $0.1 = \frac{1 \text{ event-day}}{10 \text{ years}}$. LOLE is usually evaluated on a yearly timescale, but it can also be expressed at an hourly or daily timescale.
- **Loss of Load Hours (LOLH).** This metric is an expression of LOLE where an "event" is specified to be at the hourly level (e.g., 15 hours in 10 years), allowing for higher resolution of the duration of potential shortfalls.
- **Loss of Load Probability (LOLP).** This metric is like LOLE, except that it measures the expected percentage of events over the planning period in which there was a loss of load. LOLP is equivalent to LOLE divided by the period chosen. For example, a 1-in-10 LOLE standard would lead to a LOLP of 0.0274% per day, calculated as:

$$LOLP = \left(\frac{1 \text{ event-day}}{10 \text{ years}} \right) * \left(\frac{1 \text{ year}}{365 \text{ days}} \right) * 100 = 0.0274\%$$

¹⁰ "Metrics Explainers," Electric Power Research Institute, accessed 12/16/2025, <https://msites.epri.com/resource-adequacy/metrics/metrics-explainers>.

- **Expected Unserved Energy (EUE).** This metric measures the total expected amount of unserved energy, in MWh, over the planning period. Unlike LOLE and LOLP, which measure the frequency or likelihood of a loss-of-load event, EUE measures the magnitude of energy demand not served. While modeling tools would quantify actual EUE in given scenarios, a simple conceptual relationship is as follows: EUE is equal to the LOLE multiplied by the average magnitude of the shortfall. For example, if a model found that the average shortfall during an event was 200MW across a 1-in-10 LOLE standard, and further assuming that the event lasts a full 24 hours, the EUE per year would be 480MWh.
- **Planning Reserve Margin (PRM).** This metric measures the difference between the total resources and the expected peak load, divided by the peak load. It is expressed as a percentage.¹¹ For example, if a system has 107,000 MW of resources and an expected peak load of 100,000 MW, the system has a 7% reserve margin, calculated as:

$$PRM = \left(\frac{107,000 - 100,000}{100,000} \right) = 7\%$$

The PRM assessment may, and typically does, “de-rate” resources based on the likelihood that a generator will be unavailable or produce less than its maximum potential output (i.e., less than its “nameplate capacity”) during a peak demand period. The resulting figure is known as a generator’s “accredited” capacity. For example, although the system’s total nameplate capacity could be 225,000 MW, resource accreditation may result in only 107,000 MW being counted for PRM purposes. Accreditation is further discussed below.

Each metric measures a different aspect of system risk, and most regions rely on multiple metrics. PRM provides a high-level indicator of resource capacity relative to expected peak load, but it does not capture hourly or seasonal variability in resource availability. LOLE and LOLP quantify the probability and frequency of shortfall events, but do not identify the magnitude of a loss of load event. EUE is used to measure the total quantity of energy that cannot be served in a loss-of-load event. By using multiple metrics, planners can capture both the likelihood and the magnitude of potential shortages, which a single metric cannot do on its own.

The Northwest Power and Conservation Council, an interstate compact agency created by Congress to conduct long-term regional planning for the region, uses several metrics that measure both the likelihood and the magnitude of events. The Western Resource Adequacy Program, a voluntary regional reliability and capacity-sharing program composed of electric utilities across the Pacific Northwest and the broader Western Interconnection, uses LOLE as its primary metric in its probabilistic analysis.¹²

¹¹ “Metrics Explainers,” Electric Power Research Institute, accessed 12/16/2025, <https://msites.epri.com/resource-adequacy/metrics/metrics-explainers>.

¹² “Western Resource Adequacy Program Tariff of Northwest Power Pool D/B/A Western Power Pool,” Western Power Pool, March 16, 2025, https://www.westernpowerpool.org/private-media/documents/WRAP_Tariff_Effective_3.16.25.pdf.

Because these metrics evaluate system risk, the studies need a method for representing how much each resource will likely contribute to meeting demand during period of system stress. In LOLE-, LOLH-, or EUE-based analyses, this is typically done through probabilistic assumptions about unit availability, forced outages, and load shapes rather than relying on nameplate capacity alone to reflect each resource's expected availability during peak or net-peak hours. In most of the country, these performance assumptions guide grid operators when they assign resources an accredited capacity value. The most commonly used probabilistic accreditation method is Effective Load Carrying Capability (ELCC), which measures the contribution a resource makes to reducing loss-of-load risk, typically by comparing system reliability outcomes with and without the resource relative to a benchmark "perfect capacity" resource. The purpose of applying an accredited value (via ELCC or another method) to each resource is to ensure that resources are counted based on their contribution to reducing loss-of-load risk, rather than their installed capacity.

Who Conducts Resource Adequacy Planning

Resource adequacy planning occurs at multiple institutional layers, each producing a unique assessment based on its purview, methodology, and assumptions. States in the Western Interconnection do not have a single coordinating entity that sets resource adequacy requirements. As a result, there are several independent organizations, many with overlapping jurisdictions, that conduct and publish resource adequacy analyses for the Pacific Northwest. Each of these assessments provides complementary but sometimes divergent perspectives on system conditions.

At the national level, the North American Reliability Corporation, or NERC, is the entity responsible for ensuring the reliability and security of the North American bulk power system, under delegated authority from the Federal Energy Regulatory Commission (FERC).¹³ NERC performs a variety of functions. It develops and enforces mandatory reliability standards. It also monitors the bulk power system. And NERC assesses system reliability through a variety of forecasts: (1) an annual 10-year forecast, (2) an annual forecast of the upcoming summer, usually issued about a month or two before summer begins, and (3) an annual forecast of the upcoming winter, also typically issued about a month or two before winter begins. Other NERC functions include "audit[ing] owners, operators, and users [of the bulk power system] for preparedness, as well as educat[ing] and train[ing] industry personnel."¹⁴

State regulators play an essential role in resource adequacy and reliability planning. Public Utility Commissions, such as the Washington Utilities and Transportation Commission in Washington state, typically approve utility resource adequacy assessments, specific power plants, and capital expenditures through their review of requested Certificates of Public Convenience and Necessity (CPCNs), rate cases, and integrated resource plans. Electric utilities, both investor-owned and consumer-owned, develop integrated resource plans that identify how the utility will meet

¹³ "Reliability Explainer," Federal Energy Regulatory Commission, accessed December 16, 2025, <https://www.ferc.gov/reliability-explainerhttps://www.ferc.gov/reliability-explainer>.

¹⁴ "Who We Are," North American Electric Reliability Corporation, accessed December 23, 2025, <https://www.nerc.com/who-we-are>.

customer demand over the planning horizon, usually 20 years. Electric utilities typically develop integrated resource plans every 2 to 3 years and rely on a variety of methods for evaluating resource adequacy and accrediting resources. The utility-specific resource adequacy assessment and the resource accreditation values are important components for identifying the utility's future resource needs.

In addition to state and national entities, there are several entities in the Pacific Northwest region that provide regional resource adequacy assessments.

1. **Western Electricity Coordinating Council (WECC)** is one of the six regional entities with delegated authority from NERC to ensure reliability and resource adequacy. As the FERC-approved regional manager for reliability for the Western Interconnection, its geographic focus spans 14 Western states, 2 Canadian provinces, and Northern Baja Mexico.¹⁵ Its functions include setting standards, identifying threats and shortfalls, and monitoring compliance. As part of this role, WECC conducts interconnection-wide resource adequacy assessments. WECC's assessments are advisory rather than binding, but they provide one of the most comprehensive views of adequacy risks across the Western grid and can be (and are) used as inputs to utility, state, and regional resource adequacy planning processes. WECC is divided into eight sub-regions as shown in Figure 1.¹⁶
2. **Northwest Power and Conservation Council (NWPCC)** is a regional planning body created by Congress in 1980 to ensure reliable, affordable, and environmentally responsible energy for Washington, Oregon, Idaho, and Montana (Northwest). The council develops a regional power plan that guides Bonneville Power Administration, regional utilities, and federal hydropower operations in the region. The council conducts an annual resource adequacy assessment through a collaborative approach with its Resource Adequacy Committee¹⁷ made up of regional utilities and stakeholders.¹⁸
3. **The Western Power Pool's Western Resource Adequacy Program (WRAP)** is the first coordinated regional resource adequacy planning and compliance program in the Northwest. Although participation is voluntary, member utilities enter into a binding agreement to meet common resource adequacy standards and comply with the program's planning and operational requirements. The program received FERC approval of its tariff in February 2023, establishing enforceable capacity sufficiency demonstrations, resource accreditation methods, and operational sharing provisions.¹⁹ The Western Resource Adequacy Program will start binding operations in Winter 2027/2028 for the 16

¹⁵“About WECC,” Western Electricity Coordinating Council (WECC), accessed December 23, 2025.

<https://www.wecc.org/about/about-wecc>.

¹⁶ “2025–2026 Winter Reliability Assessment Western Overview,” WECC, Subregion Reliability Highlights, November 2025, <https://feature.wecc.org/seasonal-assessment-western-overview/index.html>.

¹⁷ “Resource Adequacy Advisory Committee,” Northwest Power and Conservation Council, accessed December 16, 2025, <https://www.nwcouncil.org/energy/energy-advisory-committees/resource-adequacy-advisory-committee/>.

¹⁸ “Resource Adequacy Advisory Committee – Steering Committee Members,” Northwest Power and Conservation Council, June 2024, <https://nwcouncil.app.box.com/s/m922hdzzk0mxsoke01l9xgcvpqj0412o>.

¹⁹ “History,” Western Power Pool, accessed December 16, 2025, <https://www.westernpowerpool.org/about/history/>.

participants who agreed to participate by October 31, 2025.²⁰ These participants include a number of utilities and entities in the WECC-Northwest region: BPA, Puget Sound Energy, PUD No. 1 of Chelan County, Avista Corp., Clatskanie People's Utility District, Constellation, PUD #2 of Grant County, NorthWestern Energy, Seattle City Light, Tacoma Power, and The Energy Authority, Inc. Before binding operations begin, the Western Resource Adequacy Program will release informational assessments on regional resource development, ELCCs, and calculated PRMs.²¹ The Western Resource Adequacy Program will provide a consistent, region-wide framework for assessing and addressing resource adequacy needs and represents a significant step forward in strengthening reliability across the West.²²

4. **Bonneville Power Administration (BPA)** is a federally managed, semi-independent power marketing agency and one of the largest regional electric planning entities in the Pacific Northwest. BPA markets power from 31 federal hydroelectric dams and one nuclear plant, owns and operates roughly 75 percent of the region's high-voltage transmission system, and provides power and transmission services to approximately 148 customers, including public utility districts, cooperatives, and investor-owned utilities.²³ BPA's hydrological data, operational planning studies, and transmission reliability evaluations are foundational inputs to regional RA modeling conducted by other organizations. BPA also produces its own long-term planning documents which assess resource adequacy needs.

In addition to the regional resource adequacy organizations, there are at least two other entities that provide input and operational data that are frequently used for developing resource adequacy assessments. While we do not discuss these organizations in detail, they are important for understanding the depth and breadth of planning in the region.

1. **Pacific Northwest Utilities Conference Committee (PNUCC)** is a member organization of utilities in the West, primarily the Northwest, with the purpose of sharing information and jointly addressing issues to the membership (including resource adequacy). PNUCC annually publishes its members' energy and peak demand forecasts, which serve as inputs in resource adequacy and other analytical assessments.
2. **NorthernGrid** is the FERC-jurisdictional regional transmission planning organization for much of the Northwest, as well as the Intermountain West, responsible for developing long-term transmission plans under FERC Order 1000. Its studies evaluate future load, resource additions, and system contingencies to identify needed transmission upgrades, all of which influence regional transfer capability.

²⁰ "WPP Notice to WRAP Resource Adequacy Participants Committee," Western Power Pool, October 31, 2025, <https://www.westernpowerpool.org/news/wpp-notice-to-wrap-resource-adequacy-participants>.

²¹ "Metrics," Western Power Pool, accessed December 16, 2025, https://www.westernpowerpool.org/resources/wrap_metrics/.

²² "Tariff & Business Practice Manuals," Western Power Pool, accessed 12/16/2025, https://www.westernpowerpool.org/resources/wrap_bpms/.

²³ Corrina Ikakoula, *Bonneville Power Administration Overview*, U.S. Department of Energy, January 2016, accessed December 16, 2025, https://www.energy.gov/sites/prod/files/2016/01/f28/0911review_ikakoula.pdf.

Summary and Interpretation

Resource adequacy planning is conducted widely across the country, and the variety of methods, geographic scopes, and modeling approaches provides a robust set of perspectives on system conditions. Resource adequacy is inherently probabilistic. It is not an end state but an ongoing evaluation of risk, and all findings include uncertainty. A projected shortfall in a given modeling approach does not ensure an outage, or even necessarily predict one, particularly where the projection is a small shortfall below a target reserve margin. Although individual studies may differ in their specific findings or the magnitude of particular metrics, consistent patterns across assessments offer meaningful signals about regional adequacy. For example, if multiple studies indicate medium-term capacity shortfalls, that alignment points to elevated medium-term risk; similarly, broad agreement on sufficient near-term resources suggests low near-term risk.

Analysis of PNW Resource Adequacy Reports and Findings

Introduction to Analysis Section

In this report, we identify the key Northwest resource adequacy studies, analyze their findings, and compare their conclusions against DOE's stated rationale in the 202(c) order. We analyze studies conducted by the North American Electric Reliability Corporation, the Western Electricity Coordinating Council, the Northwest Power and Conservation Council, E3 (a consulting firm), Bonneville Power Administration, and Puget Sound Energy. These assessments use a range of deterministic and probabilistic methods that evaluate system conditions across a variety of scenarios, including extreme weather, low hydro conditions, and delayed resource development.

As noted above, we assess each study across two planning horizons: the near-term (less than 1 year) and the medium-term (1 year to 5 years) focusing on modeling outcomes, underlying assumptions, and treatment of major system changes including resource retirements. The near-term analysis evaluates resource adequacy and reliability conditions under operating conditions in which system operators generally rely on the existing resource portfolio and established emergency and operational tools, rather than new resource procurement or infrastructure development. By contrast, the medium-term analysis evaluates planning organizations' findings and identifies potential deficiencies in underlying assumptions, models, or processes.

While these analyses identify elevated risks in certain circumstances, none conclude, and none supports a conclusion, that the studied regions are at imminent risk of failing to meet demand in 2026 or in the years immediately following. Importantly, all studies incorporate planned coal retirements, including Centralia, into their modeling frameworks. The retirement of Centralia is therefore not an unaccounted-for development, but rather a long-planned transition that is fully embedded in the region's resource outlook.

Analysis of Short-Term (2026) Findings

Summary of near-term (2026) findings: Near-term resource adequacy conditions for 2026 do not indicate that the region is likely to experience a resource adequacy shortfall. NERC's Winter

Reliability Assessment and Western Electricity Coordinating Council's Western Assessment of Resource Adequacy provide high resolution short-term findings, and analyses from BPA and Puget Sound Energy provide complementary short-term insights. All studies note that extreme winter conditions or significant delays in new generation could create challenges, but none identify an imminent crisis, recommend extraordinary measures, or predict that resources will be insufficient to meet demand. While E3's assessment identifies a modeled resource adequacy shortfall in 2026, that finding is driven by a set of conservative assumptions related to the region's imports capabilities and treaty obligations. E3's assessment also does not reflect the region's current weather conditions, which points towards support to resource adequacy. Table 1 summarizes our findings.

2025/2026 NERC Winter Reliability Assessment Short-Term Findings

NERC's annual Winter Reliability Assessment is an analysis of immediate reliability and resource adequacy in the United States and Canada for the upcoming winter season. NERC's 2025/2026 assessment, released in November 2025, found all regions to be resource adequate under normal peak-load conditions.²⁴

NERC concludes that, in WECC-Northwest, "there is sufficient capacity in the area for expected peak conditions,"²⁵ and its probabilistic analysis finds no Expected Unserved Energy or Loss of Load Hours for Winter 2025–26 when planned additions are included. NERC also finds that, based on planned resource additions, imports, and expected demand growth, that no resource adequacy metrics are violated for the region, stating, "The results of the probabilistic assessment reveal no [expected unserved energy] or [loss of load hours] for Winter 2025–2026."²⁶ NERC further explains that the results for a case where new resource additions are not completed for Winter 2025–26 found "some" expected unserved energy and loss of load hours, without specifying the magnitude.²⁷ The region's reserve margin is projected at 30.9%, nearly double typical requirements.²⁸ Only in the most extreme conditions (*i.e.*, higher than expected demand paired with higher than expected generation outages) does NERC assess that the region risks pre-import shortfalls—and even then, the shortfalls are only below reserve margins (not expected peak load), and the region can rely on imports to restore reserve margins "in all winter scenarios."²⁹

NERC also finds that planned Tier 1 resources ("soar[ing]" from 463 MW to more than 3 GW) and increased firm imports (6.1 GW) more than offset the reduction from retiring units.³⁰ The region's imports are particularly valuable for maintaining resource adequacy in extreme conditions. For

²⁴ "2025–2026 Winter Reliability Assessment," page 5, NERC, November 2025, https://www.nerc.com/globalassets/our-work/assessments/nerc_wra_2025.pdf.

²⁵ "2025–2026 Winter Reliability Assessment," NERC, page 6.

²⁶ "2025–2026 Winter Reliability Assessment," NERC, page 15.

²⁷ "2025–2026 Winter Reliability Assessment," NERC, page 15.

²⁸ "2025–2026 Winter Reliability Assessment," NERC, page 11.

²⁹ "2025–2026 Winter Reliability Assessment," NERC, page 37.

³⁰ "2025–2026 Winter Reliability Assessment," NERC, page 37.

example, in the January 2024 Arctic storm in the region, FERC found that, in addition to better coordination and forecasting, effective use of regional import capacity helped prevent any load shedding event despite extreme winter conditions.³¹ NERC explains that, during the January 2024 event, “[t]he U.S. Northwest relied heavily on imports—averaging 4,745 MW during peaks and 5,241 MW across all hours, mostly from the Southwest and Rockies.”³² The region’s import capacity are also a cost effective means to better utilize excess generation in other regions during normal conditions, meaning they support normal grid operations in addition to avoiding load shedding in extreme conditions. Together, increased in-region generation and more imports explain why NERC does not issue an emergency recommendation to WECC-Northwest, instead emphasizing preparedness, monitoring, and winterization of thermal units, all of which are steps that helped avoid emergencies in extraordinary winter conditions.

NERC identifies WECC-Northwest as one of these regions facing “elevated” risk, the middle of three risk categorizations (“normal,” “elevated,” and “high”). NERC’s elevated risk categorization provides an indicator against a crisis being present. NERC reserves its “high risk” category for situations in which the region is unable to meet operating reserve requirements in normal peak conditions. If NERC had concluded there was an imminent resource adequacy crisis, it would have assigned the highest classification. Instead, NERC selected the lower risk category. And in context with the discussion and analysis in the 2025-26 winter assessment, it is clear that NERC does not identify anything near crisis conditions in WECC-Northwest.

In summary, our analysis finds that NERC’s elevated risk ranking is a finding warranting attention by state and regional authorities but falls well short of demonstrating an imminent crisis.

2024 Western Electricity Coordinating Council’s Western Assessment of Resource Adequacy Short-Term Findings

The Western Electricity Coordinating Council annually produces a Western Assessment of Resource Adequacy report, which provides an hourly, 10-year, and forward looking analysis of the WECC sub-regions, one of which is WECC-Northwest.³³ The Western Assessment of Resource Adequacy uses an energy-based probabilistic approach that incorporates planned new resources, demand growth (and its drivers), retirements, imports and other factors across several scenarios to estimate peak demand and potential hourly shortfalls. Moreover, to further analyze the approach’s sensitivities, the Western Assessment of Resource Adequacy also relies on aggregated data from the regional balancing authorities in which the completion of planned resources are delayed or not completed.³⁴ While largely overlapping with the WECC-Northwest region used by NERC in the

³¹ “System Performance Review of the January 2024 Arctic Storms,” page 18, 20, and 21, FERC, April 25, 2024, https://www.ferc.gov/sites/default/files/2024-04/24_System%20Performance%20Review%20of%20the%20January%202024%20Arctic%20Storms_0425.pdf.

³² “2025–2026 Winter Reliability Assessment,” NERC, page 52.

³³ “Western Assessment of Resource Adequacy 2024: Scenario Analysis,” Western Electricity Coordinating Council (WECC), December 3, 2024, <https://feature.wecc.org/wara/>.

³⁴ “Western Assessment of Resource Adequacy 2024: Scenario Analysis,” WECC.

Winter Reliability Assessment, the Western Assessment of Resource Adequacy divides the Western Interconnection into five sub-regions (shown in Figure 2 below) for its 2024 Assessment (which is the most recent assessment).³⁵

Figure 2: WECC subregions used for 2024 Western Assessment of Resource Adequacy



The 2024 Western Assessment of Resource Adequacy did not indicate any near-term resource adequacy shortfall for the Western Interconnection or the “NW Northwest” subregion, specifically. In all but the most extreme scenario (in which only 55% of planned resources are deployed), the study finds no demand at risk hours in 2026 and a minor number (~7) in 2027 for the NW Northwest subregion. In the moderate scenario (in which 85% of planned resources come online), the Western Electricity Coordinating Council concludes that there is “minimal impact [to NW Northwest] in the short-term.”³⁶ Importantly, the extreme 55% build scenario is less likely to materialize in the near-term than over longer forecast horizons, as project development assumptions are generally more certain and less speculative closer to the present. Recent EIA data

³⁵ WECC updated its planning regions in 2025. See <https://feature.wecc.org/seasonal-assessment-western-overview/index.html>.

³⁶ “Western Assessment of Resource Adequacy 2024: Scenario Analysis,” WECC.

for 2025 supports this conclusion. Based on Energy Information Administration 860M reports, Washington, Oregon, Idaho, and Montana added more than 1.6GW in 2025, slightly beating the 1.53GW of additions planned for 2025 and the ~1GW of additions in 2024.^{37,38} 1.68GW is planned to be added in 2026 as of the October 2025 report.³⁹

Figure 3: WARA Comparison of Resource Build Out Scenarios and Demand at-Risk Hours

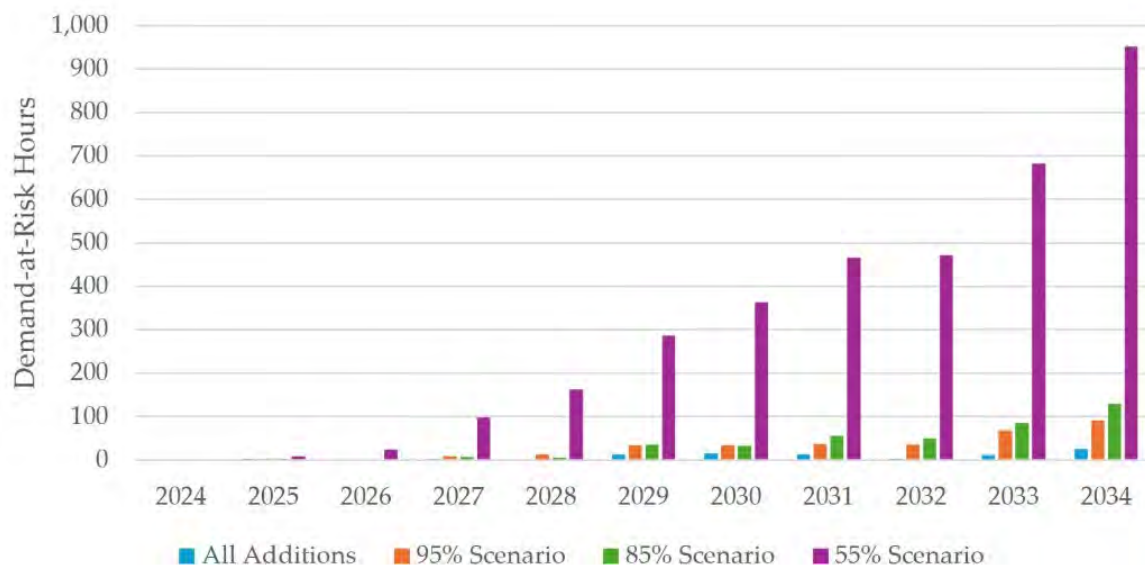


Figure 3 illustrates that the 2024 Western Assessment of Resource Adequacy results show modest delays in planned resource additions have limited impact on near-term reliability, while the extreme delays, such as the 55% build scenario, result in rapidly escalating demand-at-risk hours beginning in the late 2020s.⁴⁰ As previously discussed, a finding of demand at risk hours is not necessarily unusual nor a finding of an emergency. Planners take into account both the magnitude of the finding and the trend when making planning decisions, using both to identify the amount and type of measures needed. While any potential shortfall warrants attention, both the magnitude of any identified shortfalls and the rate of increase in 2026 and 2027 do not indicate a resource adequacy shortfall. For example, as shown in Figure 3 above, the 2024 Western Assessment of Resource Adequacy identifies demand-at-risk hours in 2025 under certain scenarios. However, actual system operations during 2025 did not result in supply shortfalls. Modest quantities of modeled demand-

³⁷ "Preliminary Monthly Electric Generator Inventory (based on Form EIA-860M as a supplement to Form EIA-860)," December 2024 and October 2025 data, U.S. EIA, accessed December 16, 2025, <https://www.eia.gov/electricity/data/eia860m/>.

³⁸ "Electric Power Annual: Table 4.7.A," U.S. EIA, accessed December 16, 2025, https://www.eia.gov/electricity/annual/table.php?t=epa_04_07_a.html.

³⁹ "Preliminary Monthly Electric Generator Inventory (based on Form EIA-860M as a supplement to Form EIA-860)," October 2025 data, U.S. EIA, accessed December 16, 2025, <https://www.eia.gov/electricity/data/eia860m/>.

⁴⁰ "Western Assessment of Resource Adequacy 2024: Scenario Analysis," WECC.

at-risk hours are not unusual and should be interpreted as early planning signals rather than evidence of an imminent resource adequacy shortfall.

E3 Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results, Short-Term Findings

E3 Study Overview

In September 2025, Energy + Environmental Economics (E3) presented the Phase 1 results of its “Resource Adequacy and the Energy Transition in the Pacific Northwest” analysis to the Washington Utilities and Transportation Commission and Washington State Department of Commerce Energy Division.⁴¹ The E3 presentation is a high-level briefing of a resource adequacy assessment that E3 conducted on behalf of more than a dozen investor- and consumer-owned utilities. The E3 analysis is an examination of the “Greater Northwest” region, which appears to include most of the NERC Northwest subregion as well as parts of the WECC-Basin subregion.⁴² The presentation was not accompanied by a report or other documentation of the study’s inputs, assumptions, and methodologies.

In the presentation, E3 states that it found a resource gap (characterized as a “reliability position”) across the Greater Northwest beginning in 2026 and growing each year through 2030.⁴³ Specifically, E3 states that it forecasts a resource gap of 1,321 MW in 2026. To reach this conclusion, E3 compares available resources against expected peak demand, inclusive of a planning reserve margin and estimated export obligations to Canada. However, the resulting finding of a resource gap is driven, in part, by a set of conservative underlying assumptions. First, E3 explains that its analysis does not include the contributions of 296 MW of “in-development” firm resources, nor the 645 MW of firm capacity equivalent “in-development” wind, solar, and battery projects.⁴⁴ When the projects currently being built are finalized, as is expected, the resource shortfall for 2026 declines to 380 MW (approximately 0.75% of total expected need for 2026). Second, E3 assumes that the Greater Northwest region is exporting power to Canada in all hours, even during peak conditions, to meet treaty obligations that are not mandatory. Third, E3 assumes an import level

⁴¹ “Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results,” page 2, E3, Sept. 22, 2025, <https://www.utc.wa.gov/sites/default/files/2025-10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf>. The two state agencies held the resource adequacy meeting as required by state legislation. Revised Code of Washington 19.280.065, <https://app.leg.wa.gov/rcw/default.aspx?cite=19.280.065>.

⁴² According to NERC’s 2025-2026 Winter Reliability Assessment, the WECC-Basin is a summer-peaking assessment area in the WECC Regional Entity that includes Utah, southern Idaho, and a portion of western Wyoming, covering Idaho Power and PacifiCorp’s eastern BA area.

⁴³ “Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results,” E3, pages 7, 8, and 10.

⁴⁴ While wind and solar are not “dispatchable” resources in the traditional sense, they do provide a reliability contribution to grid that is well understood by utility system planners. This understanding has evolved over decades of improvements in statistical weather modeling, forecasting, and actual performance observations. All generators (including wind, solar, gas, coal, etc.) have a statistical probability of being available to assist the grid during periods that are typically high-stress conditions (e.g., late afternoon in August). The contribution of each resource, after accounting for this statistical probability is often referred to as the Effective Load Carrying Capability or ELCC. This represents the “firm capacity” equivalent of the resource being considered.

that is significantly less than the level of imports experienced during the region’s cold weather event in January 2024. As explained in more detail below, these three conservative assumptions contribute directly to E3’s conclusion that the region has a modest “resource gap,”

Figure 4: E3 Total Resource Need Results for the Greater Northwest

Greater Northwest Total Resource Need and Effective Capacity Contribution from Planned Resources (MW)						
System Needs (MW)	2025	2026	2027	2028	2029	2030
Total Resource Need*	49,245	50,737	52,499	54,184	55,879	57,195
Existing Portfolio w/ Retirements	46,716	45,666	45,395	45,388	45,098	44,757
Firm Imports	3,750	3,750	3,750	3,750	3,750	3,750
Reliability Position Surplus (+) / Shortfall (-)	+1,221	-1,321	-3,354	-5,046	-7,031	-8,689
ELCC from “In-Development” Firm Resources	-	296	407	580	770	1,114
ELCC from “In-Development” Wind, Solar and Battery projects	-	645	1,015	1,316	1,508	1,934

** Total Resource Need includes peak load + planning reserve margin as well as obligation to serve the Columbia River Treaty Regime*

E3 Study Put into Context

E3’s presentation of its Phase 1 results included a 25-page slide deck but did not provide any other documentation or explanations of the assumptions and inputs used in the model. The data underlying E3’s analysis does not accompany the presentation. The lack of documentation for the E3 Study is not necessarily surprising as the work product is only Phase 1 of a consultant study meant to inform Washington state policymakers on general, high-level themes of “long-term” resource adequacy projections in the Greater Northwest. Nevertheless, the absence of summary-level information regarding key parameters, as well as the unavailability of underlying data and calculation methods, limits the ability of third parties to independently verify the study’s findings. With that caveat, CEG contacted E3 to better understand how their model was designed. Where appropriate, CEG contextualized our analysis of the E3 study with supplemental information provided by E3 but not contained in the slide deck.

Total Resource Need

As an initial matter, E3’s finding of a “resource gap” does not necessarily indicate an immediate or persistent shortage of electricity on the grid. Rather, it reflects that, under the study’s modeling assumptions, the system’s set of available resources (“Existing Portfolio w/ Retirements”) is lower

than E3's estimate of Total Resource Need, resulting in modeled risk metrics that exceed the study's defined tolerance level. The identified resource gap represents the additional accredited capacity required to bring modeled system risk back into compliance with the chosen reliability standard and is contingent on the assumptions embedded in the analysis.

The presentation, as shown in the excerpt in the figure above, identifies the Total Resource Need as "peak demand + planning reserve margin as well as obligation to serve the Columbia River Treaty regime."⁴⁵ The presentation does not identify the numerical values that sum to the total need and does not provide sufficient detail to clearly understand how each of these elements contributes to the total resource need or how the resulting Total Resource Need is calibrated to a specific probabilistic reliability standard.

In probabilistic resource adequacy frameworks, the Total Resource Need is typically defined by the level of accredited capacity required to satisfy a chosen reliability metric, most commonly a loss-of-load expectation (LOLE) of 0.1 events per year (i.e., a one-in-ten-year standard). Under such frameworks, a small, modeled resource shortfall does not necessarily indicate a qualitatively different reliability outcome, but rather that the modeled system slightly exceeds the selected risk threshold. For this study, E3 did in fact use a 0.1 LOLE. And although this information is not in the slide deck, E3 also found that the LOLE with its projected 2026 shortfall is 0.15. While 0.15 exceeds the 0.1 planning target, the incremental increase is relatively small in absolute terms and should be interpreted in the context of near-term uncertainty and conservative modeling assumptions.

Consistent with other resource adequacy studies, E3 finds that reliability risk in the Greater Northwest is most pronounced during winter periods. The most immediate modeled risk arises under a combination of extreme cold temperatures and reduced hydropower availability, such as during drought conditions.⁴⁶ As detailed below, the evidence available by December 16, 2025, the day of the DOE order, suggests that the extreme scenario will not occur during Winter 2025-26.

Imports Assumption

The E3 Study assumes a firm import limit of 3,750 MW to the Greater Northwest region.⁴⁷ Recent historical evidence, however, indicates that the Northwest has been able to achieve materially higher levels of imports under stressed system conditions. During the January 2024 Cold Weather Winter event, imports reached approximately 6,000 MW,⁴⁸ averaged 4,745 MW during peak hours, and averaged 5,241 MW across all hours.⁴⁹ These import levels were achieved even while California was a net importer during the same period.⁵⁰ Had E3 modeled import capability at levels

⁴⁵ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," E3, page 10.

⁴⁶ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," E3, pages 11-12.

⁴⁷ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," E3, page 10.

⁴⁸ "Memorandum: January 2024 Cold Weather Event," page 8, Northwest Power and Conservation Council, March 5, 2024, https://www.nwccouncil.org/fs/18649/2024_03_5.pdf.

⁴⁹ "2025-2026 Winter Reliability Assessment," NERC, page 52.

⁵⁰ "2025-2026 Winter Reliability Assessment," NERC, page 52.

consistent with the observed performance in January 2024, it would materially affect the projected reliability outcomes and would eliminate the modeled shortages through at least 2026. In its independent evaluation of E3's Phase 1 results, Sylvan Energy Analytics assumed winter import capability of up to 5,000MW, including 3,000 MW into the Pacific Northwest from non-Canadian sources, 1,000 MW from Canada, and 1,000 MW into the PacifiCorp East balancing area, based on the observed regional import levels during 2024 winter event.⁵¹

Canadian Hydropower Entitlements under the Columbia River Treaty

The Canadian Entitlement for the 2026 to 2029 operating years is 660 MW in hydropower generation capacity and 305 average MW (aMW) of energy.⁵² E3 modeled that the region would export power 660 MW of power into Canada in all hours, even during peak periods. E3's analysis did not allow for the Greater Northwest region to rely on Canadian imports and storage during peak hours. The Columbia River Treaty does not mandate that the US export power to Canada at all hours, even during peak periods. Rather, the Treaty establishes an obligation for the US to provide Canada with an agreed share of power benefits on an annual basis but allows operational flexibility in the timing and coordination of deliveries, particularly under conditions of system stress. Sylvan Energy Analytics modeled the region exporting 660 average MW into Canada across a month but allowed Canadian imports in any given hour.⁵³

Reserve Margin

As described earlier, Total Resource Need reflects a reserve margin that is intended to satisfy a probabilistic reliability criterion. In practice, small differences in the implied reserve margin associated with that criterion can determine whether a system appears to be in surplus or deficit, particularly where the modeled shortfall is relatively small, as is the case here. The E3 presentation does not disclose the reliability standard applied, such as a target loss of load expectation, nor does it provide sufficient information to infer the implied planning reserve margin embedded in the Total Resource Need or to understand how obligations associated with the Columbia River Treaty are incorporated into that calculation. As a result, it is not possible to use the slide deck to evaluate the sensitivity of the results to reasonable alternative reliability assumptions.

By way of illustration, regional resource adequacy practices commonly rely on reliability standards that result in implied planning reserve margins within a relatively narrow range. The Pacific

⁵¹ Hart, Elaine. "Near-Term Winter Resource Adequacy Challenges in the Pacific Northwest: A Review of E3's Northwest RA Study Phase 1 and Independent Evaluation of Near-Term Winter Challenges." Sylvan Energy Analytics, January 2026. https://gridlab.org/portfolio-item/pnw_nearterm_winterra/.

⁵² "Details About the Key Elements Agreed Between the United States and Canada Regarding Modernization of the Columbia River Treaty Regime" U.S. Department of State, July 26, 2024. <https://www.state.gov/bureau-of-western-hemisphere-affairs/details-about-the-key-elements-agreed-between-the-united-states-and-canada-regarding-modernization-of-the-columbia-river-treaty-regime>.

⁵³ Hart, Elaine. "Near-Term Winter Resource Adequacy Challenges in the Pacific Northwest: A Review of E3's Northwest RA Study Phase 1 and Independent Evaluation of Near-Term Winter Challenges." Sylvan Energy Analytics, January 2026. https://gridlab.org/portfolio-item/pnw_nearterm_winterra/.

Northwest Utilities Conference Committee, for example, has historically relied on a planning reserve margin of approximately 16%.⁵⁴ If the implied reserve margin resulting from E3's reliability criterion was modestly lower, such as 15%, the resulting capacity balance could differ materially. Using E3's own figures, the 2026 system shows approximately 50,357 MW of accredited capacity against a stated Total Resource Need of 50,737 MW, implying a shortfall of roughly 380 MW, a magnitude that could be affected by relatively small differences in implied reserve margin.⁵⁵

As demonstrated earlier, regional resource adequacy frameworks differ meaningfully in their reliability standards, planning reserve margin targets, and resource accreditation methodologies. Consequently, a system configuration that satisfies adequacy criteria in one region may not be evaluated the same way in another, even under similar system conditions. For example, ERCOT applies a minimum planning reserve margin target of 13.75 percent of peak demand,⁵⁶ while the Southwest Power Pool set a planning reserve margin of 15%⁵⁷ but allows for a lower PRM (9.89%) if the system is at least 75% hydro-based generation.⁵⁸ This reflects the view that hydro-dominated systems possess distinct operational attributes that influence reliability outcomes and resource adequacy assessments.

Winter 2025-2026 Conditions

The E3 presentation is an illustrative resource adequacy analysis intended to identify potential resource adequacy risks through 2030. It is designed to be informative and to support preliminary policy consideration, rather than to serve as a near-term operational assessment of the current 2025-2026 Winter. The study establishes planning thresholds, not real-time reliability metrics, and relies on annual average assumptions. For example, the presentation's hydropower generation is modeled using historical average hydrologic conditions from 1989 through 2018.

There is good reason to believe that the actual circumstances this winter pose less risk than the assumptions used in the E3 presentation. While system planners reasonably strive to meet a 1-in-10 loss-of-load expectation (LOLE) standard over the planning horizon, short-term deviations from that benchmark do not, by themselves, indicate the likelihood of load loss in any specific operating year. Assessing near-term reliability risk requires greater reliance on contemporaneous weather, hydrological, and resource availability projections. This is particularly true in the Pacific Northwest, where hydrological conditions are a dominant driver of winter reliability outcomes. E3's Report appropriately emphasizes water-year analysis for this reason. By the date of the Department of Energy order on December 16, 2025, hydrology and temperature forecasts indicated that many of

⁵⁴ "Northwest Regional Forecast of Power Loads and Resources: August 2025 through July 2035," page 11, Pacific Northwest Utilities Conference Committee, April 2025, <https://www.pnucc.org/wp-content/uploads/2025-PNUCC-Northwest-Regional-Forecast-final.pdf>.

⁵⁵ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," E3, pages 7, 8, 10.

⁵⁶ "Resource Adequacy," Electric Reliability Council of Texas, accessed December 16, 2025, <https://www.ercot.com/gridinfo/resource>.

⁵⁷ Southwest Power Pool (SPP) et al., "SPP Planning Criteria Revision 4.1A," May 12, 2023, <https://www.spp.org/documents/69547/spp%20planning%20criteria%20v4.1a.pdf>.

⁵⁸ Southwest Power Pool (SPP) et al., "SPP Planning Criteria Revision 4.1A."

the worst-case low-hydropower conditions reflected in the study had already been reduced to low-probability scenarios. As of December 15, 2025, Pacific Northwest snowpack and hydro reservoir forecasts indicate that regional hydrologic conditions are relatively strong.⁵⁹ NOAA's 120-day hydrologic outlook for the Columbia River Basin shows most rivers expected to experience near- or above-average conditions.⁶⁰ **Error! Reference source not found.** The figure below shows the hydrological forecast from the NOAA Northwest River Forecast Center at BPA's largest hydropower project, Grand Coulee dam (current forecast as of December 22, 2025 and previous forecast in dark red as of December 15, 2025). The 120-day forecast indicates that as of December 15, 2025, hydrological conditions were expected to be at or above average through April 2026.

⁵⁹ Northwest River Forecast Center, "Northwest River Forecast Center," National Oceanic and Atmospheric Administration, accessed December 22, 2025, <https://www.nwrfc.noaa.gov/rfc/>

⁶⁰ Northwest River Forecast Center, "Northwest River Forecast Center," National Oceanic and Atmospheric Administration, accessed December 22, 2025, <https://www.nwrfc.noaa.gov/rfc/>

Figure 5: Hydrology Forecast for Grand Coulee Dam (December 22, 2025 to April 21, 2026)⁶¹

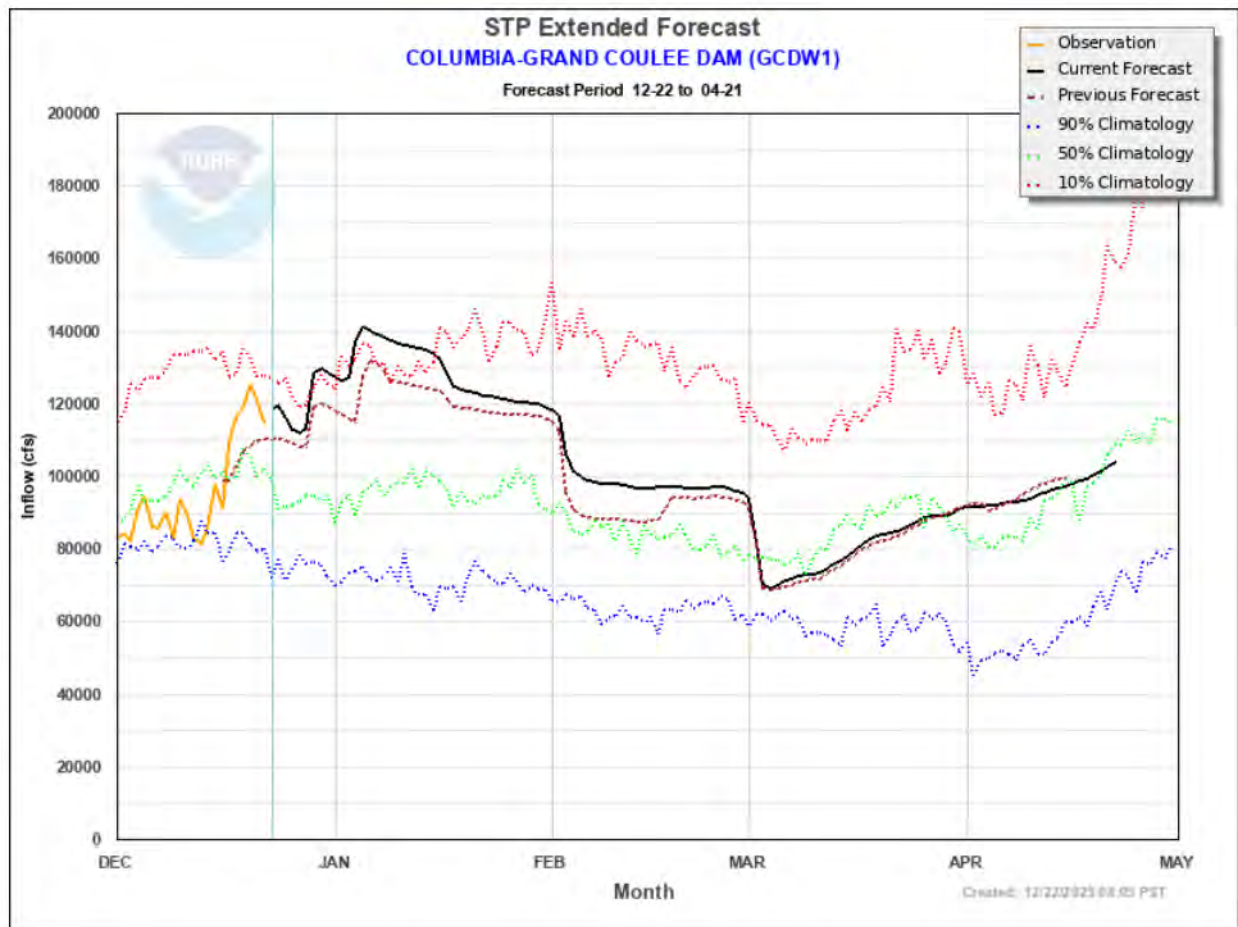


Figure 5 shows the forecasted inflows to the Columbia River at Grand Coulee Dam as compared with historical flow conditions for the same time of year. Measuring the hydropower output at Grand Coulee Dam is appropriate because it is the largest and most operationally influential facility in the Columbia River system, making its flows a reliable proxy for basin-wide hydrological conditions that drive regional winter energy availability. The black solid line represents the current forecast issued on December 22, 2025, and the red dashed line, titled “previous forecast,” represents the December 15, 2025, forecast, the day before DOE issued its Order for Centralia. CEG was unable to locate an equivalent figure released on December 15, 2025. The green dotted line represents the 50 percent climatology, or median historical inflow for each day of the year. The blue and upper red dotted lines show low and high historical flow levels for the season. Together, the climatology lines provide a reference for whether forecasted inflows are below, near, or above typical historical conditions.

⁶¹ Northwest River Forecast Center, “GCDW1 Streamflow and Snow Telemetry Plot,” National Oceanic and Atmospheric Administration, accessed December 22, 2025, <https://www.nwrfc.noaa.gov/stp/station/stpplot/stpplot.cgi?GCDW1>

As shown, the December 15 forecast (red dashed line) is consistently above the 50 percent climatology (green dotted line) across the late December through February period. This indicates that, as of mid-December, expected inflows at Grand Coulee were forecast to be above median historical conditions, rather than indicating low-hydro or stress conditions.

E3's presentation indicates that the probability of resource shortfall is highest during winter periods associated with low hydro availability.⁶² In this context, the December 15, 2025, forecast for Grand Coulee does not reflect low-hydro conditions during the critical winter months. Instead, both forecasts project inflows at or above median historical levels for much of the January–February period. As a result, the hydrologic conditions reflected in these forecasts reduce the likelihood of the most constraining near-term scenarios identified by E3, particularly during winter peak months when cold-weather events can drive elevated demand.

Bonneville Power Administration and Puget Sound Energy Planning Documents Short-Term Findings

As previously noted, the planning assessments of Puget Sound Energy (Puget) and the Bonneville Power Administration are relevant for evaluating resource adequacy in the Pacific Northwest. Puget is the largest electric and gas utility in Washington and was the largest offtaker of energy from the Centralia plant. BPA is the region's largest balancing authority and transmission owner, and Centralia is surrounded by (but not a part of) BPA's balancing authority area. Together, the planning documents produced by Puget and BPA provide the most direct insight into near-term and medium-term resource adequacy conditions relevant to Centralia, and they present no indication of a resource adequacy crisis in 2026 or early 2027.

Puget's published its most recent update to its IRP in 2023.⁶³ In that filing, Puget's resource adequacy analysis, conducted by E3, finds that the utility maintains a winter planning reserve margin exceeding 20 percent in 2027 under its preferred portfolio.⁶⁴ The analysis explicitly incorporates the retirement of the Centralia plant. Puget is currently developing its 2027 Integrated System Plan (formerly the Integrated Resource Plan) and has again retained E3 to perform the resource adequacy assessment. Puget presented its initial results in September 2025 and described several methodological updates, including changes to the load forecast, operating reserve requirements, resource accreditation, and market availability assumptions.⁶⁵ Neither the

⁶² "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," slide 11, E3, Sept. 22, 2025, <https://www.utc.wa.gov/sites/default/files/2025-10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf>.

⁶³ "2023 Electric Progress Report", Puget Sound Energy, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>. Puget Sound Energy will next publish a full Integrated System Plan in 2027.

⁶⁴ 2023 ERP Table 7.1 shows Puget Sound Energy's PRM is more than 20% in 2029 in preferred portfolio.

⁶⁵ "Resource Planning Advisory Group Meeting 2027 Integrated System Plan," page 38, Puget Sound Energy, September 30, 2025, https://irp.cdn-website.com/dc0dca78/files/uploaded/2025_0930_RPAGMeeting_Final-5b0bf24b.pdf.

2023 IRP nor the preliminary 2027 results identify emergency resource adequacy concerns in 2026 or 2027.

The Bonneville Power Administration's most recent long-term planning assessments are presented in its 2025 Pacific Northwest Loads and Resources Study (also known as the "White Book") and its 2024 Resource Program, which, together, evaluate the adequacy of BPA's resource portfolio under a range of hydrological and operating conditions.⁶⁶

BPA finds that, assuming the availability of market purchases and independent power producers, the Pacific Northwest is projected (in annual energy terms) to have firm energy surpluses in the first two operating years.⁶⁷ BPA further concludes that, under median water conditions, the federal system is capable of meeting demand during extreme winter weather events.⁶⁸ To the extent that resource adequacy challenges emerge in BPA's analysis, they occur in later years and are intended to signal the need for additional resource development, consistent with standard long-term planning practice, rather than indicating near-term emergency conditions.

Consistent with long-standing practice across the region, both Puget and BPA rely on interregional transmission access and short-term market purchases to meet resource adequacy needs and minimize system costs. Puget explains that purchasing energy from the regional power market has historically been a cost-effective means of meeting demand.⁶⁹ In other words, the region's strong interregional transmission capacity and surplus generation across the West allowed for relatively efficient balancing of supply and demand, even if a particular utility had a "shortfall" in owned resources within their own portfolio.

Puget and BPA's planning assessments do not support the finding of an imminent resource adequacy or reliability emergency. The studies identify manageable planning challenges in later years, but they do not indicate near-term operational shortfalls in 2026 or early 2027, even under conservative assumptions and stress-test scenarios.

Analysis of Medium-Term (2027-2031) Findings

Summary of medium-term (2027-2031) findings: The medium-term planning horizon is the most consequential for resource adequacy assessments, as it is the period in which emerging risks can still be addressed by state, regional, and private actors through established planning and investment processes. In addition to the 2024 Western Assessment of Resource Adequacy, E3, and Puget/BPA planning documents, we also analyze the Northwest Power and Conservation Council 2029 Resource Adequacy Assessment to assess RA conditions in the medium-term (2027-2031).

⁶⁶ "2025 Pacific Northwest Loads and Resources Study," Bonneville Power Administration (BPA), May 2025, <https://www.bpa.gov/-/media/Aep/power/white-book/2025-whitebook.pdf>; "2024 Resource Program," page 7, Bonneville Power Administration, February 21, 2025, <https://www.bpa.gov/-/media/Aep/power/resource-program/2024-rp-document.pdf>.

⁶⁷ "2025 Pacific Northwest Loads and Resources Study," BPA, page 32.

⁶⁸ "2025 Pacific Northwest Loads and Resources Study," BPA, Tables 3-7.

⁶⁹ "2023 Electric Progress Report", Puget Sound Energy, page 7-1, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>.

The Northwest Power and Conservation Council assessment is notable as the council is required, per Congressional mandate, “to assure the Pacific Northwest of an adequate, efficient, economical, and reliable power supply.”⁷⁰

The most significant risks CEG identify in the reviewed studies arise in the medium-term and are driven primarily by rapid load growth rather than coal retirements. Growing electrification, new industrial load, and data center development have increased peak and annual energy needs more quickly than in past years. These conditions place greater pressure on the timely development of new resources, transmission expansion, and demand-side programs. While risks increase later in the decade if new resources are not built on schedule, the current conditions do not constitute a crisis, nor do they justify suspending long-planned coal retirements, and planning entities are appropriately adjusting their expectations. The retirement of Centralia is not a primary driver of any identified shortfall, and none of the reviewed studies suggest that extending its operation would materially improve resource adequacy. Table 4 summarizes our findings for the medium-term analysis.

Western Electricity Coordinating Council’s Western Assessment of Resource Adequacy Medium-Term Results

In its 2024 Western Assessment of Resource Adequacy, the Western Electricity Coordinating Council finds that medium-term resource adequacy risks are concentrated in later years, particularly under scenarios where planned generation is delayed or import capability is constrained.⁷¹ Across all scenarios, modeled demand-at-risk hours increase over time, with the highest risk observed in a scenario in which only 55% of planned resources are deployed. While the assessment identifies emerging and increasing challenges under adverse assumptions, the Western Electricity Coordinating Council does not characterize this as evidence of a crisis. Instead, it is characterized as a signal for additional prioritization of reliability in (as well as generic improvement of) planning processes.⁷²

The Western Assessment of Resource Adequacy finds that load growth is the primary driver of the increasing risk,⁷³ with an expected 20.4% increase in energy demand between 2025 and 2034, and a 17.2% increase in peak demand over same period⁷⁴ - approximately four times the growth rate between 2013 and 2022.⁷⁵ In the Northwest region specifically, the 2024 Western Assessment of

⁷⁰ Northwest Power and Conservation Council 2024 Annual Report to Congress

⁷¹ “Western Assessment of Resource Adequacy 2024: Risks to Planned Resource Additions,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁷² Western Assessment of Resource Adequacy 2024: Summary,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁷³ Western Assessment of Resource Adequacy 2024: Summary,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁷⁴ Western Assessment of Resource Adequacy 2024: Summary,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁷⁵ Western Assessment of Resource Adequacy 2024: Summary,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

Resource Adequacy projects a 20% increase in energy needs from 2025 through 2034 (250 TWh to 299 TWh).⁷⁶

Consistent with the short-term findings, the 2024 Western Assessment of Resource Adequacy demonstrates that the region has been planning for plant retirements and load growth by increasing planned builds, adding unprecedented levels of new capacity (~15GW of new batteries and ~3GW of new natural gas by 2027)⁷⁷ and moderating previously-assumed retirements downwards as compared to 2022.⁷⁸ Generation additions across the WECC subregions (including WECC-Northwest) appear to be on track with the 2024 assessment's expectations, with ~9.5GW of new batteries, ~6GW of solar, ~1.7GW of gas, and ~2GW of wind, deployed across the interconnection in 2025, more than 1.6GW of which was deployed in Washington, Oregon, Idaho, and Montana.⁷⁹

The study does not identify retirements as a primary cause of future reliability risks. Instead, the analysis finds that the principal risks stem from insufficient new generation and constraints on imports, both of which could be exacerbated by supply chain challenges, interconnection backlogs, siting and permitting delays, and cost pressures.

According to the Western Assessment of Resource Adequacy, imports play a critical role in maintaining short-term reliability, and the timely completion of new generation is the key medium-term requirement for maintaining resource adequacy.⁸⁰ Although the 55% build out scenario is a useful planning exercise to stress-test the system, it appears unlikely based on historical data. The assessment notes that the 2018-2023 average project completion rate was closer to 76%, a period that included significant inflation and the supply chain disruptions from the Covid pandemic.⁸¹

A consistent theme in the 2024 Western Assessment of Resource Adequacy is the need to continue and improve upon existing state, regional, and private planning processes. The assessment highlights recent changes to utility forecasting methodologies, new long-term transmission planning efforts (e.g., efforts pursuant to FERC Order 1920), and the development of the Western Resource Adequacy Program as positive planning developments.⁸² In other words, the

⁷⁶ WARA 2024 Annual Demand by Subregion (figure 6)

⁷⁷ Western Assessment of Resource Adequacy 2024: Additions," Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁷⁸ Western Assessment of Resource Adequacy 2024: Retirements," Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>; "WARA 2024 Annual Demand by Subregion," Figure 6, Western Electricity Coordinating Council, accessed December 16, 2025 <https://www.wecc.org/wecc-document/17061>.

⁷⁹ "Preliminary Monthly Electric Generator Inventory (based on Form EIA-860M as a supplement to Form EIA-860)," December 2024 and October 2025 data, U.S. Energy Information Administration, accessed December 16, 2025, <https://www.eia.gov/electricity/data/eia860m/>.

⁸⁰ "WARA 2024 Import Scenarios," page 6, Western Electricity Coordinating Council, December 3, 2024, <https://www.wecc.org/wecc-document/17081>.

⁸¹ Western Assessment of Resource Adequacy 2024: Historical Resource Additions," Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

⁸² Western Assessment of Resource Adequacy 2024: Resource Planning," Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.

assessment calls for incremental improvement to established planning for and proportional responses to medium-term challenges, not extraordinary measures outside of the planning process.

E3 Study Medium-Term Results

By 2030, E3 finds a significant resource shortfall of ~9,000 MW for the Greater Northwest region.⁸³ E3 attributes the projected shortfall primarily to load growth, driven predominantly by the rapid interconnection of data centers.⁸⁴ While peak demand increases modestly due to population growth, increased air-conditioning adoption, and electric vehicle uptake, E3 finds that data center development accounts for the largest share of incremental demand in the region. E3 also identifies planned generator retirements and limited replacement capacity as contributing factors to its modeled 2030 shortfall.

The magnitude and timing of the projected medium-term shortfall is sensitive to several key assumptions. First, E3 did not consider large load flexibility, which Sylvan Energy Analytics finds could mitigate most or all the near-term winter resource needs under most load scenarios.⁸⁵ Second, E3 treated the Centralia coal plant as retired throughout the study period, and did not include a corresponding replacement resource, as the analysis preceded TransAlta's announcement of a coal-to-gas conversion beginning in 2028. Including the announced conversion would reduce the shortfall by approximately 670 MW of accredited capacity.

As in the Short-Term 2026 analysis, E3's medium-term results remain sensitive to assumptions related to achievable import levels, rate of new resource additions, Canadian entitlement obligations, and the implied reserve margin associated with the selected reliability criterion. These factors continue to play a material role in determining whether resource shortfalls emerge in the study.

Finally, even within E3's own presentation, the identified medium-term shortfalls appear likely to be resolved by the completion of resource additions that utilities have already planned and reflected in their Integrated Resource Plans,⁸⁶ which underscores the function of the E3 presentation as a planning signal rather than evidence of an unaddressed reliability gap.

⁸³ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," pages 9, E3, Sept. 22, 2025, <https://www.utc.wa.gov/sites/default/files/2025-10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf>.

⁸⁴ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," pages 7, E3, Sept. 22, 2025, <https://www.utc.wa.gov/sites/default/files/2025-10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf>.

⁸⁵ Hart, Elaine. "Near-Term Winter Resource Adequacy Challenges in the Pacific Northwest: A Review of E3's Northwest RA Study Phase 1 and Independent Evaluation of Near-Term Winter Challenges." slide 11, Sylvan Energy Analytics, January 2026. https://gridlab.org/portfolio-item/pnw_nearterm_winterra/.

⁸⁶ "Resource Adequacy and the Energy Transition in the Pacific Northwest: Phase 1 Results," pages 21, E3, Sept. 22, 2025, [https://www.utc.wa.gov/sites/default/files/2025-](https://www.utc.wa.gov/sites/default/files/2025-10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf)

Accordingly, the identification of a medium-term shortfall should be understood as a planning signal rather than an indication of an imminent or existing reliability emergency. Results of this magnitude underscore the need for continued and timely development of new resources, refinement of load and reliability assumptions, and improvements in regional coordination and transmission capability. Viewed in this context, the findings highlight the importance of sustained planning and investment through state, regional, and private processes, rather than the presence of a near-term crisis.

Northwest Power and Conservation Council's Medium-Term Results

The Northwest Power and Conservation Council's 2029 Resource Adequacy Assessment is the most comprehensive look at the Northwest region's power needs and risks in the medium-term. The Council was created by Congress with a mandate to improve electricity system planning for the Northwest and Columbia River Basin.⁸⁷ The Northwest Power and Conservation Council's annual Resource Adequacy Assessment is one of several planning efforts undertaken by the Council and provides a five-year evaluation of the region's resource adequacy. As the Council explains, the assessment "summarizes the . . . aggregate regional power supply's adequacy for the 2029 operating year (October 2028 through September 2029)."⁸⁸

The Northwest Power and Conservation Council is one of the country's only Congressionally mandated regional coordination efforts on energy planning. The Council forecasts demand and recommends resource plans. The eight-member Council is made of two governor-appointed members from each member state (Oregon, Washington, Idaho, and Montana) who work with support staff and technical committees, and is required to consult with utilities, state and local governments, tribes, and customers "to assure the Pacific Northwest of an adequate, efficient, economical, and reliable power supply."⁸⁹

The 2029 Assessment uses the Council's own GENESYS model to evaluate system reliability across multiple metrics, providing information about the frequency, duration, and magnitude of potential shortfall events.⁹⁰ The Assessment analyzes:

- Loss of load Events (LOLE), which measures the frequency of shortfalls.
- Duration Value at Risk, which measures shortfall duration.
- Peak Value at Risk, which measures maximum hourly shortfalls; and

[10/Revised%20V3%20E3%20Presentation%20RA%20Study%20September%2022%20WA%20RA%20Meeting.pdf](#).

⁸⁷ "2024 Annual Report to Congress," page 3, Northwest Power and Conservation Council, accessed December 16, 2025, <https://storymaps.arcgis.com/stories/3c12b13cd3a9487ab44120f5beffe128>.

⁸⁸ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 5, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁸⁹ "2024 Annual Report to Congress," page 3, Northwest Power and Conservation Council, accessed December 16, 2025, <https://storymaps.arcgis.com/stories/3c12b13cd3a9487ab44120f5beffe128>.

⁹⁰ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 6, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

- Energy Value at Risk, which measures the annual energy shortfall.⁹¹

The Northwest Power and Conservation Council's model is also intentionally conservative. For example, the assessment limits the use of emergency measures that would be employed in actual emergency situations (e.g., targeted brownouts, emergency backup generation).⁹²

The 2029 Assessment evaluates three scenarios: (1) a reference case (planned buildouts and demand growth), (2) a reduced energy efficiency case (1000MW vs. 1300MW), and (3) higher data center demand case (3976MW by 2029 vs. 2386 MW) to test and quantify specific reliability threats. Scenarios two and three are, in effect, assuming higher electricity demand. Scenario two does so by removing a portion of the anticipated energy demand savings due to energy efficiency programs, increasing total demand needing to be served in 2029. Scenario three does so explicitly by increasing data center loads.

The 2029 Assessment finds that there is no resource adequacy threat in the reference scenario in 2029 (the analyzed year). The Council concludes that even with substantial load growth the 2021 Power Plan strategy—achieving energy efficiency consistent with the high end of the Council's target, 6,600 MW of new renewables by 2029, and sufficient balancing resources and demand response is adequate to meet regional needs.⁹³ The Council's findings include modeling the full retirement of the Centralia Plant.⁹⁴

The Northwest Power and Conservation Council's analysis finds that risks only begin to emerge in the two sensitivity scenarios tested: one where energy efficiency deployment is lower than expected (1000MW vs. 1300MW by 2029), and another where data center growth is much larger than anticipated (3976MW by 2029 vs. 2386 MW).^{95,96} The table below shows the results of the reliability analysis. Unsurprisingly, significant and unplanned for additional load led to greater adequacy metric violations.⁹⁷

⁹¹ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 10, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹² "Pacific Northwest Power Supply Adequacy Assessment for 2029," pages 9-14, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹³ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 26, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹⁴ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 19, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹⁵ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 6, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹⁶ "Pacific Northwest Power Supply Adequacy Assessment for 2029," page 26, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹⁷ "Pacific Northwest Power Supply Adequacy Assessment for 2029," table 7, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

Table 3: Northwest Power and Conservation Council Adequacy Metric Results

Type	Metric	Threshold	Reference	Low End EE	Higher Data Center
Frequency	Winter LOLEV	0.1	0.022	0.350	1.294
Frequency	Summer LOELV	0.1	0.017	0.033	0.3
Duration	Duration VaR 97.5	8 hours	0	1.5	20.6
Magnitude	Peak VaR 97.5	1,200 MW	0	1,567	3,076
Magnitude	Energy VaR 97.5	9,600 MWh	0	4,196	196,324

Despite the risks in the sensitivity scenarios, the Northwest Power and Conservation Council does not characterize the findings as a crisis or as evidence that generator retirements threaten reliability. Rather, the reports finds that the best actions to mitigate risks are continuing development of energy efficiency, renewable energy, coal to gas conversions, and new transmission.⁹⁸ The Council frames these results as “early warnings” that reinforce the need for sustained planning, including work underway for the 2026 Power Plan.⁹⁹ The Council’s decision not to characterize these results as a crisis reflects the fact that the modeled risks arise only under sensitivity scenarios and can be addressed through established planning mechanisms already contemplated in the Council’s power planning process.

BPA/Puget Sound Energy Medium-Term Results

Neither Puget nor BPA present a picture of a reliability crisis in the 2027-2031 timeframe. Instead, both identify rapid load growth as the primary driver of increasing system needs and the principal source of potential reliability risk if additional resources and measures are not developed in a timely manner. BPA explains that, under firm water conditions, the Pacific Northwest is projected to have an annual energy surplus of up to 960 average megawatts in operating year 2026, declining steadily over time to an annual energy deficit of approximately 3,026 average megawatts by operating year 2034, driven primarily by increasing regional retail load.¹⁰⁰

In response to these conditions, both entities emphasize the need for timely development of new generation, expanded demand-side resources, regional coordination, and transmission investment.

⁹⁸ “Pacific Northwest Power Supply Adequacy Assessment for 2029,” pages 18-21 and 26, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

⁹⁹ “Pacific Northwest Power Supply Adequacy Assessment for 2029,” page 6, Northwest Power and Conservation Council, August 9, 2024, <https://www.nwcouncil.org/reports/2024-4/>.

¹⁰⁰ “2025 Pacific Northwest Loads and Resources Study,” page v, Bonneville Power Administration, May 2025, <https://www.bpa.gov/-/media/Aep/power/white-book/2025-whitebook.pdf>.

BPA's least-cost portfolio relies on energy efficiency, demand response, and market purchases to meet its obligations and requires only modest resource additions over the long-term.¹⁰¹ BPA's sensitivity analyses show little-or-no unserved energy in most cases, with notable shortfalls occurring only in extreme scenarios that assume the complete loss of market imports.¹⁰²

Puget projects demand growth in its territory, reaching a median winter peak load of over 5GW by 2029.¹⁰³ Puget also identifies the total resource need based on the median peak load and a five percent LOLP target. Assuming the total resource need is met, Puget will have a PRM of 26-28% in 2029 and 2034.¹⁰⁴ Table 4 shows these results.

Table 4: Puget Sound Energy 2023 IRP Total Resource Need and Planning Reserve Margin (MW)

Resource(s)	2029 Winter	2034 Winter	2029 Summer	2034 Summer
Median Peak Load	5,004	5,382	4,171	4,831
Total Resource Need	6,319	6,771	5,329	6,107
Planning Reserve Margin	26%	26%	28%	26%

Puget also estimated the additional resource development needed to meet the projected total resource need. Using an updated ELCC method for existing and new resources, Puget identifies a need for additional “perfect capacity” (i.e., new resources). Table 5 shows the ELCC-adjusted capacity of existing resources and the addition “perfect capacity” required.¹⁰⁵ Puget's modeling shows this need will be met through wind, solar, storage, peaking capacity, demand-side, and distributed resources in its preferred, least-cost, portfolio.¹⁰⁶

¹⁰¹ “2024 Resource Program,” page 70, Bonneville Power Administration, February 21, 2025, <https://www.bpa.gov/-/media/Aep/power/resource-program/2024-rp-document.pdf>.

¹⁰² “2024 Resource Program,” pages 57-58, Bonneville Power Administration, February 21, 2025, <https://www.bpa.gov/-/media/Aep/power/resource-program/2024-rp-document.pdf>.

¹⁰³ “2023 Electric Progress Report,” Table 7.10, Puget Sound Energy, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>.

¹⁰⁴ “2023 Electric Progress Report,” Table 7.10, Puget Sound Energy, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>.

¹⁰⁵ “2023 Electric Progress Report,” Table 7.10, Puget Sound Energy, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>.

¹⁰⁶ “2023 Electric Progress Report,” Table 1.1, Puget Sound Energy, March 31, 2023, <https://www.pse.com/en/IRP/Past-IRPs/2023-IRP>.

Table 5: Puget Sound Energy 2023 IRP Total Resource Need by Resource Type (MW)

Resource(s)	2029 Winter	2034 Winter	2029 Summer	2034 Summer
Thermal Plants	2,050	2,050	1,688	1,688
Mid-C Hydro	560	560	560	560
Wind, Solar, Baker, Other Contracts	997	981	244	252
Market Purchases	1,440	1,434	961	751
Total Existing Resource Capacity (ELCC-adjusted)	5,047	5,025	3,453	3,251
Total Resource Need	6,319	6,771	5,329	6,107
Additional Perfect Capacity Needed	1,272	1,746	1,875	2,856

Both Puget and BPA conduct resource adequacy analyses consistent with their balancing authority responsibilities and regional requirements, including participation in the Western Resource Adequacy Program and alignment with broader Western Electricity Coordinating Council and NERC planning efforts. While each identifies similar medium-term risks—such as delays in resource development, reduced import availability, and retirements of independent power producers—neither calls for extraordinary measures or for delaying planned plant retirements, including Centralia (from which both Puget and BPA used to purchase power). Each study, and taken together, reflects manageable planning challenges rather than a medium-term reliability crisis.

Review of Recent Washington State Assessment

Our assessment that the regional resource adequacy studies do not identify an imminent emergency is supported by the two Washington state agencies charged by the state legislature to conduct annual resource adequacy meetings. The Washington State Utilities and Transportation Commission and the Washington Department of Commerce concluded their 2025 Long-term Resource Adequacy Meetings in November 2025.

On December 31, 2025, the two state agencies transmitted a letter to the Washington Legislature and the Governor summarizing the findings of the November 4, 2025 Winter Preparedness Resource Adequacy Meeting.¹⁰⁷ The Agencies concluded that the “[w]inter reliability assessments, presented by regional resource adequacy experts, the North American Electric Reliability Corporation and Western Electricity Coordinating Council, indicate the Northwest’s electric grid

¹⁰⁷ Summary of the 2025 Winter Preparedness Resource Adequacy Meeting, Letter from Chair Brian J. Rybarik and Assistant Director, Energy Division, Jennifer Grove to Governor Bob Ferguson, Secretary of Senate Sarah Bannister, and Chief Cler of the House of Representatives Bernard Dean. December 31, 2025, available at <https://www.utc.wa.gov/casedocket/2021/210096/docsets>

meets national resource adequacy criteria under normal conditions this winter.”¹⁰⁸ The Agencies further reported that neither the Bonneville Power Administration nor Washington utilities forecast outages during the upcoming winter season. Finally, the Agencies shared that the utilities reported they have maximized hydro and natural gas storage ahead of winter and ensured facilities are operating properly, and at least two utilities noted voluntary the availability of customer curtailment programs designed to reduce demand if system conditions were to tighten.

The near-term findings are consistent with the Agencies’ broader conclusions from the 2025 Long-Term Resource Adequacy Meetings. In a November 2025 summary of the three meetings on resource adequacy to the Washington Legislature and Governor, the state agencies reported that the,

*Reliability assessments presented...indicated that the Northwest’s electric grid meets national resource adequacy criteria over the near and medium terms under a broad range of operating conditions. As a region assessed as “normal risk” the Northwest has a low likelihood of electricity supply shortfall.*¹⁰⁹

The Agencies cautioned that “normal risk” is not the same as “no risk” and that the presentations emphasized that no electric system is 100% risk-free and no resource provides perfect capacity.¹¹⁰ Utilities, policymakers, grid operators, and planners must balance the level of reliability risk with the added cost to achieve that level of reliability. There is no perfect reliability metric or reliability target. For example, one expert may conclude a 16% planning reserve margin is optimal, while another may conclude a lower PRM of 15% better balances risk and costs. These differences reflect professional judgment, input assumptions, and tolerance for risk—all of which are the traditional province of state, regional, and utility planners and decision-makers.

The Agencies also cautioned that if significant new electricity usage materializes and more extreme weather continues, the grid could face reliability challenges. With respect to the medium-term outlook, the Agencies wrote that the “utilities and policy makers must increase efforts to make customer energy demand more flexible, reduce delays in siting and interconnecting new clean energy projects, expand regional transmission capacity, and improve transparency and accuracy of

¹⁰⁸ Summary of the 2025 Winter Preparedness Resource Adequacy Meeting, Letter from Chair Brian J. Rybarik and Assistant Director, Energy Division, Jennifer Grove to Governor Bob Ferguson, Secretary of Senate Sarah Bannister, and Chief Cler of the House of Representatives Bernard Dean, page 1, December 31, 2025, available at <https://www.utc.wa.gov/casedocket/2021/210096/docsets>

¹⁰⁹ Summary of the 2025 Long-term Resource Adequacy Meeting, Letter from Chair Brian J. Rybarik and Assistant Director, Energy Division, Jennifer Grove to Governor Bob Ferguson, Secretary of Senate Sarah Bannister, and Chief Cler of the House of Representatives Bernard Dean. November 19, 2025, available at <https://www.utc.wa.gov/casedocket/2021/210096/docsets>.

¹¹⁰ Summary of the 2025 Long-term Resource Adequacy Meeting, Letter from Chair Brian J. Rybarik and Assistant Director, Energy Division, Jennifer Grove to Governor Bob Ferguson, Secretary of Senate Sarah Bannister, and Chief Cler of the House of Representatives Bernard Dean. November 19, 2025, available at <https://www.utc.wa.gov/casedocket/2021/210096/docsets>.

load forecasts and planned resource additions.”¹¹¹ Meanwhile, federal intervention into an established and functioning regional planning process introduces uncertainty and may complicate ongoing efforts to bring new resources online in a timely manner. Broadly, the 2024 Western Assessment of Resource Adequacy notes that resource adequacy is related to policy decisions, and that shifts in policymaking can “introduce significant risks to reliability.”¹¹²

Continued investments to strengthen the Pacific Northwest’s reliability position – while accounting for Centralia’s retirement – have been planned for over many years. This activity is expected to continue and can be further aided through policy certainty (and avoidance of unneeded extraordinary interventions) at the federal level.

DOE’s July Resource Adequacy Report

In July 2025, the Department of Energy released a resource adequacy report, analyzing the impacts of planned retirements on resource adequacy.¹¹³ DOE references the July report in Order 202-25-11.¹¹⁴ The July report analyzes several resource adequacy and reliability measures in 2030 across the nation, with findings for specific regions and states. DOE acknowledged that its study “could benefit greatly from the in-depth engineering assessments which occur at the regional and utility level.”¹¹⁵

The DOE study found that plant retirements have essentially no impact on Washington state, limited impacts on Oregon, and moderate impacts on other Western subregions, even when relying

¹¹¹ Summary of the 2025 Long-term Resource Adequacy Meeting, Letter from Chair Brian J. Rybarik and Assistant Director, Energy Division, Jennifer Grove to Governor Bob Ferguson, Secretary of Senate Sarah Bannister, and Chief Cler of the House of Representatives Bernard Dean. November 19, 2025, available at <https://www.utc.wa.gov/casedocket/2021/210096/docsets>.

¹¹² Western Assessment of Resource Adequacy 2024: Additional Considerations,” Western Electricity Coordinating Council, December 3, 2024, <https://feature.wecc.org/wara/>.


¹¹³ “Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid,” U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.

¹¹⁴ DOE Order No 202-25-9 at 6-7

¹¹⁵ “Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid,” page i, U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.

on DOE's highly unusual assumption that no Tier 2¹¹⁶ or Tier 3¹¹⁷ generation resources are built by 2030. ^{118, 119} Figure 6 shows loss of load hours by region in DOE's report.

Figure 61: DOE's July 2025 Report Mean Annual LOLH by Region (2030) – Plant Closures¹²⁰

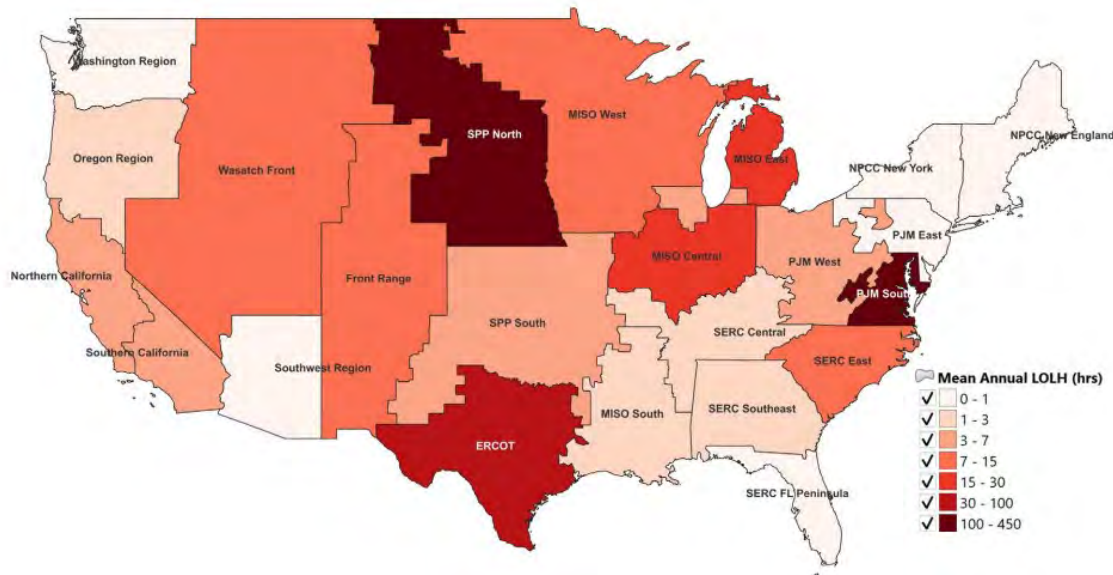

DOE's scenarios can be understood as a thought exercise, testing an unlikely hypothetical scenario in which plants are retired but where utilities do not procure additional generation per typical planning processes and requirements. Even in this hypothetical, DOE does not appear to find that Washington and Oregon violate its chosen reliability metrics.¹²¹ DOE found that, even regionally, the non-CAISO West region had the least normalized unserved energy of all regions analyzed.¹²²

¹¹⁶ NERC defines Tier 2 resources as those having made tangible progress (e.g., completion of feasibility or system impacts studies) but are less developed than Tier 1 resources. 2024 Long-Term Reliability Assessment, NERC, July 11, 2025, https://www.nerc.com/globalassets/our-work/assessments/2024-ltra_corrected_july_2025.pdf.

¹¹⁷ NERC defines Tier 3 resources as "units in an interconnection queue that do not meet the Tier 2 requirement." 2024 Long-Term Reliability Assessment, NERC, July 11, 2025, https://www.nerc.com/globalassets/our-work/assessments/2024-ltra_corrected_july_2025.pdf.

¹¹⁸ "Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid," page 7 and 37, U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.

¹¹⁹ "Request for Rehearing Of The Clean Energy Organizations," American Clean Power Association, Advanced Energy United, American Council on Renewable Energy, August 6, 2025, <https://cleanpower.org/wp-content/uploads/2025/08/2025-08-06-Resource-Adequacy-Rehearing-Request-FINAL.pdf>.

¹²⁰ "Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid," page 6, U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.

¹²¹ "Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid," page 37, U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.

¹²² "Resource Adequacy Report: Evaluating the Reliability and Security of the United States Electric Grid," pages 8 and 37, U.S. Department of Energy, July 2025, <https://www.energy.gov/topics/reliability>.


Balancing Authorities and Real-Time System Operations

As previously discussed, Resource Adequacy is generally forward-looking and distinct from real-time system operations. In addition to the extensive resource adequacy planning efforts discussed above, there is also a suite of tools available to manage the power system in real-time when challenged by extreme weather, load conditions, or other occurrences. Balancing Authorities are required by NERC and other entities to have extensive operational plans in response to threats as wide-ranging as natural disasters, winter storms, or squirrels.

Balancing Authorities are the entities responsible for managing power system operations (e.g., balancing supply and demand) and ensuring the real-time reliability of the electric system within a specific geographic area.¹²³ The Western Interconnection, which spans into Mexico and Canada, has 34 Balancing Authorities in the United States. Approximately 15 of those Balancing Authorities are located in the Northwest region, depending on the definition of the Northwest footprint, as shown in the figure below.

¹²³ "How it Works: The Role of a Balancing Authority ," U.S. Department of Energy, accessed December 16, 2025, https://www.energy.gov/sites/default/files/2023-08/Balancing%20Authority%20Backgrounder_2022-Formatted_041723_508.pdf.

Figure 7: Pacific Northwest Balancing Authorities as of October 2019¹²⁴

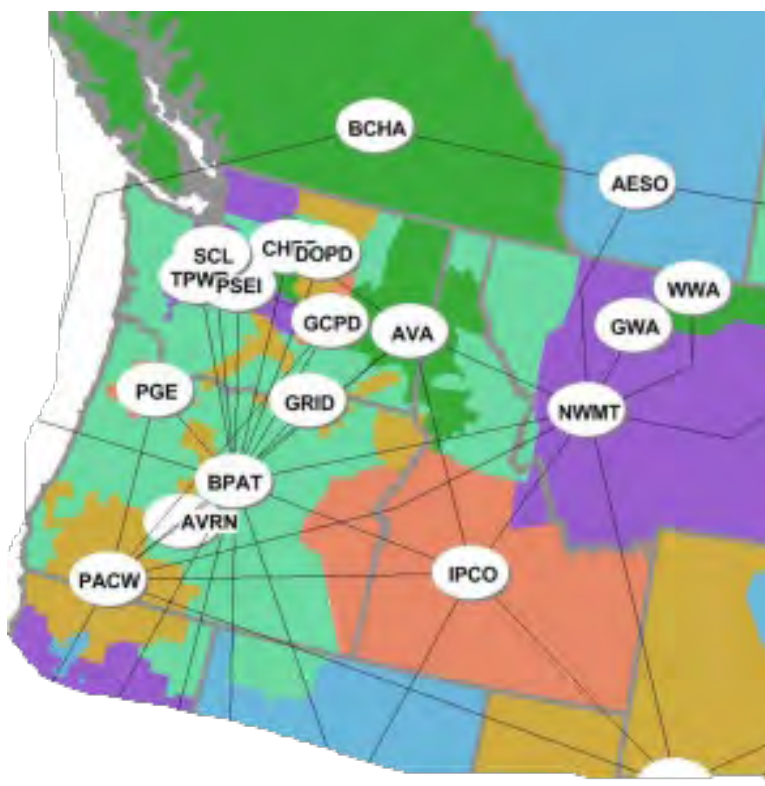

The outputs of Resource Adequacy planning ultimately inform, but do not replace, the real-time reliability responsibilities of Balancing Authorities. A Balancing Authority maintains real-time balance by ensuring that generation, load and transmission interchanges align at all times. Although generators may be owned and operated by different utilities, the Balancing Authority is responsible for ensuring that each resource’s schedules and actual output support system balance and comply with reliability requirements. The Balancing Authority does not economically dispatch resources it does not control. Rather, the Balancing Authority oversees scheduling and deploys its own balancing reserves to ensure the area remains in compliance with NERC reliability standards. The Bonneville Power Administration (shown as BPAT in the figure above) is the Balancing Authority for portions of Washington, Oregon, Idaho, and Montana.¹²⁵

Balancing Authorities are responsible for developing, maintaining, and executing emergency procedures in extreme conditions. NERC Reliability Standard EOP-011 sets the requirements for

¹²⁴ “Balancing Authority Areas As of October 2019,” NERC, accessed December 16, 2025, <https://www.nerc.com/globalassets/programs/rapa/ra/ba-bubble-map-20191106.pdf>.

¹²⁵ “Balancing Authority Area Services,” Bonneville Power Administration, accessed December 16, 2025, <https://www.bpa.gov/energy-and-services/transmission/interconnection/balancing-authority-area>.

Balancing Authorities and Reliability Coordinators.¹²⁶ The current NERC requirements (approved by FERC in 2024) require Balancing Authorities to have operations plans for energy and capacity-based emergencies and prescribe actions regarding records keeping and communications for Balancing Authorities. NERC also defines Energy Emergency Alert (EEA) levels reflecting conditions in a Balancing Authority as shown in the table below.¹²⁷ The Western Electricity Coordinating Council provides further information on best practices for adhering to NERC guidelines and potential actions to take in an emergency situation.¹²⁸

Table 6: NERC Energy Emergency Alert (EEA) Level Descriptions¹²⁹

EEA Level	Description	Circumstances
EEA 1	All available generation resources in use	- The BA is experiencing conditions in which all available generation resources are committed to meet firm load, firm transactions, and reserve commitments and is concerned about sustaining its required operating reserves. - Non-firm wholesale energy sales (other than those that are recallable to meet reserve requirements) have been curtailed.
EEA 2	Load management procedures in effect	- The BA is no longer able to provide its expected energy requirements and is an energy-deficient BA. - An energy-deficient BA has implemented its operating plan(s) to mitigate emergencies. - An energy-deficient BA is still able to maintain minimum operating reserve requirements.
EEA 3	Firm load interruption is imminent or in progress	The energy-deficient BA is unable to meet minimum operating reserve requirements.

Balancing Authorities develop plans in response to the NERC (or other) requirements. For example, Puget's Energy System Restoration Plan sets criteria and procedures for different types of incidents (including extreme cold) depending on severity, defining chains of command and responsibilities for

¹²⁶ "EOP-011-4 – Emergency Operations," NERC, accessed December 16, 2025, <https://www.nerc.com/globalassets/standards/reliability-standards/eop/eop-011-4.pdf>.

¹²⁷ "2025–2026 Winter Reliability Assessment," Table 4, NERC, November 2025, https://www.nerc.com/globalassets/our-work/assessments/nerc_wra_2025.pdf.

¹²⁸ "Best Practices for Energy Emergency Alerts," Western Electricity Coordinating Council, March 28, 2022, https://www.wecc.org/sites/default/files/documents/meeting/2024/07%20-%20Park%20G%20-%20Best%20Practices%20for%20EEAs_July%202024.pdf.

¹²⁹ "2025–2026 Winter Reliability Assessment," Table 4, NERC, November 2025, https://www.nerc.com/globalassets/our-work/assessments/nerc_wra_2025.pdf.

various entities.¹³⁰ The NERC rules allow for Balancing Authorities to develop plans to flexibly and proportionally respond to challenges or crises such as unplanned outages, extreme conditions, natural disasters, or other scenarios. In other words, Balancing Authorities are required to maintain a variety of options to respond to emergencies based on localized conditions.

Disclaimer

This report was prepared by Current Energy Group (CEG). It is intended to be read and used as a whole and not in parts. The report reflects the analyses and opinions of the authors using currently available information and does not necessarily reflect those of any other entity associated with this work.

¹³⁰ “Energy System Restoration Plan,” Puget Sound Energy, August 30, 2024, <https://www.pse.com/en/safety/first-responders/emergency-operations>.



CURRENT
ENERGY GROUP

About Current Energy Group

Current Energy Group offers clients a fresh perspective, bringing a comprehensive, interdisciplinary approach to the energy transition. By addressing the technical, economic, and policy questions at the heart of every decision, we help our clients achieve outcomes that are actionable, financially viable, and beneficial for the communities we serve.

Our nationally recognized experts provide objective insights backed by rigorous analysis to solve complex challenges across a broad range of topics, including advanced rate design, cost of service, DER integration, energy system decarbonization, gas transition, power system planning, and regulatory and policy innovation. Our team brings deep expertise to deliver proven solutions that balance sustainability, affordability, and reliability—creating meaningful impact to help shape the future of energy systems.

We serve both private- and public-sector entities, such as Fortune 500 companies, state agencies, public interest organizations, utility commissions, clean energy buyers, industry trade associations, and consumer advocates. For more information, visit currentenergy.group.

© January 2026, Current Energy Group. All rights reserved.

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-02:
Declaration of Nancy Hirsh

DECLARATION OF NANCY HIRSH

I, Nancy Hirsh, declare and state as follows:

1. I was employed at the NW Energy Coalition (NVEC) from April 1996 through August 2025. For the first eighteen years I was the policy director and then in 2015, I became the NVEC executive director.
2. I have a Bachelor of Science in Natural Resource Policy from the University of Michigan's School of Natural Resources and the Environment.
3. During my tenure at NVEC, I analyzed utility and regional resource planning and engaged in regulatory proceedings, utility rate cases, and utility program reviews. I worked with state policymakers and state agency staff on clean energy development, state energy strategy, and greenhouse gas emissions and air pollution reduction approaches.
4. I have reviewed the Department of Energy's Order No. 202-25-11 and have consulted with former colleagues from Sierra Club, NW Energy Coalition, and Climate Solutions.

Introduction

5. In this declaration, I address the following topics: (1) the impetus for negotiations to close the Centralia coal plant; (2) the key features of the negotiated deal; (3) the codification of the deal by the State of Washington; (4) how the shutdown agreement was incorporated into Washington State's clean energy and greenhouse gas emission reduction policies; and (5) how the TransAlta closure agreement has been implemented, including measures to address impacts on workers and the community.

Impetus for the Negotiations

6. In 2009-2010, the Washington Department of Ecology released a proposed permit and reached a proposed settlement with TransAlta, ultimately leading to an air permit addressing mercury and nitrogen oxide (NOx) emissions from Centralia. *See, e.g.*, Ex. 1-104 – Ecology BART Order 6426 for Centralia (June 18, 2010). There was widespread objection to the agreement and permit because they did not sufficiently reduce nitrogen oxide (NOx), mercury, or carbon dioxide emissions. In particular, Ecology was not requiring Selective Catalytic Reduction (SCR) technology, which is the most effective NOx control technology available. The Sierra Club and other environmental organizations challenged this permit in various adjudicative forums. *See, e.g.*, *Sierra Club v. Southwest Clean Air Agency and TransAlta Centralia Generation, LLC*, PCHB No. 09-108, and No. 409-17-8-II (Wash. Ct. App., Div. II).
7. While challenges over the Title V permit continued throughout 2009, Washington Governor Gregoire issued Executive Order 09-05, in May 2009, directing the Department of Ecology to work to obtain TransAlta's commitment to have the Centralia plant meet the State's greenhouse gas emissions performance standard in RCW 80.80.040(1) by the

end of 2025. Ex. 1-114 - Executive Order 09-05 (May 21, 2009). This would, in practice, require closure of the plant. At the time, the Centralia plant was the largest single source of greenhouse gas emissions in Washington State, accounting for 10% of state emissions.¹ Without an earlier closure date, Washington would not meet its 2020 climate goal as established in 2008 in RCW 70A.45.020. In addition, the Centralia plant was and continues to be the single largest source of Nitrogen Oxides (NOx) in the State.² NOx is a significant source of haze pollution. In 2011 the Centralia plant emitted 6635 tons of NOx per year and the next largest emitter produced 1100 tons per year. In 2023, the Centralia plant emitted 3955 tons per year compared to the next largest emitter that produced 2161 tons of NOx per year. On behalf of NWEAC, I joined other advocates to bring a 2015 or 2020 closure date proposal to informal discussions with Governor Gregoire's team and state policymakers.

8. During 2010, on behalf of the NW Energy Coalition, I helped lead ongoing conversations between environmental advocates and representatives of the Governor's policy office about legislative and/or policy options to develop a comprehensive clean up and/or closure strategy that accelerated the Governor's executive order timeline and expanded clean energy and local economic development. Pressure was mounting on TransAlta, first regarding immediate installation of toxic mercury controls (TransAlta was planning new mercury controls by the end of 2012), and second as U.S. Environmental Protection Agency was considering requiring installation of SCR technology. TransAlta indicated that it would consider investment in SCR along with a firm commitment to extend the life of the plant to recoup its investment.
9. In January 2011, I met with Governor Gregoire and other members of the Environmental Priorities Coalition, which includes Climate Solutions, NWEAC, Sierra Club, and Washington Environmental Council (now Washington Conservation Action) to discuss potential legislation that would require Centralia's compliance with the state greenhouse gas emissions performance standard by 2015, elimination of the sales and use tax exemptions for purchase and use of coal, and state support for worker and economic development in Lewis County, where Centralia is located.

Negotiations with TransAlta, Governor Gregoire's Policy Advisors, and Public Interest Leaders

10. The Washington legislature considered two bills in early February 2011, (HB 1825 sponsored by Rep. Lias and SB 5769 sponsored by Senator Rockefeller) to require Centralia's compliance with the greenhouse gas emissions performance standard. HB1825 had a 2015 compliance date, and SB 5769 had a 2020 compliance date.

¹ <https://ecology.wa.gov/regulations-permits/compliance-enforcement/transalta>;
<https://data.wa.gov/Natural-Resources-Environment/Total-Emissions-by-Reporter-Excluding-Biogenic-CO2/2ci3-df4x>

² <https://ecology.wa.gov/air-climate/air-quality/air-quality-targets/air-emissions-inventory>

11. On February 21, 2011, Governor Gregoire brought together TransAlta representatives and key environmental leaders from NW Energy Coalition, Sierra Club, Washington Environmental Council (now Washington Conservation Action) and Climate Solutions, with her policy advisors to explore a compromise package that reduced emissions, supported workers, and provided appropriate financial stability to the Company.
12. I represented NWEAC during the negotiations.
13. After almost a week of negotiations, the parties agreed to near-term application of mercury controls, selective non-catalytic reduction (SNCR) controls to reduce NO_x emissions, closure of Unit #1 by the end of 2020, closure of Unit #2 by the end of 2025, a \$55 million coal transition fund, extension of sales and use tax exemption for coal purchases and use as long as air pollution conditions were met, support for the company to continue selling electricity until closure, and support to forestall requiring SCR installation if the closure agreement was codified and implemented.

Codification of the deal and subsequent Memorandum of Agreement

14. This agreement was then turned into legislative language and was offered as a striking amendment to SB 5769. With minor amendments, this bill, the Coal-Fired Electric Generation Facilities Act, passed the legislature on April 22, 2011, and was signed by Governor Gregoire on April 29, 2011. A very controversial aspect of the legislation provided that the State could not impose any further greenhouse gas emissions standards on this facility or on a utility purchasing Coal Transition Power from Centralia. RCW 80.80.110.
15. The legislation required the Governor to enter into a Memorandum of Agreement (MOA) with TransAlta to:
 - establish a process for installation of SNCR emissions control technology by January 2013; and
 - develop a strategy for TransAlta to contribute \$55 million in financial assistance to the community (\$30 million for energy efficiency and economic development and \$25 million for energy technologies).
16. At the end of 2011, TransAlta and Governor Gregoire signed the MOA. Ex. 1-106 – Washington-TransAlta Shutdown Memorandum of Agreement (Dec. 23, 2011).
17. As part of TransAlta having the opportunity to be financially healthy during the transition period, the Company was allowed to continue to sell at least 500 megawatts of what was called “coal transition power” to a Washington based utility or the Bonneville Power Administration. Such a power purchase agreement (PPA) could last until 2025 and would be granted an exemption from the Greenhouse Gas Emissions Performance Standard. During the legislative drafting and negotiations, utilities that were considering such a PPA argued that a simple Emissions Performance Standard exemption was not enough for them to endure the public outcry over a coal-fired power purchase. The legislature

authorized the Utilities and Transportation Commission to allow a utility to earn the equity portion of its authorized rate of return.³ Traditional utility regulation does not allow shareholder earnings on a PPA, because the utility does not hold the capital risk. This 2011 law was groundbreaking in that regard.

18. The legislation and the MOA maintained the existing sales and use tax exemptions for the facility if it met the air pollution requirements in the Memorandum of Agreement. The tax exemptions made TransAlta's commitment of financial assistance for the community, workers, economic development and clean energy an easier commitment to make.

The shutdown agreement has been the predicate of the state's clean energy and climate laws since, as well as planning for resource adequacy for the region and alternatives.

19. The exemption from any future greenhouse gas emission reduction requirement for Centralia and a utility purchasing coal transition power from it undergirded climate legislation and state planning for the next 15 years.
20. Washington State has passed three significant clean energy and climate pollution control policies since the 2011 adoption of the Coal-Fired Electric Generation Facilities Act and in each of these new laws, specific exemptions were included for TransAlta and Puget Sound Energy until the dates Centralia was scheduled to shut down each of its units. In addition, regional power planning agencies, such as the Northwest Power and Conservation Council, have assumed closure of the Centralia plant as part of their regional resource adequacy assessments and its 5-to-20-year power planning for the region.
21. I was a lead drafter of the voter approved Energy Independence Act (2006) that established clean energy standards for electric utilities and required investments in energy efficiency and new renewable energy generation. In 2013, State Senator Braun, representing the district in which Centralia resides, advanced a bill to specifically allow an exemption from the renewable energy standard. This exemption applied to an electric utility purchasing "coal transition power." RCW 19.285.040 (2)(d). No other exemption for fossil fuels was allowed in the statute.
22. As policymakers were developing the Clean Energy Transformation Act (CETA) in 2019 (SB 5116) to phase out fossil fuel use in electricity production for consumption in Washington, they consulted with the environmental organizations that had negotiated the Centralia closure deal with the Governor's office in 2011. We acknowledged that TransAlta was adhering to the terms of the original closure legislation and supported policymaker's decision to incorporate the 2025 closure date into the law, which required all utilities in Washington State to end use of coal-fired electricity to serve their customers by December 31, 2025. This date was intentionally adopted to allow Puget Sound Energy and TransAlta to operate under their power purchase contract. RCW

³ SB 5769 §§ 304 (4), (6)

19.405.030 (1)(a). CETA also contains a penalty on electric utilities for non-compliance with the elimination of coal from electricity supply. The penalty is \$100 x 1.5 per megawatt-hour of coal-fired electricity used to serve customers. RCW 10.405.090(1)(a)(i).

23. In 2021, the Climate Commitment Act (CCA) was passed by the Washington legislature to cap greenhouse gas emissions and invest allowance revenue in clean energy and emission reduction programs. RCW 70A.65. The pace of the ramp-down of greenhouse gas emissions accounted for the timeline for closure of the Centralia coal plant at the end of 2025. In addition, TransAlta was exempt until closure from purchasing emission allowances for greenhouse gas emissions from the plant and Puget Sound Energy was exempt from purchasing emission allowances for the coal transition power it purchased from TransAlta.

Agreement implementation and its impact on workers and the community

24. Two important aspects of the closure deal were the agreement for TransAlta to install SNCR pollution control technology to address haze and NOx rather than face potential EPA requirements to install the more effective (and costlier) SCR technology. And the agreement to allow an exemption from the State's greenhouse gas emissions performance standard for Centralia and a Washington utility purchasing Centralia power up until the shutdown dates. After codification of the deal, the environmental negotiators signed a Memorandum of Understanding with TransAlta agreeing to support SNCR for pollution control before EPA and to support the purchase of Coal Transition Power by a Washington utility before the Washington Utilities and Transportation Commission. Ex. 1-107 – TransAlta-Conservation Organizations Shutdown Memorandum of Understanding (June 2012).
25. During negotiations with the company, a key factor influencing our decision to support the long closure timeline was the impact of the plant closure on the workers and the community. We discussed with TransAlta and the Governor's staff the need to support worker retraining opportunities and economic development investments within the community. TransAlta agreed to provide \$55 million dollars toward these ends within the community and to advance clean energy within the state if the state maintained the sales and use tax credits on the coal purchases until closure.
26. The legislature provided broad details for the allocation of the \$55 million. Funds from TransAlta would be split with \$30 million going toward economic development, weatherization and energy efficiency in the impacted community, and \$25 million going toward energy technologies that create energy, economic development, pollution reduction and environmental benefits. TransAlta would start contributing funds by January 1, 2012 and further details were left to be worked out in the MOA with the Governor.
27. I worked with the Governor's office and TransAlta to further refine the allocation of financial resources to ensure the intended impacts were realized. A key aspect of the MOA development was the sub-allocation of \$10 million explicitly for energy efficiency

and weatherization with \$1 million targeting weatherization for low- and moderate-income residents within Lewis and south Thurston Counties. It was also determined that the \$20 million could be invested in community development as well as economic development within the affected communities. The parties also agreed to allow the \$25 million for energy technologies to be invested anywhere in Washington state.

28. Initially the MOA set up three grant review boards, one for each area of investment. NWECC was named in the MOA to serve on the Weatherization Board, and I was selected to serve and began working with the Weatherization Board in late 2013. After several years of grantmaking, it became clear that with the administrative complexity of three Boards and up to 35 individuals serving on the Boards consolidation would improve effectiveness. In a motion to the Governor, TransAlta requested a modification of the MOA to collapse the three Boards into one, while maintaining the three separate financial accounts. The remaining Board, the Centralia Coal Transition Board (CCTB), consists of five employees of TransAlta and four community/outside representatives. NWECC was maintained as the sole organization from outside the affected area. I have served on the Centralia Coal Transition Board (CCTB) since its inception.
29. Within the \$20 million allocated for community and economic development, the CCTB decided to set aside \$9 million for the workers. Of this, \$1 million was dedicated to education and retraining and \$8 million for a payout for each worker who is terminated by the closures of Unit #1 at the end of 2020 and Unit #2 at the end of 2025.
30. The CCTB members will continue to evaluate grant proposals and award grants through July 2026. Almost all funds for weatherization, energy efficiency, and community and economic development have been distributed. A modest portion of the energy technology funds remains available for grants in 2026.

I declare under penalty of perjury under 28 U.S.C. § 1746, that the foregoing is true and correct to the best of my knowledge.

Executed on this 13th day of January, 2026, in Seattle, Washington.



Nancy Hirsh

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-03:
DOE 202(c) Webpage



[Office of Cybersecurity, Energy Security, and Emergency Response](#) > [DOE's Use of Federal Power Act..](#)

DOE's Use of Federal Power Act Emergency Authority

Under Federal Power Act (FPA) section 202(c), during the continuance of a war in which the United States is engaged or when an emergency exists by reason of a sudden increase in the demand for electric energy, or a shortage of electric energy, or of facilities for the generation or transmission of electric energy, or of the fuel or water for generating facilities, or other causes, the Secretary of Energy may require by order temporary connections of facilities, and generation, delivery, interchange, or transmission of electricity as the Secretary determines will best meet the emergency and serve the public interest. 16 U.S.C. § 824a(c).

All public comments and requests related to FPA section 202(c) should be sent via email to AskCR@hq.doe.gov. Information that the sender deems sensitive and not eligible for public release should be marked accordingly, and both a public (redacted) and non-public version of such materials should be submitted. Additional information about 202(c) procedures, if necessary, will be announced on this page.

The provision of this process for submission of correspondence or comments on any pending application is for purposes of ensuring the receipt by the appropriate office and personnel within the Department. Establishment of this

email address does not establish a “docket,” and those submitting correspondence do not constitute parties or intervenors to any proceeding. Further, submission of correspondence to the Department does not in any way limit or prevent the ability of the Secretary to act on any application, or pursuant to section 202(c) without application, in any way and at any time as he or she deems appropriate.

202(c) Orders Issued to Date



2026 DOE 202(c) Orders

202(c) orders issued from Jan. 1, 2026 to Dec. 31, 2026

[Learn More](#)

2025 DOE 202(c) Orders

202(c) orders issued from Jan. 1, 2025 to Dec. 31, 2025

[Learn More](#)



2024 DOE 202(c) Orders

202(c) orders issued from Jan.
1, 2024 to Dec. 31, 2024

[Learn More](#)

2023 DOE 202(c) Orders

202(c) orders issued from Jan.
1, 2023 to Dec. 31, 2023

[Learn More](#)

2022 DOE 202(c) Orders



2021 DOE 202(c) Orders

202(c) orders issued from Jan.
1, 2022 to Dec. 31, 2022

202(c) orders issued from Jan.
1, 2021 to Dec. 31, 2021



2020 DOE 202(c) Orders

202(c) orders issued from Jan.
1, 2020 to Dec. 31, 2020

[Learn More](#)

DOE 202(c) Orders Issued Prior to 2020

DOE 202(c) orders issued prior
to 2020

[Learn More](#)

Numbering Scheme Information

Beginning in 2022, the Department modified the numbering scheme associated with its section 202(c) emergency orders. Prior to 2022, emergency orders followed a fiscal year timeline, whereas since the beginning of 2022, emergency orders have aligned with the calendar year. For example,

a 202(c) emergency order issued in November 2017 is identified as Order No. 202-18-1 and an order issued in December 2022 is identified as Order No. 202-22-3.



U.S. DEPARTMENT
of **ENERGY**

Committed to Restoring America's Energy Dominance.

Quick Links

[Leadership & Offices](#)

[Contact Us](#)

[Newsroom](#)

[Careers](#)

Resources

[Budget & Performance](#)

[Freedom of Information Act \(FOIA\)](#)

[Privacy Program](#)

[Directives, Delegations, & Requirements](#)

[Inspector General](#)

Federal Government

[USA.gov](#)

[The White House](#)

Follow Us



[Open Gov](#) [Accessibility](#) [Privacy](#) [Information Quality](#) [No Fear Act](#)
[Web Policies](#) [Vulnerability Disclosure Program](#) [Whistleblower Protection](#)
[Equal Employment Opportunity](#) [Notice of Court Orders](#)

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-04:
Cooke Email to Alle-Murphy

-----Original Message-----

From: Alle-Murphy, Linda

Sent: Wednesday, December 28, 2005 9:05 AM

To: Mansueti, Lawrence

Subject: Re: Order No. 202-05-3

Dear Mr. Mansueti,

I am an associate at Schnader Harrison Segal and Lewis, working together with John Britton, who represents the City of Alexandria in the Mirant Power Plant matter. I have a few procedural questions regarding the application for rehearing.

According to Section VI.H. of Order No. 202-05-3, applications for rehearing in this matter should be addressed to you. Section VI.H. cites to 16 U.S.C. Section 825(l), which refers to the "Commission" (FERC). I am just seeking to confirm that Section 825(l) also applies to this DOE proceeding.

Also, are 10 CFR Section 1003.1 et seq., Office of Hearings and Appeals Procedural Regulations applicable to this proceeding (e.g. re service requirements, etc.) If not, are there other procedural rules that apply to this proceeding?

Thank you very much for your assistance! You may respond by return e-mail or, if that is not convenient for you, by telephone or fax.

Linda Alle-Murphy
Linda B. Alle-Murphy
Schnader Harrison Segal & Lewis LLP
1600 Market Street, Suite 3600
Philadelphia, PA 19103-7286

From: Cooke, Lot
Sent: Friday, December 30, 2005 8:51 AM
To: 'LAlle-Murphy@Schnader.com'
Subject: Rehearing procedures for DOE Order No. 202-05-3

Dear Ms. Alle-Murphy:

In response to your emailed question to Mr. Mansueti--

The DOE Organization Act transferred the authority of the Federal Power Commission to the Secretary, except for authority over rates and charges for the transmission and sale of electric energy, which was transferred to FERC. Federal Power Act (FPA) Section 202(c) emergency authority was generally and specifically given to the Secretary.

An order issued under the FPA is only reviewable pursuant to the rehearing provisions contained in section 313 of the FPA, so that is the applicable provision under which to seek rehearing of the December 20, 2005 order.

The DOE regulations on emergency orders, 10 CFR section 205.370, et seq., do not have a specific rehearing section, but a party seeking rehearing can look for procedural guidance to FERC's Rules of Practice and Procedure, 18 CFR Part 385. In particular the rehearing regulations contained at 18 CFR section 385.713 and the service requirement contained at 18 CFR section 385.2010. The Office of Hearings and Appeals procedures are not applicable as the Secretary will make the rehearing decision pursuant to FPA section 313.

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-05:
DOE Rehearing Procedures



U.S. DEPARTMENT
of ENERGY

Office of Cybersecurity, Energy Security, and Emergency Response DOE 202(c) Order Rehearing Procedures

DOE 202(c) Order Rehearing Procedures

DOE may revise these procedures through advance written notification to the parties and posting [here](#).

Intervention. Any person seeking to intervene to become a party must file a written motion to intervene by emailing AskCR@hq.doe.gov. A motion to intervene must state the movant's interest in sufficient factual detail to demonstrate that the movant has or represents an interest which may be directly and substantially affected by the outcome of the proceeding. A motion to intervene must be filed within 30 days after the

issuance of a section 202(c) order, which includes an original order or a renewal order. No grant of late intervention is permitted unless DOE finds good cause. The grant of party status will be expressly stated by DOE order within thirty days of filing. A motion to intervene may be combined with a motion for rehearing, answer, or other motion.

Rehearing. Pursuant to 16 U.S. Code § 825l, any party applying for rehearing must file a written motion for rehearing by emailing AskCR@hq.doe.gov within 30 days after the issuance of a section 202(c) order. The motion for rehearing must set forth specifically the ground or grounds upon which such motion is based and must contain a clear and concise statement of the facts and law which support the motion and the specific relief or ruling requested. Any grounds not specifically identified in such motion shall be waived. All motions for rehearing will be addressed in a consolidated proceeding and order on rehearing. Unless DOE acts upon the motion for rehearing within 30 days of filing, such motion may be deemed to have been denied.

Answers. Any party may file an answer to another party's motion by emailing AskCR@hq.doe.gov within 7 days after the motion is filed. An answer must contain a clear and concise statement of any disputed factual allegations and any law upon which the answer relies. An answer to an answer is not permitted.

Timing and Service. DOE will use best efforts to post filings [here](#) within 24 hours of receipt. Such posting constitutes service to all parties. Filing or posting due dates that fall on a federal holiday or weekend shall be extended to the next business day. Documents received after 4:30 p.m. Eastern Time are deemed filed on the next business day.

Confidentiality. DOE strongly encourages that all filings be limited to information suitable for public release. If procedures to maintain confidentiality are requested, DOE will provide them as needed at the discretion of DOE.

Committed to Restoring America's Energy Dominance.

Quick Links

[Leadership & Offices](#)

[Contact Us](#)

[Mission](#)

[Careers](#)

Resources

[Budget & Performance](#)

[Freedom of Information Act \(FOIA\)](#)

[Privacy Program](#)

[Directives, Delegations, & Requirements](#)

[Inspector General](#)

Federal Government

[USA.gov](#)

[The White House](#)

Follow Us

[Open Gov](#) [Accessibility](#) [Privacy](#) [Information Quality](#) [Web Policies](#) [Vulnerability Disclosure Program](#)
[Whistleblower Protection](#)

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-06:
Groundwater Report (Jan. 2025)

2024 Annual Groundwater Monitoring Report for the Limited Purpose Landfill at the TransAlta Centralia Mine, near Centralia, Washington

Prepared for


TransAlta Centralia Mining LLC

January 2025

Jacobs

999 W. Riverside Ave Suite 500
Spokane, WA 99201
(509) 747-2000

This report has been certified by a Hydrogeologist
licensed in the State of Washington and employed by Jacobs Engineering Group Inc.

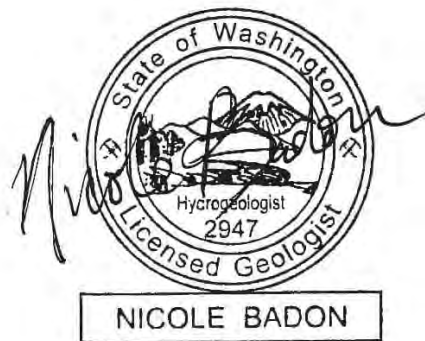

01/30/2025

Nicole Badon, representing:
Jacobs Engineering Group

Contents

Section	Page
Acronyms and Abbreviations.....	iv
Introduction.....	1-1
1.1 Purpose and Objectives	1-1
1.2 Document Organization.....	1-2
1.3 Site Description.....	1-2
1.4 Status of the Groundwater Monitoring Program	1-3
Monitoring Program Description	2-1
2.1 Monitoring Program	2-1
2.2 Monitoring Network.....	2-1
2.3 Groundwater Level Measurement.....	2-1
2.4 Groundwater Sampling.....	2-2
2.5 Field and Laboratory Quality Control	2-2
Groundwater Monitoring Results	3-1
3.1 Compliance Monitoring Events.....	3-1
3.2 Groundwater Levels and Hydrographs	3-1
3.3 Groundwater Flow Direction	3-1
3.4 Groundwater Flow Velocity Estimates	3-1
3.5 Groundwater Quality Results.....	3-2
3.6 Data Quality Assessment	3-2
Statistical Evaluation.....	4-1
4.1 Statistical Evaluation Regulatory Requirements.....	4-1
4.2 Statistical Evaluation Methods and Compliance Limits.....	4-1
4.3 Statistical Evaluation Results	4-2
Alternative Source Demonstration.....	5-3
5.1 CCR Rule Regulatory Applicability.....	5-3
5.2 Alternative Source Demonstration	5-3
5.2.1 Site History.....	5-3
5.2.2 Background Monitoring Results	5-4
5.3 Alternative Source Demonstration Results.....	5-5
Summary	6-1
References.....	7-1
Appendixes	
Tables	
Figures	
Appendix A Field Forms	
Appendix B Laboratory Reports	

Acronyms and Abbreviations

°C	degrees Celsius
CCR	coal combustion residuals
CCR SAP	<i>Groundwater Monitoring Sampling and Analysis Plan for the Limited Purpose Landfill at the TransAlta Centralia Mine</i>
CFR	Code of Federal Regulations
DQR	Double Quantification Rule
EPA	U.S. Environmental Protection Agency
HNO ₃	nitric acid
LPLF	Limited Purpose Landfill
mg/L	milligram per liter
SSI	statistically significant increase
SWFPR	sitewide false positive rate
TCM	TransAlta Centralia Mine
UPL	Upper Prediction Limit
WAC	Washington Administrative Code

Introduction

This section summarizes the 2024 annual report's purpose and objectives, the document organization, and provides the site description and the status of the monitoring program.

1.1 Purpose and Objectives

This document is the 2024 annual report for the Limited Purpose Landfill at the TransAlta Centralia Mine (TCM), as required per *CCR Groundwater Monitoring and Corrective Action* of 40 Code of Federal Regulations (CFR), 257.90(e), *Annual Groundwater Monitoring and Corrective Action Report*. Per the CCR Rule, the minimum requirements for each annual report submittal must include the following (as itemized per 40 CFR 257.90(e) [items 1 through 5]):

1. A map showing the Coal Combustion Residuals (CCR) unit (landfill) and the designated CCR groundwater monitoring network, including upgradient and downgradient wells with well identification numbers.
2. The identification of monitoring wells that were installed or decommissioned during the preceding year, along with a narrative description, and the reasons those actions were taken.
3. A summary of the groundwater samples that were collected for analysis for each upgradient (or background) and downgradient well, the dates the samples were collected, and whether the sample was required by the detection or assessment monitoring program.
4. A narrative discussion of transition between monitoring programs (the date and circumstances of transitioning from detection phase to assessment monitoring), if applicable
5. Other information required per 40 CFR 257.90 through 257.94, interpreted to include the following:
 - A map showing groundwater elevations, inferred groundwater elevation contours, and inferred groundwater flow direction from the sampling events conducted during the year.
 - A groundwater elevation hydrograph, including data over the period of record.
 - Groundwater flow rates for the semiannual events conducted during the preceding year.
 - Results from data quality review and data validation
 - A summary of the statistical method and the respective background (compliance) limits for Detection Monitoring (Appendix III) constituents
 - A summary of any Appendix III constituents that are identified as a statistically significant increase (SSI) greater than background levels.

In addition to this technical information, the annual report must also include a narrative of the following items:

- Documentation of the status of the monitoring program (that is, detection or assessment phase)
- Key actions completed for the preceding calendar year including alternative source demonstrations
- A description of problems encountered, and actions taken to resolve the problems (if needed)
- Key activities anticipated for the upcoming year

The annual reports are due by January 31 and summarize monitoring results from the preceding year. The CCR Rule requires specific reports and notifications throughout the monitoring process, with up to three forms of submittals:

- The site's operating record (40 CFR 257.105)
- Notifications to the State Director (40 CFR 257.106)
- The publicly accessible internet site (40 CFR 257.107)

1.2 Document Organization

The document is organized into the following sections:

- Section 1. Introduction. Presents the document purpose and objectives, site description, and status of monitoring program.
- Section 2. Monitoring Program Description. Summarizes the groundwater monitoring system design (well network) and the sampling program for the Limited Purpose Landfill.
- Section 3. Groundwater Monitoring Results. Summarizes the groundwater monitoring information related to background data collection and the initial compliance event and provides a map showing groundwater elevations and inferred flow direction, estimates of groundwater seepage velocity, and a summary of groundwater quality results for the initial compliance event.
- Section 4. Statistical Evaluation. Summarizes the statistical method and the compliance limits and compares the initial compliance results to the compliance limits to determine whether there is an SSI greater than background conditions for the Appendix III constituents.
- Section 5. Alternative Source Demonstration. Summarizes statistically significant exceedances, the detection monitoring results, retesting, confirmation, and documentation of an alternative source demonstration for the confirmed values.
- Section 6. Summary. Summarizes the key points of the initial annual report per the CCR regulatory requirements.
- Section 7. References. Lists the documents referenced to develop this report.

1.3 Site Description

TCM manages the Limited Purpose Landfill, which is approximately 7 miles east of Centralia, Washington (Figure 1). The Limited Purpose Landfill is north of Pit 7 in the Centralia Mine. The site is in the southern half of Section 33, Township 15N, Range 1W; Latitude 46°44'23" North, Longitude 122°49'55". The site address is 913 Big Hanaford Road, and the Property Tax Parcel (Account) Number is 023387001000. The permitted area encompassing the Limited Purpose Landfill is 57 acres, and the actual footprint of the waste disposal area is 18 acres (Figure 2). The Limited Purpose Landfill consists of the waste disposal area, and the surface impoundments immediately south of the waste disposal area to manage leachate generated at the disposal cell.

TransAlta Centralia Generation LLC operates a coal-burning power plant that is located adjacent to TCM and generates residual ash waste; the residual ash waste is disposed of into the Limited Purpose Landfill. The construction of Stage 1 began during the summer of 2009, and the Lewis County Environmental Health Department authorized TCM to begin waste disposal operations effective October 31, 2009. On December 21, 2009, the Lewis County Environmental Health Department amended the facility permit to approve the disposal of residual ash waste in Stage 1 Area A3a, in addition to Areas A1 and A2, which had been approved for disposal in the original permit. The Stage 2 Area of the Limited Purpose Landfill

SECTION 1

was constructed in three phases from 2011 through 2014 and was subsequently approved for the receipt of ash waste material.

1.4 Status of the Groundwater Monitoring Program

The groundwater monitoring program is currently in the detection phase, as described under 40 CFR 257.94, *Detection Monitoring Program*.

In 2019, the background levels for the Appendix III constituents listed for detection monitoring were updated. The resultant Upper Prediction Limits (UPLs) represent a longer period of monitoring providing an additional 5 monitoring events. Due to the complex behavior of groundwater and need for sufficiently large sample sizes, the EPA Unified Guidance recommends that background levels should be evaluated and possibly updated every four to eight measurements.

Groundwater monitoring was conducted May 8, 2024 and October 8 and 9, 2024 for biannual monitoring. Resampling was conducted after the May 8, 2024 event on June 24, 2024 for an exceedance for boron in wells LPLF-2R and LPLF-8, and TDS in LPLF-2R. Resampling was conducted after the October 8 and 9, 2024 sampling event on November 26, 2024 for boron in wells LPLF-2R and LPLF-8, and TDS in LPLF-2R. The resampling results were used in an alternative source demonstration, as documented in Section 5 of this report. Based on the demonstrations, the SSI are determined as a result of natural variation in groundwater concentrations from the resaturated spoils beneath the facility.

Monitoring Program Description

This section summarizes the CCR groundwater monitoring program for the Limited Purpose Landfill.

2.1 Monitoring Program

Groundwater is monitored in accordance with the CCR SAP (CH2M, 2016). Details regarding the site hydrogeology, the stratigraphic sequence, the uppermost aquifer, and the lower aquitard/confining unit are presented in the groundwater monitoring system design document (CH2M, 2017a) posted to the publicly available website and are not reiterated herein. Details regarding the monitoring network, sampling, and field/laboratory quality control are described in the following sections.

2.2 Monitoring Network

Effective April 17, 2015, the CCR regulations (specifically, 40 CFR 257.91, *Groundwater Monitoring Systems*) require a facility to install a detection groundwater monitoring system at appropriate locations and depths to yield groundwater samples from the uppermost aquifer and monitoring of all potential contamination pathways. At least one upgradient well must accurately represent the quality of background groundwater unaffected by potential leakage from the CCR unit. The regulations also state that at least three downgradient wells must accurately represent the quality of groundwater passing the waste boundary for the detection of potential groundwater contamination in the uppermost aquifer.

Table 1 summarizes the groundwater monitoring well network and construction details for the Limited Purpose Landfill. Figure 2 shows the designated CCR groundwater monitoring network, which consists of five wells screened in the uppermost aquifer and located around the perimeter of the ash disposal area. Monitoring wells LPLF-1 and LPLF-5 are effectively upgradient of the landfill and used to characterize background conditions unaffected by the landfill, and wells LPLF-2R, LPLF-7R, and LPLF-8 are downgradient and designated as compliance wells. As noted in Section 1.4, documentation of the CCR *Groundwater Monitoring Systems* design was submitted to the publicly available website in October 2017, as described in the *Coal Combustion Residual Groundwater Monitoring System Certification for the Limited Purpose Landfill at the Centralia Mine near Centralia, Washington* (CH2M, 2017a).

2.3 Groundwater Level Measurement

Static groundwater level measurements are collected during each monitoring event to calculate groundwater elevations, estimate groundwater flow direction, and calculate the groundwater seepage velocity. Groundwater elevations are calculated by subtracting the field measured static depth to water from the surveyed top-of-casing elevations relative to the local vertical datum (NAD 27, Washington State Plane, North 3601, Feet Intl). Field-measured groundwater levels are recorded on field forms (provided in Appendix A) and the groundwater level data are presented in Section 3.

2.4 Groundwater Sampling

Each well is equipped with dedicated tubing to facilitate low-flow sampling methods, except for LPLF-1, which is bailed to collect the sample. A peristaltic pump is used to support sampling methods required for low-flow (minimal drawdown) groundwater sampling procedures as described under *Groundwater Sampling Guidelines for Superfund and RCRA Project Managers* (EPA, 2002). In accordance with the low-flow method, purging continues until field parameters have stabilized to acceptable tolerances as outlined in the CCR SAP (CH2M, 2016b). Field parameters are measured using factory-calibrated multiparameter probe. Appendix A includes copies of field sampling forms for sampling events conducted in 2024.

Groundwater samples were collected in laboratory-provided sample containers. Below are the test methods, reporting limits, and preservatives to collect groundwater samples for the Appendix III constituents for detection monitoring.

Constituent	Analytical Test Method	Reporting Limit (mg/L)	Preservative
Boron	EPA 6010C	0.01	HNO ₃
Calcium	EPA 6010C	0.05	HNO ₃
Chloride	E300	2.5	Chill to 4°C
Fluoride	E300	0.5	Chill to 4°C
pH	SM 4500H B	0.1	Chill to 4°C
Sulfate	E300	10	Chill to 4°C
Total Dissolved Solids	A2540C	1	Chill to 4°C

°C = degrees Celsius

HNO₃ = nitric acid

mg/L = milligram per liter

Laboratory analyses were performed by an accredited and certified testing laboratory (ALS, in Kelso, Washington).

2.5 Field and Laboratory Quality Control

As described in the CCR SAP (CH2M, 2016b), field and laboratory quality control are guided by the field quality control procedures that included sample labeling, chain-of-custody documentation, and sealing of sample containers following sample collection. Field duplicate and matrix spike (with duplicates) samples are collected during each sampling event. Temperature and method blanks are included with each shipment.

Laboratory quality control procedures included analysis of method blanks, surrogates, duplicates, and matrix spike/matrix spike duplicates. Results from the laboratory quality control procedures are included in the analytical data packages and are included in Appendix B.

Groundwater Monitoring Results

This section summarizes the groundwater monitoring results related to the dates of sampling for the monitoring events, groundwater elevations, groundwater flow direction, the estimates of groundwater seepage velocity, and the groundwater quality results from the monitoring events.

3.1 Compliance Monitoring Events

The CCR Rule requires at least eight background groundwater monitoring events before the October 17, 2017, deadline to establish background conditions. Monitoring events after the eighth background event are considered initial detection-phase compliance monitoring to determine whether there is an SSI greater than background conditions. Below is a summary of the compliance and resampling events and the respective constituent suites for the sampling events. In 2024 an additional 2 monitoring events were included in the re-evaluation and determination of groundwater conditions.

Monitoring Event Type/Purpose	Date Completed	Appendix III, Detection Monitoring Constituents	Resampled Wells
Detection/Compliance	May 8, 2024	Yes	NA
Resampling/Confirmation	June 24, 2024	2 Constituents (boron, and TDS)	LPLF-2R, LPLF-8
Detection/Compliance	October 8 and 9, 2024	Yes	NA
Resampling/Confirmation	November 26, 2024	2 Constituents (boron, and TDS)	LPLF-2R, LPLF-8

3.2 Groundwater Levels and Hydrographs

Table 2 summarizes the groundwater measurements from the 2024 groundwater monitoring program. Figure 3 shows the groundwater elevation hydrograph from the CCR network wells from the initial monitoring events conducted from November 2016 through November 2024. In general, groundwater elevations are relatively similar to historical levels. Continued monitoring will be used to assess the need to evaluate seasonal patterns, characteristics, or apparent trends in the site hydrograph.

3.3 Groundwater Flow Direction

Figures 4 and 5 show the elevation contours and inferred flow direction for the groundwater conditions at the site for May and October 2024, respectively. The groundwater in the uppermost aquifer beneath the Limited Purpose Landfill generally flows to the southwest. Well, LPLF-5 was dry during the October 8, 2024 sampling event (the elevation of the lowest measured groundwater level in LPLF-5 was used for contouring). A flow direction to the southwest is consistent with historical groundwater monitoring results.

3.4 Groundwater Flow Velocity Estimates

The estimated groundwater seepage velocity is 5 feet per year, which is based on the following equation and hydraulic assumptions and groundwater elevations in the uppermost aquifer:

$$v = \frac{K_a i}{n_e} \quad \text{Equation from Fetter, 1994}$$

where:

v	=	groundwater velocity (seepage velocity)
K_a	=	average horizontal hydraulic conductivity
i	=	horizontal hydraulic gradient
n_e	=	effective porosity

- An average hydraulic conductivity estimate of 0.11 to 0.17 feet per day (equivalent to 3.88×10^{-5} to 5.82×10^{-5} centimeters per second), which is based on slug test analyses and as summarized in the *Coal Combustion Residual Groundwater Monitoring System Certification for the Limited Purpose Landfill at the Centralia Mine Site near Centralia, Washington* (CH2M, 2017a).
- Hydraulic gradient was consistently 0.02 to 0.03 feet per foot, as measured from Figures 4 and 5. This value is considered a typical but lower value based on previous monitoring performed under the pre-existing WAC program since 2007.
- Effective porosity of 0.15 (assumed value generally representative of mine spoils)

3.5 Groundwater Quality Results

Table 3 presents the groundwater quality results for the Appendix III constituents from the 2024 groundwater monitoring and resampling events. Groundwater data from the monitoring events are compared to the background conditions per the selected statistical method to determine whether the initial compliance values exceed background concentrations, as presented in Section 4. Resampling was conducted to confirm parameters that represented statistically significant exceedances for those wells and parameters identified.

3.6 Data Quality Assessment

The groundwater quality data were reviewed to assess the representativeness and usability of data before performing statistical evaluations as presented in Section 4. The method for performing the data quality review is documented in the CCR SAP (CH2M, 2016b) and follows procedures in the U.S. Environmental Protection Agency (EPA) *National Functional Guidelines for Inorganic Superfund Methods Data Review* (EPA, 2016).

Table 4 is a summary of the data validation that was conducted for each sampling and analysis event. The summary includes review of laboratory analysis, receipt, qualifiers, laboratory method blanks, replicant sample results, and matrix spike recovery. Additionally, a field duplicate was collected for each detection monitoring event and relative percentage difference calculated for the duplicate sample. Laboratory and field duplicate values were within the data validation limits.

The data quality assessment is that analysis was consistent with the CCR SAP for the site. Based on this review, the field and laboratory methods followed the procedures specified in the CCR SAP, the completeness target/goal of 100 percent was achieved, none of the data were rejected, and data were found to satisfy the data quality objectives to be included for statistical evaluation as presented in Section 4.

Statistical Evaluation

This section summarizes the CCR regulatory requirements for statistical evaluation under the detection phase, as well as the selected statistical method, and compares the 2024 monitoring data to determine if monitoring values exceed compliance limits.

4.1 Statistical Evaluation Regulatory Requirements

The CCR Rule specifically lists four methods acceptable for statistical analysis (40 CFR 257.93[f]):

1. Parametric or nonparametric analysis of variance
2. Tolerance intervals
3. Prediction intervals (limits)
4. Control charts

Another statistical test method also may be considered if it meets the performance standards listed in 40 CFR 297.93(g). Per the CCR Rule, the selected statistical method was posted to the publicly available website by the October 17, 2017, deadline.

4.2 Statistical Evaluation Methods and Compliance Limits

Based on the site-specific groundwater conditions and results from an exploratory evaluation of the background data, the selected statistical method for evaluating groundwater detection monitoring data is a prediction interval (limit) method, which is a statistical method option, per 40 CFR 257.93(f)(3). The prediction interval method will be used separately for each well-constituent pair and was selected because the Appendix III constituents exhibited significant spatial variability, making an upgradient versus downgradient, also known as interwell, comparison infeasible. The method for six of the seven Appendix III constituents (including boron, calcium, chloride, pH, sulfate, and TDS) is an intra-well Prediction Limit; the seventh constituent, fluoride, is handled separately via the Double Quantification Rule (DQR). Per EPA *Unified Guidance* (2009), the DQR is applicable to constituents that exhibit 100 percent no-detect characteristics, and fluoride is 100 percent nondetect during the background period. The DQR method, which is applicable to fluoride only, assumes that a SSI is confirmed if both the original and retest values are confirmed to be detected values. Supplemental details and rationale for method selection are presented in *Coal Combustion Residual Statistical Method for the Limited Purpose Landfill at the Centralia Mine near Centralia, Washington* (CH2M, 2017b), which has been posted to the CCR public website prior to the October 17, 2017, deadline.

EPA's *Unified Guidance* (2009) recommends that prediction limits be combined with retesting for maintaining a low sitewide false positive rate (SWFPR) while providing high statistical power. The exploratory analysis confirmed a "1-of-2" retesting strategy is acceptable and will be used to verify an apparent SSI (that is, an initial SSI for Appendix III constituents). Retesting is an integral part of the statistical methodology for controlling the SWFPR when multiple monitoring locations and parameters are being evaluated. Assuming the "1-of-2" retesting approach, an apparent SSI cannot be confirmed or denied until the results of the resampling event have been obtained.

Following the prediction interval method, the compliance limits were calculated on the CCR Appendix III constituents for the three downgradient compliance wells (LPLF-2R, LPLF-8, and LPLF-7R). The calculation of intra-well prediction limits is used for six of the seven CCR constituents, including boron, calcium, chloride, pH, sulfate, and TDS; fluoride is evaluated separately via the DQR as a result of the 100 percent nondetects during background period. Assuming that sample background data are normally

distributed, or assuming that they can be transformed to fit a normal distribution, then the parametric upper prediction limit (UPL) is based on equation (1) as follows:

$$UPL = \bar{x} + Ks \quad (1)$$

where:

$\bar{x}$ is the sample mean,

s is the sample standard deviation, and

K is a multiplier factor that is chosen based on the evaluation schedule (nE), number of constituents (nc), number of wells (nw), number of background observations (n), overall SWFPR, and the specific retesting scheme selected.

For constituents such as pH, which require both lower and upper prediction limits, equation (2) is used:

$$LPL, UPL = \bar{x} \pm Ks \quad (2)$$

Table 5 presents the background (compliance) limits for each Appendix-III constituent derived from the equations above. For selected constituents exhibiting trends during background period, the background data were detrended before determining the background levels. As shown in Table 5, the constituents in which trends will be accounted for include boron, calcium, and TDS at well LPLF-2R; chloride, sulfate, and TDS at well LPLF-7R; and calcium, sulfate, and TDS at well LPLF-8. For the cases listed as 'no' for trend removal, the UPLs and lower prediction levels are the fixed compliance values to directly compare against future detection monitoring data to determine a SSI above compliance, and will be the levels to use until background is updated in the future. However, for cases listed as 'yes' for trend removal, the UPL is a calculated value dependent on time of sampling using equation (3) as follows:

$$\text{Trend accounting UPL} = \text{Intercept} + \text{slope} * (\text{time, in days}) + \text{residual value} \quad (3)$$

Note that the trendline equations and variables for intercept, slope, time, and residual values are shown in Table 5; these UPLs are listed as 'calculated' as they are dependent upon the time when the compliance data were obtained. The time (in days) is assumed as the number of days starting from the initial background event (which was collected on November 14, 2016) to when the compliance data in question were collected (example May 8, 2024, which is 2732 days following the initial event on November 14, 2016). For TDS at well LPLF-2R, transformation was performed using the Tukey power transformation to convert it into a normal distribution before applying the simple regression to determine an appropriate relationship for trend removal.

4.3 Statistical Evaluation Results

Table 6 summarizes the monitoring results determined to be confirmed SSI after retesting and therefore identified for further evaluation. The 2024 groundwater monitoring results were less than or within the respective compliance limits, except for the following six cases, boron in LPLF-2R (spring and fall) and LPLF-8 (spring and fall), and total dissolved solids (TDS) in LPLF-2R (spring and fall).

Resampling and confirmation testing were conducted within 90 days after validation of monitoring results and evaluated for potential detection or applicability of an alternative source demonstration. Resampling confirmed the values for boron in LPLF-2R and LPLF-8, and TDS in LPLF-2R. Therefore, resulting in a total of six SSIs.

The remaining detections were determined that an alternative source demonstration was appropriate for the six results. Section 5 discusses the alternative source demonstration and applicability to these confirmed SSI results. It is anticipated that these results will be included in a review of site conditions and groundwater quality variability under changing groundwater elevations.

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-07:
Cleanup Site Details (Oct. 2025)

Cleanup Site Details

Cleanup Site ID: 17302

Cleanup Site ID: 17302 Facility/Site ID: 94772166 UST ID: 8710 [Site Page](#) [Site Documents](#) [View Map](#)

Cleanup Site Name: TransAlta Centralia [Glossary](#)

Alternate Names: CENTRALIA STEAM PLANT, TransAlta, TransAlta Centralia

LOCATION

Address: 913 BIG HANAFORD RD City: CENTRALIA Zip Code: 98531 County: Lewis
Latitude: 46.75487 Longitude: -122.86360 WRIA: 23 Legislative District: 20 Congressional District: 3 TRS: 15N 1W 30

DETAIL

Status: Awaiting Cleanup NFA Received? No Is PSI site? No
Statute: MTCA NFA Date: N/A Current VCP? No Past VCP? No
Site Rank: N/A NFA Reason: N/A Brownfield? No
Site Manager: Middleton, Tom Responsible Unit: Southwest Active Institutional Control? No

CLEANUP UNITS

Cleanup Unit Name	Unit Type	Unit Status	Resp Unit	Unit Manager	Current Process
TransAlta	Upland	Awaiting Cleanup	SW	Middleton, Tom	Ecology-supervised or conducted
TransAlta Sediment	Sediment	Awaiting Cleanup	SW	Middleton, Tom	Ecology-supervised or conducted

ACTIVE INSTITUTIONAL CONTROLS

Instrument Type	Restriction Media	Restrictions/Requirements	Date	Recording Number	Recording County	Tax Parcel
-----------------	-------------------	---------------------------	------	------------------	------------------	------------

There are no current Institutional Controls in effect for this site.

AFFECTED MEDIA & CONTAMINANTS

MEDIA						
Contaminant	Soil	Groundwater	Surface Water	Sediment	Air	Bedrock
Arsenic	C	C				
Dioxins/Furans	B					
Halogenated Solvents		C				
Mercury				C		
Metals - Other	C	C		C		
Petroleum-Diesel		C				
Petroleum-Other		B				

Key:
B - Below Cleanup Level C - Confirmed Above Cleanup Level RA - Remediated-Above
S - Suspected R - Remediated RB - Remediated-Below

SITE ACTIVITIES

Activity	Status	Start Date	End Date/ Completion Date
Site Discovery/Release Report Received	Completed		5/14/2025
Initial Investigation / Federal Preliminary Assessment	Completed		6/2/2025
Early Notice Letter(s)	Completed		8/13/2025

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-08:
Mercury Mortality Risks of Coal



Support the School

Your gift powers excellence in research and education to advance public health.

Home / News / Particulate pollution from coal associated with double the risk of mortality than PM2.5 from other sources

Environment & Climate Health

Particulate pollution from coal associated with double the risk of mortality than PM2.5 from other sources

By Staff Writer • November 23, 2023

Search Harvard Chan



For immediate release: November 23, 2023

Exposure to fine particulate air pollutants from coal-fired power plants (coal PM2.5) is associated with a risk of mortality more than double that of exposure to PM2.5 from other sources, according to a new study led by George Mason University, The University of Texas at Austin, and Harvard T.H. Chan School of Public Health. Examining Medicare and emissions data in the U.S. from 1999 to 2020, the researchers also found that 460,000 deaths were attributable to coal PM2.5 during the study period—most of them occurring between 1999 and 2007, when coal PM2.5 levels were highest.

The study was published on November 23, 2023, in Science.

Search Harvard Chan

[Share Post](#)

much more harmful than we thought, and its mortality burden has been seriously underestimated,” said lead author Lucas Henneman, assistant professor in the Sid and Reva Dewberry Department of Civil, Environmental, and Infrastructure Engineering at Mason. “These findings can help policymakers and regulators identify cost-effective solutions for cleaning up the country’s air, for example, by requiring emissions controls or encouraging utilities to use other energy sources, like renewables.”

Using emissions data from 480 coal power plants in the U.S. between 1999 and 2020, the researchers modeled where wind carried coal sulfur dioxide throughout the week after it was emitted and how atmospheric processes converted the sulfur dioxide into PM2.5. This model produced annual coal PM2.5 exposure fields for each power plant. They then examined individual-level Medicare records from 1999 to 2016, representing the health statuses of Americans ages 65 and older and representing a total of more than 650 million person-years. By linking the exposure fields to the Medicare records, inclusive of where enrollees lived and when they died, the researchers were able to understand individuals’ exposure to coal PM2.5 and calculate the impact it had on their health.

They found that across the U.S. in 1999 the average level of coal PM2.5 was 2.34 micrograms per cubic meter of air (ug/m³). This level decreased significantly by 2020, to 0.97 ug/m³. The researchers calculated that a one ug/m³ decrease in annual average coal PM2.5 was associated with a 12% decrease in the risk of mortality from all causes. The researchers also found that coal PM2.5 was associated with a 12% increase in the risk of mortality from cardiovascular disease.

[Search Harvard Chan](#)



The researchers were also able to quantify deaths attributable to specific power plants, producing a ranking of the coal-fired power plants studied based on their contribution to coal PM2.5's mortality burden. They found that 10 of these plants each contributed at least 5,000 deaths during the study period. They visualized the deaths from each power plant in a publicly available online tool (<https://cplaatgt.github.io/cpie/>).

The study also found that 390,000 of the 460,000 deaths attributable to coal-fired power plants took place between 1999 and 2007, averaging more than 43,000 deaths per year. After 2007, these deaths declined drastically, to an annual total of 1,600 by 2020.

"Beyond showing just how harmful coal pollution has been, we also show good news: Deaths from coal were highest in 1999 but by 2020 decreased by about 95%, as coal plants have installed scrubbers or shut down," Henneman said.

"I see this as a success story," added senior author Corwin Zigler, associate professor in the Department of Statistics and Data Sciences at UT Austin and founding member of the UT Center for Health & Environment: Education & Research. "Coal power plants were this major burden that U.S. policies have already significantly reduced. But we haven't completely eliminated the burden—so this study provides us a better understanding of how health will continue to improve and lives will be saved if we move further toward a clean energy future."

The researchers pointed out the study's continuing urgency and relevance, writing in the paper that coal power is still part of some U.S. states' energy



"As countries debate their energy sources—and as coal maintains a powerful, almost mythical status in American energy lore—our findings are highly valuable to policymakers and regulators as they weigh the need for cheap energy with the significant environmental and health costs," said co-author Francesca Dominici, Clarence James Gamble Professor of Biostatistics, Population, and Data Science at Harvard Chan School and director of the Harvard Data Science Initiative.

Funding for the study came from the National Institutes of Health (grants R01ES026217, R01MD012769, R01ES028033, 1R01ES030616, 1R01AG066793, 1R01MD016054-01A1, 1R01ES 034373-01, 1RF1AG080948, and 1R01ES029950); the Environmental Protection Agency (grant 835872); the EmPOWER Air Data Challenge (grant LRFH); the Alfred P. Sloan Foundation (grant G-2020-13946); and the Health Effects Institute (grants R-82811201 and 4953).

"Mortality risk from United States coal electricity generation," Lucas Henneman, Christine Choirat, Irene Dedoussi, Francesca Dominici, Jessica Roberts, Corwin Zigler, *Science*, online November 23, 2023, doi: [10.1126/science.adf4915](https://doi.org/10.1126/science.adf4915).

Image: iStock/Triton_Tree

For more information:

Maya Brownstein

mbrownstein@hsph.harvard.edu

Search Harvard Chan



SCHOOL OF PUBLIC HEALTH

Marc Airhart

mairhart@austin.utexas.edu

###

Harvard T.H. Chan School of Public Health brings together dedicated experts from many disciplines to educate new generations of global health leaders and produce powerful ideas that improve the lives and health of people everywhere. As a community of leading scientists, educators, and students, we work together to take innovative ideas from the laboratory to people's lives—not only making scientific breakthroughs, but also working to change individual behaviors, public policies, and health care practices. Each year, more than 400 faculty members at Harvard Chan School teach 1,000-plus full-time students from around the world and train thousands more through online and executive education courses. Founded in 1913 as the Harvard-MIT School of Health Officers, the School is recognized as America's oldest professional training program in public health.

George Mason University is Virginia's largest public research university. Located near Washington, D.C., Mason enrolled over 40,000 students from 130 countries and all 50 states for the fall 2023 semester. Mason has grown rapidly over the last half-century and is recognized for its innovation and entrepreneurship, remarkable diversity, and commitment to accessibility. Also in 2023, the university launched Mason Now: Power the Possible, a \$1 billion comprehensive campaign to support student success, research, innovation, community, and sustainability. Learn more at gmu.edu .

Search Harvard Chan



across 19 colleges and schools. As Texas' leading research university, UT attracts more than \$650 million annually for discovery. Amid the backdrop of Austin, Texas, a city recognized for its creative and entrepreneurial spirit, the university provides a place to explore countless opportunities for tomorrow's artists, scientists, athletes, doctors, entrepreneurs and engineers.

Related Topics

Related News

Get the latest public health news

Stay connected with Harvard Chan School

Subscribe to our newsletters

Search Harvard Chan



HARVARD
T.H. CHAN

SCHOOL OF PUBLIC HEALTH

[Administrative Offices](#)

[Public Health Resources](#)

[Jobs](#)

[my.harvard](#)

[Intranet](#)

[Make a Gift](#)

[Contact](#)

[Accessibility](#)

[Digital Accessibility](#)

[Privacy Statement](#)

[Nondiscrimination Policy](#)

[Report Copyright Infringement](#)

[Report Security Issue](#)

[Trademark Notice](#)

Public health insights in your
inbox

[Search Harvard Chan](#)



HARVARD
T.H. CHAN

SCHOOL OF PUBLIC HEALTH

Public Health

677 Huntington Avenue, Boston, MA 02115

© 2025 The President and Fellows of Harvard College

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-09:
Ecology 2018-2028 Regional Haze Plan



State Implementation Plan Revision

Second Regional Haze Plan (2018 – 2028)

By

Air Quality Program

Washington State Department of Ecology
Olympia, Washington

January 2022
Publication 22-02-005

Publication Information

This document is available on the Department of Ecology's website at:

<https://apps.ecology.wa.gov/publications/summarypages/22-02-005.html>

Contact Information

Air Quality Program

P.O. Box 47600

Olympia, WA 98504-7600

Phone: 360-407-7600

Website: www.ecology.wa.gov/contact

ADA Accessibility

The Department of Ecology is committed to providing people with disabilities access to information and services by meeting or exceeding the requirements of the Americans with Disabilities Act (ADA), Section 504 and 508 of the Rehabilitation Act, and Washington State Policy #188.

To request an ADA accommodation, contact Ecology by phone at 360-407-6800 or email at aqcomments@ecy.wa.gov. For Washington Relay Service or TTY call 711 or 877-833-6341. Visit Ecology's website for more information.

Department of Ecology's Regional Offices

Map of Counties Served

Department of Ecology Regional Offices



Region	Counties served	Mailing Address	Phone
Southwest	Clallam, Clark, Cowlitz, Grays Harbor, Jefferson, Mason, Lewis, Pacific, Pierce, Skamania, Thurston, Wahkiakum	P.O. Box 47775 Olympia, WA 98504	360-407-6300
Northwest	Island, King, Kitsap, San Juan, Skagit, Snohomish, Whatcom	15700 Dayton Avenue N. Shoreline, WA 98133	206-594-0000
Central	Benton, Chelan, Douglas, Kittitas, Klickitat, Okanogan, Yakima	1250 West Alder Street Union Gap, WA 98903	509-575-2490
Eastern	Adams, Asotin, Columbia, Ferry, Franklin, Garfield, Grant, Lincoln, Pend Oreille, Spokane, Stevens, Walla Walla, Whitman	4601 North Monroe Spokane, WA 99205	509-329-3400
Headquarters	Statewide	P.O. Box 46700 Olympia, WA 98504	360-407-6000

State Implementation Plan Revision

Second Regional Haze Plan (2018 – 2028)

Air Quality Program
Washington State Department of Ecology
Headquarters
Olympia, WA



DEPARTMENT OF
ECOLOGY
State of Washington

Table of Contents

List of Figures and Tables	iv
Figures	iv
Tables	vi
Appendices	ix
Acknowledgements.....	xi
Acronyms, Abbreviations, and Terms.....	xii
Executive Summary.....	1
Chapter 1. Regional Haze Program Overview and Plan Development	2
1.1 Background	2
1.2 Regional Haze Rule.....	3
1.3 Progress report requirements.....	4
1.4 Regional haze state implementation plan development	6
1.5 Environmental justice considerations	10
1.6 Meaningful public participation (reserved).....	11
1.7 Organization of the second regional haze plan (2018 -2028)	12
Chapter 2. Visibility and Visibility Monitoring in Washington’s Class 1 Areas.....	14
2.1 Natural sources of visibility impairment	14
2.2 Anthropogenic sources of visibility impairment	14
2.3 Emissions.....	15
2.4 The IMPROVE program for visibility monitoring	15
2.5 The revised IMPROVE equation and measuring visibility impairment.....	16
2.6 Baseline conditions	17
2.7 Natural conditions.....	17
2.8 Uniform rate of progress.....	18
2.9 Washington’s Class 1 Areas and visibility monitoring	20
Chapter 3. Current Visibility Conditions in Washington’s Class 1 Areas	30
3.1 Overview of visibility conditions in Washington	30
3.2 Olympic National Park.....	34
3.3 North Cascades National Park and Glacier Peak Wilderness	39
3.4 Alpine Lakes Wilderness.....	44
3.5 Mount Rainier National Park.....	49
3.6 Goat Rocks Wilderness and Mount Adams Wilderness	54
3.7 Pasayten Wilderness	59
3.8 Summary	64
Chapter 4. Emissions Inventory.....	65

4.1 Emissions inventory development	65
4.2 Emissions inventory scenarios	65
4.3 Emissions inventory comparison.....	67
4.4 Facilities selected for Four-Factor Analysis (FFA)	73
4.5 Summary	78
Chapter 5. Regional Haze Modeling	79
5.1 CAMx simulations.....	79
5.2 CAMx performance	80
5.3 Source apportionment options	88
Chapter 6. Source Apportionment and Washington’s Impacts on Mandatory Class 1 Areas	90
6.1 Olympic National Park.....	92
6.2 North Cascades National Park and Glacier Peak Wilderness	103
6.3 Alpine Lakes Wilderness.....	113
6.4 Mount Rainier National Park.....	123
6.5 Goat Rocks Wilderness and Mount Adams Wilderness	133
6.6 Pasayten Wilderness	143
6.7 In-State Contribution of Nitrates and Sulfates.....	153
6.8 Other Mandatory Class 1 Areas Impacted by Washington Anthropogenic Emissions.....	154
Chapter 7. Source Selection and Four-factor Analysis	157
7.1 Introduction	157
7.2 Source screening analysis (Q/d)	157
7.3 Reasonableness evaluation	161
7.4 Facility specific reasonableness analyses	165
7.5 Chemical pulp & paper mill four-factor analysis	179
7.6 Refineries	182
7.7 Summary	205
Chapter 8. Long-term Strategy for Visibility Improvement.....	207
8.1 Introduction	207
8.2 Washington’s approach to long-term strategy	208
8.3 Development of Washington’s long-term strategy.....	210
8.4 Major visibility-impairing pollutants	210
8.5 State, federal, and local rules and controls that limit emissions of visibility-impairing pollutants.....	211
8.6 Controls on visibility-impairing pollutants not in previous RH SIP	213
8.7 Summary	221
Chapter 9. Reasonable Progress Goals	222
9.1 Introduction	222

9.2 Olympic National Park.....	225
9.3 North Cascades National Park and Glacier Peak Wilderness	227
9.4 Alpine Lakes Wilderness.....	228
9.5 Mount Rainier National Park.....	230
9.6 Goat Rocks Wilderness and Mount Adams Wilderness	231
9.7 Pasayten Wilderness	233
9.8 Summary	234
Chapter 10. Future Planning Process and Summary	236
10.1 Future planning process.....	236
10.2 Amendments to the 2021 regional haze SIP revision	239
10.3 Summary	241
Bibliography.....	244

List of Figures and Tables

Figures

Figure 1–1: Regional Planning Organizations.....	7
Figure 2–1: Revised Interagency Monitoring of Protected Visual Environments Equation.....	17
Figure 2–2: Comparison of extinction, deciview, and visual range.....	17
Figure 2–3: Example of How Uniform Rate of Progress is Determined Source: EPA Guidance for Setting Reasonable Progress Goals under the Regional Haze Program	18
Figure 2–4: Washington's Class 1 Areas and visibility monitoring sites.....	20
Figure 2–5: Location of the OLYM1 site	24
Figure 2–6: Location of the NOCA1 Site.....	25
Figure 2–7: Location of the SNPA1 site	26
Figure 2–8: Location of the MORA1 site	27
Figure 2–9: Location of the WHPA1 site	28
Figure 2–10: Location of the PASA1 site	29
Figure 3–1: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at OLYM1.	34
Figure 3–2: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at OLYM1. ...	35
Figure 3–3: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at OLYM1. ...	38
Figure 3–4: Current visibility conditions compared to the unadjusted glidepath (MID) and baseline (clearest days) at NOCA1.	40
Figure 3–5: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at NOCA1. ...	41
Figure 3–6: Annual species contributions to light extinction for MID and clearest days from 2002 to 2018 at NOCA1. ...	44
Figure 3–7: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at SNPA1.	45
Figure 3–8: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at SNPA1.	46
Figure 3–9: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at SNPA1.	49
Figure 3–10: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at MORA1.....	50
Figure 3–11: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at MORA1.	51
Figure 3–12: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at MORA1.	54
Figure 3–13: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at WHPA1.....	55
Figure 3–14: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at WHPA1.....	56
Figure 3–15: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at WHPA1.....	59
Figure 3–16: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at PASA1.....	60
Figure 3–17: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at PASA1.	61
Figure 3–18: Annual species contributions to light extinction for MID and clearest days from 2002 to 2018 at PASA1.	64
Figure 5–1. Average model bias of light extinction in the 2014 modeling scenario for 2014 clearest days at all sites....	82
Figure 5–2. Average annual light extinction on MID observed at OLYM1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.	83
Figure 5–3. Average annual light extinction on MID observed at NOCA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.	84
Figure 5–4. Average annual light extinction on MID observed at SNPA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.	85
Figure 5–5. Average annual light extinction on MID observed at MORA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions	86

Figure 5–6. Average annual light extinction on MID observed at WHPA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.	87
Figure 5–7. Average annual light extinction on MID observed at PASA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.	88
Figure 6-1: WEP for source area potential to contribute to extinction on MID by pollutant at the OLYM1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	94
Figure 6-2: Expected source regions of sulfates (SO ₄) in 2028 at OLYM1 for MID (CAMx total = 11.9 Mm ⁻¹).	95
Figure 6-3: Expected source categories and regions of SO ₄ in 2028 at OLYM1 for MID (CAMx total = 11.9 Mm ⁻¹).	96
Figure 6-4: Expected source regions of SO ₄ in 2028 at OLYM1 for clearest days (CAMx total = 4.2 Mm ⁻¹).	97
Figure 6-5: Expected source categories and regions of SO ₄ in 2028 at OLYM1 for clearest days (CAMx total = 4.2 Mm ⁻¹).	98
Figure 6-6: Expected source regions of NO ₃ in 2028 at OLYM1 for MID (CAMx total = 5.9 Mm ⁻¹).	99
Figure 6-7: Expected source categories and regions of NO ₃ in 2028 at OLYM1 for MID (CAMx total = 5.9 Mm ⁻¹).	100
Figure 6-8: Expected source regions of NO ₃ in 2028 at OLYM1 for clearest days (CAMx total = 2.5 Mm ⁻¹).	101
Figure 6-9: Expected source categories and regions of NO ₃ in 2028 at OLYM1 for clearest days (CAMx total = 2.5 Mm ⁻¹).	102
Figure 6-10: WEP for source area potential to contribute to extinction on MID by pollutant at the NOCA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	104
Figure 6-11: Expected source regions of SO ₄ in 2028 at NOCA1 for MID (CAMx total = 11.3 Mm ⁻¹).	105
Figure 6-12: Expected source categories and regions of SO ₄ in 2028 at NOCA1 for MID (CAMx total = 11.3 Mm ⁻¹).	106
Figure 6-13: Expected source regions of SO ₄ in 2028 at NOCA1 for clearest days (CAMx PSAT total = 3.6 Mm ⁻¹).	107
Figure 6-14: Expected source categories and regions of SO ₄ in 2028 at NOCA1 for clearest days (CAMx total = 3.6 Mm ⁻¹).	108
Figure 6-15: Expected source regions of NO ₃ in 2028 at NOCA1 for MID (CAMx total = 5.9 Mm ⁻¹).	109
Figure 6-16: Expected source categories and regions of NO ₃ in 2028 at NOCA1 for MID (CAMx total = 5.9 Mm ⁻¹).	110
Figure 6-17: Expected source regions of NO ₃ in 2028 at NOCA1 for clearest days (CAMx total = 0.8 Mm ⁻¹).	111
Figure 6-18: Expected source categories and regions of NO ₃ in 2028 at NOCA1 for clearest days (CAMx total = 0.8 Mm ⁻¹).	112
Figure 6-19: WEP for source area potential to contribute to extinction on MID by pollutant at SNPA1 (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	114
Figure 6-20: Expected source regions of SO ₄ in 2028 at SNPA1 for MID (CAMx total = 22.9 Mm ⁻¹).	115
Figure 6-21: Expected source categories and regions of SO ₄ in 2028 at SNPA1 for MID (CAMx total = 22.4 Mm ⁻¹).	116
Figure 6-22: Expected source regions of SO ₄ in 2028 at SNPA1 for clearest days (CAMx total = 4.4 Mm ⁻¹).	117
Figure 6-23: Expected source categories and regions of SO ₄ in 2028 at SNPA1 for clearest days (CAMx total = 4.4 Mm ⁻¹).	118
Figure 6-24: Expected source regions of NO ₃ in 2028 at SNPA1 for MID (CAMx total = 14.9 Mm ⁻¹).	119
Figure 6-25: Expected source categories and regions of NO ₃ in 2028 at SNPA1 for MID (CAMx total = 14.9 Mm ⁻¹).	120
Figure 6-26: Expected source regions of NO ₃ in 2028 at SNPA1 for clearest days (CAMx PSAT total = 2.2 Mm ⁻¹).	121
Figure 6-27: Expected source categories and regions of NO ₃ in 2028 at SNPA1 for clearest days (CAMx PSAT total = 2.2 Mm ⁻¹).	122
Figure 6-28: WEP for source area potential to contribute to extinction on MID by pollutant at the MORA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	124
Figure 6-29: Expected source regions of SO ₄ in 2028 at MORA1 for MID (CAMx total = 13.2 Mm ⁻¹).	125
Figure 6-30: Expected source categories and regions of SO ₄ in 2028 at MORA1 for MID (CAMx total = 13.2 Mm ⁻¹).	126
Figure 6-31: Expected source regions of SO ₄ in 2028 at MORA1 for clearest days (CAMx total = 3.7 Mm ⁻¹).	127
Figure 6-32: Expected source categories and regions of SO ₄ in 2028 at MORA1 for clearest days (CAMx total = 3.7 Mm ⁻¹).	128
Figure 6-33: Expected source regions of NO ₃ in 2028 at MORA1 for MID (CAMx total = 7.2 Mm ⁻¹).	129
Figure 6-34: Expected source categories and regions of NO ₃ in 2028 at MORA1 for MID (CAMx total = 7.2 Mm ⁻¹).	130

Figure 6-35: Expected source regions of NO ₃ in 2028 at MORA1 for clearest days (CAMx total = 1.6 Mm ⁻¹).	131
Figure 6-36: Expected source categories and regions of NO ₃ in 2028 at MORA1 for clearest days (CAMx total = 1.6 Mm ⁻¹).	132
Figure 6-37: WEP for source area potential to contribute to extinction on MID by pollutant at the WHPA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	134
Figure 6-38: Expected source regions of SO ₄ in 2028 at WHPA1 for MID (CAMx total = 8.2 Mm ⁻¹).	135
Figure 6-39: Expected source categories and regions of SO ₄ in 2028 at WHPA1 for MID (CAMx total = 8.2 Mm ⁻¹).	136
Figure 6-40: Expected source regions of SO ₄ in 2028 at WHPA1 for clearest days (CAMx total = 3.0 Mm ⁻¹).	137
Figure 6-41: Expected source categories and regions of SO ₄ in 2028 at WHPA1 for clearest days (CAMx total = 3.0 Mm ⁻¹).	138
Figure 6-42: Expected source regions of NO ₃ in 2028 at WHPA1 for MID (CAMx total = 4.1 Mm ⁻¹).	139
Figure 6-43: Expected source categories and regions of NO ₃ in 2028 at WHPA1 for MID (CAMx total = 4.1 Mm ⁻¹).	140
Figure 6-44: Expected source regions of NO ₃ in 2028 at WHPA1 for clearest days (CAMx total = 1.1 Mm ⁻¹).	141
Figure 6-45: Expected source categories and regions of NO ₃ in 2028 at WHPA1 for clearest days (CAMx total = 1.1 Mm ⁻¹).	142
Figure 6-46: WEP for source area potential to contribute to extinction on MID by pollutant at the PASA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.	144
Figure 6-47: Expected source regions of SO ₄ in 2028 at PASA1 for MID (CAMx total = 7.2 Mm ⁻¹).	145
Figure 6-48: Expected source categories and regions of SO ₄ in 2028 at PASA1 for MID (CAMx total = 7.2 Mm ⁻¹).	146
Figure 6-49: Expected source regions of SO ₄ in 2028 at PASA1 for clearest days (CAMx total = 4.0 Mm ⁻¹).	147
Figure 6-50: Expected source categories and regions of SO ₄ in 2028 at PASA1 for clearest days (CAMx total = 4.0 Mm ⁻¹).	148
Figure 6-51: Expected source regions of NO ₃ in 2028 at PASA1 for MID (CAMx total = 3.8 Mm ⁻¹).	149
Figure 6-52: Expected source categories and regions of NO ₃ in 2028 at PASA1 for MID (CAMx total = 3.8 Mm ⁻¹).	150
Figure 6-53: Expected source regions of NO ₃ in 2028 at PASA1 for clearest days (CAMx total = 2.1 Mm ⁻¹).	151
Figure 6-54: Expected source categories and regions of NO ₃ in 2028 at PASA1 for clearest days (CAMx PSAT total = 2.1 Mm ⁻¹).	152
Figure 9-1: Projected 2028 visibility conditions on the MID in Olympic National Park.	226
Figure 9-2: Projected 2028 visibility conditions on the MID in North Cascades National Park and Glacier Peak Wilderness	227
Figure 9-3: Projected 2028 visibility conditions on the MID in Alpine Lakes Wilderness	229
Figure 9-4: Projected 2028 visibility conditions on the MID in Mount Rainier National Park	230
Figure 9-5: Projected 2028 Visibility Conditions on the MID in Goat Rocks Wilderness and Mount Adams Wilderness	232
Figure 9-6: Projected 2028 visibility conditions on the MID in Pasayten Wilderness.....	233

Tables

Table 1-1: EPA required elements of the Progress Report and the corresponding references in relevant chapters.	5
Table 2-1: Monitor Aerosol Composition.....	16
Table 2-2: Washington's Class 1 Areas.....	21
Table 3-1: IMPROVE monitoring sites.	30
Table 3-2: Baseline, current, and estimated natural visibility conditions for the clearest days (in dv).	32
Table 3-3: Baseline, current, and estimated future visibility conditions for the most impaired days (in dv).	33
Table 3-4: Annual species contributions to light extinction for MID from 2014 - 2018 at OLYM1.	36
Table 3-5: Annual species contributions to light extinction for clearest days from 2014 - 2018 at OLYM1.	36
Table 3-6: Number of MID at OLYM1, by season, from 2014 - 2018.	37
Table 3-7: Seasonal species contributions to light extinction for MID from 2014 - 2018 at OLYM1.	37
Table 3-8: Annual species contributions to light extinction for MID from 2014 - 2018 at NOCA1.	42
Table 3-9: Annual species contributions to light extinction for clearest days from 2014 - 2018 at NOCA1.	42
Table 3-10: Number of MID at NOCA1, by season, from 2014 - 2018.	43

Table 3-11: Seasonal species contributions to light extinction for MID from 2014 - 2018 at NOCA1.	43
Table 3-12: Annual species contributions to light extinction for MID from 2014 - 2018 at SNPA1.	47
Table 3-13: Annual species contributions to light extinction for clearest days from 2014 - 2018 at SNPA1.	47
Table 3-14: Number of MID at SNPA1, by season, from 2014 - 2018.	48
Table 3-15: Seasonal species contributions to light extinction for MID from 2014 - 2018 at SNPA1.	48
Table 3-16: Annual species contributions to light extinction for MID from 2014 - 2018 at MORA1.	52
Table 3-17: Annual species contributions to light extinction for clearest days from 2014 - 2018 at MORA1.	52
Table 3-18: Number of MID at MORA1, by season, from 2014 - 2018.	53
Table 3-19: Seasonal species contributions to light extinction for MID from 2014 - 2018 at MORA1.	53
Table 3-20: Annual species contributions to light extinction for MID from 2014 - 2018 at WHPA1.	57
Table 3-21: Annual species contributions to light extinction for clearest days from 2014 - 2018 at WHPA1.	57
Table 3-22: Number of MID at WHPA1, by season, from 2014 - 2018.	58
Table 3-23: Seasonal species contributions to light extinction for MID from 2014 - 2018 at WHPA1.	58
Table 3-24: Annual species contributions to light extinction for MID from 2014 - 2018 at PASA1.	62
Table 3-25: Annual species contributions to light extinction for clearest days from 2014 - 2018 at PASA1.	62
Table 3-26: Number of MID at PASA1, by season, from 2014 to 2018.	63
Table 3-27: Seasonal species contributions to light extinction for MID from 2014 to 2018 at PASA1.	63
Table 4-1: Washington state anthropogenic SO ₂ emissions (in tons/year)	68
Table 4-2: Washington state anthropogenic NO _x emissions (in tons/year)	69
Table 4-3: Washington state anthropogenic VOC emissions (in tons/year)	70
Table 4-4: Washington state anthropogenic PM _{2.5} emissions (in tons/year)	71
Table 4-5: Washington state anthropogenic PM ₁₀ emissions (tons/year)	71
Table 4-6: Washington state anthropogenic ammonia emissions (tons/year)	72
Table 4-7: Information for facilities selected for FFA.	73
Table 4-8: Annual NO _x emissions for FFA facilities (tons/year)	75
Table 4-9: Annual SO ₂ emissions for FFA facilities (tons/year)	76
Table 4-10: Annual PM ₁₀ emissions for FFA facilities (tons/year)	77
Table 6-1: Expected in-state anthropogenic sulfate contributions by source category for Washington's Mandatory Class 1 Areas in 2028.	153
Table 6-2: Expected in-state anthropogenic nitrate contributions by source category for Washington's Mandatory Class 1 Areas in 2028.	153
Table 6-3: Washington's Anthropogenic Emissions Contribution to Sulfate and Nitrate Light Extinction at Mandatory Class 1 Areas outside of Washington.	155
Table 7-1: Q/d of sources selected for FFA.	159
Table 7-2: Emissions summary.	169
Table 7-3: Cardinal cost vs Ecology using the EPA Control Cost Manual with June 15, 2020, updated exhaust flow and capital cost.	172
Table 7-4: Primary aluminum facility 2014 emissions	175
Table 7-5: General refinery information.	183
Table 7-6: Washington refineries annual emissions and production capacity	185
Table 7-7: BP Cherry Point equipment identified for RACT analysis.	188
Table 7-8: Reformer heaters cost comparison.	190
Table 7-9: Crude heater cost comparison.	190
Table 7-10: Two reforming furnace #1 (H ₂ Plant) cost comparison	191
Table 7-11: Phillips 66 Equipment identified for RACT	192
Table 7-12: Crude heater 1F-1 cost comparison.	193
Table 7-13: FCCU/CO boiler cost.	193
Table 7-14: Shell equipment identified for RACT rule development	195
Table 7-15: Boiler #1 Erie City--31G-F1 cost comparison.	196
Table 7-16: FCCU/CO boiler cost.	197
Table 7-17: CRU #2 cost comparison	197
Table 7-18: MPC emission rates pre - and post - best available retrofit technology (BART)	199
Table 7-19: Tesoro equipment identified for RACT rule development.	200

Table 7-20: FCCU cost comparison	201
Table 7-21: Crude heater cost comparison	202
Table 7-22: Heater H11 cost comparison.....	204
Table 8-1: Control Strategies not in previous RH SIP.	213
Table 8-2: Anticipated net effect on visibility of emission reductions over the second control period for MID, in deciviews (dv)	220
Table 8-3: Anticipated net effect on visibility of emission reductions over the second control period for clearest days, (dv).....	220
Table 9-1: Washington’s Class 1 Areas and their 2028 reasonable progress goals in deciviews (dv).....	223
Table 9-2: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Olympic National Park.	226
Table 9-3: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in North Cascades National Park and Glacier Peak Wilderness.	228
Table 9-4: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in the Alpine Lake Wilderness.	229
Table 9-5: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Mount Rainier National Park.....	231
Table 9-6: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Mount Adams Wilderness and Goat Rocks Wilderness	232
Table 9-7: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Pasayten Wilderness.....	233
Table 9-8: 2028 reasonable progress goals in deciviews (dv) for the MID	234
Table 9-9: 2028 projections in deciviews (dv) for the clearest days	235

Appendices

Due to document size constraints, all appendices are available as separate documents. Note that some of the content was not drafted by Ecology and cannot meet Ecology's document accessibility requirements.

[Appendix A. Federal Land Manager Consultation Log and Informal Comments and Responses](#)

[Appendix B. IMPROVE site](#)

[Appendix C. U.S. Environmental Protection Agency Memo – Regional Haze Technical Addendum – June 3, 2020](#)

[Appendix D. Procedures for Making Visibility Projections and Adjusting Glidepaths using the WRAP-WAQS 2014 Modeling Platform](#)

[Appendix E. Ash Grove Cement Consent Decree and Brochure](#)

[Appendix F. Technical Guidance on Tracking Visibility Progress for the Second Implementation Period of the Regional Haze Program](#)

[Appendix G. Notification about FFA selection in 2019](#)

[Appendix H. SWCAA Final Air Discharge Permit for Modification of Glass Furnace and New Emergency Generator](#)

[Appendix I. FFA Follow-Up Information for Pulp & Paper](#)

[Appendix J. Snapshot summary of mill submittal values for NO_x, SO₂, and PM control costs after Ecology adjustment and review](#)

[Appendix K. Western Regional Air Partnership Consultation](#)

[Appendix L. WESTAR-WRAP Modeling Delay Letter – February 8, 2021](#)

[Appendix M. Cement Documents for Plan Development](#)

[Appendix N. Glass Manufacturing Documents for Plan Development](#)

[Appendix O. Pulp and Paper Manufacturing Documents for Plan Development](#)

[Appendix P. Refineries Documents for Plan Development](#)

[Appendix Q. Agreed Orders – Alcoa Wenatchee and Intalco Smelters](#)

[Appendix R. State to State Consultation](#)

[Appendix S. Cardinal Glass Winlock – SCR Project – Air Discharge Permit Application](#)

[Appendix T. EPA Memo – Clarifications Regarding RH SIP](#)

[Appendix U. Public Comments – National Parks Conservation Association et al](#)

[Appendix U-1 Public Comments – National Parks Conservation Association et al. Exhibits](#)

[Appendix U-2 Public Comments – National Parks Conservation Association et al. Enclosures](#)

[Appendix V. Public Comments – All Other Comments Received](#)

[Appendix W. Summary of Public Comments and Ecology's Response](#)

[Appendix X. Public Notification](#)

[Appendix Y. Public Hearing Transcript](#)

[Appendix Z. Letter of Designation by the Governor](#)

[Appendix AA. SIP Adoption Order and Letter of Submittal to EPA](#)

Acknowledgements

The authors of this report thank the following people for their contribution for their contribution and assistance in preparing this implementation plan:

Tim Allen, U.S. Fish and Wildlife Service
Bret Anderson U.S. Forest Service
Rick Graw, U.S. Forest Service
Jeff Hunt, EPA
Kirsten King, National Park Service
Debra Miller, National Park Service
Tom Moore, Western Regional Air Partnership
Melanie Peters, National Park Service
Janice Peterson, U.S. Forest Service
Don Shepherd, National Park Service
Andrea Stacy, National Park Service

The principal contributors from Ecology:

Anya Caudill
Philip Gent
Gary Huitsing
Jean-Paul Huys
Scott Inloes
Margaret Plummer
Colleen Stinson
Farren Thorpe

The managers from Ecology who provided review and oversight:

Jason Alberich
Martha Hankins
Chris Hanlon-Meyer

Acronyms, Abbreviations, and Terms

Anthropogenic	Caused or produced by humans
ARS	Air Resource Specialist, Inc.
BACT	Best Available Control Technology
BART	Best Available Retrofit Technology
Btu	British thermal unit
CAA	Clean Air Act
CAMx	Comprehensive Air Quality Model with Extensions
CD	Clearest days
CFR	Code of Federal Regulations
CIRA	Cooperative Institute for Research in the Atmosphere
CISWI	Commercial and Industrial Solid Waste Incineration Units
CM	Coarse Matter
CMAQ	Community Multi-Scale Air Quality Model
CO	Carbon Monoxide
CO ₂	Carbon Dioxide
DNR	Washington Department of Natural Resources
dv	Deciview; a measure of light extinction
EC	Elemental Carbon
Ecology	Washington State Department of Ecology
EGU	Electric Generating Unit
EI	Emission Inventory
EPA	US Environmental Protection Agency
FCCU	Fluid Catalytic Cracking Unit
FIP	Federal Implementation Plan
FLM	Federal Land Manager
GCVTC	Grand Canyon Visibility Transport Commission
GHG	Greenhouse Gas
Glidepath	The rate of improvement sufficient to attain natural conditions by 2064
HI	Haze Index
IMPROVE	Interagency Monitoring of Protected Visual Environments
LTS	Long Term Strategy
MARPOL VI	Maritime Pollution Annex VI
MID	Most Impaired Days
Mm ⁻¹	Inverse megameter; a measure of light extinction
MM	Million
MM5	Meteorological Mesoscale 5
NESHAP	National Emission Standards for Hazardous Air Pollutants
NH ₃	Ammonia
(NH ₄) ₂ SO ₄	Ammonium Sulfate
NO ₂	Nitrogen Dioxide
NO ₃	Ammonium Nitrate or NH ₄ NO ₃
NO _x	Nitrogen Oxides

NPCA	National Parks Conservation Association
NPDES	National Pollutant Discharge Elimination System
NPS	National Park Service
NSPS	New Source Performance Standards
NSR	New Source Review
NTEC	National Tribal Environmental Council
NWPPA	Northwest Pulp and Paper Association
O ₃	Ozone
OC	Organic Carbon
ODEQ	Oregon Department of Environmental Quality
OM	Organic Mass
OMC	Organic Mass of Carbon
PM	Particulate Matter
PM _{2.5}	Fine Particles or Particulate Matter with an aerodynamic diameter of 2.5 microns or less
PM ₁₀	Coarse Particles or Particulate Matter with an aerodynamic diameter of 10 microns or less
POA	Primary Organic Aerosol
ppm	parts per million
PSAT	Particulate Matter Source Apportionment Technology
PSD	Prevention of Significant Deterioration
RACT	Reasonably Available Control Technology
RAVI	Reasonably Attributable Visibility Impairment
RH	Regional Haze
RHR	Regional Haze Rule
RPG	Reasonable Progress Goal
RPO	Regional Planning Organization
RRF	Relative Response Factors
SIP	State Implementation Plan
SMOKE	Sparse Matrix Operator Kernel Emissions
SMP	Smoke Management Plan
SOIL	Fine Soil
SO ₂	Sulfur Dioxide
SO ₄	Ammonium Sulfate or (NH ₄) ₂ SO ₄
SO _x	Sulfur Oxides
TIP	Tribal Implementation Plan
TSS2	Technical Support System
URP	Uniform Rate of Progress
USDA FS	U.S. Department of Agriculture – Forest Service
USDI FWS	U.S. Department of the Interior – Fish and Wildlife Service
USDI NPS	U.S. Department of the Interior – National Park Service
USGS	U.S. Geological Survey
VOC	Volatile Organic Compound
WAC	Washington Administrative Code

WEP	Weighted Emissions Potential
WESTAR	Western States Air Resources Council
WRAP	Western Regional Air Partnership

Executive Summary

This report is Washington's second Regional Haze State Implementation Plan covering 2018 through 2028 and the progress report for 2014 through 2018. The Regional Haze Rule requires Washington to meet natural visibility conditions (no human-caused haze) in our eight mandatory Class 1 federal Areas by 2064.

The plan must:

- Establish goals to improve visibility in Washington's three national parks and five wilderness areas (mandatory Class 1 federal Areas).
- Develop long-term strategies to reduce air pollution that causes poor visibility:
 - o Improve visibility on the 20 percent most polluted days;
 - o Protect current visibility on the 20 percent clearest days;
 - o Identify and reduce Washington's air impacts to mandatory Class 1 federal Areas outside Washington.

Ecology identified that:

- Two mandatory Class 1 federal Areas (Goat Rocks Wilderness and Mount Adams Wilderness) are forecast to meet natural conditions (EPA's visibility goals) by 2028.
- Emissions from transportation are the largest source of air pollution that causes poor visibility. We have started rulemaking to reduce transportation emissions:
 - o Chapter 173-423 WAC, Clean Vehicles Program, which adopts California's more protective vehicle emission standards;
 - o Chapter 173-424 WAC, Clean Fuels Program Rule, which reduces pollution from vehicle fuels.
- Emissions from petroleum refineries contribute to poor visibility. We plan to identify emission controls, if any, to reduce emissions from refineries. After we have identified and scheduled installation of controls, we will amend this plan.

Washington's second Regional Haze State Implementation Plan:

- Establishes 2028 visibility goals for Washington's mandatory Class 1 federal Areas.
- Develops a long-term strategy to improve visibility.
- Provides inventories of emissions causing a visibility problem.
- Analyzes sources of haze in Washington's mandatory Class 1 federal Areas.
- Selects and evaluates the largest emitting stationary sources for potential emission controls.
 - o Determines reasonable controls using a reasonability analysis.
 - o Determines the emission controls that sources must install to improve visibility.

Chapter 1. Regional Haze Program Overview and Plan Development

1.1 Background

In 1977, Congress amended the Clean Air Act (CAA), 42 U.S.C. 7401 et seq., to include provisions to protect scenic vistas in certain Class 1 Areas. In these amendments, Congress declared a national visibility goal:

“The prevention of any future, and the remedying of any existing, impairment of visibility in mandatory class I Federal areas which impairment results from manmade air pollution.” (CAA Section 169A)

In 1979, EPA, in consultation with the Secretary of the Interior, established 156 mandatory class 1 federal Areas (Class 1 Areas) in which they determined visibility was an important factor. EPA designated eight Class 1 Areas in Washington.

EPA promulgated reasonably attributable visibility impairment (RAVI) regulations in 1980 to address the national visibility goal. RAVI regulations address distinct plumes (called “plume blight”) caused by large stationary sources. RAVI regulations represented the first phase in addressing visibility impairment. Each state must develop visibility plans as part of the larger air quality State Implementation Plan (SIP). The SIP is a large body of federally-enforceable state regulations, programs, and permits that implement, maintain, and enforce federal ambient air quality standards and the Regional Haze Program.

The Washington State Department of Ecology (Ecology) revised the SIP for the purpose of visibility protection (Visibility SIP) and submitted it to EPA in March 1985. EPA formally approved the Visibility SIP on May 4, 1987. Ecology reviewed and revised the Visibility SIP several times since then.

Washington’s Visibility SIP addressed the distinct plumes from large stationary sources and silvicultural smoke. Although we do not consider prescribed burning from forestry activities a stationary source, prescribed burning has a significant impact on visibility. Because of this, Washington addressed this source in its Visibility SIP. Specifically, Ecology coordinated with the Washington Department of Natural Resources (DNR) to include visibility protections in the 1998 Smoke Management Plan (SMP). Ecology submitted a RAVI SIP — including the 1998 SMP — that focused on silvicultural (forest) smoke management in addition other sources that affect haze. Ecology submitted the 1999 RAVI SIP to EPA on November 5, 1999; EPA approved it June 11, 2003.¹

EPA adopted the Regional Haze Rule (RHR) in 1999. The RHR addressed visibility impairment from widespread haze caused by emissions from multiple sources. These emissions often mix and

¹ Final Federal Register Notice: 68 FR 34821, June 11, 2003. <https://www.govinfo.gov/content/pkg/FR-2003-06-11/pdf/03-14573.pdf#page=1>; Proposal Federal Register Notice: 67 FR 65077, October 23, 2002. <https://www.govinfo.gov/content/pkg/FR-2002-10-23/pdf/02-26992.pdf>

disperse over long distances. The RHR established a comprehensive visibility protection program for the 156 Class 1 Areas.

In 2010, Ecology developed its first Regional Haze SIP (Ecology, 2010, revised 2012). It identified key sources of air pollution and defined a strategy to improve visibility in Washington's Class 1 Areas during the first planning period from 2005 through 2018. Ecology submitted the required Regional Haze Five Year Progress Report for the state (Ecology, 2017) in 2017. This document is the second Regional Haze SIP and covers the 10-year period from 2018 through 2028. It also serves as the progress report for 2014 through 2018.

For information on Washington's Regional Haze program, visit Ecology's Regional Haze website (Ecology, 2021).²

1.2 Regional Haze Rule

The objectives of the RHR are:

- Improve existing visibility in all 156 Class 1 Areas;
- Prevent future impairment of visibility by anthropogenic sources; and
- Meet the national goal of natural visibility conditions by 2064.

The RHR requires each state to adopt a RH SIP that focuses on improving visibility in the 20 percent most impaired days (MID), and protecting visibility in the 20 percent clearest days. A state's RH SIP must provide a comprehensive analysis of natural and anthropogenic sources of haze in each Class 1 Area within the state and contain strategies to control and reduce emissions that contribute to haze. For each Class 1 Area, the state must establish reasonable progress goals (RPGs) for each implementation period towards achieving natural visibility conditions. The RPGs must provide an improvement in visibility for the most impaired days over the period of the implementation plan and maintain the visibility for the clearest days over the same period. The SIP must also address Class 1 Areas outside of the state that we anticipate emissions from within the state might affect.

The RHR breaks the regional haze program into several planning periods from 2005 to 2064. The first RH SIP covered the initial planning period from 2005 - 2018. That SIP established the basis for future RH SIP revisions and initiated the process of making reasonable progress toward the 2064 goal. This second RH SIP covers the planning periods from 2018 - 2028.

In 2017, EPA revised the RHR. EPA clarified the relationship between long-term strategies and RPGs in state plans and the long-term strategy obligations of all states. EPA reiterated that the CAA requires states to consider four statutory factors in each implementation period to determine the rate of progress towards natural visibility conditions that is reasonable for each Class 1 Area. Those four factors are:

- Costs of compliance;
- Time necessary for compliance;
- Energy and non-air quality environmental impacts; and

² <https://ecology.wa.gov/Air-Climate/Air-quality/Air-quality-targets/Regional-haze>

- Remaining useful life of the facility.

The 2017 RHR revisions also addressed other issues, including:

- Described the way in which we select a set of days during each year for purposes of tracking progress towards natural visibility conditions;
- Revised some requirements for the content of progress reports;
- Updated, simplified, and extended to all states the provisions for reasonably attributable visibility impairment;
- Revoked federal implementation plans adopted in the 1980s that require EPA to assess and address any existing RAVI situations in some states;
- Revised the requirement for states to consult with the federal land managers (FLMs);
- Adjusted the due date for the next SIP from 2018 to 2021;
- Revised the due dates for progress reports; and
- Changed the requirement that states submit progress reports as formal SIP revisions to documents that need not comply with the procedural requirements of 40 CFR 51.102, 40 CFR 51.103, and Appendix V to Part 51.

Changes to FLM consultation requirements will bring the expertise and perspective of these officials into the state plan development process early enough that they can meaningfully contribute to the state's deliberations.

1.3 Progress report requirements

This RH SIP revision also serves as a progress report that demonstrates Washington's progress towards the 2018 Reasonable Progress Goals (RPGs) during the period since the previous progress report. To serve as a progress report, the 2021 Regional Haze Plan revision must address the *Requirements for periodic comprehensive revisions of implementation plans for regional haze in 40 CFR 51.308(f) and (g)*. Each state must analyze the following elements in evaluating progress towards intermediate visibility goals. These elements include:

- A status update of all controls that were implemented and relied on to achieve the RPGs;
- A summary of the emissions reductions;
- A current conditions analysis including the clearest and most impaired days;
- Any changes to the speciated analysis at each Class 1 Area to identify if there are changes to which pollutants impact visibility in each Class 1 Area;
- Updated emissions inventory and any changes in emissions and sources;

EPA also specifies that the evaluation period should only cover the period since the last progress report, and include the most recent five years of available data.

In October 2017, Ecology submitted to EPA the progress report (Ecology, 2017). The report was originally due to EPA in 2015, using the data from 2009 – 2013. However, due to the delay in submitting the report, we reviewed intermediate progress based on the data collected during the 2009 - 2013 period as well as 2010 – 2014. The 2017 Progress Report addressed the following:

- Status of RH Plan state strategy
- Emissions reductions from RH Plan control strategies

- Visibility progress and emission inventory trends
- Assessment of changes impeding visibility progress
- Review of visibility monitoring strategy
- RH Plan adequacy determination
- FLM comments

We concluded in our 2017 Progress Report that visibility in Washington’s Class 1 Areas improved since the 2000 – 2004 baseline period, and the visibility measured in the 2010–2014 period met or exceeded the 2018 visibility goals.

In the current 2021 RH SIP revision, however, EPA recalculated visibility metrics. At the time of the preparation of this RH SIP revision, the most recent data available for the analysis was for the 2014 – 2018 five-year period.

Preliminary raw Interagency Monitoring of Protected Visual Environments (IMPROVE) monitoring data for 2019 was presented via the FLMs Environmental Database website to the public in February 2021.³ However, we did not use this raw data for this progress report because it could be incomplete and any missing data substitutions would influence progress report analysis.

Table 1-1 describes each of the progress report elements required by EPA and references relevant chapters in this RH SIP revision where it addresses each element.

Table 1-1: EPA required elements of the Progress Report and the corresponding references in relevant chapters.

Progress Report Element	Chapter where Addressed
40 CFR 51.308(g)(1) A description of the status of implementation of all measures included in the implementation plan for achieving reasonable progress goals for mandatory Class 1 Federal areas both within and outside the State	Chapter 9. Reasonable Progress Goals.
40 CFR 51.308(g)(2) A summary of the emissions reductions achieved throughout the State through implementation of the measures described in paragraph (g)(1) of this section.	Chapter 4. Emissions Inventory.
40 CFR 51.308(g)(3) For each mandatory Class 1 Federal area within the State, the State must assess the following visibility conditions and changes, with values for most impaired, least impaired and/or clearest days as applicable expressed in terms of 5-year averages of these annual values. The period for calculating current visibility conditions is the most recent 5-year period preceding the required date of the progress report for which data are available as of a date 6 months preceding the required date of the progress report.	Chapter 3. Current Visibility Conditions in Washington’s Class 1 Areas.

³ <http://vista.cira.colostate.edu/Improve/aqrv-summaries/>

Progress Report Element	Chapter where Addressed
40 CFR 51.308(g)(4) An analysis tracking the change over the period since the period addressed in the most recent plan required under paragraph (f) of this section in emissions of pollutants contributing to visibility impairment from all sources and activities within the State. Emissions changes should be identified by type of source or activity. With respect to all sources and activities, the analysis must extend at least through the most recent year for which the state has submitted emission inventory information to the Administrator in compliance with the triennial reporting requirements of subpart A of this part as of a date 6 months preceding the required date of the progress report. With respect to sources that report directly to a centralized emissions data system operated by the Administrator, the analysis must extend through the most recent year for which the Administrator has provided a State-level summary of such reported data or an internet-based tool by which the State may obtain such a summary as of a date 6 months preceding the required date of the progress report. The State is not required to backcast previously reported emissions to be consistent with more recent emissions estimation procedures, and may draw attention to actual or possible inconsistencies created by changes in estimation procedures.	Chapter 3. Current Visibility Conditions in Washington's Class 1 Areas. Chapter 4. Emissions Inventory. Chapter 5. Western Regional Air Partnership Modeling. Chapter 7. Source Apportionment and Impacted Class 1 Areas. Chapter 9. Reasonable Progress Goals.
40 CFR 51.308(g)(5) An assessment of any significant changes in anthropogenic emissions within or outside the State that have occurred since the period addressed in the most recent plan required under paragraph (f) of this section including whether or not these changes in anthropogenic emissions were anticipated in that most recent plan and whether they have limited or impeded progress in reducing pollutant emissions and improving visibility.	Chapter 4. Emissions Inventory.

The current implementation plan elements and strategies are sufficient to enable Washington or other states with Class 1 Areas affected by emissions from Washington, to meet all established RPGs for the period covered by the first implementation plan. All Washington Class 1 Area 2018 RPGs were below the uniform rate of progress and Washington remains on track to meet the long-term goal of natural conditions by 2064.

1.4 Regional haze state implementation plan development

Regional haze planning requires a regional approach to visibility impairment. This section provides background on:

- Regional planning to address regional haze.
- The role of the Western Regional Air Partnership (WRAP) in the development of this second regional haze State Implementation Plan (RH SIP).

Regional planning

Haze-causing pollutants originate from numerous sources located in different geographic areas and can transport over long distances. In recognition of this, EPA encouraged states to create regional planning organizations (RPOs) to coordinate regional activities related to the Regional Haze Rule (RHR). States formed—and EPA funded—five RPOs, which collectively cover the 48 contiguous states, Alaska, and Hawaii (Figure 1–1).



Figure 1–1: Regional Planning Organizations

Western Regional Air Partnership

The Western Regional Air Partnership (WRAP) is a voluntary organization of western states, tribes, and federal agencies that work collaboratively to address visibility impairment in Class 1 Areas. WRAP formed in 1997 as the successor to the Grand Canyon Visibility Transport Commission (GCVTC). The 1990 Amendments to the CAA authorized the formation of visibility transport commissions and required EPA to establish the GCVTC.

WRAP promoted, supported, and monitored the implementation of the GCVTC's June 1996 recommendations for improving visibility in the 16 national parks and wilderness areas on the Colorado Plateau. The recommendations developed by the GCVTC represented a significant milestone in the study of regional haze. The GCVTC's technical analysis found the customary focus on mitigating visibility impairment from stack plumes associated with stationary point sources insufficient to address the wide range of pollutants and sources that caused or contributed to visibility impairment across the Colorado Plateau. The GCVTC's air quality monitoring and modeling showed that the long-range transport (more than 100 miles) of emissions from numerous and widespread sources contributed to regional haze.

The RHR expanded the focus of regional visibility planning processes in the West from the Colorado Plateau to all western Class 1 Areas. WRAP embraced this geographic expansion by expanding its role to address regional haze in all 13 contiguous western states, Alaska, and Hawaii.

The focus of WRAP for this second RH SIP is technical analysis. WRAP has engaged in compilation of ambient monitoring, emission inventories, air quality modeling, and data analysis. The result is a regionally consistent body of technical data and analysis to address regional haze in the west. WRAP also provides a forum for coordination and consultation between states, tribes, and FLMs.

WRAP staff work through committees, and workgroups composed of states, tribes, FLMs, and EPA. Various state and federal agencies provide additional staff time. WRAP also contracts with environmental consulting firms for analysis of air pollution data, compilation and preparation of emissions inventory data, photochemical modeling, and analyses of natural and/or uncontrollable air pollution sources.

Washington's consultation with other states, tribes, and FLMs.

Addressing regional haze requires communication between states, tribes, EPA, and FLMs. Communications can be both informal and formal. The RHR has requirements for a state to consult with the FLMs administering Class 1 Areas within a state. This section discusses the role of consultation between the state of Washington and other states, tribes, and FLMs in the development of the second RH SIP.

Consultation with other states

The RHR requires consultation between states on the development of coordinated emission management strategies. This requirement applies both to Class 1 Areas within Washington, and to Class 1 Areas outside Washington, where we anticipate emissions from Washington contribute to visibility impairment.

Coordination facilitates completion of technical tasks and policy decisions in areas such as:

- Monitoring
- Emissions
- Source attribution
- Modeling
- Control measures

This extensive coordination results in an RH SIP that reflects Washington's implementation of a regionally consistent approach to addressing visibility impairment in the west.

Washington held several conference calls with neighboring states (Alaska, Idaho and Oregon) from 2019 through 2021 to discuss the progress of regional haze plan development, including discussions on the RACT/four factor analysis and control strategies (Appendix R). Our participation in WRAP also fostered a regionally consistent approach to regional haze planning in the western states and provided a sound mechanism for consultation (Appendix K). Consultation among the fifteen western states within WRAP continues through conference calls and WRAP sponsored working group updates and results meetings.

Tribal notification

Although the RHR does not have a requirement for formal consultation with the tribes, Washington notified tribes in Washington, and federally recognized tribes in Oregon, and Idaho closest to Washington, of the development of the RH SIP. This was an informative letter to the chairpersons of the tribes in Washington. We followed up with invitations to chairpersons, natural resource managers, and tribal historic preservation officers to public meetings held in December of 2020 and January 2021 and several participated in those meetings.

Consultation with federal land managers

The RHR requires consultation between Washington and FLMs on development and implementation of the RH SIP. The RHR specifies that the consultation must provide an opportunity for affected FLMs to comment on the state's assessment of visibility impairment in each Class 1 Area and provide recommendations on the reasonable progress goals and the development and implementation of visibility control strategies to address visibility impairment. Ecology provided FLMs with an opportunity to comment on the long-term strategy, reasonable progress goals, source selection, and four-factor analysis to identify reasonable controls of haze causing emissions more than 120 days prior to the start of a public hearing or other public comment opportunity.

Formal consultation requirements do not preclude informal consultation. Ecology had informal consultation opportunities and other public comment opportunities during SIP development. These were conference calls with representatives of the U.S. Forest Service, the National Park Service, and the U.S. Fish and Wildlife Service. The major focus of these meetings was Ecology's source selection. Ecology used the EPA recommended Q/d (emissions over distance to the nearest Class 1 Area) method to determine the sources we analyzed, the four-factor analyses, and suggested control strategies. These discussions were helpful for both Ecology and the FLMs. Ecology used the discussions and informal written comments from FLMs to review the Q/d determinations.

Appendix A contains information on Ecology’s early and formal consultation with the FLMs for this RH SIP. It includes the written comments submitted to Ecology along with a synopsis of FLM comments accompanied by Ecology’s responses, as well as a summary of our meetings.

1.5 Environmental justice considerations

Introduction

Ecology incorporates environmental justice (EJ) into their planning process. EJ envisions and captures the need for change and defines actions the agencies may take to remove disparities. In general, EJ includes two main components:

- Fair treatment means that no group of people should bear a disproportionate share of the negative environmental consequences resulting from industrial, governmental, and commercial operations or policies
- Meaningful involvement means that the public has a fair opportunity to participate in decisions about activities that may affect their environment and/or health; can influence the regulatory agency’s decision; and the decision-makers seek out and facilitate the involvement of those potentially affected early and throughout the process.

Ecology EJ actions

Ecology consulted with our EJ coordinator to determine how best to address EJ concerns within the constraints of the Regional Haze Rule and guidance. Based upon her guidance and the use of EJSCREEN, we took the following actions:

- Identify the population characteristics of the people affected by the action (such as minority populations, low-income populations, non-English speaking populations, and tribes).
- Assess and address disproportionately high and adverse human health or environmental effects on minority populations and low-income populations.
- Plan for and facilitate the meaningful involvement of affected communities in the processes.
- Ensure that potentially affected populations have appropriate opportunity to learn about, participate in, and influence Ecology’s decisions and actions.

To ensure that all people, regardless of their social, racial, geographical, or able-bodied status could participate in the review and decision making about the second Regional Haze SIP, we:

- Provided public notices that meet online accessibility requirements and notified interested public via emails and newspaper publications.
- Translated the notices into the priority minority languages in Washington:
 - Spanish
 - Korean
 - Vietnamese
 - Chinese
- Notified the leaders of the tribal communities in Washington and offered Government-to-Government consultation in addition to inviting the tribal members to attend public meetings.

- Held accessible online webinars to discuss various aspects of the program.
- Provided 45 days for the public to submit comments.
- Held a virtual public hearing.
- Simplified and formatted the Public Review Draft (text and graphics) to ensure it is compatible with available text-to-speech readers.

The long-term strategy in this regional haze SIP revision includes emission reductions from permits and state rules. The visibility benefits of these controls provide co-benefits to the communities that are in the vicinity where emission reductions occur. An example of such controls would be federal fuel and engine rules that have resulted in large reductions in mobile source air pollution and improvements in visibility.

Grant programs to reduce mobile source emissions and diesel pollution in disproportionately impacted communities

There are several emission control grant programs in Washington that take into account EJ concerns in awarding grants or have co-benefits for nearby disadvantaged communities. These include the woodstove buy-back and exchange program (Chapter 173-433 WAC), the low emission vehicles 2021 rulemaking to reduce emissions around ports, distribution centers, and freight corridors (which tend to be located within disadvantaged communities), and the Volkswagen enforcement action grants that prioritizes projects in or near communities disproportionately impacted by diesel fumes.

1.6 Meaningful public participation

Summary of changes to the public review draft

Ecology made the following changes to the public review draft SIP:

- In Chapter 7, changed all occurrences of “All controls identified as reasonable in the reasonability analysis will be installed and operated as an enforceable requirement consistent with the RHR” to “All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR.”
- In Chapter 7, in the conclusion to the Marathon Petroleum Company changed the following sentence “To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls will likely occur in the next implementation period” to “To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls may occur in the next implementation period.”
- In Table 7-19, a footnote was added to the BART 2008 \$/ton column that stipulates: “FCCU is SNCR, others LNB.”
- In the Executive summary, “Emissions from petroleum refineries cause poor visibility” was changed to “Emissions from petroleum refineries contribute to poor visibility.”
- Added the following paragraphs to Section 6.8:

The PSAT identified sulfate contributions from non-EGU point sources in Washington, originating from the 12,053 tons of non-EGU SO₂ emissions included in the model (see Chapter 6). However, 64 percent of those modeled SO₂ emissions (7,729 tons) are from the two aluminum facilities in Washington (Alcoa Wenatchee and Alcoa Intalco). WRAP modeled these facilities using historical emissions data and with no assumed emissions reductions. The Alcoa Wenatchee facility curtailed in 2015, going to zero emissions, and announced on December 13, 2021, that it will permanently close. The Alcoa Intalco facility curtailed in 2020 and went to zero emissions. Ecology and Intalco entered into an Agreed Order in January 2021 requiring Intalco to conduct a four-factor analysis before restarting (see Chapter 7 and appendix Q for more details).

As a result of the above analysis, we have determined that sources in Washington do not have significant impacts in other States' mandatory Class 1 Areas beyond the measures already addressed in this SIP submittal. Ecology did not receive any request for additional reductions from neighboring states during our consultations with them.

- Ecology received a comment noting that we did not include a facility with a Q/d greater than 10 in the four-factor analysis. The McKinley Paper Plant is a recycled paper mill and is not a chemical pulping facility, which is why it was not included with the other chemical pulp and paper facilities for whom we requested a four-factor analysis. Our original intent was to have the McKinley facility included with other non-chemical paper mills in future implementation periods. However, the McKinley facility does have a Q/d of 83.1, which exceeds the selection criteria of 10. Ecology will start the four-factor analysis process with McKinley and include the results in an update to the SIP.

Ecology's response to comments on the public review draft

Please see Appendix U and V for the individual comments and Appendix W for Ecology's responses.

1.7 Organization of the second regional haze plan (2018 -2028)

The RH SIP is organized as follows:

Chapter 1

- Overview of the RHR and the development of the RH SIP.
- This includes the role of regional planning, the Western Regional Air Partnership (WRAP), and consultation with FLMS, tribes, and other states.
- It also includes a description of where the progress report elements are found in the document.

Chapter 2

- Primer on visibility
- Describes Washington's eight Class 1 Areas
- Describes visibility monitoring for these area at the Interagency Monitoring of Protected Visual Environments (IMPROVE) sites.

Chapter 3

- Describes current conditions in the Class 1 Areas.
- Describes the uniform rate of progress (URP) in visibility improvement needed to achieve the 2064 natural conditions.

Chapter 4

- Discusses the visibility baseline and 2018 statewide emissions inventories that Ecology developed and used to prepare this plan.

Chapter 5

- Describes the modeling used by the WRAP that Washington relied upon for this plan.

Chapter 6

- Discusses the significant in-state and regional sources of haze that affect Washington's Class 1 Areas and will likely affect visibility conditions in 2028.
- Discusses the Class 1 Areas in adjacent states that Washington emissions significantly affect.

Chapter 7

- Describes the source selection process and the four-factor analysis to determine the reasonableness of additional emission controls for inclusion in the long-term strategy.

Chapter 8

- Describes the long-term strategy to address regional haze visibility impairment in Washington's Class 1 Areas.
- Identify and reduce Washington's air impacts to mandatory Class 1 federal Areas outside of Washington.

Chapter 9

- Defines the reasonable progress goal for each of the eight Class 1 Areas in Washington.

Chapter 10

- Describes future planning.
- Summarizes the Washington RH SIP.

Chapter 2. Visibility and Visibility Monitoring in Washington's Class 1 Areas

2.1 Natural sources of visibility impairment

Natural sources of visibility impairment are emissions not attributed to anthropogenic (human-caused) emissions, and they can be major contributors to visibility impairment. Natural sources include:

- Volcanos
- Wildfire
- Windblown dust
- Certain wildland prescribed fire

Even when there is an absence of emissions, the scattering of light by air molecules can degrade visibility. We refer to this as “Rayleigh scattering”. The air molecules’ temperature and density can cause this effect.

We cannot control these sources. We focus control strategies for visibility improvement on what we can control, anthropogenic sources. Current analysis methods for monitoring data do not provide a clear distinction between natural and anthropogenic emissions, but certain pollutant species, such as sulfur dioxide (SO₂) and nitrogen oxides (NO_x) are more representative of anthropogenic sources, while organic mass (OM) and coarse particulate matter (PM₁₀) are usually more representative of natural sources such as wildfire and dust, respectively.

2.2 Anthropogenic sources of visibility impairment

Anthropogenic sources of visibility impairment include everything attributable to human activities that produces emissions of visibility impairing pollutants. Some examples include:

- Industrial activities
- Transportation
- Agricultural activities
- Residential heating
- Managed outdoor burning

Anthropogenic sources can be of local, regional, or international nature. Only anthropogenic sources and emissions within the boundaries of the United States can be controlled. Some anthropogenic sources of emission are beyond the scope of Washington’s SIP. Emissions from Mexico, Canada, other international emissions, and offshore marine shipping emissions in the Pacific Ocean are examples of anthropogenic sources that contribute to visibility impairment in Washington, but are beyond the scope of this planning document.

2.3 Emissions

Natural sources and anthropogenic sources emit visibility-impairing pollutants. Particle and gas emissions may go through chemical changes before an air monitor captures them. For this reason, the chemical species causing visibility impairment may not be the same species emitted by a pollution source.

2.4 The IMPROVE program for visibility monitoring

The Interagency Monitoring of Protected Visual Environments (IMPROVE) program is a multi-agency cooperative effort with the primary purposes of protecting visibility in Class 1 Areas and characterizing regional haze. The objectives of IMPROVE program are to:

- Establish current visibility and aerosol conditions in Class 1 Areas.
- Identify chemical species and emission sources responsible for visibility impairment.
- Document long-term trends for assessing progress towards the national visibility goal.
- Provide regional haze monitoring representing visibility in Class 1 Areas, where practical, in support of the Regional Haze Rule (RHR).

A formal cooperative relationship operates and maintains the IMPROVE monitoring sites. This cooperative includes:

- EPA
- National Parks Service (NPS)
- Fish and Wildlife Service (USFWS)
- Bureau of Land Management (BLM)
- Forest Service (USFS)

IMPROVE monitors obtain a complete signature of the composition of the airborne particles affecting visibility. Each IMPROVE monitor collects a 24-hour sample of these particles onto a set of filters every three days to determine the standard chemical components causing visibility impairment at that site.

To facilitate the data analysis, we group together some elemental particles and compounds (based on scientific principles) into seven standard components that cause light extinction.

Table 2-1 lists the seven standard aerosol components of light extinction along with the default color used in graphics throughout this document.

Table 2-1: Monitor Aerosol Composition

Aerosol Component	Abbreviation (Color)
Ammonium Sulfate	(NH ₄) ₂ SO ₄ (yellow)
Ammonium Nitrate	NH ₄ NO ₃ (orange)
Organic Mass	OM (green)
Elemental Carbon	EC (black)
Fine Soil	Soil (maroon)
Coarse Mass	CM (gray)
Sea Salt	Sea Salt (light blue)

The IMPROVE website (IMPROVE) has detailed information regarding the IMPROVE program, including history, sampling protocols, standard operating procedures, and data availability.

Data collected at the IMPROVE monitoring sites is used by:

- Land managers
- Industry planners
- Scientists
- Public interest groups
- Air quality regulators

2.5 The revised IMPROVE equation and measuring visibility impairment

Some of the particles that compose aerosols absorb light, while others reflect or scatter light. Both absorption and scattering of light result in light extinction. Light extinction is the technical term for visibility impairment between the viewer and the light source.

Each of the key components of particulate aerosols affect light extinction in different ways. The first IMPROVE equation underestimated the highest extinction values and overestimated the lowest extinction values. The revised algorithm was developed by Pitchford et al., 2007 (Marc Pitchford, 2007). The revised algorithm is relatively simple, it produces consistent estimates of light extinction for all IMPROVE aerosol monitoring sites, and it permits the individual particle component contributions to light extinction to be separately estimated (see

Figure 2–1). The revised IMPROVE equation also accounts for site-specific Rayleigh scattering values based on altitude. Rayleigh scattering is the scattering of light by molecules of air.

$b_{ext} \approx$	$2.2 \times fs(RH) \times [\text{Small Sulfate}] + 4.8 \times fL(RH) \times [\text{Large Sulfate}]$ $+ 2.4 \times fs(RH) \times [\text{Small Nitrate}] + 5.1 \times fL(RH) \times [\text{Large Nitrate}]$ $+ 2.8 \times [\text{Small Organic Mass}] + 6.1 \times fL(RH) \times [\text{Large Organic Mass}]$ $+ 10 \times [\text{Elemental Carbon}]$ $+ 1 \times [\text{Fine Soil}]$ $+ 1.7 \times fs(RH) \times [\text{Sea Salt}]$ $+ 0.6 \times [\text{Coarse Mass}]$ $+ \text{Rayleigh Scattering (site specific)}$ $+ 0.33 \times [\text{NO}_2 \text{ (ppb)}]$
-------------------	---

Figure 2–1: Revised Interagency Monitoring of Protected Visual Environments Equation

The result of the revised IMPROVE equation is referred to as the reconstructed light extinction (denoted as b_{ext}). It represents the light extinction due to the aerosol particulates measured at the IMPROVE monitor and is proportional to the mass measured at the monitor.

We express reconstructed light extinction in units of inverse megameters (Mm^{-1}). The RHR requires the tracking of visibility conditions in terms of the haze index metric expressed in the deciview (dv) unit (40 CFR 51.308(f)(1)(i)). Generally, we consider a one-dv change in the haze index a humanly perceptible change under ideal conditions, regardless of background visibility conditions. Figure 2–2 shows the relationship between extinction, Mm^{-1} , dv, and visual range (km).

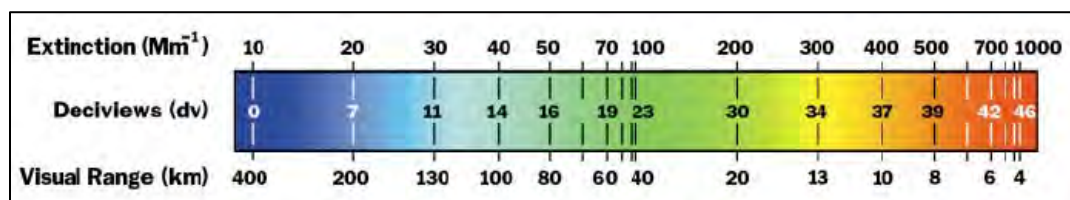


Figure 2–2: Comparison of extinction, deciview, and visual range

Source: (Malm, 2018).

2.6 Baseline conditions

The RHR requires the calculation of baseline conditions for each Class 1 Area. EPA has defined baseline conditions as the five-year average (annual values for 2000 - 2004) of IMPROVE monitoring data (expressed in dv) for the most impaired days (MID) and the clearest days. In the first regional haze plan, we defined the baseline conditions as reference points against which we tracked visibility improvement.

2.7 Natural conditions

The visibility under natural conditions (absent any anthropogenic impairment) could vary daily, based on the contribution of natural sources and meteorological conditions. Therefore, natural conditions consist of a level of visibility (in dv) for both the most impaired and clearest days.

Since no visibility monitoring data exists from the before anthropogenic impairment period, we base these estimates of natural conditions on EPA guidance (EPA, 2003) on how to estimate natural conditions.

2.8 Uniform rate of progress

The uniform rate of progress (URP) is the calculation of the uniform slope, or glidepath, of the line between baseline visibility conditions and natural visibility conditions over the 60-year period. For the first regional haze plan, the benchmark was the dv level that we planned to meet in 2018 (Figure 2–3). This was the 2018 milestone, and it applied to both the most impaired and clearest days. For the second regional haze planning period, the benchmark is the dv level achieved by 2028 (Figure 2–3).

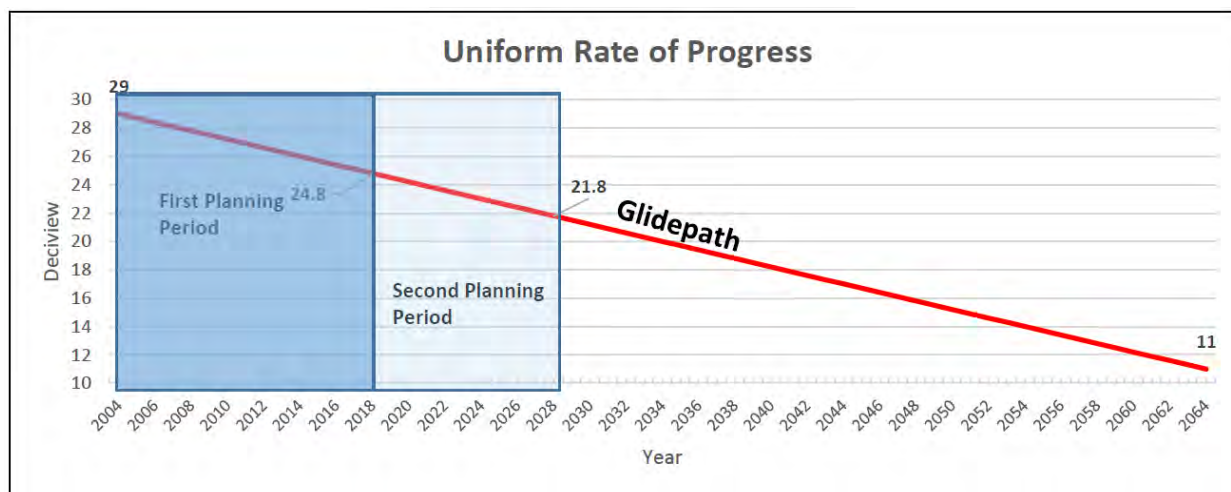


Figure 2–3: Example of How Uniform Rate of Progress is Determined Source: EPA Guidance for Setting Reasonable Progress Goals under the Regional Haze Program

The difference between baseline conditions and natural conditions represents the amount of progress needed to reach natural visibility conditions. In this example (not actual data), the State has determined that the baseline for the most impaired days for the Class 1 Area is 29 dv and estimated that natural background is 11 dv, a difference of 18 dv.

The annual average visibility improvement needed to reach natural conditions by 2064 is the total amount of improvement needed divided by 60 years (the period between 2005 and 2064). The visibility improvement per year is the uniform rate of progress (URP) expressed in dv per year. In this example, the average improvement needed is 0.3 dv/yr.

$$\text{URP} = [\text{Baseline Condition} - \text{Natural Condition}] / 60 \text{ years}$$

Multiply the annual average visibility improvement needed by the number of years in the first planning period (14 years from 2005 until 2018). In this example, this value is 4.2 dv. This is the visibility improvement that we would need during the first planning period to attain natural visibility conditions by 2064.

Calculate the visibility improvement needed to maintain a uniform rate of progress to 2028 (i.e. the amount of reduction in dv necessary for the second planning period) by multiplying the URP value by the number of years between the baseline period and the end of the second planning period (24 years). In this example, the value is 7.2 dv.

Visibility improvement from the baseline to 2018 = [uniform rate of progress] x [14 years]

Visibility improvement from the baseline to 2028 = [uniform rate of progress] x [24 years]

2.9 Washington's Class 1 Areas and visibility monitoring

Washington's Class 1 Areas

Washington has eight Class 1 Areas: three national parks and five wilderness areas. Visibility in the Class 1 Areas is monitored at the interagency monitoring of protected visual environments (IMPROVE) sites. Figure 2–4 shows Washington's eight Class 1 Areas along with the locations of the IMPROVE monitors for the Class 1 Areas.

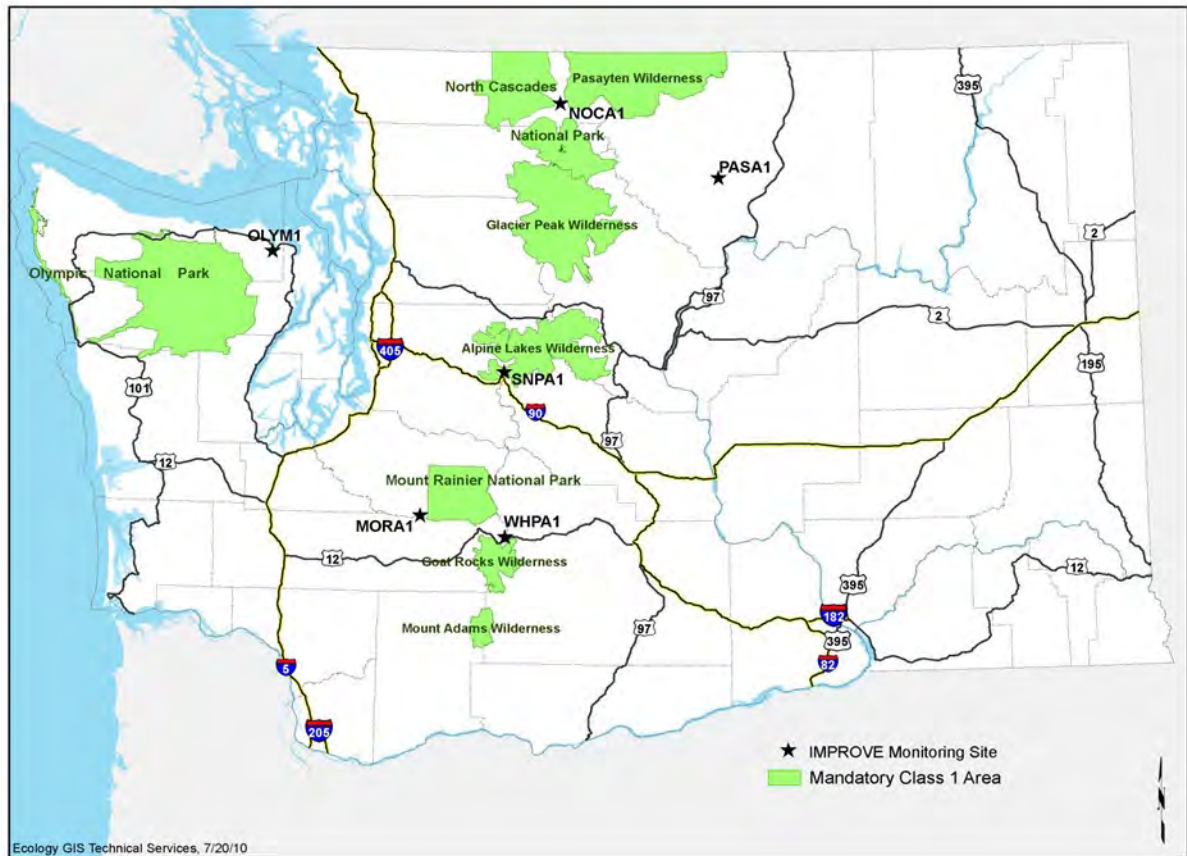


Figure 2–4: Washington's Class 1 Areas and visibility monitoring sites

Table 2-2 provides information on the size of and the federal agency that manages each Class 1 Area, as well as the name of the IMPROVE monitor for each area. The acreages are from 40 CFR 81.434. They may not match the current acreages of the national park or wilderness area for reasons including more accurate surveys or expansion of the area.

Table 2-2: Washington's Class 1 Areas

Class 1 Area	Acreage	Federal Land Manager	IMPROVE monitor
Olympic National Park	892,578	USDI-NPS	OLYM1
North Cascades National Park	503,277	USDI-NPS	NOCA1
Glacier Peak Wilderness	464,258	USDA-FS	NOCA1
Alpine Lakes Wilderness	303,508	USDA-FS	SNPA1
Mt. Rainier National Park	235,239	USDI-NPS	MORA1
Goat Rocks Wilderness	82,680	USDA-FS	WHPA1
Mt. Adams Wilderness	32,356	USDA-FS	WHPA1
Pasayten Wilderness	505,524	USDA-FS	PASA1
Total Acres	3,019,420		

The sections below briefly describe Washington's Class 1 Areas. Maps of these areas are included later in this chapter.

Olympic National Park

Olympic National Park includes a significant portion of the Olympic Peninsula in northwestern Washington. It consists of two segments: the Olympic Mountains, which form the mountainous core of the park, and a coastal strip, stretching for 90 km (56 mi) along the Pacific coast. Thirteen major rivers are flowing from the Olympic Mountains in all directions. Ninety-five percent of the park is designated wilderness.

Elevations range from sea level to 2,428 m (7,965 ft) at the crest of Mt. Olympus near the center of the peninsula. The area has the greatest precipitation gradient in the world for temperate latitudes. Annual precipitation is near 400 cm (150 in) in the western valleys and 500 cm (200 in) at the summit of Mt Olympus but as little as 41 cm (16 in) on the northeast shore of the peninsula in the rain shadow of the Olympic Mountains.

North Cascades National Park

North Cascades National Park is set in the rugged mountains and the beautiful scenery of the Cascade Mountain Range in northcentral Washington, about 80 km (50 mi) east of Bellingham. The area was set aside to preserve dramatic mountain scenery, alpine areas, and glaciers. Mountain summits rise abruptly 1,800-2,600 m (5,900-8,530 ft) above the valley floor. Approximately 93 percent of the park is designated wilderness.

North Cascades National Park lies less than 150 km (95 mi) from major metropolitan areas, most notably, Seattle, Washington and Vancouver, British Columbia.

Glacier Peak Wilderness

Glacier Peak Wilderness includes more than 200 lakes, many unnamed and tremendously difficult to access, in various cirques and hidden basins. The wilderness straddles the northern Cascade Range roughly between Suiattle River on the west and Lake Chelan on the east. North Cascades National Park is adjacent to the northern border.

The dominant topographic feature is Glacier Peak, a 3,214 m (10,541 ft) high volcanic cone. Other mountain summits are 2,500 m (8,200 ft) or lower in elevation. Most terrain lies below 2,000 m (6,500 feet) elevation.

Glacier Peak Wilderness drains on the west side of the Cascade crest to the Suiattle and Sauk Rivers, tributaries to the Skagit River, which flows into northern Puget Sound. East of the Cascade crest, streams flow to Lake Chelan and the Columbia River basin. The lowest elevations where streams exit the wilderness on the west side are around 400 m (1,300 ft). The lowest elevations east of the Cascade crest are 350 to 400 m (1,200 to 1,300 ft), close to the 335 m (1,099 ft) elevation of Lake Chelan.

Alpine Lakes Wilderness

When Congress passed the 1976 Alpine Lakes Wilderness Act to protect the area in its unique natural state they created the Alpine Lakes Wilderness. The name Alpine Lakes takes its origin from the nearly 700 small mountain lakes nestled among the high rock peaks and forested valleys of the region. The Mt. Baker-Snoqualmie National Forest and the Okanogan-Wenatchee National Forest jointly administer the wilderness.

Alpine Lakes Wilderness is located in the rugged central Cascade Range. It is accessible by 47 trailheads and 990 km (615 mi) of trail on both sides of the crest of the Cascade Range between Stevens Pass (US Hwy 2) on the north and Snoqualmie Pass (I-90) on the south.

Mount Rainier National Park

Mount Rainier National Park became the nation's fifth national park in 1899. The Park was set aside to protect timber, minerals, and other natural resources. One hundred kilometers (62 mi) southeast of Seattle, Mount Rainier is the highest of the chain of volcanoes comprising the Cascade Range. At 4,392 m (14,410 ft), Mount Rainier is the fifth tallest peak in the contiguous 48 states. The massive mountain occupies more than one-fourth of the park's area. The 27 major glaciers on its slopes form the largest mass of year-round ice in the United States outside of Alaska.

Mount Rainier National Park lies within 64 km (40 mi) of Puget Sound. The lowlands along the eastern shore of Puget Sound are the most populated and industrialized area of Washington.

Goat Rocks Wilderness

The Goat Rocks Wilderness is a portion of the volcanic Cascade Range in southwestern Washington located between Mount Rainier and Mount Adams. The Goat Rocks are remnants of a large volcano, which has been extinct for some two million years. The cluster of rocks and

peaks in this area earned the title “Goat Rocks” because of the bands of mountain goats that live there. The wilderness lies in both the Gifford Pinchot National and the Okanogan-Wenatchee National Forests.

Glaciation and erosion have worn away the terrain and left moderate summits east and west of the crest of the Cascades. Elevation in the Goat Rocks range from 900 m (3,000 ft) to 2,450 m (8,201 ft) at Gilbert Peak. The deep east-west drainages below the ridges often open into park-like alpine meadows dotted with small lakes and even smaller ponds.

Mount Adams Wilderness

Congress designated the Mount Adams Wilderness in 1964. The wilderness lies in the Gifford Pinchot National Forest on the crest of the Cascade Range in southwestern Washington. Second in height only to Mount Rainier statewide, 3,742 m (12,276 ft) Mount Adams looms over at least 10 glaciers and a wilderness of forested slopes and subalpine meadows. The huge volcanic bulk of the mountain takes up a considerable portion of the Wilderness. Since the eruption of Mount St. Helens, Mount Adams has become a popular attraction for mountain climbers.

Pasayten Wilderness

The Pasayten Wilderness stretches across the crest of the Cascade Range in northern Washington. The wilderness is bordered on the north by 80 km (50 mi) of the Canadian border and on the west by the Ross Lake National Recreation Area. The Pasayten Wilderness is located in both the Okanogan-Wenatchee and the Mount Baker-Snoqualmie National Forests.

The terrain of the western Pasayten is a series of high ridges that flatten out in the eastern portion to high plateaus. Almost 150 peaks in the Pasayten have elevations above 2,300 m (7,500 ft). The part west of the Cascade crest is in the upper Skagit River basin and drains into Ross Lake and the Skagit River and then into northern Puget Sound. From the eastern part of the wilderness, streams flow north into British Columbia or southeast into the central Columbia Plateau. The lowest elevations are around 1,000 m (3,000 ft) at the western boundary near Ross Lake and the southern boundary near Lost River Gorge.

Visibility monitoring of Washington's Class 1 Areas

Washington has six IMPROVE sites that monitor the visibility of the state's eight Class 1 Areas. Four have been combined into two clusters and one monitor is used to represent each cluster. We discuss each site briefly below. You can find additional information on nearby populations, industrial centers, and wind patterns for the sites in Appendix B.

Olympic IMPROVE site: OLYM1

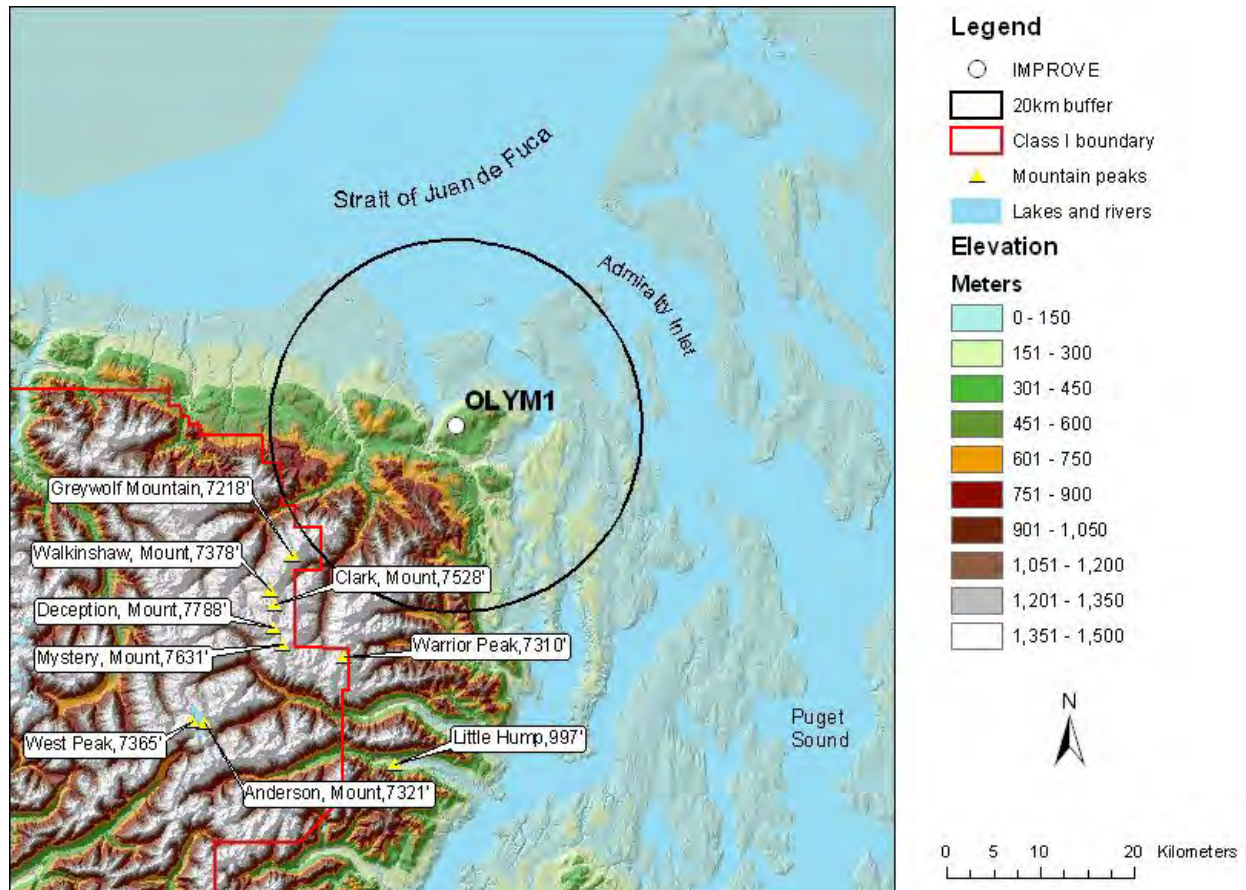


Figure 2–5: Location of the OLYM1 site

Source: Causes of Haze Assessment Descriptive Maps

The IMPROVE site representing the Olympic National Park is OLYM1, located northeast of the park boundary on an exposed hilltop (Blyn Lookout) near the northeastern extreme of the Olympic Peninsula at an elevation of 600 m (1,968 ft) (Figure 2–5).

Representativeness

OLYM1 is on the northeast shore of the peninsula near Sequim. Sequim is in the rain shadow of the Olympics, with sea level precipitation less than 50 cm (20 inches) annually. The rain shadow effect may be less severe at the OLYM1 elevation of 600 m. OLYM1 should be representative of eastern Olympic National Park areas most of the time, although at this elevation there may be periods when it is above inversion height.

Because of the size of the park, different sources may affect different areas. For the northeastern portion of the park, where the OLYM1 monitoring site is located, nearby industrial and urban emission sources that most immediately affect the area are in Port Angeles. For the western portions of the park, including the coastal section, there are no additional large source areas, although there may be timber and shipping related industries.

North Cascades IMPROVE Site: NOCA1

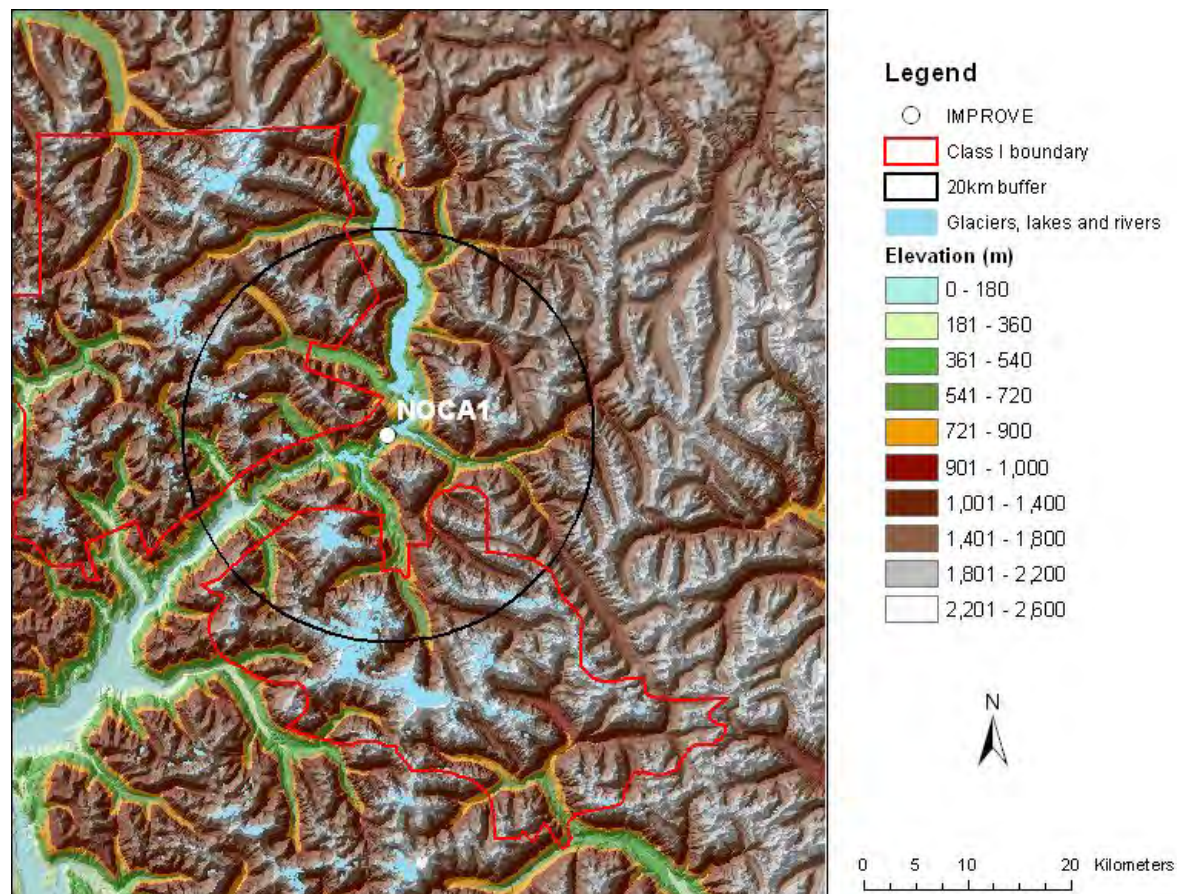


Figure 2–6: Location of the NOCA1 Site

Source: Causes of Haze Assessment Descriptive Maps

The NOCA1 IMPROVE site is the monitoring site for two Class 1 Areas, North Cascades National Park and Glacier Peak Wilderness. NOCA1 is located near Ross Lake on the upper reaches of the Skagit River just outside of the eastern boundary of the northern park section, located north of the Skagit River (Figure 2–6). The monitor is situated at an elevation of 576 m (1,889 ft) and is 87 m (285 ft) above the level of Ross Lake and about 200 m (650 ft) below the surrounding ridge tops.

Representativeness

The NOCA1 IMPROVE site is within the Skagit River Valley near Ross Lake and is in the lower slopes of a valley. It may at times be within surface-based valley inversions. The monitor is representative of the lower elevation air shed.

Snoqualmie Pass IMPROVE site: SNPA1

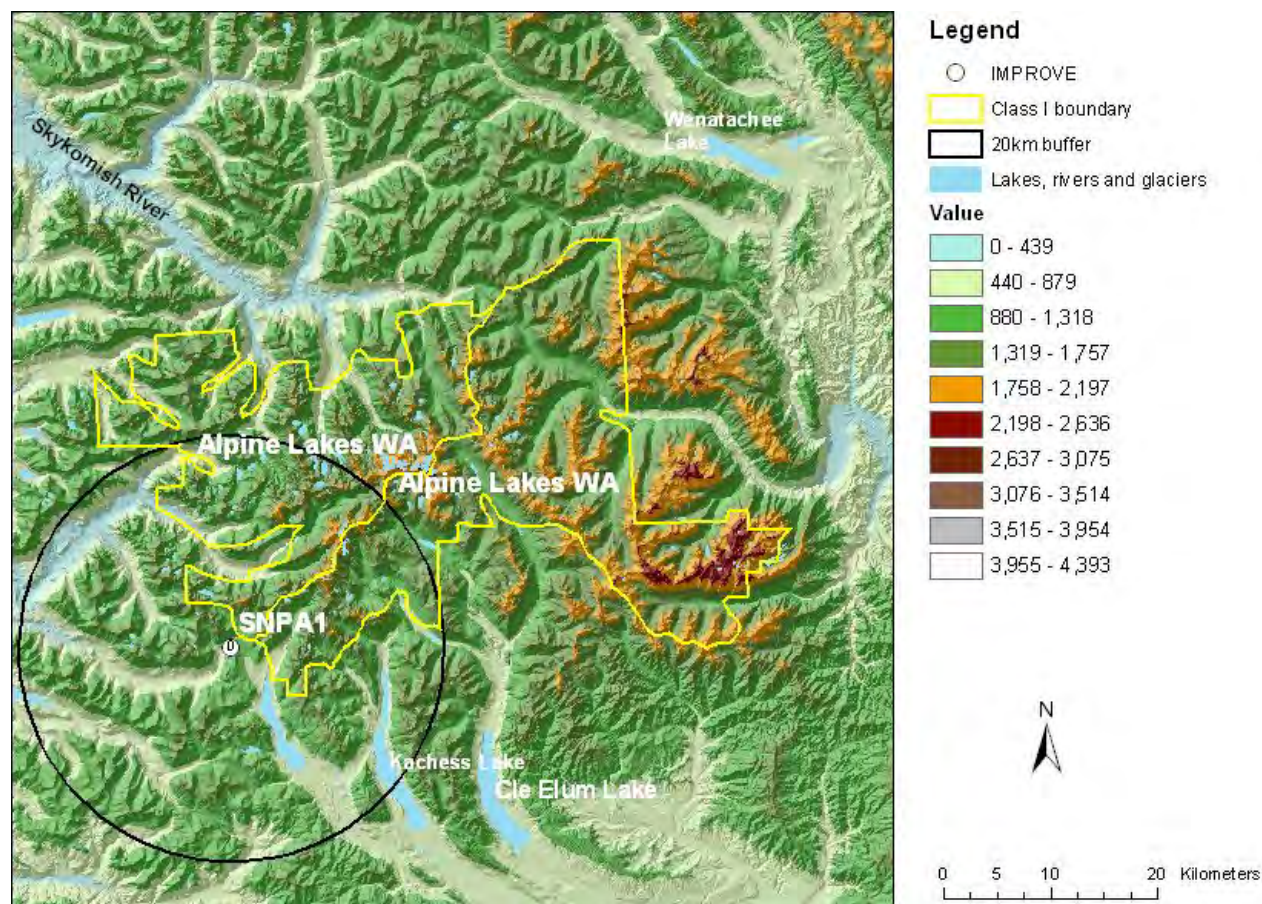


Figure 2–7: Location of the SNPA1 site

Source: Causes of Haze Assessment Descriptive Maps

SNPA1 is the IMPROVE site representing the Alpine Lakes Wilderness. SNPA1 is located near the southwest boundary of the wilderness in Snoqualmie Pass, a pass over the Cascade Range (Figure 2–7). The monitoring site elevation of 1,160 m (3,805 ft) is 239 m (784 ft) above the Snoqualmie Pass elevation of 921 m (3,022 ft). SNPA1 is located near a ski area on Snoqualmie Pass.

Representativeness

SNPA1 is at a well-exposed ridge crest location and should be very representative of the particulate aerosol concentration and composition at similarly exposed locations in the Alpine Lakes Wilderness. The elevation of SNPA1 is at the lower end of the range of elevations of the wilderness.

The mountain pass location of SNPA1 is representative of transport flow across the Cascade crest. Due to its location at a ridge crest, SNPA1 is probably above trapping inversions that may develop at valley bottom locations west and east of the Cascade crest.

Mount Rainier IMPROVE site: MORA1

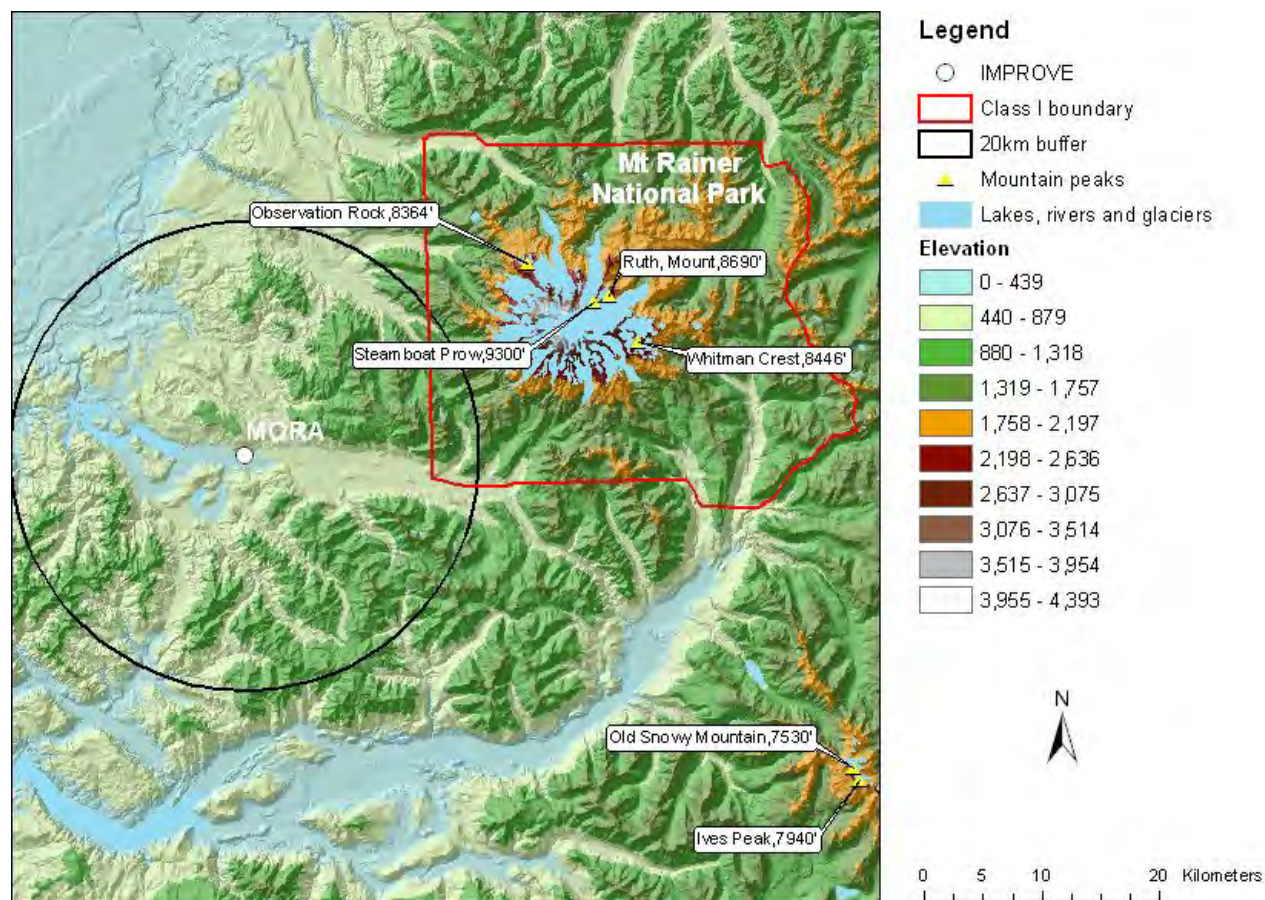


Figure 2–8: Location of the MORA1 site

Source: Causes of Haze Assessment Descriptive Maps

The IMPROVE site representing Mount Rainier National Park, MORA1, is situated southeast of the park at the Tahoma Woods park headquarters. MORA1 is located within the Nisqually River Valley at an elevation of 439 m (1,440 ft). The monitor is some 30 km (18.5 mi) west-southwest from the summit of Mount Rainer (Figure 2–8) as shown above.

The orientation of the drainage is east to west, with an elevation drop of about 60 ft/mile. Where the Nisqually River empties into Alder Lake Reservoir (5 km or 3 miles) west of the site the river elevation is 367 m (1,204 ft).

The valley bottom at the monitoring site is about 1.5 km (0.9 mi) wide. The monitoring site is at the northern edge of the valley bottom. Elevations rise to 450 m (1,475 ft) at a distance of 2 km (1.25 mi) north and 3 km (1.9 mi) south from the monitoring site. Regional ground cover is predominantly fir and pine forest.

Representativeness

The valley where the IMPROVE site is located may be subject to inversion and trapping of pollutants during periods of high pressure and stagnation. In those cases, the trapped stable

layer would contain the monitoring site. In those instances, the monitor would only be representative of the lower portions of the park.

Generally, wind directions at MORA1 channel to an east/west direction with characteristic mountain/valley circulations of easterly nighttime drainage flow and westerly daytime upslope flow in the valley.

White Pass IMPROVE site: WHPA1

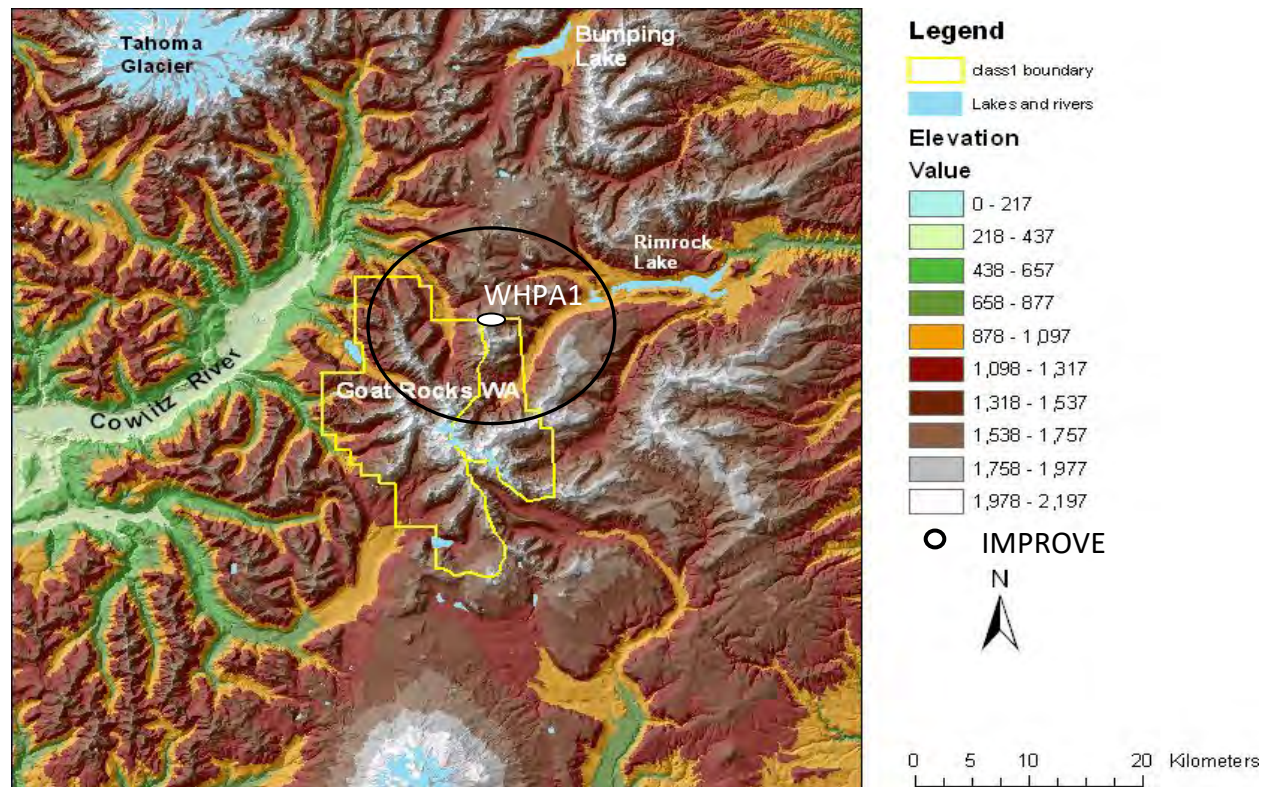


Figure 2–9: Location of the WHPA1 site

Source: Causes of Haze Assessment Descriptive Maps

The IMPROVE site representing Goat Rocks and Mount Adams Wilderness Areas, WHPA1, is located on the crest of the Cascade Range at the northern Goat Rocks Wilderness boundary at White Pass Ski Resort near White Pass Washington (Figure 2–9). The monitoring site elevation is 1,830 m (6,002 ft).

Representativeness

WHPA1 is at a ridge crest location well exposed to upper airflows and to aerosols transported aloft from upwind sources. WHPA1 should be representative of aerosol concentration and composition at similarly exposed locations in the Goat Rocks and Mount Adams Wilderness Areas. Its elevation and exposure should also make it representative of regional characteristics and transport from distant source regions at pressure heights near 850 mb that are relatively unperturbed by terrain effects.

Pasayten IMPROVE site: PASA1

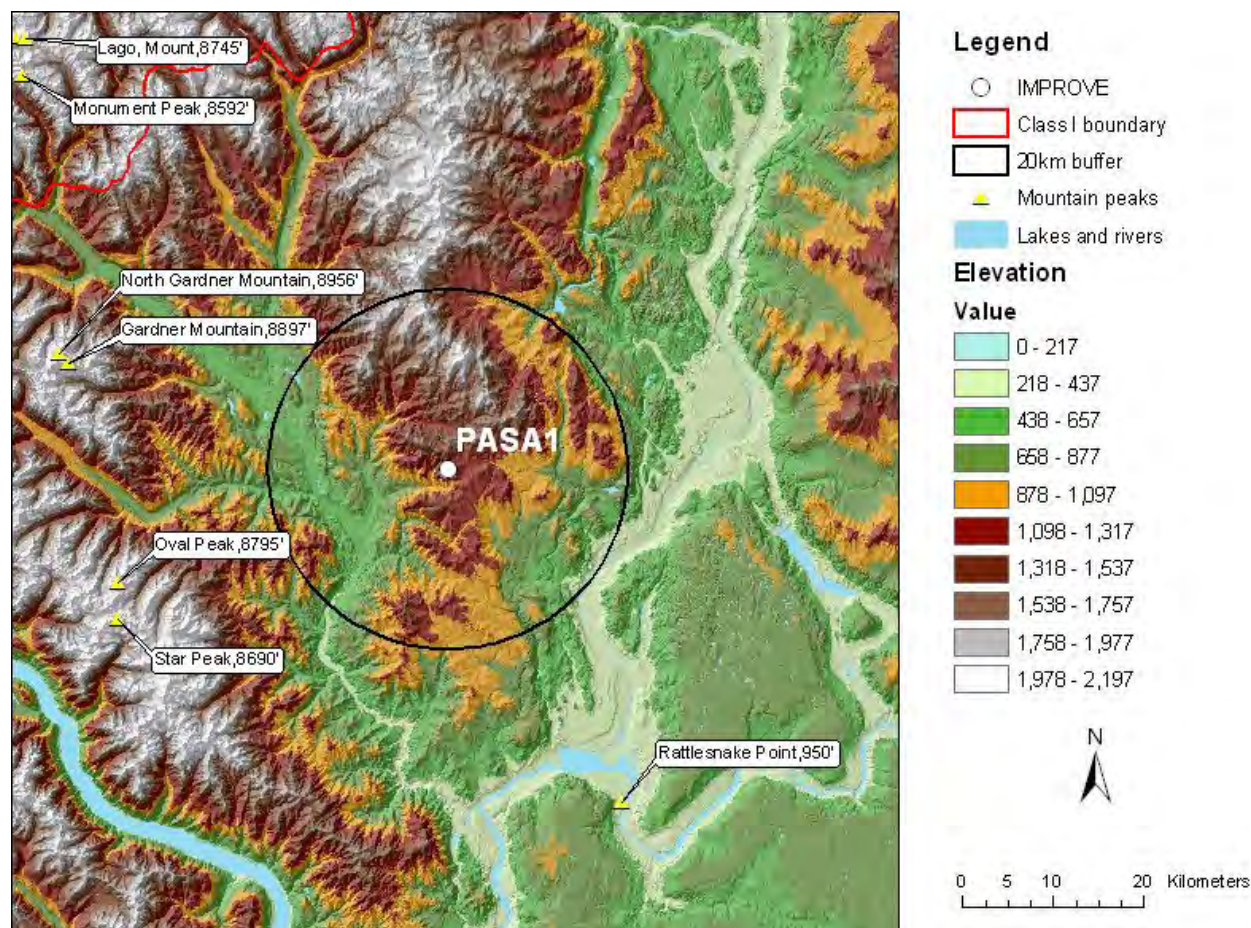


Figure 2–10: Location of the PASA1 site

Source: Causes of Haze Assessment Descriptive Maps

The IMPROVE site representing Pasayten Wilderness, PASA1, is situated near the crest of Little Buck Mountain, 50 km (30 mi) south and east of the wilderness boundary (Figure 2–10). PASA1 is located at an exposed elevation of 1,634 m (5,360 ft).

Representativeness

The PASA1 IMPROVE site is at a well-exposed ridge top location and is somewhat representative of regional conditions including high elevation locations in the Pasayten Wilderness. It is more representative of upper level (850 mb) aerosol characteristics of the central Columbia Plateau and Basin. This monitor is further away from the Class 1 Area it represents than any others in Washington. The PASA1 monitor is in an area that has frequent prescribed burning that may not actually impact the Pasayten Wilderness. Prescribed burning near the PASA1 monitor does not typically impact visibility in the Pasayten Wilderness because prevailing westerly winds and terrain limit the transport of smoke from the Columbia Plateau to the Cascade mountains.

The North Cascades National Park IMPROVE site, NOCA1, may be more representative of low elevations of the Pasayten Wilderness east of the Cascade crest.

Chapter 3. Current Visibility Conditions in Washington's Class 1 Areas

3.1 Overview of visibility conditions in Washington

3.1.1 Introduction

Washington Department of Ecology (Ecology) analyzed current visibility conditions in Washington's eight mandatory Class 1 Federal Areas (Class 1 Areas) as required by the Regional Haze Program (40 CFR 51.308(f)(1)). We compared current visibility conditions to both the historical baseline and natural conditions. The five-year period (2014 - 2018) is the most recent monitoring dataset available for regulatory use and is the period we refer to as "current conditions" throughout this document. The first Regional Haze State Implementation Plan (RH SIP) defined "baseline visibility conditions" as the five-year period from 2000 - 2004. The Regional Haze Rule (RHR) sets the statutory deadline of 2064 to reach natural visibility conditions at all Class 1 Areas. Natural visibility represents the visibility conditions in the absence of human-caused impairment.

3.1.2 Methodology

Ecology used the monitoring data for the current conditions from the interagency monitoring of protected visual environments (IMPROVE) sites that track pollutants affecting visibility in Class 1 Areas. For more information on the pollutants, see Chapter 4 Emission Inventories. Washington has six IMPROVE sites and eight Class 1 Areas. Two of the sites cover four Class 1 Areas. Table 3-1 provides general information on the six sites⁴. For more information about the IMPROVE program see Chapter 2, Section 2.2: Visibility monitoring of Washington's Class 1 Areas.

Table 3-1: IMPROVE monitoring sites.

Site name	Site abbreviation	Site sponsor	Monitored Class 1 Area
Olympic	OLYM1	USDI-NPS	Olympic National Park
North Cascades	NOCA1	USDI-NPS	North Cascades National Park & Glacier Peak Wilderness
Snoqualmie Pass	SNPA1	USDA-FS	Alpine Lakes Wilderness
Mount Rainier	MORA1	USDI-NPS	Mount Rainier National Park
White Pass	WHPA1	USDA-FS	Goat Rocks Wilderness & Mount Adams Wilderness
Pasayten	PASA1	USDA-FS	Pasayten Wilderness

⁴ See the map of the Class 1 Areas and the monitoring sites at: <https://ecology.wa.gov/Air-Climate/Air-quality/Air-quality-targets/Regional-haze>.

The Western Regional Air Partnership (WRAP) analyzed and compiled the IMPROVE monitoring data for consistency in planning among Western states. We used WRAP's technical data and analysis to determine current conditions. We also used the WRAP Technical Support System (TSS) online tool at <https://views.cira.colostate.edu/tssv2/> to generate graphs and tables illustrating the results of the data analysis. Those interested in reviewing the data may access the observation-specific tools at <https://views.cira.colostate.edu/tssv2/Express/VisTools.aspx>.

During the first planning period, we used the worst (haziest) days from the IMPROVE monitoring data to determine the baseline visibility for the worst visibility days for the 2000 - 2004 period. However, the RHR revision in 2017 changed the metric on how to select a set of the worst visibility days during each year to track progress towards natural visibility conditions. The revised metric reflects the finding that natural events such as wildfires and dust storms overwhelmingly influence the haziest days. The rule revision removed five percent of the haziest days recorded at the IMPROVE sites from the calculations to create "the most impaired days" (MID) metric. The MID are the 20 percent of the worst visibility days in a calendar year, after removing the five percent haziest days. Thus, the design of the MID metric identifies the days with the largest amounts of anthropogenic visibility impairment. Because of the rule revision, EPA and WRAP recalculated the baseline conditions for all Class 1 Areas for the second implementation period.

The RHR requires that states track progress in visibility with a metric of haze known as the deciview (dv). We use the dv because under many circumstances, a person will perceive a change in one dv to be the same on both clear and hazy days. However, the dv does not easily relate to pollutant concentrations. Therefore, species contribution analysis uses a metric directly related to pollutant concentrations, known as "light extinction," with units of inverse megameters (Mm^{-1}). Light extinction does not linearly relate to a person's perception of changes in haze, but does linearly relate to pollutant concentrations in the atmosphere.

The glidepath from the baseline visibility conditions for the MID to the natural conditions over a 60-year period depicts the uniform rate of progress (URP). The uniform rate of visibility improvement for the MID is measured in deciviews of improvement per year. We need to maintain this average rate to attain natural visibility conditions by the end of 2064 in each Class 1 Area. Thus, the URP glidepath is a planning tool to help track ongoing improvements in visibility and to gauge whether there are sufficient controls over the emission sources to meet our progress goals during this planning period and stay on track to achieve the natural condition goals by 2064.

In the first planning period, natural conditions and the URP glidepath endpoint were the same by default. However, not all human-caused impairment comes from emission sources that the state can control. In accordance with the RHR (40 CFR 51.308(f)(1)(vi)(B)), the states can propose an adjustment to the endpoint of the glidepath to account for emissions they do not control such as international emissions. In this planning period, WRAP calculated the impacts of international anthropogenic sources on Washington's visibility in each Class 1 Area.

Washington is focusing on impairments that come from the sources within the states' control and is proposing an adjustment to the endpoint of the glidepath in Chapter 9 to account for international contributions.

In this chapter, the current visibility conditions are compared to the unadjusted glidepath for each of the eight Class 1 Areas in Washington (40 CFR 51.308(f)(1)(vi)). In Chapter 9, we adjusted the endpoint of the glidepath to account for the international contributions and use the international adjusted glidepath when we project reasonable progress goals.

For each Class 1 Area, we calculated the uniform rate of progress, and reviewed the visibility during MID and clearest days during 2014 - 2018. We compared the clearest days to the baseline, and the MID to the unadjusted URP glidepath. We provided an analysis of the annual and seasonal species' contributions to the visibility impairment during the current period. We also provided a visibility trend synopsis of annual species contributions to light extinction from 2002 - 2018.

3.1.3 Summary results

Table 3-2 and Table 3-3 show a summary of the 2000 - 2004 baseline, IMPROVE 2008 - 2012, IMPROVE 2014 - 2018, and estimated natural conditions for the clearest days and MID. This is required by the RHR (40 CFR 51.308(f)(1)(i - v)).

Table 3-2: Baseline, current, and estimated natural visibility conditions for the clearest days (in dv).

Class 1 Area	IMPROVE monitor	Baseline 2000-2004	Average 2008-2012	Current conditions 2014-2018	Estimated natural conditions 2064	Difference between current and natural conditions
Olympic National Park	OLYM1	6.0	3.9	3.6	2.7	0.9
Glacier Peak Wilderness Area	NOCA1	3.4	2.9	2.5	1.9	0.6
North Cascades National Park	NOCA1	3.4	2.9	2.5	1.9	0.6
Alpine Lakes Wilderness Area	SNPA1	5.5	4.0	3.3	2.3	1.0
Mount Rainier National Park	MORA1	5.5	4.2	3.9	2.6	1.3
Goat Rocks Wilderness Area	WHPA1	1.7	1.3	1.0	0.8	0.2
Mount Adams Wilderness Area	WHPA1	1.7	1.3	1.0	0.8	0.2
Pasayten Wilderness Area	PASA1	2.7	2.1	1.6	1.2	0.4

Table 3-3: Baseline, current, and estimated future visibility conditions for the most impaired days (in dv).

Class 1 Area	IMPROVE monitor	Baseline 2000-2004	Average 2008-2012	Current conditions 2014-2018	Estimated unadjusted natural conditions 2064	Difference between current and natural conditions
Olympic National Park	OLYM1	14.9	13.5	11.9	6.9	5.0
Glacier Peak Wilderness Area	NOCA1	12.6	11.1	10.0	6.9	3.1
North Cascades National Park	NOCA1	12.6	11.1	10.0	6.9	3.1
Alpine Lakes Wilderness Area	SNPA1	15.4	13.7	12.7	7.3	5.4
Mount Rainier National Park	MORA1	16.5	14.1	12.7	7.7	5.0
Goat Rocks Wilderness Area	WHPA1	10.5	9.1	8.0	6.1	1.9
Mount Adams Wilderness Area	WHPA1	10.5	9.1	8.0	6.1	1.9
Pasayten Wilderness Area	PASA1	10.4	9.6	9.5	6.0	3.5

3.2 Olympic National Park

The baseline visibility for the Olympic National Park is 6.0 dv for the clearest days and 14.9 dv for the MID. The unadjusted URP glidepath goes from 14.9 to 6.9 dv at a rate of 0.13 dv per year (8 dv divided by 60 years), which is the rate that would need to be maintained to reach natural visibility conditions in the park by 2064.

The current conditions (2014 - 2018) calculated from OLYM1 monitoring data are 3.6 dv for the clearest days and 11.9 dv for the MID. The clearest days' visibility improved by 2.4 dv from the baseline. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 1.8 dv. The MID visibility improved by 3 dv and is under the unadjusted URP glidepath.

Figure 3–1 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at OLYM1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most recent annual average MID are below the glidepath, which indicates a rate of visibility improvement that will accomplish the 2064 natural conditions goal.

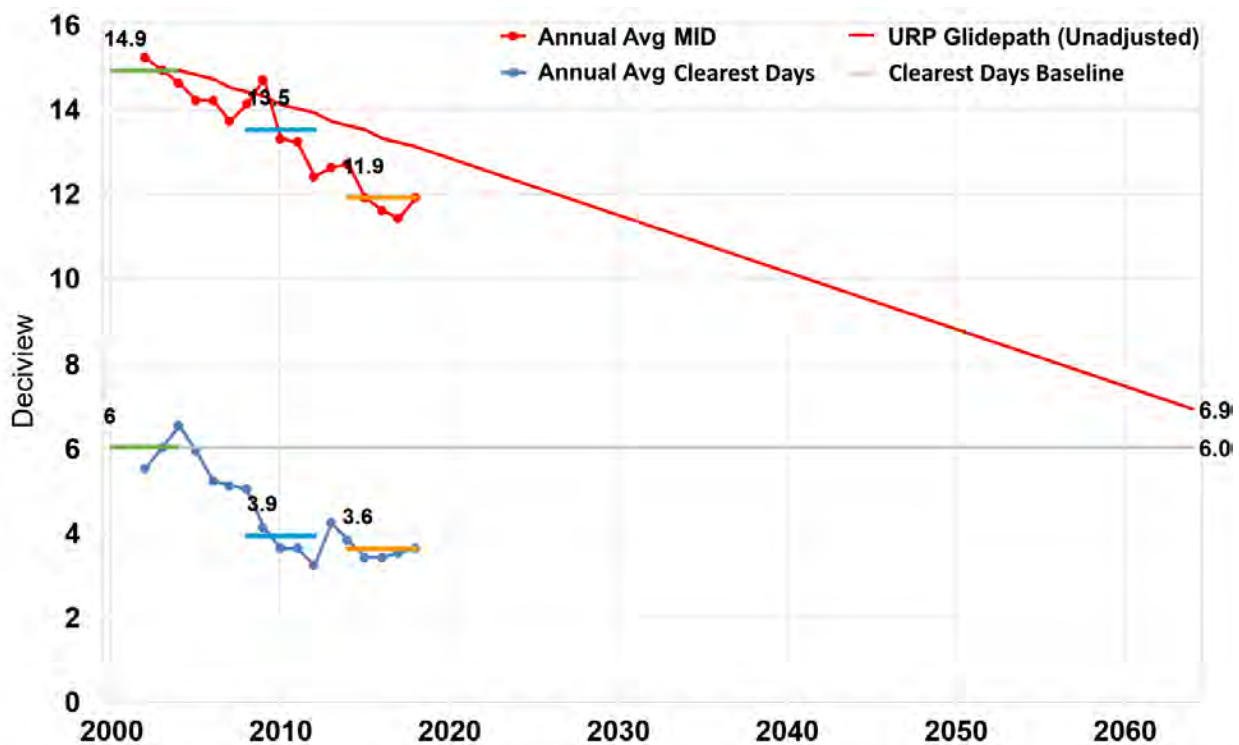


Figure 3–1: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at OLYM1.

Figure 3–2 shows the annual species contributions to light extinction from 2014 - 2018 for both MID and clearest days. Sulfates decreased in 2015 for both MID and clearest days and the decrease sustained through the rest of the five-year period. Nitrates showed very little change and organic mass showed some year-to-year variability.

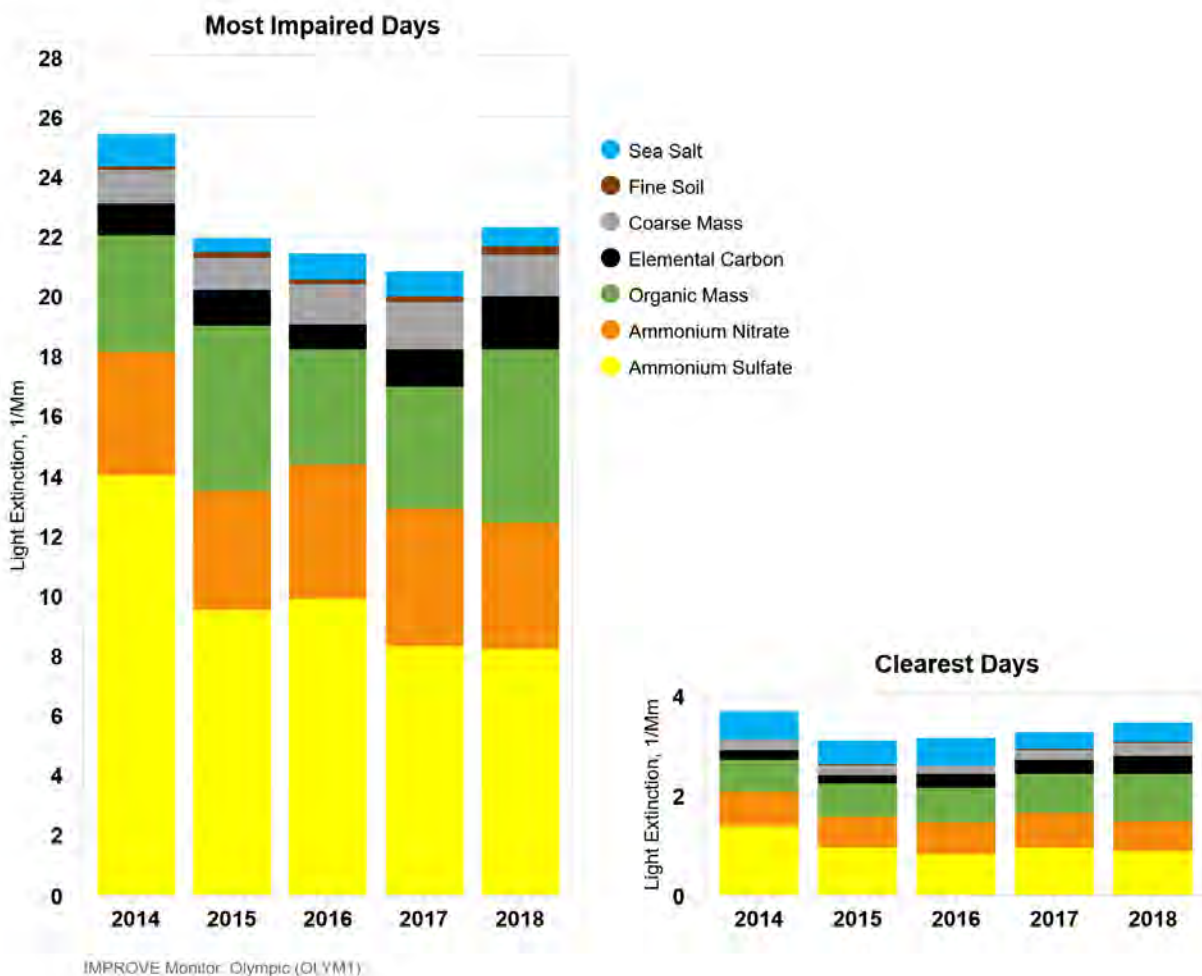


Figure 3–2: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at OLYM1.

Table 3-4 shows the annual species' contribution during the five-year period from 2014 - 2018 for the MID. Sulfates contributed nearly half of the light extinction to MID from 2014 - 2018. The percentage of organic mass increased in 2015 and 2018. During the five-year period, sulfates (44%) were the largest contributor to light extinction, followed by organic mass (21%) and nitrates (19%). Elemental carbon, coarse mass, fine soil, and sea salt had minimal contributions to light extinction.

Table 3-4: Annual species contributions to light extinction for MID from 2014 - 2018 at OLYM1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	4%	2%	4%	4%	3%	3%
Fine Soil	1%	1%	1%	1%	1%	1%
Coarse Mass	4%	5%	6%	8%	6%	6%
Elemental Carbon	4%	5%	4%	6%	8%	5%
Organic Mass	15%	25%	18%	20%	26%	21%
Ammonium Nitrate	16%	18%	21%	22%	19%	19%
Ammonium Sulfate	55%	44%	46%	40%	37%	44%

Table 3-5 shows the annual species contributions during the five-year period for the clearest days. Sulfates (30%) contributed the most to light extinction followed by organic mass (22%), nitrates (20%), and sea salt (14%).

Table 3-5: Annual species contributions to light extinction for clearest days from 2014 - 2018 at OLYM1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	15%	15%	17%	11%	11%	14%
Fine Soil	0%	1%	0%	0%	1%	0%
Coarse Mass	6%	7%	6%	6%	8%	7%
Elemental Carbon	5%	5%	8%	9%	10%	7%
Organic Mass	17%	22%	22%	23%	27%	22%
Ammonium Nitrate	19%	19%	21%	22%	17%	20%
Ammonium Sulfate	38%	31%	26%	29%	26%	30%

Table 3-6 and Table 3-7 show the seasonality of MID from 2014 - 2018. Sulfates contributed nearly half of the visibility impacts in spring, summer, and fall. Nitrates contributed a third of visibility impacts in the winter, but less for other seasons. The majority of MID occurred during the spring and summer, which is also when sulfate impacts were largest.

Table 3-6: Number of MID at OLYM1, by season, from 2014 - 2018.

Year	Winter	Spring	Summer	Fall
2014	1	7	10	6
2015	2	12	3	7
2016	1	5	14	4
2017	3	4	13	4
2018	3	8	8	5
5-yr Total	10	36	48	26

Table 3-7: Seasonal species contributions to light extinction for MID from 2014 - 2018 at OLYM1.

Species	Winter	Spring	Summer	Fall
Sea Salt	3%	3%	4%	3%
Fine Soil	1%	2%	1%	1%
Coarse Mass	4%	6%	7%	4%
Elemental Carbon	7%	6%	4%	7%
Organic Mass	22%	19%	19%	25%
Ammonium Nitrate	32%	17%	17%	21%
Ammonium Sulfate	31%	46%	49%	40%

Figure 3–3 shows the long-term trends for OLYM1. Nitrates and sulfates decreased since the baseline period for both MID and clearest days. Organic mass decreased for the clearest days over the past 17 years of observations.

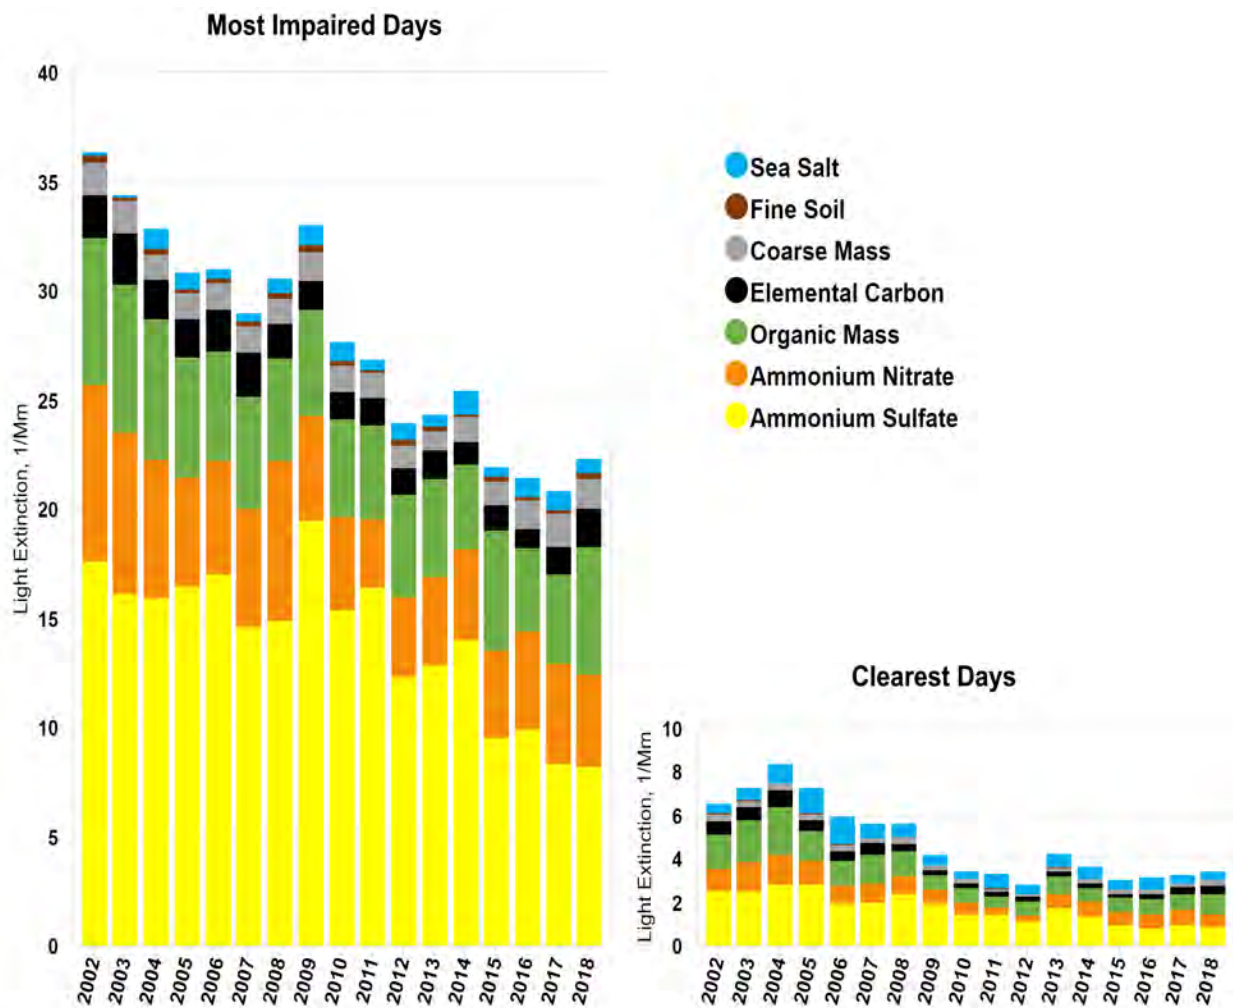


Figure 3–3: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at OLYM1.

3.3 North Cascades National Park and Glacier Peak Wilderness

The NOCA1 monitoring site measures visibility in the North Cascades National Park and Glacier Peak Wilderness. Data for 2017 did not meet the data completeness requirements per the EPA document “Guidance for Tracking Progress under the RHR” (EPA, 2003). Twenty-three days (19% of the total) were missing for all species. WRAP performed data substitutions for 2017 using the OLYM1 IMPROVE site to address data completeness problems, due to the reasonable sulfate, elemental carbon, and organic mass correlation. See Appendix C for additional information on the WRAP data completeness memo.

The baseline visibility for the North Cascades National Park and Glacier Peak Wilderness is 3.4 dv for the clearest days and 12.6 dv for the MID. The unadjusted URP glidepath goes from 12.6 to 6.9 dv at a rate of 0.01 dv per year (5.7 dv divided by 60 years), which is the rate that needs to be maintained to reach natural visibility conditions in the park by 2064.

Based on the IMPROVE monitoring data, the 2014 – 2018 period visibility for the MID is 10.0 dv, and 2.5 dv for the clearest days. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 1.3 dv. The MID visibility improved by 2.6 dv from the baseline and is under the unadjusted URP glidepath. On the clearest days, the visibility improved by 0.9 dv.

Figure 3–4 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at NOCA1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most recent annual average MID are below the glidepath, which indicates a rate of visibility improvement that will accomplish the 2064 natural conditions goal.

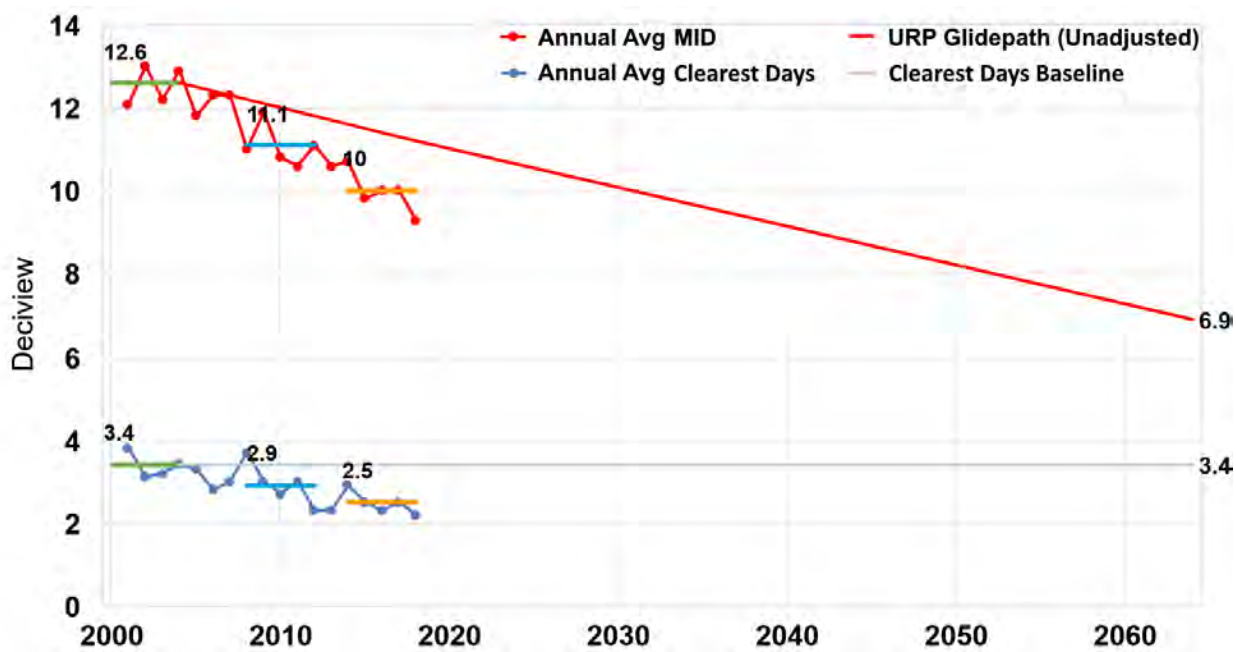


Figure 3–4: Current visibility conditions compared to the unadjusted glidepath (MID) and baseline (clearest days) at NOCA1.

Figure 3–5 shows the annual species contributions to light extinction from 2014 to 2018 for both MID and clearest days. Sulfates decreased for both MID and clearest days during the five-year period. Nitrates and organic mass showed some year-to-year variability.

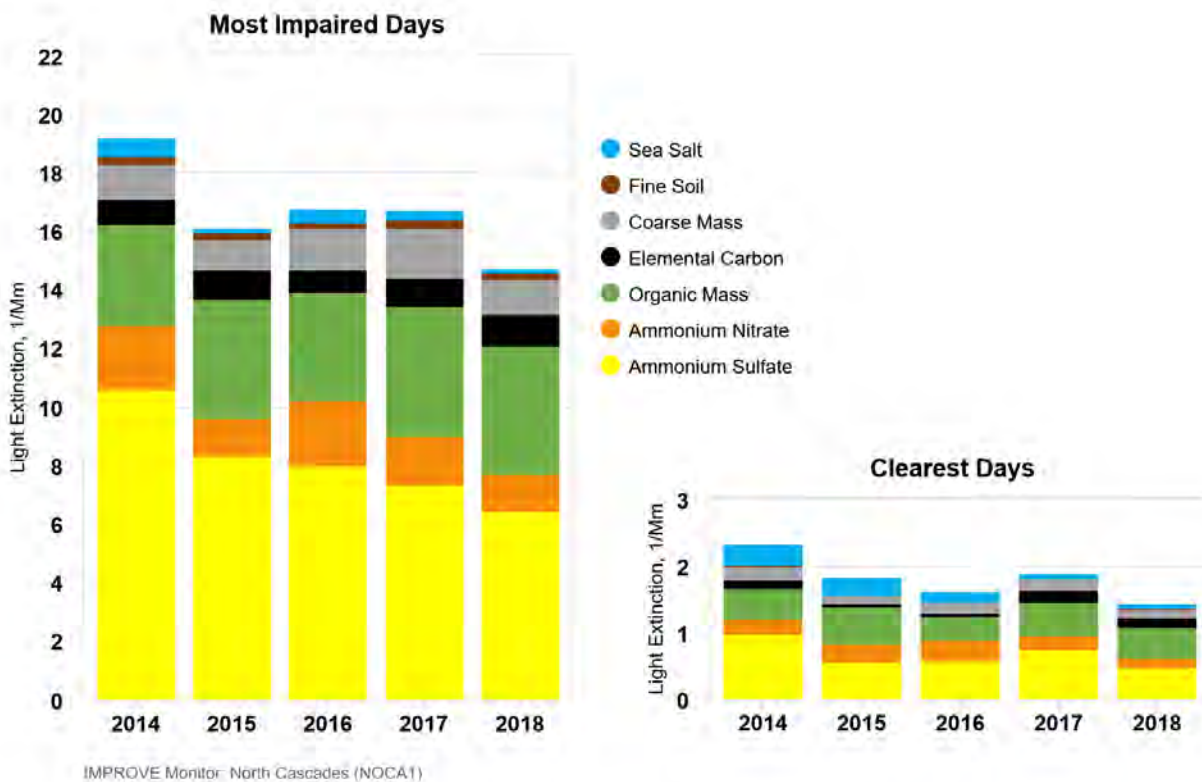


Figure 3–5: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at NOCA1.

Table 3-8 shows the annual species contributions during the five-year period for the MID. Sulfates contributed half of the light extinction to MID from 2014 - 2018. The percentage of organic mass increased in 2015, 2017, and 2018. During the five-year period, sulfates (49%) were the largest contributor to light extinction, followed by organic mass (24%), nitrates (10%), and coarse mass (8%). Elemental carbon, fine soil, and sea salt had minimal contributions to light extinction.

Table 3-8: Annual species contributions to light extinction for MID from 2014 - 2018 at NOCA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	3%	1%	3%	2%	1%	2%
Fine Soil	2%	2%	1%	2%	2%	2%
Coarse Mass	6%	7%	9%	10%	8%	8%
Elemental Carbon	4%	6%	4%	6%	7%	5%
Organic Mass	18%	25%	22%	27%	30%	24%
Ammonium Nitrate	11%	8%	13%	10%	9%	10%
Ammonium Sulfate	55%	52%	48%	44%	44%	49%

Table 3-9 shows the annual species contributions during the five-year period for the clearest days. Sulfates (36%) contributed the most to light extinction, followed by organic mass (26%). Note the relatively low contribution of nitrates for both MID and clearest days at NOCA1.

Table 3-9: Annual species contributions to light extinction for clearest days from 2014 - 2018 at NOCA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	14%	14%	10%	4%	5%	9%
Fine Soil	1%	1%	1%	1%	1%	1%
Coarse Mass	9%	7%	9%	8%	9%	8%
Elemental Carbon	5%	2%	3%	10%	9%	6%
Organic Mass	19%	30%	23%	27%	31%	26%
Ammonium Nitrate	10%	15%	19%	11%	11%	13%
Ammonium Sulfate	41%	31%	36%	39%	33%	36%

Table 3-10 and Table 3-11 show the seasonality of MID from 2014 - 2018. Sulfates contributed to the majority of light extinction for all seasons. Organic mass contributed to nearly a third of light extinction in the fall. Coarse mass contributed to 10% of the light extinction in the summer, but less for other seasons. The majority of MID occurred during the spring and summer, when nitrate and coarse mass contributions were largest.

Table 3-10: Number of MID at NOCA1, by season, from 2014 - 2018.

Year	Winter	Spring	Summer	Fall
2014	1	11	7	4
2015	2	14	4	3
2016	0	8	13	3
2017	2	7	13	2
2018	1	13	5	5
5-yr Total	6	53	42	17

Table 3-11: Seasonal species contributions to light extinction for MID from 2014 - 2018 at NOCA1.

Species	Winter	Spring	Summer	Fall
Sea Salt	0%	1%	2%	3%
Fine Soil	1%	2%	1%	1%
Coarse Mass	4%	7%	10%	6%
Elemental Carbon	6%	6%	5%	7%
Organic Mass	18%	23%	24%	29%
Ammonium Nitrate	5%	10%	12%	8%
Ammonium Sulfate	67%	50%	46%	46%

Figure 3–6 shows the long-term trends for NOCA1. Sulfates decreased since the baseline period for both MID and clearest days. Organic mass showed some year-to-year variability over the past 17 years of observations.

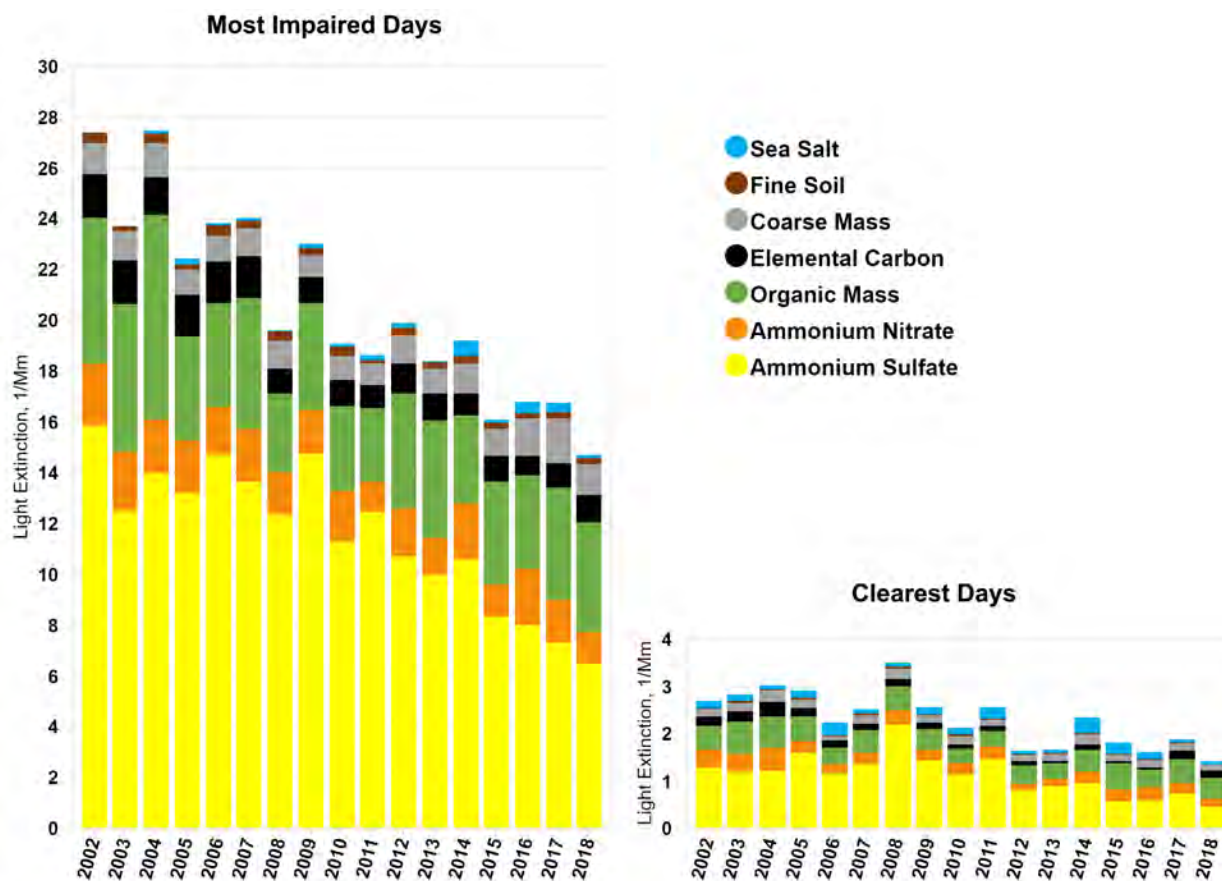


Figure 3–6: Annual species contributions to light extinction for MID and clearest days from 2002 to 2018 at NOCA1.

3.4 Alpine Lakes Wilderness

The SNPA1 monitoring site measures baseline visibility in the Alpine Lakes Wilderness for the MID and clearest days for the years 2001 - 2004. Data for 2013 did not meet the data completeness requirements per the EPA document “Guidance for Tracking Progress under the RHR.” Fourteen days (12% of the total) were missing for all species. WRAP performed data substitutions for 2013 to using the MORA1 IMPROVE site to address data completeness problems, due to the strong sulfate and soil correlation, and reasonable elemental carbon, organic mass, and coarse matter correlation. See Appendix C for additional information on the WRAP data completeness memo.

The baseline visibility for the Alpine Lakes Wilderness is 5.5 dv for the clearest days and 15.4 dv for the MID. The unadjusted URP glidepath goes from 15.4 to 7.3 dv at a rate of 0.14 dv per year (8.1 dv divided by 60 years), which is the rate that would need to be maintained to reach natural visibility conditions in the park by 2064.

The current conditions (2014 – 2018) calculated from the SNPA1 monitoring data are 3.3 dv for the clearest day and 12.7 dv for the MID. The clearest days' visibility improved by 2.2 dv from the baseline. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 2.0 dv. The MID visibility improved by 2.7 dv and is below the unadjusted URP glidepath.

Figure 3–7 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at SNPA1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most recent annual average MID are below the glidepath, which indicates a rate of visibility improvement that will accomplish the 2064 natural conditions goal.

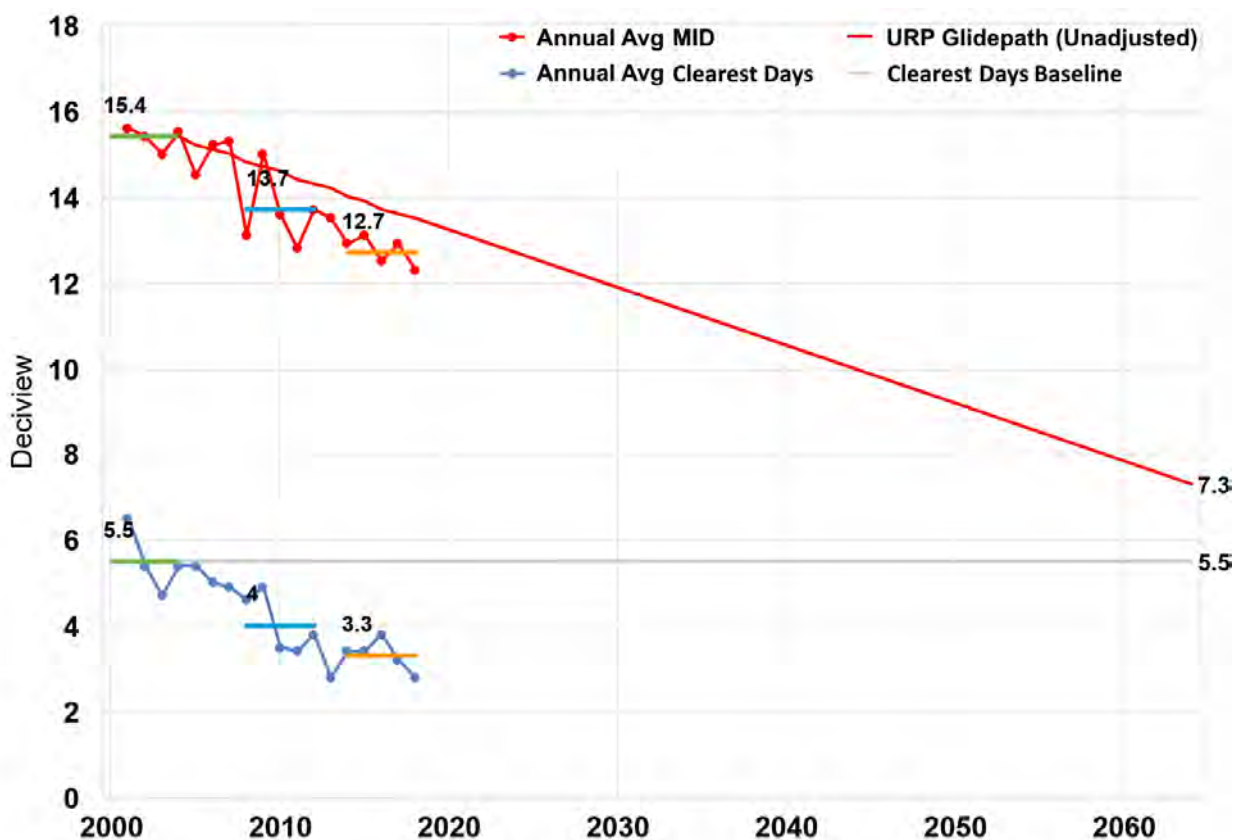


Figure 3–7: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at SNPA1.

Figure 3–8 shows the annual species contributions to light extinction from 2014 - 2018 for both MID and clearest days. Sulfates decreased for MID during the five-year period. Nitrates and organic mass showed some year-to-year variability.

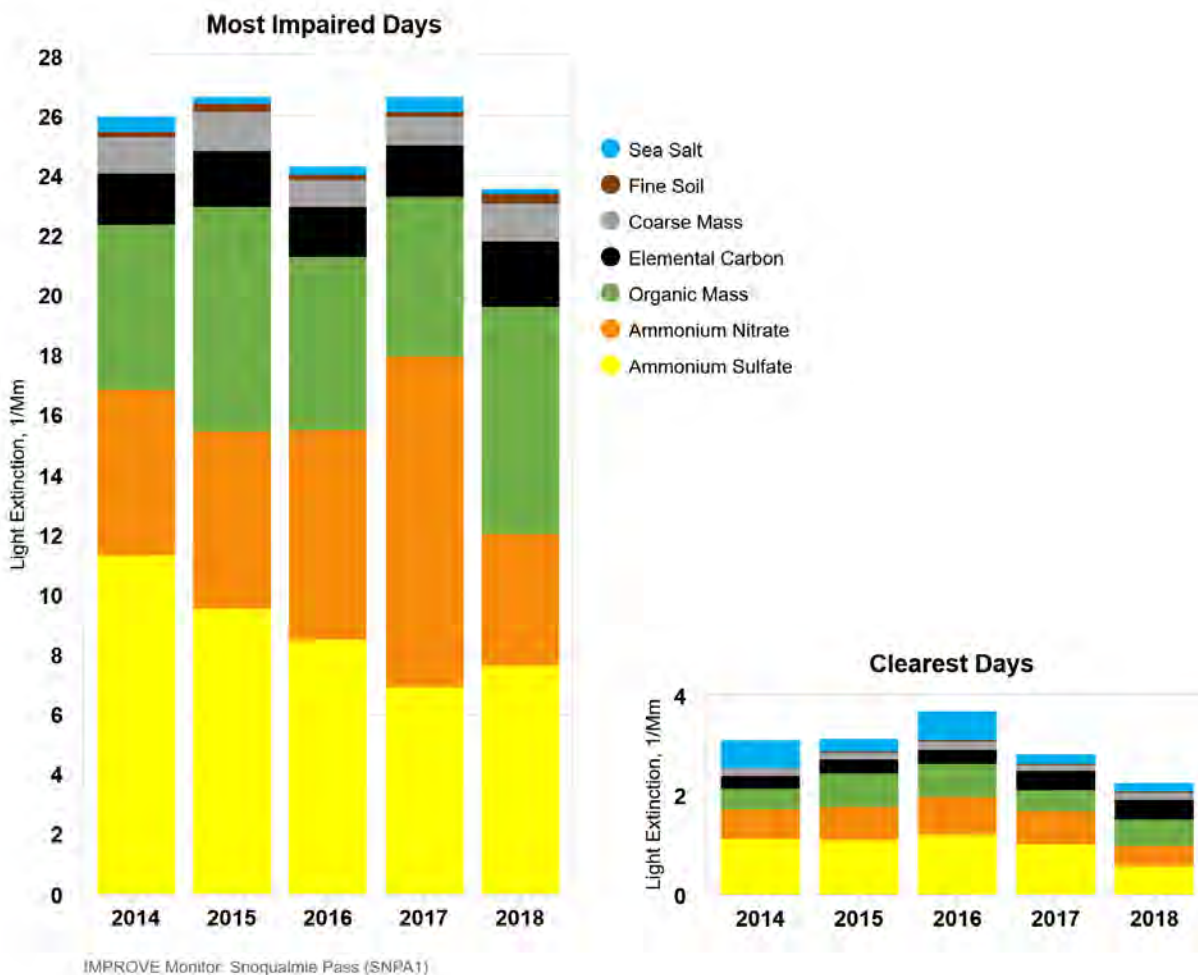


Figure 3–8: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at SNPA1.

Table 3-12 shows the annual species contribution during the five-year period for the MID. Sulfates contributed more than a third of the light extinction on MID from 2014 to 2018. The percentage of nitrates increased in 2017 while the percentage of organic mass increase in 2015 and 2018. During the five-year period, sulfates (35%) were the largest contributor to light extinction, followed by nitrates (26%) and organic mass (25%). Elemental carbon, coarse mass, fine soil, and sea salt had minimal contributions to light extinction.

Table 3-12: Annual species contributions to light extinction for MID from 2014 - 2018 at SNPA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	2%	1%	1%	2%	2%	2%
Fine Soil	1%	1%	1%	1%	1%	1%
Coarse Mass	5%	5%	4%	4%	5%	5%
Elemental Carbon	7%	7%	7%	6%	9%	7%
Organic Mass	21%	28%	24%	20%	32%	25%
Ammonium Nitrate	21%	22%	29%	41%	19%	26%
Ammonium Sulfate	44%	36%	35%	26%	32%	35%

Table 3-13 shows the annual species contributions during the five-year period for the clearest days. Sulfates (33%) contributed the most to light extinction, followed by nitrates (20%), sea salt (19%), organic mass (18%), and elemental carbon (12%).

Table 3-13: Annual species contributions to light extinction for clearest days from 2014 - 2018 at SNPA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	18%	21%	18%	14%	23%	19%
Fine Soil	1%	1%	0%	1%	1%	1%
Coarse Mass	5%	4%	5%	4%	6%	5%
Elemental Carbon	9%	9%	8%	14%	18%	12%
Organic Mass	13%	21%	18%	14%	23%	18%
Ammonium Nitrate	19%	21%	20%	23%	19%	20%
Ammonium Sulfate	36%	35%	33%	37%	26%	33%

Table 3-14 and Table 3-15 show the seasonality of MID from 2014 - 2018. Sulfates contributed nearly half of the light extinction in spring and summer. Nitrates contributed two thirds of the light extinction in winter, but much less for other seasons. Organic mass contributed to nearly a third of light extinction in the summer and fall. The majority of MID occurred in spring, summer, and fall.

Table 3-14: Number of MID at SNPA1, by season, from 2014 - 2018.

Year	Winter	Spring	Summer	Fall
2014	2	8	9	5
2015	0	10	7	6
2016	2	4	10	6
2017	5	3	10	5
2018	1	7	6	9
5-yr Total	10	32	42	31

Table 3-15: Seasonal species contributions to light extinction for MID from 2014 - 2018 at SNPA1.

Species	Winter	Spring	Summer	Fall
Sea Salt	2%	2%	1%	1%
Fine Soil	0%	2%	1%	0%
Coarse Mass	2%	6%	6%	3%
Elemental Carbon	5%	7%	7%	8%
Organic Mass	10%	22%	29%	29%
Ammonium Nitrate	66%	19%	16%	32%
Ammonium Sulfate	16%	44%	40%	27%

Figure 3–9 shows the long-term trends for SNPA1. Sulfates have decreased since the baseline period for MID. Every species decreased since the baseline period for clearest days.

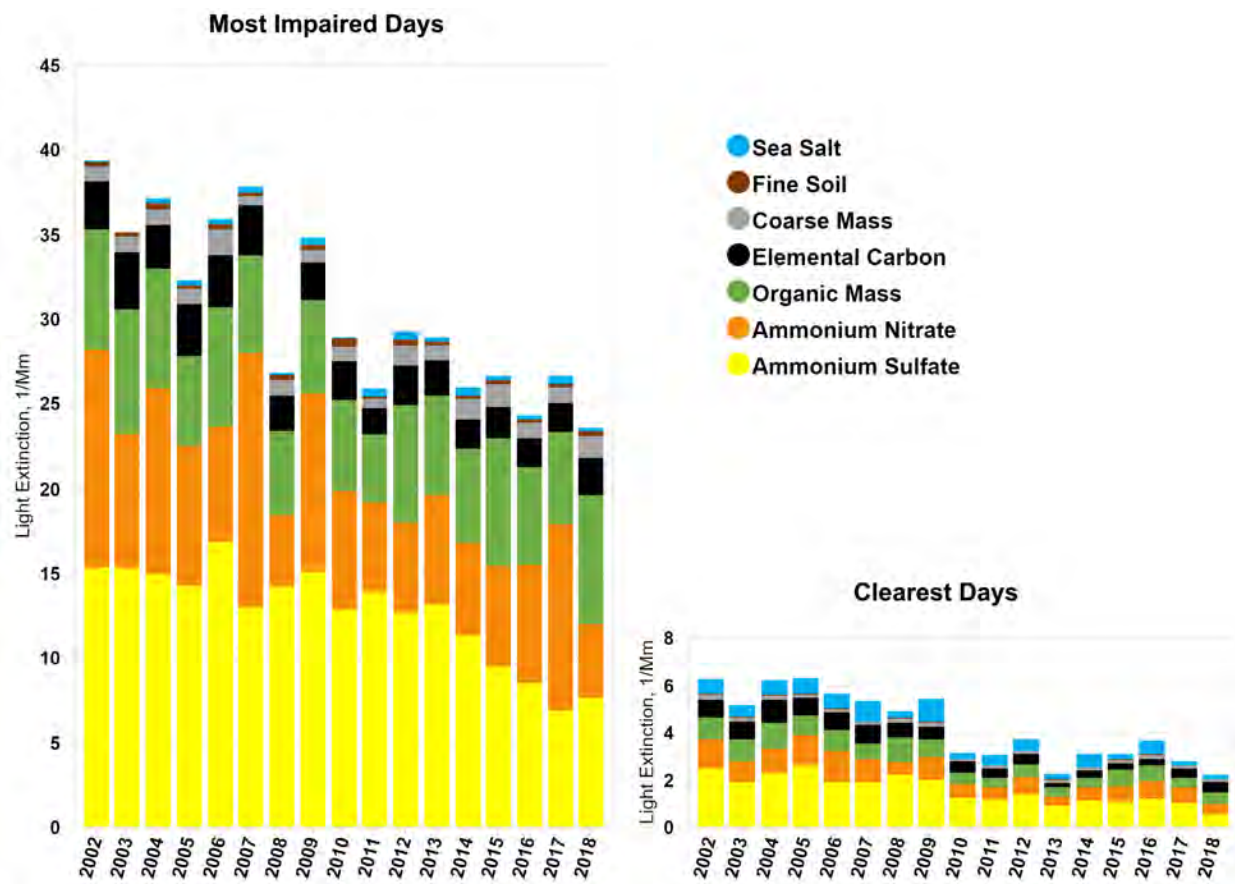


Figure 3–9: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at SNPA1.

3.5 Mount Rainier National Park

The baseline visibility for the Mount Rainier National Park is 5.5 dv for the clearest days and 16.5 dv for the MID. The unadjusted URP glidepath goes from 16.5 to 7.7 dv at a rate of 0.15 dv per year (9.8 dv divided by 60 years), which is the rate that would need to be maintained to reach natural visibility conditions in the park by 2064.

The current conditions (2014 - 2018) calculated from the MORA1 monitoring data are 3.9 dv for the clearest days and 12.7 for the MID. The clearest days' visibility improved by 1.6 dv from the baseline. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 2.1 dv. The MID visibility improved by 3.8 dv and is under the unadjusted URP glidepath.

Figure 3–10 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at MORA1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most

recent annual average MID are below the glidepath, which indicates a rate of visibility improvement that will accomplish the 2064 natural conditions goal.

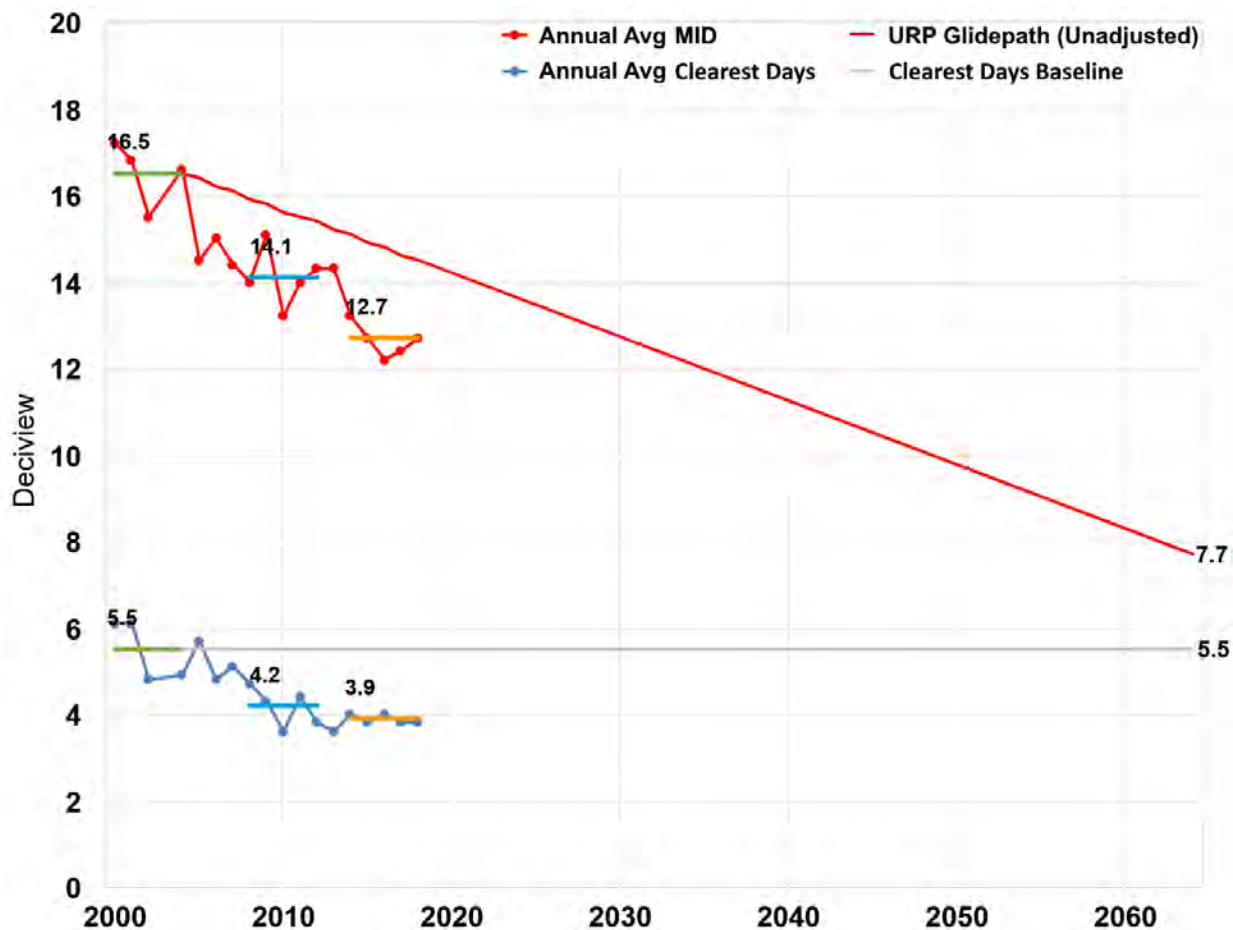


Figure 3-10: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at MORA1.

Figure 3–11 shows the annual species contributions to light extinction from 2014 - 2018 for both MID and clearest days. Sulfates decreased each year for MID. Organic mass increased in 2018 for MID. The clearest days showed very little change for all species.

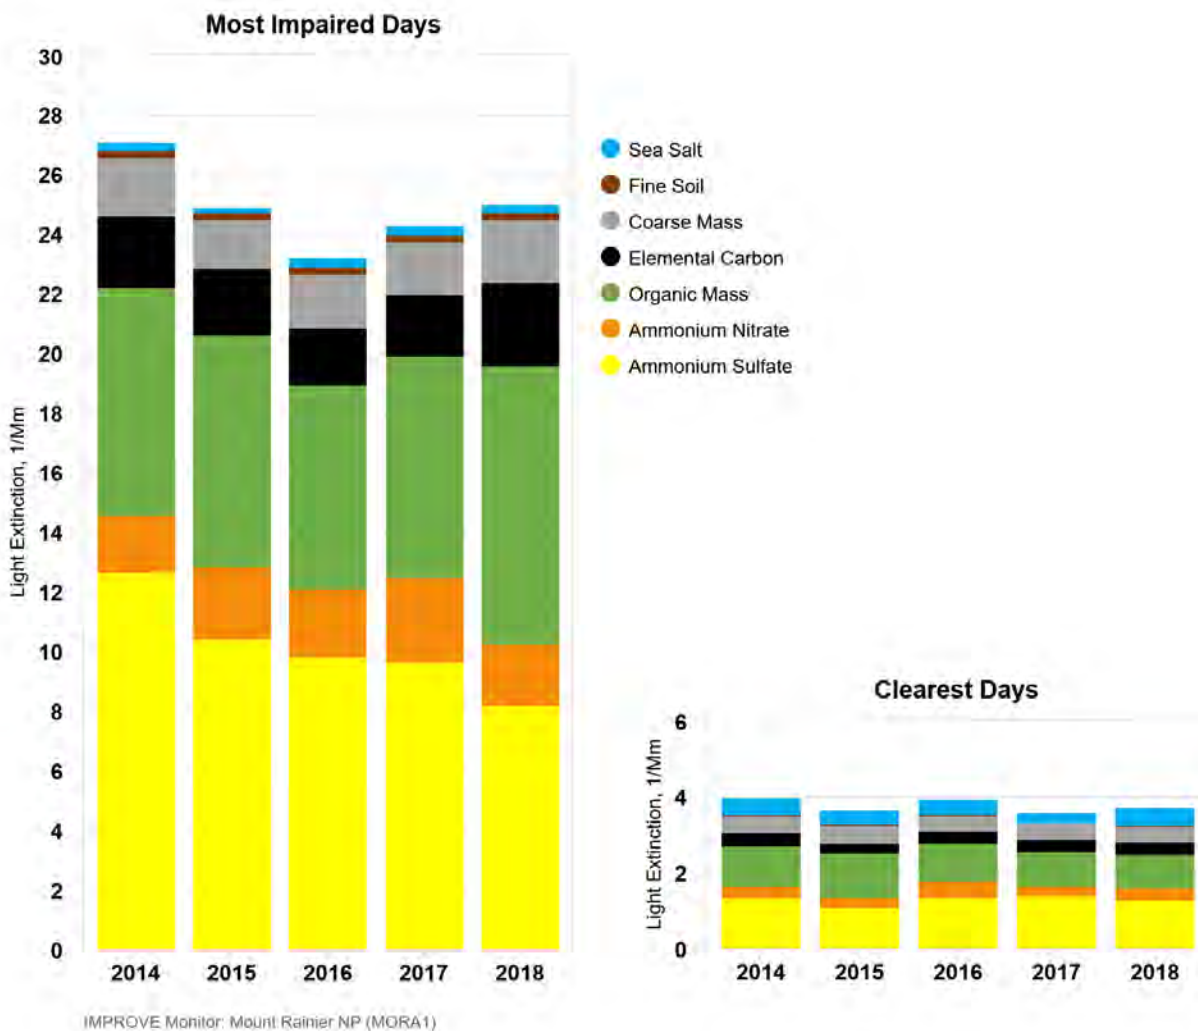


Figure 3–11: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at MORA1.

Table 3-16 shows the annual species contributions during the five-year period for the MID. Sulfates contributed more than a third of the light extinction to MID from 2014 - 2018. Organic mass contributed to nearly a third of the light extinction, but increased in 2018. During the five-year period, sulfates (41%) were the largest contributor to light extinction, followed by organic mass (31%), nitrates (9%), and elemental carbon (9%).

Table 3-16: Annual species contributions to light extinction for MID from 2014 - 2018 at MORA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	1%	0%	1%	1%	1%	1%
Fine Soil	1%	1%	1%	1%	1%	1%
Coarse Mass	7%	7%	8%	7%	8%	7%
Elemental Carbon	9%	9%	8%	8%	11%	9%
Organic Mass	28%	31%	29%	31%	38%	31%
Ammonium Nitrate	7%	10%	10%	12%	8%	9%
Ammonium Sulfate	47%	42%	42%	40%	33%	41%

Table 3-17 shows the annual species contributions during the five-year period for the clearest days. Sulfates (35%) contributed the most to light extinction, following by organic mass (26%), coarse mass (12%), and sea salt (10%).

Table 3-17: Annual species contributions to light extinction for clearest days from 2014 - 2018 at MORA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	11%	10%	11%	7%	13%	10%
Fine Soil	0%	1%	0%	1%	1%	1%
Coarse Mass	11%	13%	11%	12%	11%	12%
Elemental Carbon	10%	7%	8%	9%	9%	9%
Organic Mass	26%	32%	25%	25%	24%	26%
Ammonium Nitrate	8%	7%	11%	7%	9%	8%
Ammonium Sulfate	34%	31%	35%	39%	34%	35%

Table 3-18 and Table 3-19 show the seasonality of MID from 2014 - 2018. Sulfates contributed nearly half of the light extinction in spring and summer. Organic mass contributed more than a third of the light extinction in fall and winter. The majority of MID occurred during the spring and summer, which is also when sulfate and nitrate impacts are highest.

Table 3-18: Number of MID at MORA1, by season, from 2014 - 2018.

Year	Winter	Spring	Summer	Fall
2014	3	3	14	3
2015	3	12	5	3
2016	1	6	12	5
2017	1	3	15	4
2018	1	8	8	7
5-yr Total	9	32	54	22

Table 3-19: Seasonal species contributions to light extinction for MID from 2014 - 2018 at MORA1.

Species	Winter	Spring	Summer	Fall
Sea Salt	1%	1%	1%	1%
Fine Soil	1%	1%	1%	0%
Coarse Mass	3%	7%	8%	8%
Elemental Carbon	19%	8%	8%	12%
Organic Mass	41%	29%	31%	36%
Ammonium Nitrate	6%	10%	9%	7%
Ammonium Sulfate	29%	43%	42%	36%

Figure 3–12 shows the long-term trends for MORA1. Sulfates decreased since the baseline period for both MID and clearest days.

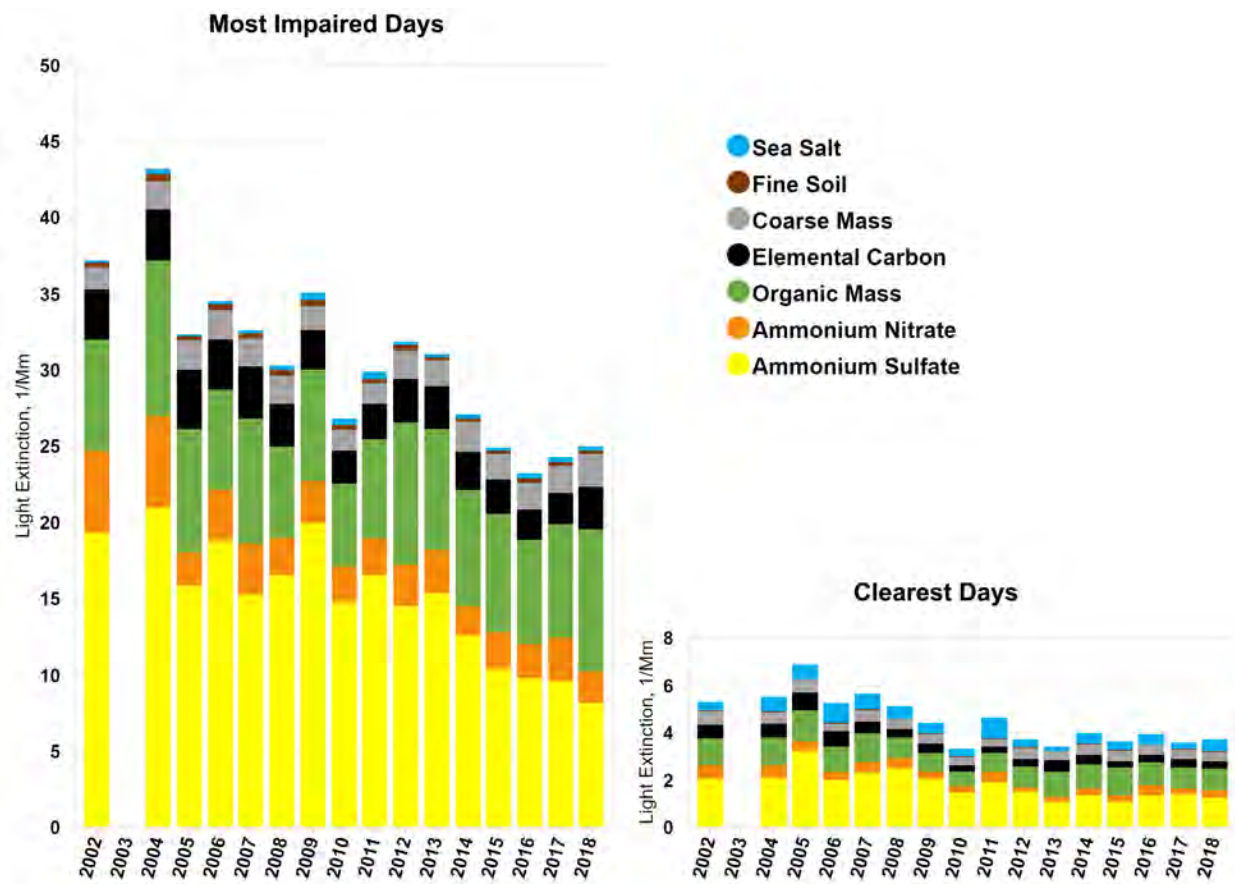


Figure 3–12: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at MORA1.

3.6 Goat Rocks Wilderness and Mount Adams Wilderness

The baseline visibility for the Goat Rocks Wilderness and Mount Adams Wilderness is 1.7 dv for the clearest days and 10.5 dv for the MID. The unadjusted URP glidepath goes from 10.5 to 6.1 dv at a rate of 0.07 dv per year (4.4 dv divided by 60 years), which is the rate that would need to be maintained to reach natural visibility conditions in the park by 2064.

The current conditions (2014 - 2018) calculated from WHPA1 monitoring data are 1.0 dv for the clearest days and 8.0 dv for the MID. The clearest days' visibility improved by 0.7 dv from the baseline. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 1.0 dv. The MID visibility improved by 2.5 dv and is under the unadjusted URP glidepath.

Figure 3–13 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at WHPA1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most recent annual average MID are below the glidepath, which indicates a rate of visibility improvement that will accomplish the 2064 natural conditions goal.

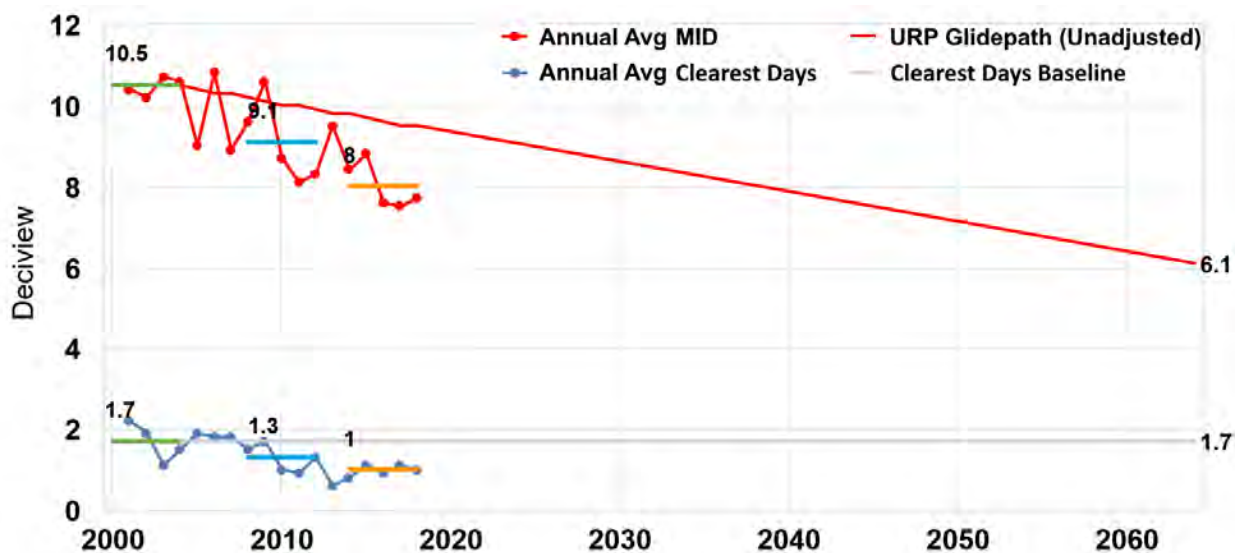


Figure 3–13: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at WHPA1.

Figure 3–14 shows the annual species contributions to light extinction from 2014 - 2018 for both MID and clearest days. Sulfates decreased in 2016 for MID, with the decrease sustained through the rest of the five-year period. Organic mass increased in 2015 and 2018 for MID. All species showed very little change for clearest days.

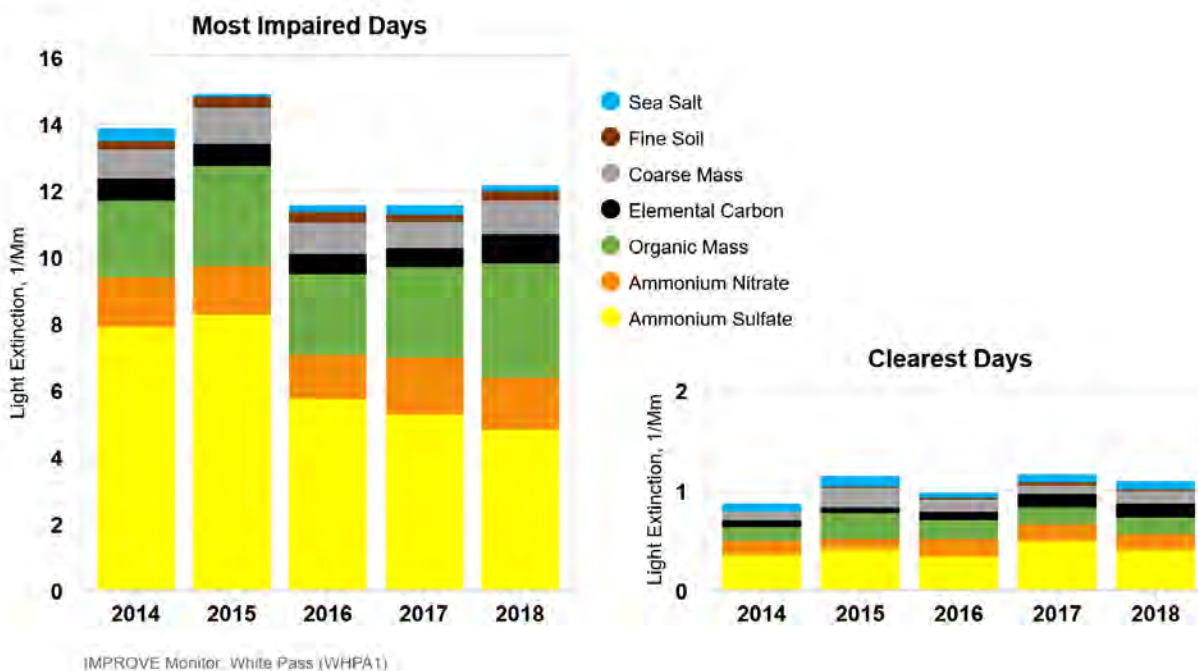


Figure 3–14: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at WHPA1.

Table 3-20 shows the annual species contribution during the five-year period for the MID. Sulfates contributed half of the light extinction to MID from 2014 - 2018. During the five-year period, sulfates (50%) were the largest contributor to light extinction, followed by organic mass (22%) and nitrates (12%). Elemental carbon, coarse mass, fine soil, and sea salt had minimal contributions to light extinction.

Table 3-20: Annual species contributions to light extinction for MID from 2014 - 2018 at WHPA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	3%	1%	2%	2%	2%	2%
Fine Soil	2%	2%	3%	2%	2%	2%
Coarse Mass	6%	7%	8%	7%	8%	7%
Elemental Carbon	5%	4%	5%	5%	7%	5%
Organic Mass	16%	20%	21%	23%	28%	22%
Ammonium Nitrate	11%	10%	11%	15%	13%	12%
Ammonium Sulfate	57%	56%	50%	46%	40%	50%

Table 3-21 shows the annual species contributions during the five-year period for the clearest days. Sulfates (39%) contributed the most to light extinction followed by organic mass (18%), nitrates (14%), and coarse mass (12%).

Table 3-21: Annual species contributions to light extinction for clearest days from 2014 - 2018 at WHPA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	9%	10%	6%	8%	7%	8%
Fine Soil	1%	1%	1%	1%	2%	1%
Coarse Mass	9%	17%	13%	8%	12%	12%
Elemental Carbon	8%	5%	8%	11%	12%	9%
Organic Mass	17%	23%	20%	15%	15%	18%
Ammonium Nitrate	15%	9%	18%	14%	14%	14%
Ammonium Sulfate	42%	36%	35%	43%	38%	39%

Table 3-22 and Table 3-23 show the seasonality of MID from 2014 - 2018. Sulfates contributed most of the visibility impacts in all seasons. Organic mass contributed nearly a third of visibility impacts in the summer, but less for other seasons. The majority of MID occurred during the spring, when nitrate and coarse mass contributions were largest.

Table 3-22: Number of MID at WHPA1, by season, from 2014 - 2018.

Year	Winter	Spring	Summer	Fall
2014	3	11	3	5
2015	3	10	5	3
2016	0	8	8	7
2017	2	8	11	2
2018	3	9	3	8
5-yr Total	11	46	30	25

Table 3-23: Seasonal species contributions to light extinction for MID from 2014 - 2018 at WHPA1.

Species	Winter	Spring	Summer	Fall
Sea Salt	1%	1%	2%	3%
Fine Soil	2%	3%	1%	1%
Coarse Mass	6%	8%	8%	6%
Elemental Carbon	7%	5%	5%	6%
Organic Mass	14%	19%	29%	22%
Ammonium Nitrate	11%	14%	11%	9%
Ammonium Sulfate	60%	49%	45%	54%

Figure 3–15 shows the long-term trends for WHPA1. Sulfates, nitrates, and organic mass decreased since the baseline period for both MID and clearest days.

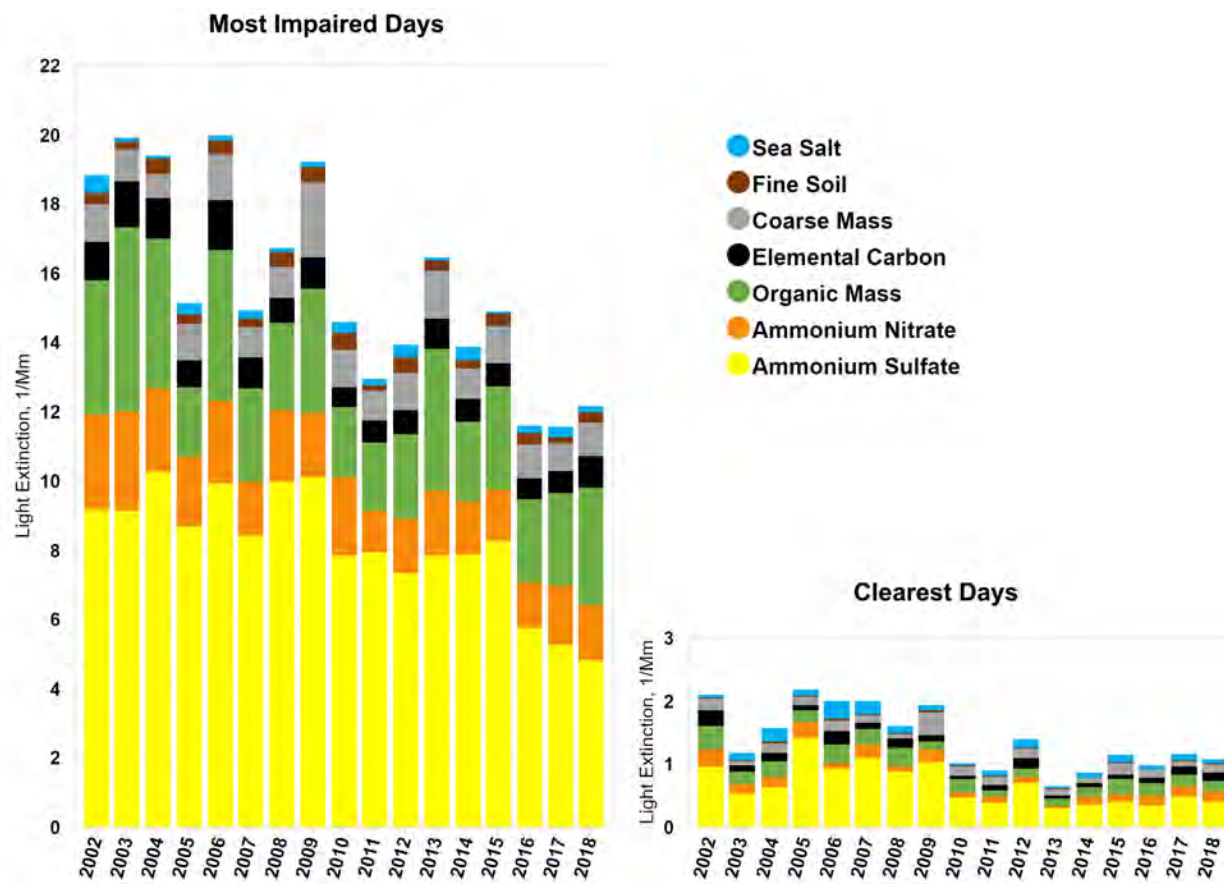


Figure 3–15: Annual species contributions to light extinction for MID and clearest days from 2002 - 2018 at WHPA1.

3.7 Pasayten Wilderness

The baseline visibility for the Pasayten Wilderness is 2.7 dv for the clearest days and 10.4 dv for the MID. Pasayten had the best baseline visibility conditions for the MID of all Washington's Class 1 Areas, and is the second best for the visibility on the clearest days. The unadjusted URP glidepath goes from 10.4 to 6.0 dv at a rate of 0.07 dv per year (4.4 dv divided by 60 years), which is the rate that would need to be maintained to reach natural visibility conditions in the park by 2064.

The current conditions (2014 – 2018) calculated from the PASA1 monitoring data are 1.6 dv for the clearest days and 9.5 dv for the MID. The clearest days' visibility improved by 1.1 dv from the baseline. The amount of visibility improvement from the baseline to 2018 required to stay below the 2018 URP unadjusted glidepath for MID is 1.0 dv. The MID visibility improved by 0.9 dv so the Pasayten's five-year average for MID is slightly above the unadjusted URP glidepath.

Figure 3–16 shows the MID compared to the unadjusted URP glidepath, and the clearest days compared to the baseline at PASA1 for the five-year averages 2000 - 2008, 2008 - 2012, and 2014 - 2018; and the annual averages for the MID and clearest days since 2002. The most recent annual average MID are above the glidepath. Note that some days included in the MID were influenced wildfire smoke. Ecology estimated that in Pasayten from 2014-2018, seven percent of the haziest days were influenced by wildfire, with considerable year-to-year variability. Thus, the removal of five percent of the haziest days as allowed by the RHR was insufficient to remove natural events such as wildfire from the MID. After the proposed endpoint adjustment for international emissions in **Chapter 9**, as allowed by the RHR, the most recent MID are below the adjusted glidepath, which indicates a rate of visibility improvement that will accomplish the adjusted 2064 natural conditions goal.

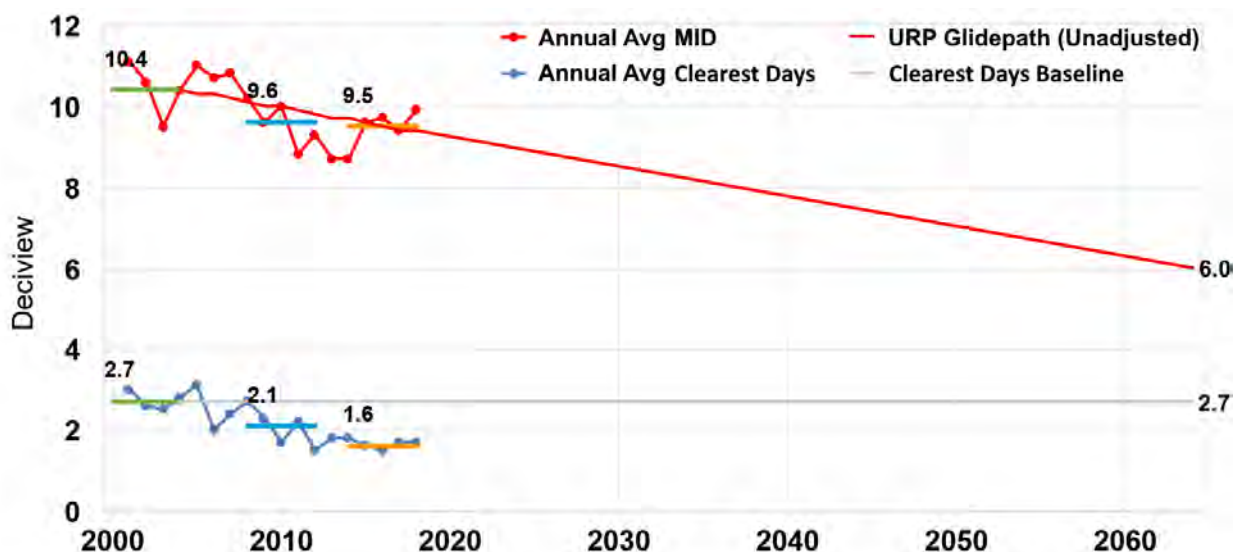


Figure 3–16: Current visibility conditions compared to the unadjusted URP glidepath and baseline (clearest days) at PASA1.

Figure 3–17 shows the annual species contributions to light extinction from 2014 - 2018 for both MID and clearest days. Sulfates decreased over the five-year period for MID and clearest days. Organic mass increased and nitrate showed year-to-year variability for MID. All species showed very little change for clearest days.

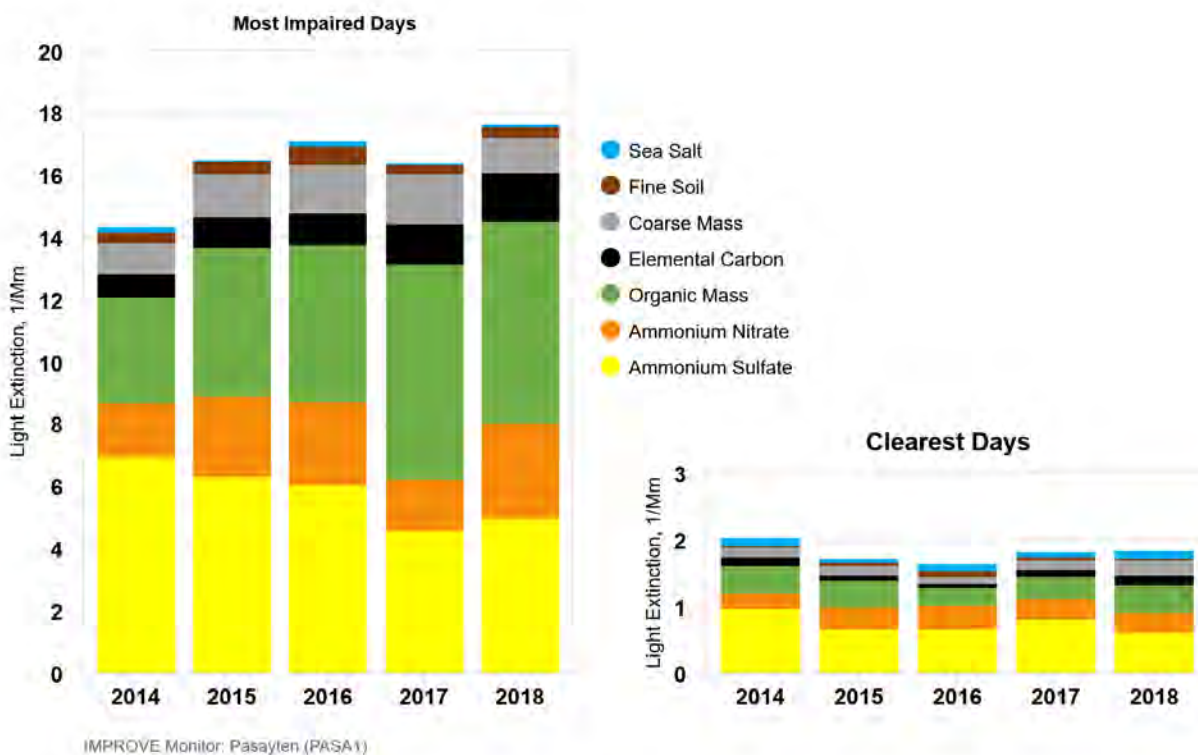


Figure 3–17: Annual species contributions to light extinction for MID and clearest days from 2014 - 2018 at PASA1.

Table 3-24 shows the annual species contributions during the five-year period for the MID. Sulfates and organic mass each contributed one third of the light extinction to MID from 2014 - 2018. Organic mass increased in 2017 and 2018. During the five-year period, contributions to light extinction were largest from sulfates (35%), organic mass (32%), and nitrates (14%). Elemental carbon, coarse mass, fine soil, and sea salt had minimal contributions to light extinction.

Table 3-24: Annual species contributions to light extinction for MID from 2014 - 2018 at PASA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	1%	1%	1%	0%	0%	1%
Fine Soil	2%	2%	3%	2%	2%	2%
Coarse Mass	7%	8%	9%	10%	6%	8%
Elemental Carbon	5%	6%	6%	8%	9%	7%
Organic Mass	24%	29%	30%	42%	37%	32%
Ammonium Nitrate	12%	16%	16%	10%	17%	14%
Ammonium Sulfate	48%	38%	35%	28%	28%	35%

Table 3-25 shows the annual species contributions during the five-year period for the clearest days. Sulfates (41%) contributed the most to light extinction followed by organic mass (20%) and nitrates (17%).

Table 3-25: Annual species contributions to light extinction for clearest days from 2014 - 2018 at PASA1.

Species	2014	2015	2016	2017	2018	Average
Sea Salt	5%	4%	4%	4%	6%	5%
Fine Soil	1%	2%	6%	2%	2%	3%
Coarse Mass	7%	9%	7%	8%	12%	9%
Elemental Carbon	6%	5%	4%	6%	8%	6%
Organic Mass	20%	23%	16%	18%	22%	20%
Ammonium Nitrate	12%	18%	22%	17%	15%	17%
Ammonium Sulfate	48%	39%	41%	45%	34%	41%

Table 3-26 and Table 3-27 show the seasonality of MID from 2014 - 2018. Sulfates contributed nearly half the visibility impacts in winter and spring. Organic mass contributed more than a third of visibility impacts in summer and fall. The majority of MID occurred in the fall and spring, but summer MID increased in 2017 due to the large wildfire season in the Pacific Northwest. Six of the seven summer MID in 2017 were during regional wildfire events (Dates: July 12, 2017; July 15, 2017; July 24, 2017; August 14, 2017; August 17, 2017; September 19, 2017). Eleven regional wildfire days were included in the MID for PASA during the five-year period, suggesting that the standard threshold to remove wildfire impacts from MID (top 5% of large organic mass days) was insufficient.

Table 3-26: Number of MID at PASA1, by season, from 2014 to 2018.

Year	Winter	Spring	Summer	Fall
2014	4	11	0	8
2015	1	8	3	9
2016	0	9	4	11
2017	1	7	7	8
2018	2	8	2	12
5-yr Total	8	43	16	48

Table 3-27: Seasonal species contributions to light extinction for MID from 2014 to 2018 at PASA1.

Species	Winter	Spring	Summer	Fall
Sea Salt	0%	0%	1%	1%
Fine Soil	1%	4%	3%	1%
Coarse Mass	3%	11%	13%	5%
Elemental Carbon	6%	5%	6%	8%
Organic Mass	16%	25%	43%	37%
Ammonium Nitrate	24%	10%	5%	19%
Ammonium Sulfate	49%	44%	29%	28%

Figure 3–18 shows the long-term trends for PASA1. Sulfates decreased since the baseline period for both MID and clearest days. Organic mass and nitrates showed some year-to-year variability for MID.

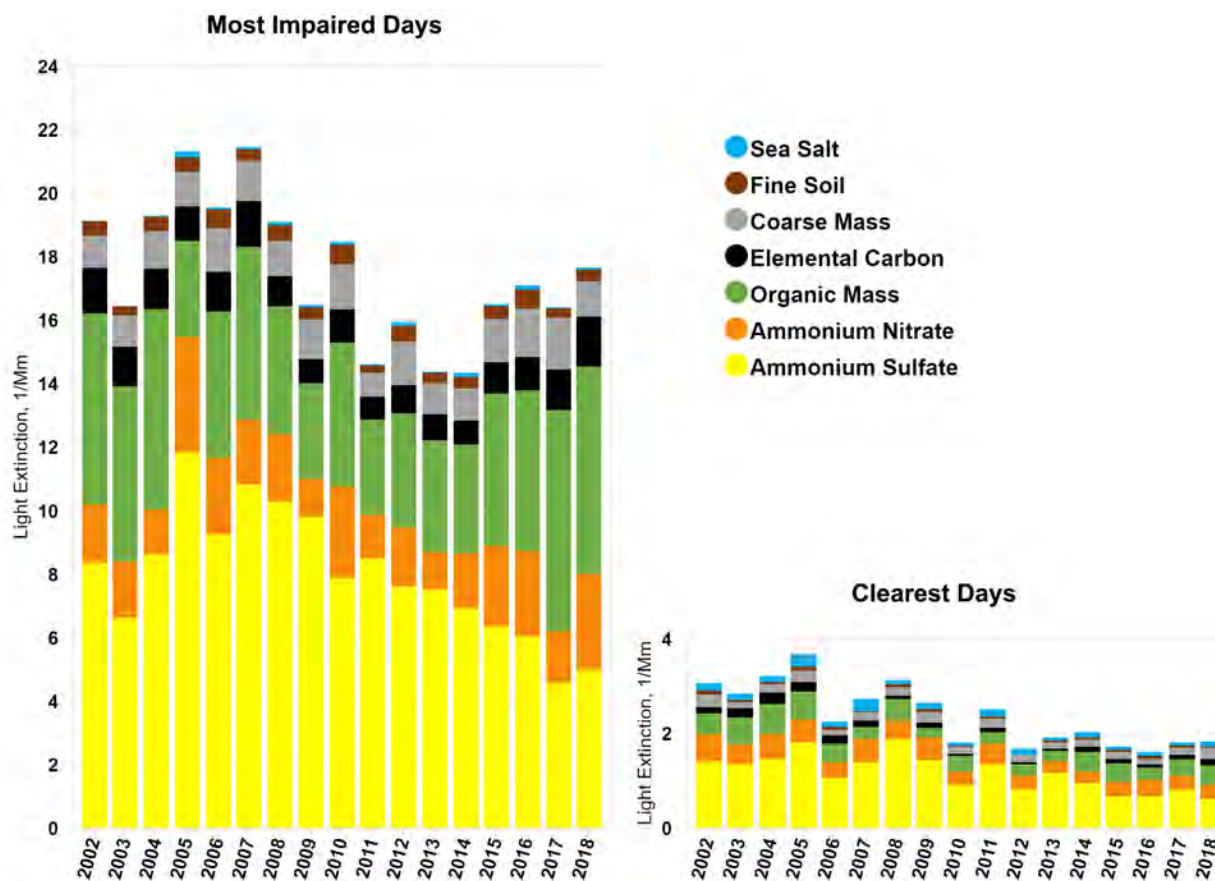


Figure 3–18: Annual species contributions to light extinction for MID and clearest days from 2002 to 2018 at PASA1.

3.8 Summary

All of Washington’s Class 1 Areas have shown improvements in visibility on the MID since the baseline and since the first implementation period. The visibility also has not degraded on the clearest days. Sulfates, nitrates and organic mass are the largest contributors to regional haze, with organic mass showing variability from year-to-year. All the Class 1 Areas are also below the unadjusted glidepath for this implementation period except the current five-year MID average for the Pasayten Wilderness, although it has some of the best visibility in the state. The Pasayten’s five-year average is slightly above the unadjusted glidepath due to effects of wildfire where the removal of five percent of the haziest days was insufficient to compensate for the effects of fire. The area also borders Canada and receives the most international contributions. In subsequent chapters, we propose adjusting the endpoint of the URP glidepath to account for the impact from international emissions. The Pasayten’s 5-year MID average is below the URP glidepath when adjusted for international contributions.

Chapter 4. Emissions Inventory

This chapter summarizes emissions from sources located in Washington that could be affecting visibility in mandatory class 1 Federal areas (Class 1 Areas) in Washington and other states. The Regional Haze Rule (RHR) (40 CFR 51.308 (f)(6)(v)) requires a statewide emissions inventory (EI) of pollutants that we reasonably anticipate to cause or contribute to visibility impairment in any Class 1 Areas. This chapter describes the EI development process, the various EI scenarios developed for regional haze (RH) modeling, a summary of the emissions from each anthropogenic source category, and changes in emissions at facilities selected for a four-factor analysis (FFA).

4.1 Emissions inventory development

The emissions summaries presented in this chapter play an important role in the identification and evaluation of sources that we reasonably expect to influence visibility. An accurate EI helps prioritize emission reduction efforts and helps ensure that model predictions of 2028 visibility impairment are reasonable. The year 2028 represents the second milestone date for demonstrating reasonable progress toward the national visibility goal.

State, local, and tribal air pollution control programs regularly collect and report EI data to EPA. EPA publishes a national emissions inventory (NEI) every three years, which includes all sources of air pollution. Reviewing EI summaries, identifying issues, and correcting errors is an important process that provides a better understanding of emissions sources that could be contributing to visibility impairment.

Western Regional Air Partnership (WRAP) workgroups compiled EI data for use in WRAP modeling and individual state analyses. EI summaries are available from the [WRAP Technical Support System \(TSS\) website](#)⁵. The TSS website also provides references that describe the methods used for RH SIP EI development.

The EPA NEI is the cornerstone of regional haze state implementation plan (RH SIP) EI development. WRAP developed the EI data for RH modeling in collaboration with state, local, and tribal air pollution control programs and EPA, using the 2014 NEI as the starting point. WRAP made several improvements to the 2014 NEI using corrections submitted by the regulatory agencies and updates from the EPA 2016 modeling platform. EPA subsequently released the 2017 NEI in 2020, summarized in this chapter for reference.

4.2 Emissions inventory scenarios

The WRAP focused on EI development for three scenarios: 2014 Actual, Representative Baseline (RepBase), and 2028 On-the-Books (OTB):

- The 2014 Actual EI is a quality-controlled dataset, including state corrections to the 2014 NEI point and nonpoint sources. The purpose of the 2014 Actual EI is to represent the

⁵ <http://views.cira.colostate.edu/tssv2/>

actual emissions of pollutants causing or contributing to visibility impairment during calendar year 2014. The WRAP considers the 2014 Actual EI to be the best available estimates of 2014 emissions for all states in the WRAP. The WRAP used the 2014 Actual EI as the basis to model visibility for the calendar year 2014 and to evaluate model performance.

- The RepBase EI is the modeling baseline used for comparison to future projections. The WRAP designed the Rep Base EI to be the best available data representative of the 2014-2018 five-year period. Ecology used the 2014 Actual EI to develop the RepBase EI with the following updates: states and WRAP workgroups submitted point source emissions, WRAP workgroups developed a representative fire EI, and used the EPA 2016 modeling platform for nonroad emissions. Industrial pulp and paper mill emissions in Washington used the 2017 values for the RepBase EI.
- The 2028 OTB EI is a projected inventory to evaluate reasonable progress toward achieving the national visibility goal. This EI uses the 2016 modeling platform projections for 2028 and emissions submitted by state, local, and tribal air pollution control programs and WRAP workgroups. It includes additional controls or plant closures, which have a planned completion prior to 2028.

The WRAP estimated emissions for the year 2028 by including “On-the-Books” (that is, adopted or soon to be adopted) controls, regulations, and major facility changes. The OTB EI also includes changes to mobile (on-road and non-road) sources as represented in the EPA 2016 modeling platform projections of 2028 emissions. EPA based 2028 mobile source emissions on known fuel standards and projections of population and mobile fleet make-up.

The documentation section of the webpage entitled “Inventory Collaborative 2016v1 Emissions Modeling Platform”⁶ (WRAP) cites the methods for projecting mobile source emissions. In summary:

- EPA projected the Commercial Marine Vessel (CMV) (C1 & C2) emissions from 2016 to 2028 using factors derived from the Regulatory Impact Analysis (RIA) *Control of Emissions of Air Pollution from Locomotive Engines and Marine Compression Ignition Engines Less than 30 Liters per Cylinder (73 FR 37095)*.
- EPA developed growth rates for CMV (C3) emissions from 2016 to 2028 using an EPA report on projected bunker fuel demand. The EPA used bunker fuel usage as a surrogate for marine vessel activity.
- EPA estimated locomotive fuel use for 2028 based on the 2018 Annual Energy Outlook (U.S. Energy Information Administration) freight rail energy use growth rate projections for 2016 through 2028.
- EPA used the Motor Vehicle Emissions Simulator (MOVES) model for other non-road sources and for on-road sources, run specifically for 2028.
- EPA reduced medium and heavy-duty truck energy rates for 2014 and later model-year vehicles to account for the Phase 1 of the Greenhouse Gas Emissions Standards and Fuel

⁶ <http://views.cira.colostate.edu/wiki/wiki/10202>

Efficiency Standards for Medium-and Heavy-Duty Engines and Vehicles. (U.S. EPA and NHTSA, 2012).

- Reductions of the Light-duty energy rates for 2017 and later model years vehicles to account for the Light-duty EPA and NHTSA greenhouse gas and fuel economy standards. (U.S. EPA & NHTSA, 2011).

4.3 Emissions inventory comparison

We analyzed anthropogenic EI data for the following visibility-impairing pollutants: sulfur dioxide (SO₂), nitrogen oxides (NO_x), volatile organic compounds (VOC), particulate matter (PM_{2.5} and PM₁₀), and ammonia (NH₃). The emissions tables in this section show the primary source categories for each visibility impairing pollutant. The primary emissions source categories vary by the type of pollutant. Using the following groups, we calculated the summaries for anthropogenic sources:

- Point Sources
 - Electric Generating Units (EGU)
 - Non-EGU
- On-road Mobile
- Non-road
 - Commercial Marine Vessel (CMV)
 - Rail
 - Other Non-road (vehicles and equipment)
- Non-point
 - Home heating (wood)
 - Agriculture and fugitive dust (from livestock, tilling, roads, construction)
 - Other non-point
- Fire Events
 - Prescribed fire
 - Agricultural fire

The EI data had two general issues identified:

- Prescribed fire calculations in the modeled scenarios (2014 Actual, RepBase, and 2028 OTB) used EPA methodology. This method is problematic for Washington because most accomplished prescribed burning is as pile burns, which the EPA methodology does not consider. The 2017 NEI prescribed fire emissions are based on our permitted tons burned and appropriate corresponding emission factors, which represents Ecology's best estimate of the category.
- Some non-point emissions in the modeled scenarios (2014 Actual, RepBase, and 2028 OTB) used methodology that Ecology has since revised. Non-point calculations in the 2017 NEI use updated methodology and represent Ecology's best estimate of the category.

Despite the known issues with the EI comparison, the RepBase is comparable to the 2028 OTB in a relative sense for projecting future visibility. However, when attempting to discern the best actual estimate of recent emissions, the 2017 NEI value is the best reference.

SO₂ emissions

Gaseous SO₂ emissions convert to sulfate particles, generally ammonium sulfate, in the atmosphere. Ammonium sulfate particles grow rapidly in size in the presence of water through water absorption and change from solid particles to solution droplets. The size of ammonium sulfate at high relative humidity (>70%) makes it disproportionately responsible for visibility impairment compared to inorganic salts that do not take up water molecules.

SO₂ emissions in Washington come primarily from point sources, including a coal-fired power plant, oil refineries, primary aluminum plants, pulp and paper mills, and a cement plant. Ecology expects a large reduction in SO₂ emissions by 2028 because TransAlta will cease coal-fired power production by the end of 2025, with one boiler shut down at the end of 2020. CMV was a large source of SO₂ but recent adoption of low-sulfur fuels and port electrification efforts have reduced emissions, as represented in the 2017 NEI.

Table 4-1: Washington state anthropogenic SO₂ emissions (in tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	3,229	1,588	2,134	62
Non-EGU Point	11,577	12,503	8,060	12,528
On-Road Mobile	552	552	410	241
CMV	10,232	374	478	516
Rail	10	10	11	10
Other Non-Road	52	50	47	34
Home Heating (Wood)	229	229	225	229
Agriculture and Dust				
Other Non-Point	2,042	2,042	1,097	2,042
Prescribed Fire	997	1,611	18	1,611
Agricultural Fire	111	111	152	111
Total (tons/year)	29,031	19,070	12,632	17,384

NO_x emissions

The burning of any material or fuel can generate NO_x (NO + NO₂) emissions because atmospheric oxygen and nitrogen chemically react at temperatures found in combustion. NO_x reacts in the atmosphere to form nitrate particles such as Ammonium Nitrate (NO₃). Like Ammonium Sulfate ((NH₄)₂SO₄), NO₃ particles grow rapidly in the presence of water to reach a size that is disproportionately responsible for visibility impairment.

NO_x emissions come predominantly from on-road mobile sources. Ecology expects those vehicular emissions to continue decreasing through 2028 due to new fuel efficiency standards and the transition to cleaner-burning (and electric) vehicles. We also expect total NO_x

emissions from non-road mobile sources to decrease. Another sizable reduction in NO_x will occur when coal-fired power production ceases at TransAlta. Overall, Ecology expects NO_x emissions in Washington to decline by more than 40 percent by 2028, primarily due to significant improvements in on-road and non-road mobile source emissions.

Table 4-2: Washington state anthropogenic NO_x emissions (in tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	10,023	8,482	10,196	2,250
Non-EGU Point	20,687	21,948	20,567	21,439
On-Road Mobile	130,500	130,500	89,319	34,366
CMV	16,767	19,062	23,458	17,652
Rail	15,202	15,202	14,258	11,631
Other Non-Road	28,398	24,509	23,200	13,886
Home Heating (Wood)	1,530	1,530	1,381	1,530
Agriculture and Dust				
Other Non-Point	12,050	12,050	10,455	12,050
Prescribed Fire	1,662	1,614	717	1,614
Agricultural Fire	479	479	1,063	479
Total (tons/year)	237,298	235,376	194,614	116,897

VOC emissions

VOCs emitted into the atmosphere can condense and oxidize to form secondary organic aerosols, which can degrade visibility. VOCs also play a role in the photochemical production of ozone in the troposphere. The dominant source of VOCs is biogenic emissions, which comprise more than half of the total Washington VOC emissions. Forests and other vegetation emit these natural emissions. VOCs react with NO_x to produce nitrated organic particles that impact visibility in the same series of chemical events that lead to ozone. Thus, strategies to reduce ozone in the atmosphere often lead to visibility improvements. However, since natural biogenic VOCs are a dominant source, it is difficult to get visibility improvements by controlling VOCs from anthropogenic sources.

The largest sources of anthropogenic VOC emissions include on-road mobile sources and solvent use (included in the “other non-point” category). Population growth primarily drives significant VOC increases in the “other non-point” category for 2028. However, Ecology expects VOC reductions from mobile sources in the 2028 inventory to more than offset any increases due to population growth.

Table 4-3: Washington state anthropogenic VOC emissions (in tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	114	65	285	36
Non-EGU Point	11,764	11,291	10,118	11,299
On-Road Mobile	71,971	71,971	59,158	26,295
CMV	596	1,073	1,173	1,252
Rail	744	716	611	494
Other Non-Road	36,508	25,629	24,166	19,189
Home Heating (Wood)	15,448	17,371	13,803	17,370
Agriculture and Dust	2,236	2,236	1,635	2,236
Other Non-Point	86,545	86,545	97,490	86,545
Prescribed Fire	29,998	72,388	3,406	72,388
Agricultural Fire	748	747	2,369	747
Total (tons/year)	256,672	290,032	214,214	237,851

PM_{2.5} emissions

PM_{2.5} in the EI includes primary emissions of particulate matter less than 2.5 microns in size, and is synonymous with smoke and fine aerosols. Depending on the year, wildfires generate the majority of PM_{2.5} emissions in Washington. The primary anthropogenic sources are non-point, including fugitive dust (agriculture, construction, and roads) and residential wood combustion. Ecology expects modest PM_{2.5} reductions from the on-road and non-road sectors as they use technology that is more efficient. However, there are large uncertainties when projecting categories like fugitive dust, prescribed burning, and wildfires.

Table 4-4: Washington state anthropogenic PM_{2.5} emissions (in tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	402	537	671	315
Non-EGU Point	4,007	4,040	2,978	4,057
On-Road Mobile	3,808	3,808	2,573	1,484
CMV	651	396	464	443
Rail	389	389	356	298
Other Non-Road	2,824	2,332	2,217	1,316
Home Heating (Wood)	12,371	12,371	10,614	12,371
Agriculture and Dust	18,304	18,304	29,822	18,304
Other Non-Point	12,932	12,932	6,383	12,932
Prescribed Fire	12,337	21,860	2,420	21,860
Agricultural Fire	1,895	1,894	2,703	1,894
Total (tons/year)	69,920	78,863	61,200	75,274

PM₁₀ emissions

PM₁₀ in the EI includes primary emissions of particulate matter less than 10 microns in size, representing the sum of coarse and fine particles. The primary anthropogenic source is fugitive dust (agriculture, construction, and roads), but fire categories do have significant influence on state totals. Small non-point category increases, which are sensitive to population growth, match the small reductions expected from the on-road and non-road sectors.

Table 4-5: Washington state anthropogenic PM₁₀ emissions (tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	427	586	914	334
Non-EGU Point	4,576	4,594	3,446	4,613
On-Road Mobile	6,913	6,913	5,219	5,029
CMV	819	418	490	469
Rail	404	404	367	307
Other Non-Road	2,973	2,451	2,331	1,402
Home Heating (Wood)	12,377	12,377	10,622	12,377
Agriculture and Dust ⁷	237,282	237,282	183,637	237,282
Other Non-Point	14,854	14,854	7,505	14,854
Prescribed Fire	14,557	24,800	2,778	24,800
Agricultural Fire	2,718	2,717	2,769	2,717
Total (tons/year)	297,900	307,396	220,078	304,184

⁷ The TSS data from this row showed dust emissions after meteorological adjustment. We replaced those values with the unadjusted numbers so that they are directly comparable to the 2017 NEI values.

Ammonia emissions

Agricultural related activities such as livestock operations and farming fertilizer applications are the primary sources of NH₃. NH₃ emissions can react with SO₂ and NO_x to form sulfate and nitrate particles, which are significant contributors to visibility impairment. Washington has a strong agricultural community that will continue operating indefinitely. We expect no changes to agricultural practices that will decrease ammonia emissions.

Table 4-6: Washington state anthropogenic ammonia emissions (tons/year)

Source Category	2014 Actual	Rep Baseline	2017 NEI	2028 OTB
EGU Point	69	88	106	86
Non-EGU Point	436	449	388	449
On-Road Mobile	2,356	2,356	2,206	1,744
CMV	8	8	9	9
Rail	9	9	9	9
Other Non-Road	48	40	40	45
Home Heating (Wood)	735	735	656	735
Agriculture and Dust	27,538	27,538	34,570	27,538
Other Non-Point	1,562	1,562	1,252	1,562
Prescribed Fire	2,394	3,602	2,244	3,602
Agricultural Fire	1,952	1,950	6,164	1,950
Total	37,107	38,337	47,644	37,729

4.4 Facilities selected for Four-Factor Analysis (FFA)

This section provides emissions from major point sources identified for FFA. Ecology selected seventeen facilities for additional evaluation, spanning six categories:

- Aluminum Production
- Cement Manufacturing
- Glass Manufacturing
- Electric Power Generation
- Paper Manufacturing
- Petroleum Refineries

Table 4-7: Information for facilities selected for FFA

Category	Current Facility Name	FIPS	Site Code
Aluminum Production	Alcoa Primary Metals Intalco Works	53073	0001
Aluminum Production	Alcoa Wenatchee, LLC	53007	0001
Cement Manufacturing	Ash Grove Cement Company	53033	11339
Flat Glass Manufacturing	Cardinal FG Winlock	53041	2175
Electric Power Generation	TransAlta Centralia Generation, LLC	53041	754
Paper Manufacturing	Boise Paper	53071	0003
Paper Manufacturing	COSMO Specialty Fibers, Inc.	53027	0001
Paper Manufacturing	Georgia-Pacific Consumer Operations, LLC	53011	0005
Paper Manufacturing	Longview Fibre Paper and Packaging, Inc.	53015	0002
Paper Manufacturing	Nippon Dynawave Packaging Co.	53015	0003
Paper Manufacturing	Port Townsend Paper	53031	0001
Paper Manufacturing	WestRock Tacoma Mill	53053	0008
Petroleum Refineries	BP Cherry Point Refinery	53073	10007
Petroleum Refineries	Phillips 66 Ferndale Refinery	53073	00005
Petroleum Refineries	Shell Puget Sound Refinery	53057	00003
Petroleum Refineries	Tesoro Northwest Company	53057	00005
Petroleum Refineries	US Oil & Refining Co.	53053	12593

Aluminum production facilities

Alcoa has two aluminum smelters in Washington State under Ecology's Industrial Section jurisdiction: Intalco in Ferndale (Whatcom County) and Wenatchee Works (Chelan County). Alcoa curtailed the Wenatchee facility in 2015 and the Ferndale facility in 2020. Both facilities have a very large potential to emit SO₂, and would contribute to regional haze if Alcoa re-started aluminum production operations. Ecology held facility emissions constant at 2014 Actual levels for the RepBase and 2028 OTB scenarios.

Cement manufacturing

The Ash Grove Cement Company (King County; Puget Sound Clean Air Agency jurisdiction) is one of the largest NO_x point sources in the state, emitting over 1,000 tons of NO_x per year. Ecology held facility emissions constant at 2014 Actual levels for the RepBase and 2028 OTB scenarios.

Flat glass manufacturing

The Cardinal FG Winlock (Lewis County; SWCAA jurisdiction) glass manufacturing facility is one of the largest NO_x point sources in the state, emitting over 800 tons per year. Facility emissions were set to 2014 Actual levels for the RepBase and the 2028 OTB scenario assumed reductions from a selective catalytic reduction control with ammonia injection, which will be installed in 2021.

Electric power generation

The TransAlta Centralia coal-powered EGU (Lewis County; SWCAA jurisdiction) has historically been one of the largest sources of NO_x and SO₂ in the state, currently emitting over 5,000 tons of NO_x and 1,500 tons of SO₂ per year. The facility will cease coal-fired energy production before 2028; one unit ceased coal-fired operation in 2020 and the other in 2025 with additional NO_x reductions until then. Ecology set facility emissions to 2014 Actual levels for the RepBase and to zero for the 2028 OTB scenario.

Paper manufacturing

Seven paper-manufacturing facilities in the state collectively emit over 6,000 tons of NO_x, 1,500 tons of SO₂, and 1,300 tons of PM₁₀ per year. Facility emissions were set to 2017 NEI levels for the RepBase and 2028 OTB scenarios.

Petroleum refineries

Five petroleum refineries in the state collectively emit over 5,500 tons of NO_x and 1,000 tons of SO₂ per year. Ecology held facility emissions constant at 2014 Actual levels for the RepBase and 2028 OTB scenarios.

Table 4-8: Annual NOx emissions for FFA facilities (tons/year)

Current Facility Name	2011	2012	2013	2014	2015	2016	2017	2018	2019	Rep Base	2028 OTB
Alcoa Primary Metals Intalco Works	152	185	220	227	213	188	192	183		227	227
Alcoa Wenatchee, LLC	63	66	67	70	63	1	0	0		70	70
Ash Grove Cement Company	918	665	997	1,144		1,343	1,368	1,159		1,144	1,144
Cardinal FG Winlock	810	657	774	791	807	808	809	809		791	250
TransAlta Centralia Generation, LLC	6,635	4,658	7,793	7,538	5,624	5,019	6,232	5,939		7,538	0
Boise Paper	861	760	629	742	676	681	637	600		637	637
COSMO Specialty Fibers, Inc.	367	364	374	465	644	606	402	384		402	402
Georgia-Pacific Consumer Operations, LLC	528	489	464	463	453	452	486	235		486	486
Longview Fibre Paper and Packaging, Inc.	1,372	1,389	1,498	1,215	952	1,044	1,041	1,092		1,041	1,041
Nippon Dynawave Packaging Co.	2,137	2,221	2,048	2,086	2,024	1,969	1,949	2,276		1,949	1,949
Port Townsend Paper	473	493	482	494	488	489	475	490		475	475
WestRock Tacoma Mill	945	985	890	940	1,032	1,084	1,121	1,035		1,121	1,121
BP Cherry Point Refinery	1,991	1,876	1,959	1,893	1,865	1,905	1,930	1,820		1,893	1,893
Phillips 66 Ferndale Refinery	788	702	784	723	726	769	674	691		723	723
Shell Puget Sound Refinery	1,101	1,319	1,409	1,230	1,076	1,109	1,054	1,146		1,230	1,230
Tesoro Northwest Company	1,882	2,051	1,731	1,918	1,826	2,020	1,971	1,878		1,918	1,918
US Oil & Refining Co.	134	127	135	133		63	115	116		133	133

Table 4-9: Annual SO₂ emissions for FFA facilities (tons/year)

Current Facility Name	2011	2012	2013	2014	2015	2016	2017	2018	2019	Rep Base	2028 OTB
Alcoa Primary Metals Intalco Works	4,538	4,723	4,672	4,794	5,022	4,374	3,987	4,103		4,794	4,794
Alcoa Wenatchee, LLC	2,906	3,127	3,712	2,935	2,741	0				2,935	2,935
Ash Grove Cement Company	51	37	42	57		68	69	67		57	57
Cardinal FG Winlock	56	47	54	57	59	59	56	55		57	71
TransAlta Centralia Generation, LLC	1,136	1,228	2,820	3,037	2,386	1,438	1,707	1,502		3,037	0
Boise Paper	793	604	534	186	68	692	885	393		885	885
COSMO Specialty Fibers, Inc.	214	206	230	237	353	369	242	255		242	242
Georgia-Pacific Consumer Operations, LLC	19	20	19	17	16	30	40	21		40	40
Longview Fibre Paper and Packaging, Inc.	202	302	133	141	220	126	198	258		198	198
Nippon Dynawave Packaging Co.	582	484	378	440	351	376	390	328		390	390
Port Townsend Paper	150	187	198	79	51	44	46	68		46	46
WestRock Tacoma Mill	349	347	263	261	244	190	190	224		190	190
BP Cherry Point Refinery	1,026	930	879	917	907	781	828	726		917	917
Phillips 66 Ferndale Refinery	108	73	46	49	44	45	38	43		49	49
Shell Puget Sound Refinery	369	445	466	349	233	246	225	228		349	349
Tesoro Northwest Company	315	284	237	191	130	125	80	80		191	191
US Oil & Refining Co.	5	4	4	4		7	6	7		4	4

Table 4-10: Annual PM₁₀ emissions for FFA facilities (tons/year)

Current Facility Name	2011	2012	2013	2014	2015	2016	2017	2018	2019	Rep Base	2028 OTB
Alcoa Primary Metals Intalco Works	679	736	705	637	708	696	599	563		637	637
Alcoa Wenatchee, LLC	546	395	430	457	467	3	3	3		457	457
Ash Grove Cement Company	31	30	36	43		30	29	16		43	43
Cardinal FG Winlock	10	8	12	12	12	11	16	16		12	15
TransAlta Centralia Generation, LLC	415	209	236	187	140	299	423	347		187	0
Boise Paper	127	124	123	120	113	122	134	106		134	134
COSMO Specialty Fibers, Inc.	272	232	285	272	398	417	280	333		280	280
Georgia-Pacific Consumer Operations, LLC	167	193	178	173	181	151	163	95		163	163
Longview Fibre Paper and Packaging, Inc.	81	257	333	218	202	213	209	220		209	209
Nippon Dynawave Packaging Co.	76	75	121	129	133	129	124	144		124	124
Port Townsend Paper	314	264	291	275	247	220	193	181		193	193
WestRock Tacoma Mill	97	125	155	153	136	201	222	223		222	222
BP Cherry Point Refinery	131	128	98	83	107	118	84	130		83	83
Phillips 66 Ferndale Refinery	59	46	65	64	59	54	60	59		64	64
Shell Puget Sound Refinery	236	228	193	183	207	177	182	191		183	183
Tesoro Northwest Company	154	162	143	157	152	140	144	136		157	157
US Oil & Refining Co.	12	12	12	12		11	12	12		12	12

4.5 Summary

The EI summarizes emissions from sources located in Washington that we reasonably expect to affect visibility in Class 1 Areas in Washington and other states. We used the EI to summarize the anthropogenic emissions from each source category and the changes in emissions at the facilities subjected to a four-factor analysis. We used these emission summaries to prioritize emission reduction efforts and ensure that model predictions of 2028 visibility impairment are reasonable.

Chapter 5. Regional Haze Modeling

Washington relied on the Western Regional Air Partnership (WRAP) modeling for this Regional Haze (RH) State Implementation Plan (SIP). This chapter describes the modeling effort conducted by WRAP for the western contiguous states. Also discussed are model configuration, model performance, and source apportionment options.

WRAP used the Comprehensive Air Quality model and Extensions (CAMx) to perform the representative baseline and 2018 OTB scenarios. CAMx results were used to calculate Relative Response Factors (RRFs), which were applied to the measured baseline period concentrations at the IMPROVE sites. This provided a visibility projection for 2028. Chapter 9 discusses visibility projection results in the context of Reasonable Progress Goals and the Uniform Rate of Progress Glidepath, as determined by the RRFs derived from CAMx simulations.

The WRAP provided source apportionment results using the Weighted Emissions Potential (WEP) technique and the CAMx Particulate Matter Source Apportionment Technology (PSAT) tool. The WEP is a useful method for identifying sources that impair visibility at the Interagency Monitoring of Protected Visual Environments (IMPROVE) monitors, and requires far less computational resources than CAMx PSAT. However, the CAMx PSAT analysis is more appropriate for computing projected visibility because it considers all possible sources of air pollution and atmospheric processes. Chapter 6 discusses the WEP and PSAT results.

5.1 CAMx simulations

The primary tool used by the WRAP for projecting future visibility is the CAMx v 7.0. CAMx is a state-of-the-science photochemical grid model that comprises a "one-atmosphere" treatment of tropospheric air pollution that includes source apportionment techniques⁸. The CAMx model takes into account emissions, advection and dispersion, photochemical transformation, aerosol thermodynamics and phase transfer, aqueous chemistry, and wet and dry deposition of trace species.

CAMx requires meteorological inputs of three-dimensional gridded variables such as wind, temperature, humidity, cloud cover, and precipitation. The CAMx simulations computed for WRAP utilized gridded meteorological data from the Weather Research and Forecasting model. The Weather Research and Forecasting model is the most common source of modeled meteorology in the U.S. used as input to photochemical grid models. Local, state, national, and international modeling efforts use the Weather Research and Forecasting model extensively.

WRAP and the Western Air Quality Study (WAQS) developed the modeling platform with two-way nesting between the continental U.S. (36 km grid-cells) and the western U.S. (12-km grid-cells) modeling domains. Ramboll Group A/S (Ramboll) conducted model simulations for the 2014 base case, the representative baseline, and the 2028 on-the-books (OTB) future U.S. anthropogenic emissions scenarios. Ramboll simulated two 2028 emission scenarios: one with

⁸ <http://www.camx.com/home.aspx>

2014 actual fires and one with a representative fire dataset developed by the WRAP Fire and Smoke Work Group.

Ramboll compiled emissions updates submitted by local, state, and federal agencies and went through several updates as requested by states in the WRAP. Ramboll included a wind-blown dust pre-processor for better soil and coarse mass performance during dust events. They also implemented a bi-directional ammonia deposition scheme for better nitrate performance, especially in agricultural regions. The emission inventories were prepared for CAMx using the Sparse Matrix Operator Kernel Emissions (SMOKE) program. See Chapter 4 for more information about the anthropogenic emissions inventory data used in modeling.

CAMx simulations of the WRAP region required emission inventory data outside the WRAP region. Ramboll compiled emissions for Pacific offshore commercial marine vessels, non-WRAP states, Mexico, and Canada. WRAP posted results on the [Technical Support System \(TSS\) website](#)⁹. The CAMx model also requires input of specific concentrations of visibility-impairing pollutants at the boundaries of the modeling domain. Boundary conditions represent pollutants reaching North America from the rest of the world. Boundary conditions came from the WRAP Revised 2014 GEOS-Chem Base Case.

5.2 CAMx performance

RAMBOLL evaluated the performance of CAMx simulations by comparing CAMx model-simulated concentrations with 2014 ambient monitoring data from a large number of sites. This evaluation determined that the model's performance justified use of the model for simulating future conditions. RAMBOLL used the 2014 Actual emissions inventory for the simulation. They evaluated CAMx for both the most impaired days and the clearest days. See the CAMx 2014v2 Model Performance Evaluation section reported on the [WRAP/WAQS 2014v2 Modeling Platform Description and Western Region Performance Evaluation \(MPE\)](#)¹⁰ site.

The following list summarizes model performance evaluation findings for particulate speciation monitors in the northwest part of the WRAP modeling domain at the locations of IMPROVE and Chemical Speciation Network (CSN) sites:

- Sulfate (SO₄)
 - Year-round overestimation in the northwest.
- Nitrate (NO₃)
 - Initial tests largely underestimated nitrate, but the addition of a bi-directional ammonia deposition scheme to the final 2014 modeling scenario-increased nitrate (NO₃). This may have been too much of an increase for the northwest.
 - Final result was year-round overestimation of nitrate (NO₃) in the northwest at IMPROVE sites but better nitrate (NO₃) performance in the northwest at CSN sites.
 - Better nitrate (NO₃) performance in cold months when monitored concentrations are greater.

⁹ <https://views.cira.colostate.edu/tssv2/>

¹⁰ http://views.cira.colostate.edu/iwdw/docs/WRAP_WAQS_2014v2_MPE.aspx

- Organic mass
 - Overestimation in many parts of the domain, including the northwest.
 - Overestimation of primary organic aerosol (POA) on days when fire impacts occur.
 - Dominated by fires and biogenic secondary organic aerosol (SOA), which are both large sources of uncertainty and generally due to uncontrollable emissions.
- Elemental carbon
 - Overestimated in the northwest during fire impacts, but otherwise concentrations are small.
- Soil and coarse mass
 - The model underestimates windblown dust emissions, causing underestimates of soil and coarse mass during windblown dust events.
 - Better soil performance than Round one RH SIPs due to new method to calculate elements from the model, which matches monitoring methods.
 - Coarse mass (CM) is underestimated in all climate regions and seasons.
 - Much of CM monitored is likely local as CM has a higher deposition rate and shorter transport distance.
 - Subgrid-scale impacts are difficult for a regional grid-model to simulate.
 - Given the uncertainties in the CM modeling results, future-year CM projections were held constant, with an RRF = 1.

Model performance was analyzed for IMPROVE monitors that represent mandatory Class 1 Areas in the state of Washington. Light extinction derived from the 2014 IMPROVE monitor data was compared to the 2014, representative baseline, and OTB model scenarios. CAMx over-predicted light extinction at every IMPROVE monitor for the average clearest days and most impaired days (MIDs).

All model species related to anthropogenic emissions consistently over-predicted for 2014 clearest days at Washington State IMPROVE monitors, across all months. Figure 5–1 shows the clearest days model performance for the 2014 model scenario. The representative baseline and 2028 OTB model scenarios were similar to the 2014 model scenario for clearest days at all sites, except for organic mass in October at NOCA1. The representative baseline and 2028 OTB modeling scenarios showed a tripling of the organic mass bias at NOCA1 for clearest days (not shown), due to change-over to the “representative” fire emissions dataset.

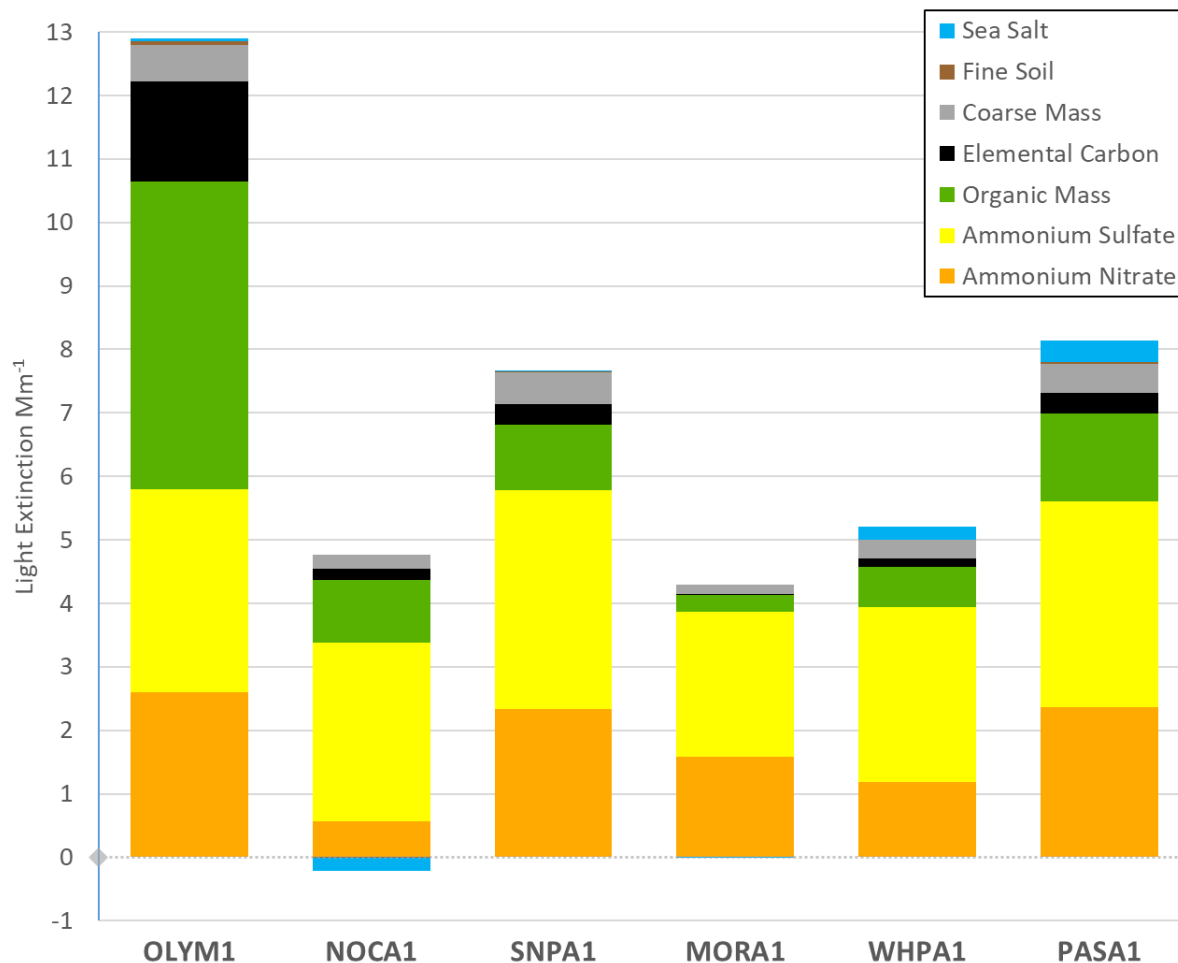


Figure 5–1. Average model bias of light extinction in the 2014 modeling scenario for 2014 clearest days at all sites.

The CAMx performance at Class 1 Area IMPROVE monitors in Washington State for MID is shown in Figures 5-2 thru 5-7. Sulfates, nitrates, and organic mass are over-predicted in the model for Washington State. Upon further analysis of individual model days, it is evident that fire emissions included in the modeling were severely over-estimated on MIDs. The representative baseline and 2028 OTB model simulations used a different fire dataset than the 2014 simulations, shifting the largest model bias from the PASA1 site to SNPA1 and other locations. Overestimation of emissions from prescribed burning in Washington State is not surprising, given that fire emissions calculations from EPA (2014 model scenario) and WRAP (representative baseline and 2028 OTB scenarios) do not accurately represent pile burning, which is the dominant form of prescribed burning in Washington. Wildfire emissions also had negative impacts on model performance, especially for representative baseline and 2028 OTB scenarios, because the wildfire days screened from the 2014 MID are not the same days with highest wildfire impacts in the model. Despite the model performance issues related to fire emissions, they do not negatively influence the RRFs (and therefore the future visibility projection) because the 2028 future scenario holds fire emissions constant relative to the baseline. In fact, over-prediction of model species causes visibility projections (RPGs) to be

more conservative since the proportional change in model scenario predictions due to OTB emissions controls is reduced, thereby constraining the RRF closer to one (no projected change).

Ecology used the CAMx modeling results with the understanding that they were the best tool available to forecast concentrations of visibility-impairing pollutants and projected visibility in 2028, the end of the second implementation period. Despite known model performance issues, we can still use CAMx results in combination with the RRF approach to evaluate the benefits of emission reduction strategies for nitrates and sulfates. The RRF allows us to project visibility changes at Class 1 Areas for regional haze planning purposes.

Model performance for MID at OLYM1

Figure 5–2 shows that elemental carbon, nitrates, and organic mass are over-predicted at OLYM1 for all model scenarios while sea salt is under-predicted. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios increased model bias for MID due to clear over-predictions of organic mass in August and September. The largest model bias occurred in October, December, and January due to over-predictions of nitrates and organic mass, but these were not related to wildland fire emissions and persisted across all model scenarios.

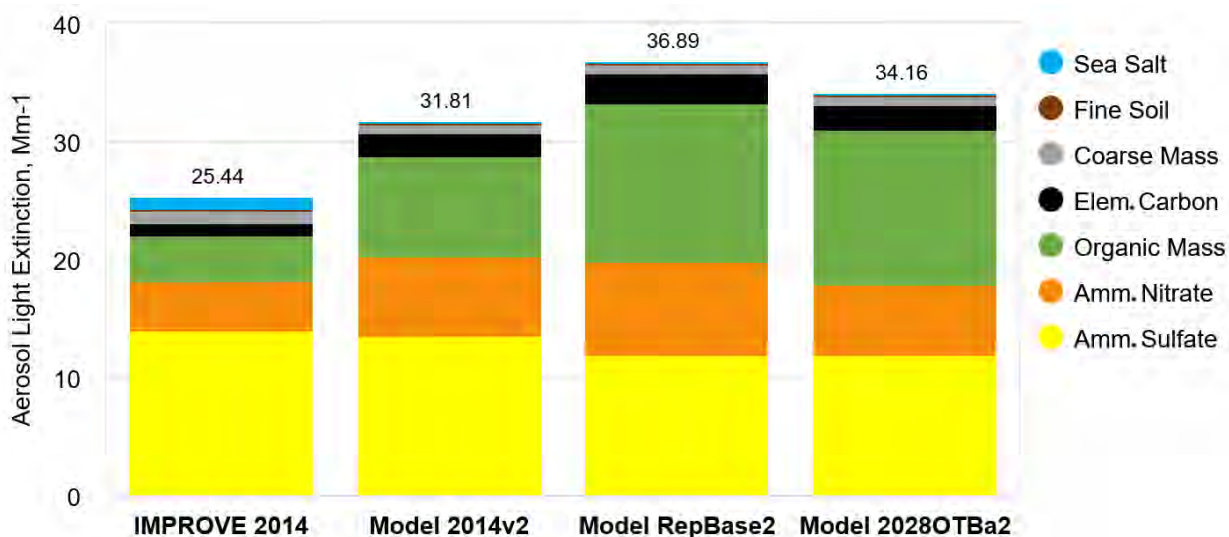


Figure 5–2. Average annual light extinction on MID observed at OLYM1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.

Model performance for MID at NOCA1

Figure 5–3 shows that nitrates and organic mass are over-predicted at NOCA1 for all model scenarios. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios greatly increased model bias for MID due to clear over-predictions of organic mass in September and October, likely due to over-predictions of prescribed burning emissions in the representative fire dataset. There is also consistent over-prediction of nitrates for 2014 MID across most months.

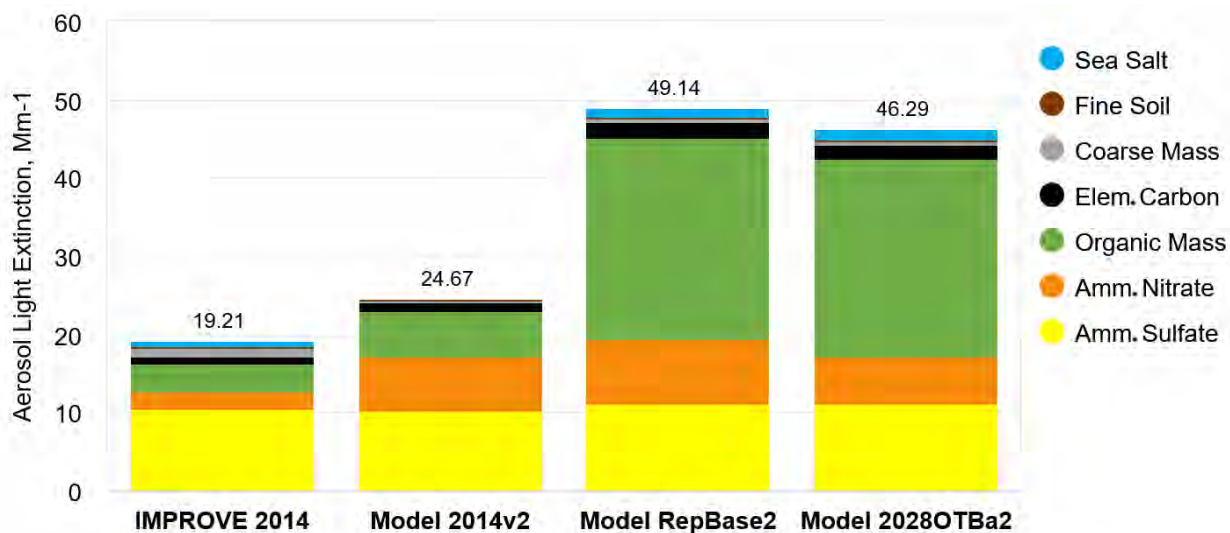


Figure 5–3. Average annual light extinction on MID observed at NOCA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.

Model performance for MID at SNPA1

Figure 5–4 shows that all pollutants are extremely over-predicted at SNPA1 for the representative baseline and 2028 OTB scenarios. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios severely increased model bias for MID due to clear over-predictions of organic mass in August, due to over-predictions or incorrect timing of wildfire emissions in the representative fire dataset. There is also clear over-prediction of nitrates from all model scenarios on springtime MIDs.

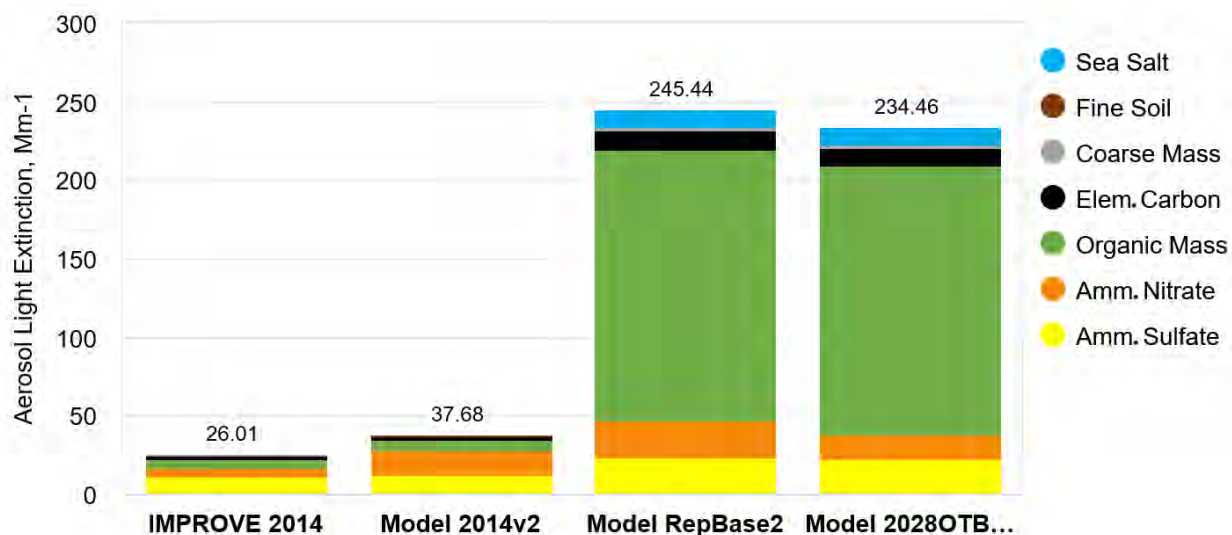


Figure 5–4. Average annual light extinction on MID observed at SNPA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.

Model performance for MID at MORA1

Figure 5–5 shows that nitrates and organic mass are over-predicted at MORA1 for all model scenarios. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios greatly increased model bias for MID due to clear over-predictions of organic mass in August, likely due to over-predictions or incorrect timing of wildfire emissions in the representative fire dataset. There is also clear over-prediction of nitrates from all model scenarios on springtime MIDs.

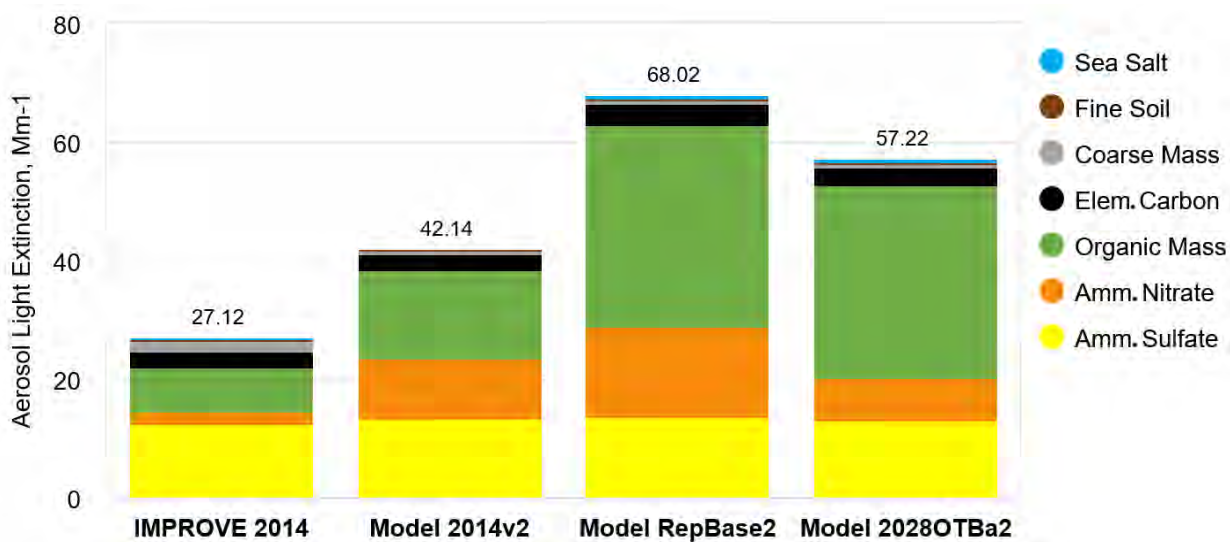


Figure 5–5. Average annual light extinction on MID observed at MORA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions

Model performance for MID at WHPA1

Figure 5–6 shows that nitrates and organic mass are over-predicted at WHPA1 for all model scenarios. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios had only a small effect on organic mass performance. There is a clear over-prediction of nitrates from all model scenarios on MIDs across all months.

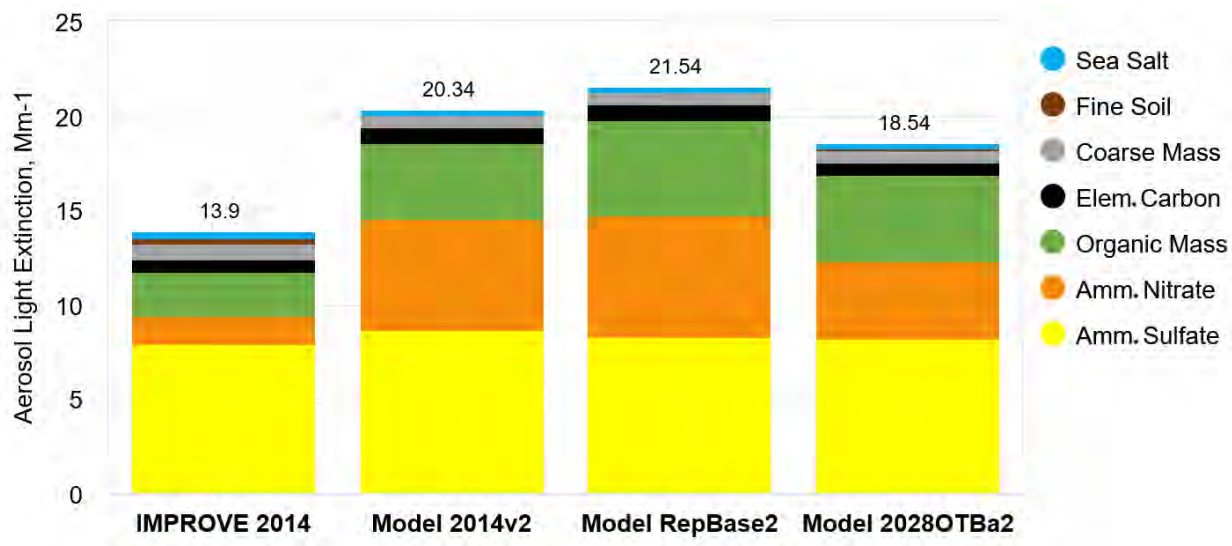


Figure 5–6. Average annual light extinction on MID observed at WHPA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.

Model performance for MID at PASA1

Figure 5–7 shows that nitrates and organic mass are over-predicted at PASA1 for all model scenarios. The representative fire emissions dataset used for the representative baseline and 2028 OTB scenarios greatly improved model performance, due to removal of an incorrectly modeled prescribed fire in October from the 2014 model scenario. There is a clear over-prediction of nitrates from all model scenarios on MIDs across all months.

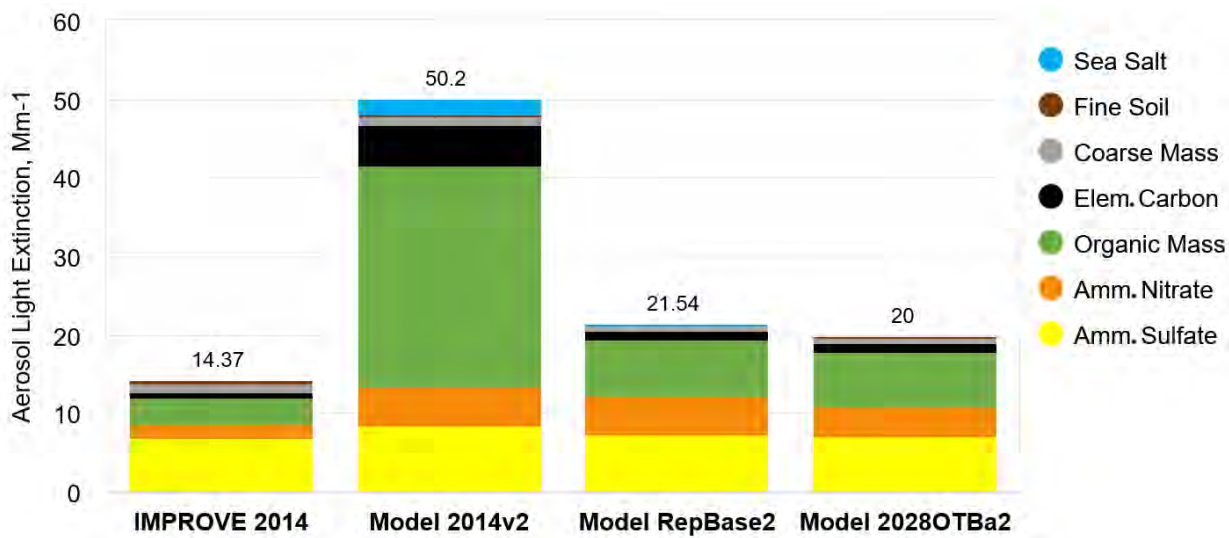


Figure 5–7. Average annual light extinction on MID observed at PASA1 in 2014 compared to the 2014, representative baseline, and 2028 OTB model scenarios predictions.

5.3 Source apportionment options

In order to determine the significant sources contributing to haze in Washington’s Class 1 Areas, we rely upon source apportionment analysis provided on the [WRAP TSS website](http://views.cira.colostate.edu/tssv2/)¹¹.

WRAP provided two options for analyzing source apportionment of light extinction caused by pollutants at IMPROVE monitors:

1. The WEP tool, which was used to attribute sources of sulfate, nitrate, organic mass, and elemental carbon.
2. The PSAT tool, which was used to attribute sources of sulfate and nitrate. Source apportionment is especially important for anthropogenic sources of sulfate and nitrate because they have major impacts on visibility at Class 1 Areas.

The WEP is a screening tool that helps to identify source regions that have the potential to contribute to haze formation at specific Class 1 Areas. WEP combines emission inventories, meteorological model data, and the calculated residence time of air masses over each model grid-cell, to estimate the potential for a visibility-impairing pollutant to affect a specific Class 1

¹¹ <http://views.cira.colostate.edu/tssv2/>.

Area. WEP is obtained by combining the emissions weighted residence time at IMPROVE monitors with 2028 OTB emissions of light extinction precursors. The WEP analysis provided a broad overview of potential contributions from within and near Washington but does not look at emissions from outside the domain or Pacific offshore, nor does it account for chemistry or deposition. Ecology used the WEP tool to estimate anthropogenic source locations for light-extinction precursors: sulfur dioxide for ammonium sulfate extinction, nitrogen oxides for ammonium nitrate, primary organic aerosol for organic mass, and elemental carbon for itself. Chapter 6 discusses the WEP results.

The PSAT tool was used to further analyze sulfate and nitrate source apportionment for the 2028 OTB CAMx scenario that, unlike the WEP, accounts for all known physical and chemical processes in the atmosphere. The PSAT results also provide more information than the WEP, because they estimate contributions from all regions. PSAT allows a comparison of the relative contributions from Washington State, USA, international, natural, and wildland fire sources. PSAT results also estimate contributions from various emissions categories within the source regions. The PSAT analysis can be useful in determining contributing sources that may be controllable within Washington and in identifying potentially controllable sources, or the need for controls, in other jurisdictions (neighboring states, other countries, and Pacific offshore). Chapter 6 discusses the PSAT results.

Overall, while results from both tools provide relative information on sources of visibility-impairing pollutants, the PSAT results are more reliable and the WEP results more qualitative because of the way the results are developed. The PSAT results come from one-atmosphere, photochemical modeling simulations for sulfate and nitrate, and thus are a modeling prediction of how emissions impact a Class 1 Area. WEP only estimates impacts from the residence time of the air mass over an area and the total annual anthropogenic emissions in that area without consideration of natural sources, chemistry, or sources outside the model domain.

Chapter 6. Source Apportionment and Washington's Impacts on Mandatory Class 1 Areas

This chapter discusses the following:

- Expected contributions from regional anthropogenic emissions to light extinction at Washington's mandatory Class 1 Areas in 2028,
- Expected contributions from international, natural, and wildland fire sources to light extinction at Washington's Class 1 Areas in 2028,
- Expected sulfate and nitrate contributions from Washington anthropogenic emissions to light extinction at out-of-state Class 1 Areas in 2028.

The contributions from regions and source categories were determined using Particulate Matter Source Apportionment (PSAT) and Weighted Emissions Potential (WEP), described in Chapter 5. The WEP includes elemental carbon, organic mass, nitrates, and sulfates but is only for nearby anthropogenic emissions. PSAT only includes nitrates and sulfates, but accounts for all global sources.

The WEP and PSAT analyses presented in this chapter are based purely on model data generated by CAMx, the Hybrid Single-Particle Lagrangian Integrated Trajectory (HYSPLIT) model, and related pre-processors. Model simulations used 2014 meteorology and the 2028 on-the-books (OTB) emissions inventory. WEP and PSAT results did not adjust using relative response factors (RRFs), as is done for the reasonable progress goals (RPGs), due to the computational expense and time that would have been required to do source apportionment for all visibility-impairing species.

We discuss baseline monitored haze and the 2028 RPGs in this chapter for reference. This is because it is important to consider actual observations when attempting to extrapolate model results to the real world. We compared modeled light extinction by species to the baseline monitoring to take into account model bias. Model bias is a consideration when attempting to infer relative source contributions from PSAT and WEP analyses (see Chapter 5). In general, the model bias analysis shows an over-prediction of anthropogenic pollutants.

The Western Regional Air Partnership (WRAP) modeling does not include source apportionment analysis for the Representative Baseline (RepBase) model scenario. However, emissions inventory changes between RepBase and 2028 OTB are the only factors responsible for differences between the two model scenarios. We held constant emissions from non-point, international, natural, and wildland fire for both model scenarios. Reductions of projected visibility impairment in the model-generated results (and thereby the RPGs) are likely from a short list of notable changes:

- Shutdown of TransAlta Centralia coal-fired power plant boilers is a significant reduction in Washington State SO₂ emissions.
- Reduction in on-road mobile NO_x emissions by 74 percent in Washington, which caused the majority of modeled nitrate reductions. Less significant reductions of NO_x from other source categories were also included.

- There were significant reductions in point and mobile emissions outside of Washington. However, anthropogenic emissions from other states likely have a non-significant impact on visibility at Washington State Class 1 Areas. This is a result of the predominant wind-flow in Washington.

The WEP does not consider wildland fire. The PSAT model tracks wildland fire, but the model analyses do not provide the necessary information to make reasonable conclusions about source apportionment of wildland fire. This is because organic mass is not part of the PSAT analysis, the PSAT does not track wildland fire geographically, and a “representative” fire dataset in the CAMx model simulations replaced actual 2014 fire emissions. The WRAP state generally agreed that recent revisions to the Regional Haze Rule (RHR) make it clear that days impacted by wildland fire should not be used to track reasonable progress. Therefore, calculating modeled wildland fire contributions to Interagency Monitoring of Protected Visual Environments (IMPROVE) monitors by state was not needed. However, several conducted “no fire” simulations are viewable on the WRAP Technical Support System (TSS) website (<https://views.cira.colostate.edu/tssv2/>).

Each Class 1 Area organizes the data. Where two Class 1 Areas share an IMPROVE monitor the areas are discussed together. Presentation of the data is in the following order:

- Olympic National Park – OLYM1
- North Cascades National Park and Glacier Peak Wilderness - NOCA1
- Alpine Lakes Wilderness – SNPA1
- Mount Rainer National Park – MORA1
- Goat Rocks Wilderness and Mount Adams Wilderness – WHPA1
- Pasayten Wilderness – PASA1

The area of influence (AOI), determined by HYSPLIT, and the WEP analyses of sulfate, nitrate, organic mass, and elemental carbon on most impaired days (MID) are presented. The WEP considers 2028 OTB anthropogenic emissions in the Western US modeling domain but does not consider natural, international, or wildland fire (wildfire and prescribed fire) emissions. The WEP analyses summarizes using the following categories:

- EGU: includes emissions from major point sources that are electric generating units.
- Non-EGU: includes emissions from major point sources that are not electric generating units. Note that insignificant upstream and midstream processes from the oil & gas industry are included with non-EGU in Chapter 4 but not shown here.
- On-road: includes emissions from all vehicles that travel on roads.
- Non-road: includes emissions from locomotives, commercial marine vessels, mobile equipment, and other non-road vehicles.
- Non-point: includes emissions from all other anthropogenic sources, not categorized elsewhere such as institutional, commercial, residential, and agricultural.

Discussed in this chapter as well is the rank point analysis, which presents the relative contribution of out-of-state point sources to the total point source WEP.

Also presented are the PSAT analyses of sulfate and nitrate on MID and clearest days, which considers all sources. The following categories summarize the PSAT analyses:

- Washington anthropogenic: includes industrial, institutional, commercial, residential, agricultural, and mobile sources within Washington State. This source category has very little uncertainty because it was specifically developed for the RH modeling.
- USA anthropogenic: includes industrial, institutional, commercial, residential, agricultural, and mobile sources within the USA (but not Washington State). This source category has very little uncertainty because it was specifically developed for the RH modeling.
- International anthropogenic: includes industrial, institutional, commercial, residential, agricultural, and mobile sources outside of the USA. This source category has moderate uncertainty because it is influenced by international sources from many countries both inside and outside the model domain.
- Natural: vegetation, soils, sea salt, and volcanos. Note that this is not the same as the RHR definition of “natural” sources because wildfire is not included. This source category has moderate uncertainty due to the parameterization of natural emissions.
- Wildland fire: wildfire (WF) and prescribed fire (Rx) for USA, Canada, and Mexico. This source category has large uncertainty and is greatly overestimated in the CAMx modeling for MID in the state of Washington.

Within the state-level PSAT results, anthropogenic sources are further separated into similar categories as the WEP, except on-road and non-road sources are lumped together. Remaining anthropogenic sources are effectively the sum of all non-point categories. Most state-level PSAT results show similar expectations for 2028 light extinction impacts from within Washington State:

- Mobile sources will be the largest source of nitrates. For reference, the 2028 OTB mobile emissions inventory of NO_x for Washington State is 44% on-road vehicles, 23% commercial marine vessels, 15% locomotives, and 18% other non-road vehicles and equipment.
- Non-EGU will be the largest source of sulfates. For reference, the 2028 OTB non-EGU emissions inventory of SO₂ for Washington State is 62% aluminum production, 16% paper manufacturing, and 12% petroleum refineries.

Note that there are small inconsistencies between the reported model species light extinction values in the various tools on the TSS, due to the processes needed to convert model concentrations to light extinction and the lack of PSAT results for all species. For consistency, the reported model values for each species in this chapter were taken from the model performance analysis on the TSS, which vary slightly compared to the total of all components in the state-level PSAT bar charts.

6.1 Olympic National Park

The OLYM1 IMPROVE monitoring site represents the visibility at Olympic National Park. The 2014 to 2018 average conditions in Chapter 3 show that sulfates (44%), organic mass (21%),

and nitrates (19%) together contribute to 84% of the light extinction on MID. On the clearest days, sulfates (30%), organic mass (22%), and nitrates (20%) contributed to 72% of the light extinction at OLYM1.

WEP and rank point analyses

The WEP analysis for the OLYM1 site on MID for the 2028 OTB scenario is summarized in Figure 6.1, showing an AOI of sources in western Washington and the Puget Sound region. There is also some minimal influence from sources in the Portland, OR and Vancouver, BC metropolitan areas. Nitrates at OLYM1 show considerable influence from non-EGU point, on-road, non-road, and non-point sources. Sulfates at OLYM1 show considerable influence from non-EGU Point, non-road, and non-point sources. Non-point sources mostly influence organic mass at OLYM1. Non-point sources mostly influence elemental carbon, but also shows a large influence from on-road and non-road sources.

The rank point WEP analysis attributed 98.9% of point source nitrates to Washington State, with 1.0% and 0.3% attributed to Oregon and California, respectively. The rank point WEP analysis attributed 99.4% of point source sulfates to Washington State, with 0.5% attributed to Oregon.

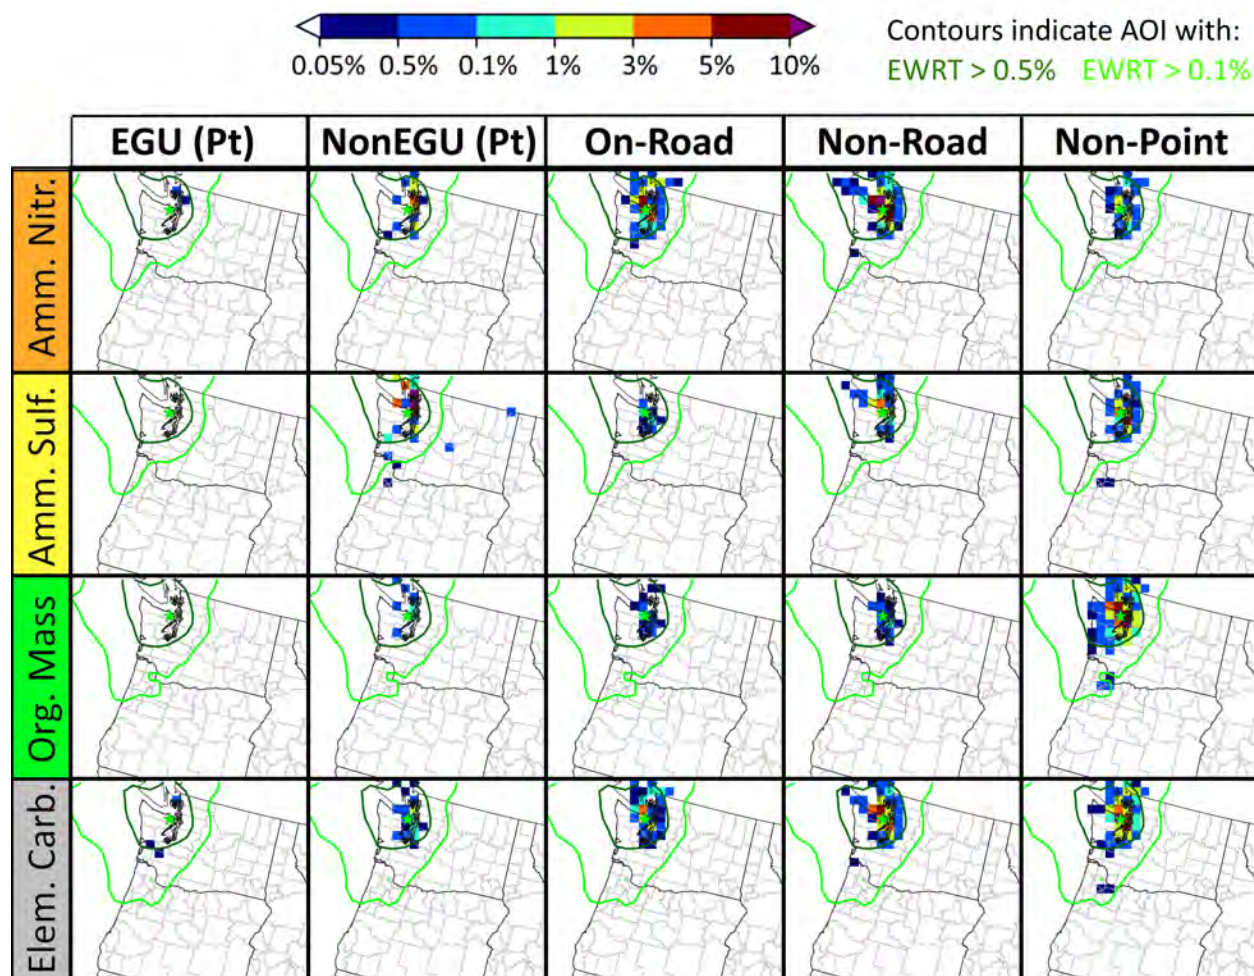


Figure 6-1: WEP for source area potential to contribute to extinction on MID by pollutant at the OLYM1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at OLYM1.

Most Impaired Days

The PSAT tracer analysis shows that 2028 MID visibility impacts of sulfates at OLYM1 are expected to come primarily from natural (52%), international anthropogenic (22%) and wildland fire (13%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 9% of the sulfates responsible for light extinction at OLYM1. See Figure 6-2 for more information.

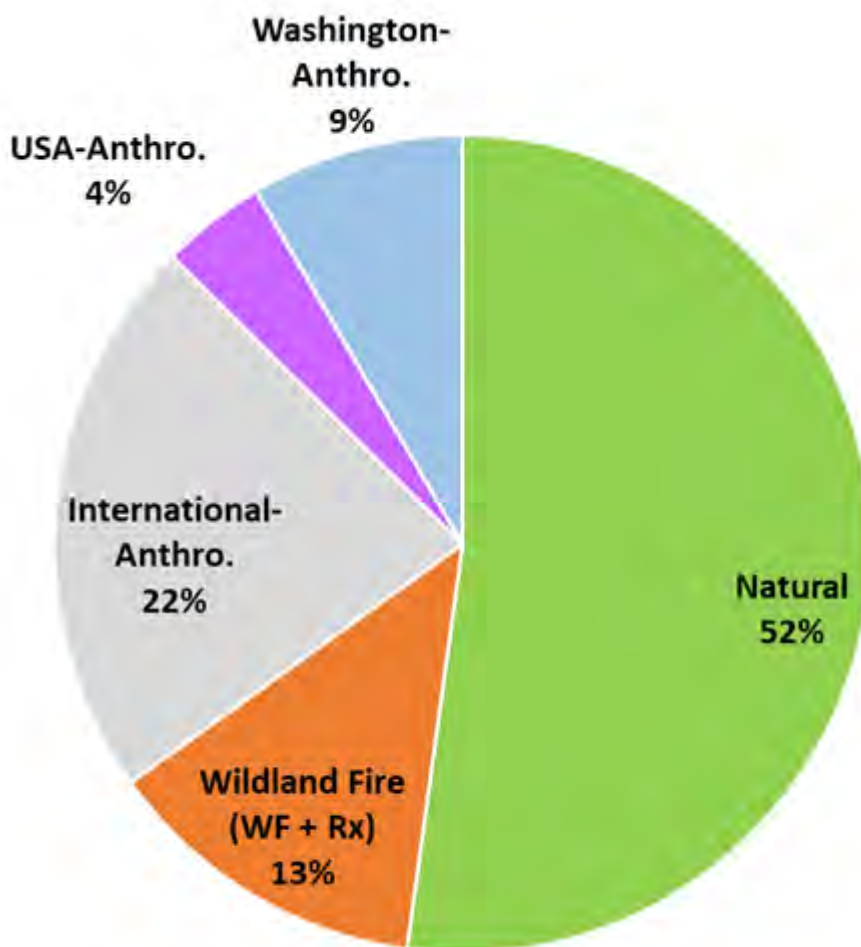


Figure 6-2: Expected source regions of sulfates (SO₄) in 2028 at OLYM1 for MID (CAMx total = 11.9 Mm⁻¹).

The modeled sulfates for 2028 MID at OLYM1 was 11.9 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 10.03 Mm⁻¹ and 10.00 Mm⁻¹, respectively.

Figure 6-3 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the OLYM1 monitoring site on 2028 MID.

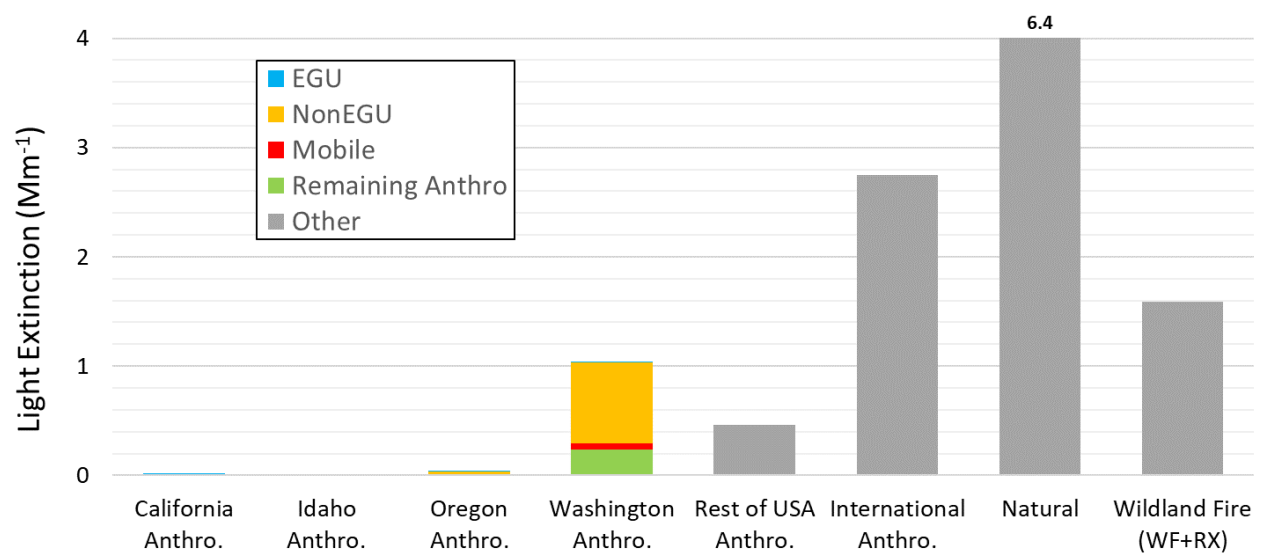


Figure 6-3: Expected source categories and regions of SO₄ in 2028 at OLYM1 for MID (CAMx total = 11.9 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at OLYM1 are expected to come primarily from natural (37%), out-of-state US anthropogenic (24%), and international anthropogenic (19%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 16% of the sulfates responsible for light extinction at OLYM1. See Figure 6-4 for more information.

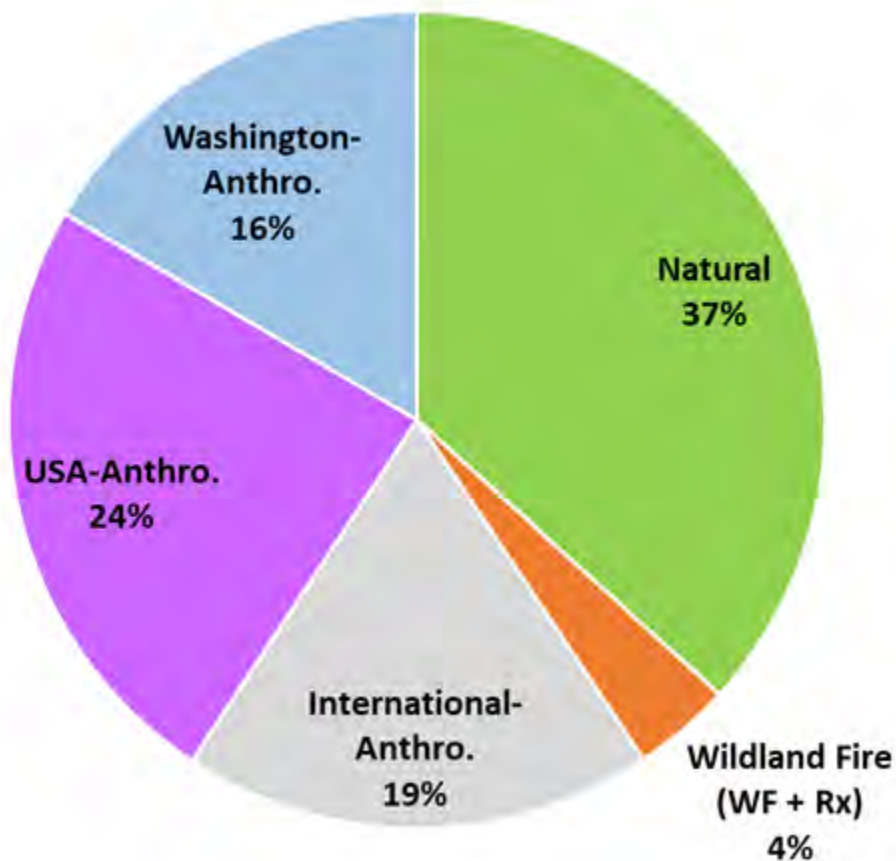


Figure 6-4: Expected source regions of SO_4 in 2028 at OLYM1 for clearest days (CAMx total = 4.2 Mm^{-1}).

The modeled sulfates for 2028 clearest days at OLYM1 was 4.2 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 1.01 Mm^{-1} and 1.00 Mm^{-1} , respectively. Figure 6-5 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at OLYM1 on 2028 clearest days.

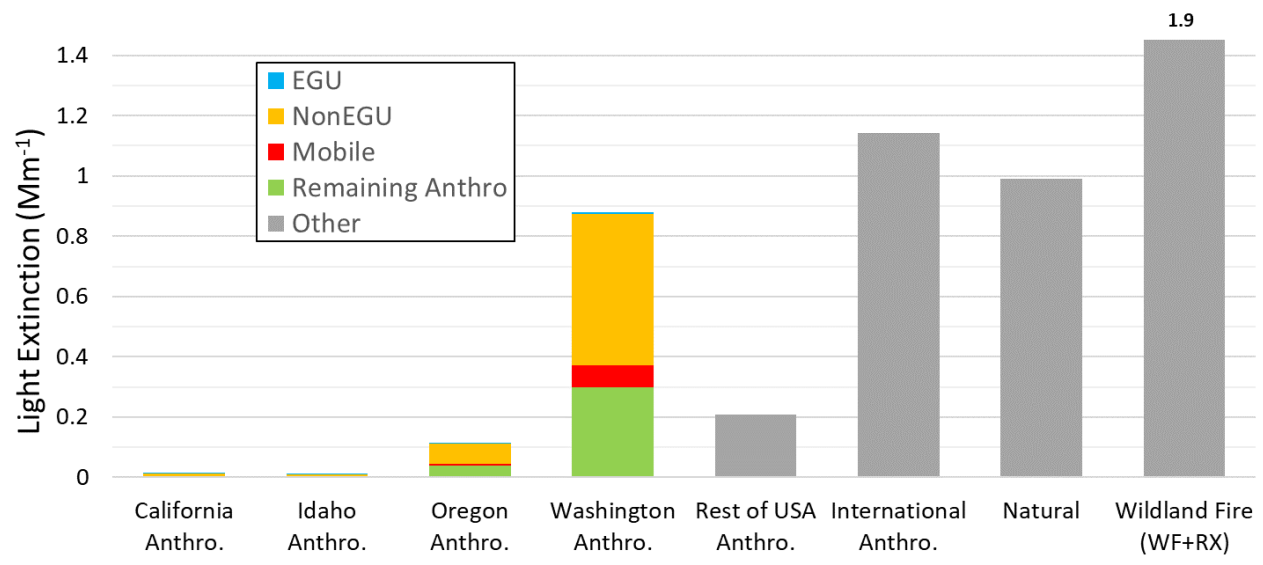


Figure 6-5: Expected source categories and regions of SO₄ in 2028 at OLYM1 for clearest days (CAMx total = 4.2 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the third largest species contribution to light extinction for the MID and second largest species contribution for the clearest days during the 2014-2018 baseline at OLYM1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at OLYM1 are expected to come primarily from international anthropogenic sources (47%) while natural sources (8%), and wildland fires (2%) are expected to have minimal impacts. All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 36% of the nitrates responsible for light extinction at OLYM1 on MID. See Figure 6-6 for more information.

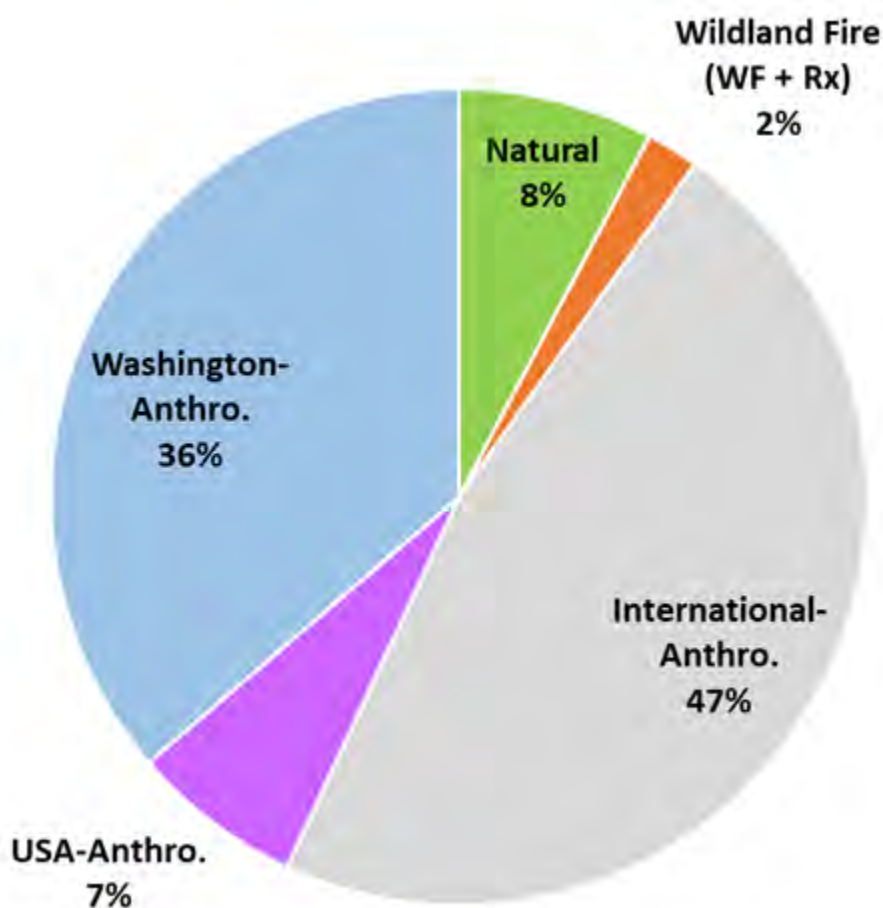


Figure 6-6: Expected source regions of NO_3 in 2028 at OLYM1 for MID (CAMx total = 5.9 Mm^{-1}).

The modeled nitrates for 2028 MID at OLYM1 was 5.9 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 4.28 Mm^{-1} and 3.28 Mm^{-1} , respectively.

Figure 6-7 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at OLYM1 on 2028 MID.

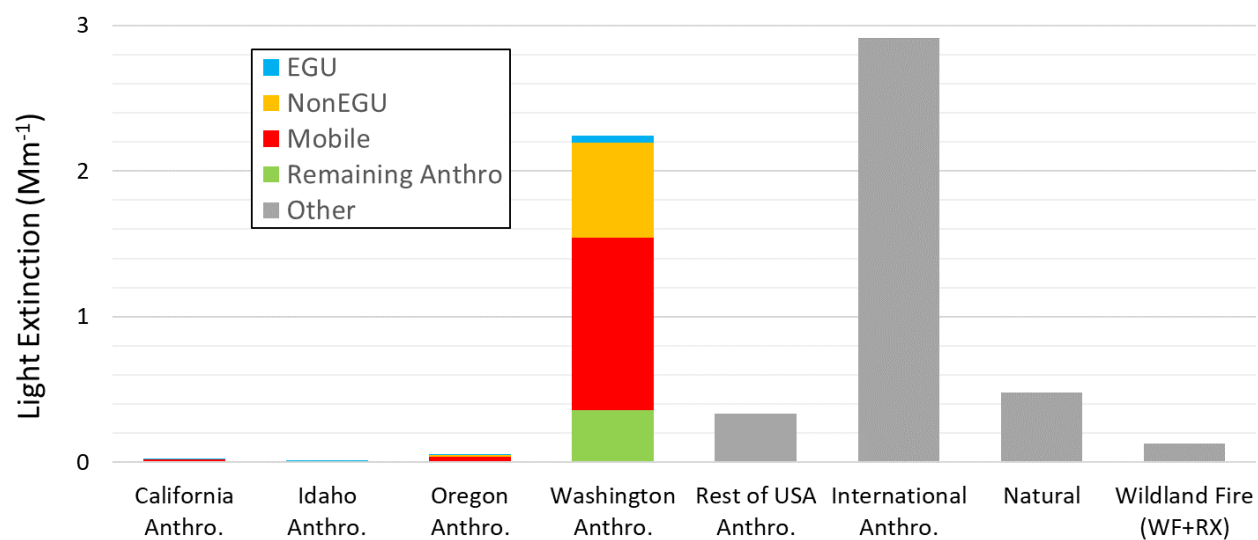


Figure 6-7: Expected source categories and regions of NO₃ in 2028 at OLYM1 for MID (CAM_x total = 5.9 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of nitrates at OLYM1 are expected to come primarily from out-of-state US anthropogenic (44%) sources. Washington anthropogenic sources are expected to contribute 33% of the nitrates responsible for light extinction at OLYM1 on clearest days. See Figure 6-8 for more information.

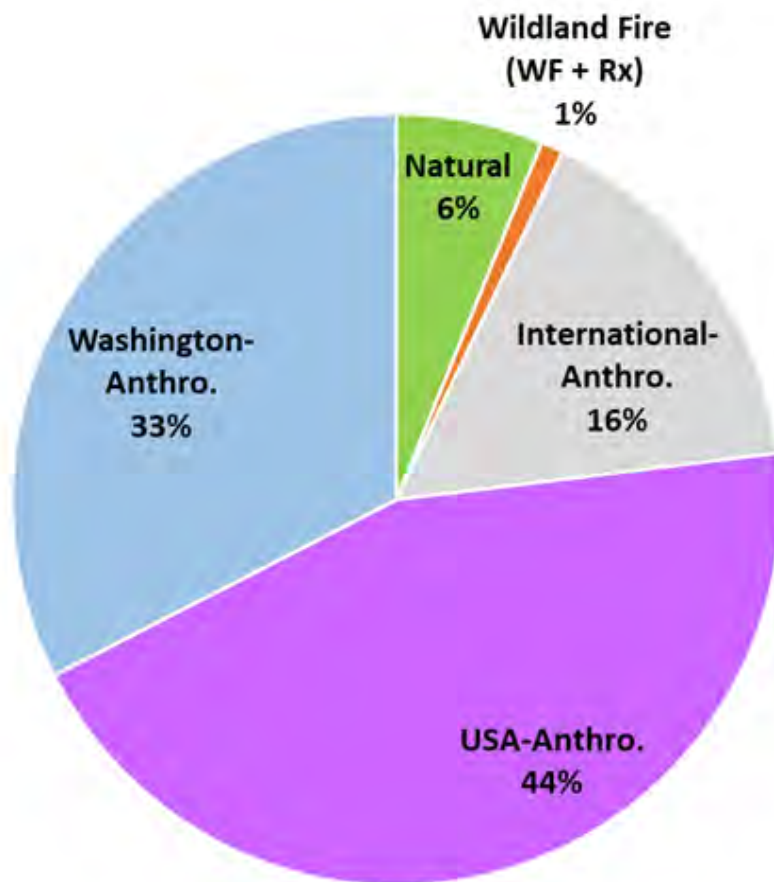


Figure 6-8: Expected source regions of NO_3 in 2028 at OLYM1 for clearest days (CAMx total = 2.5 Mm^{-1}).

The modeled nitrates for 2028 clearest days at OLYM1 was 2.5 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.65 Mm^{-1} and 0.46 Mm^{-1} , respectively. Figure 6-9 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at OLYM1 on 2028 clearest days.

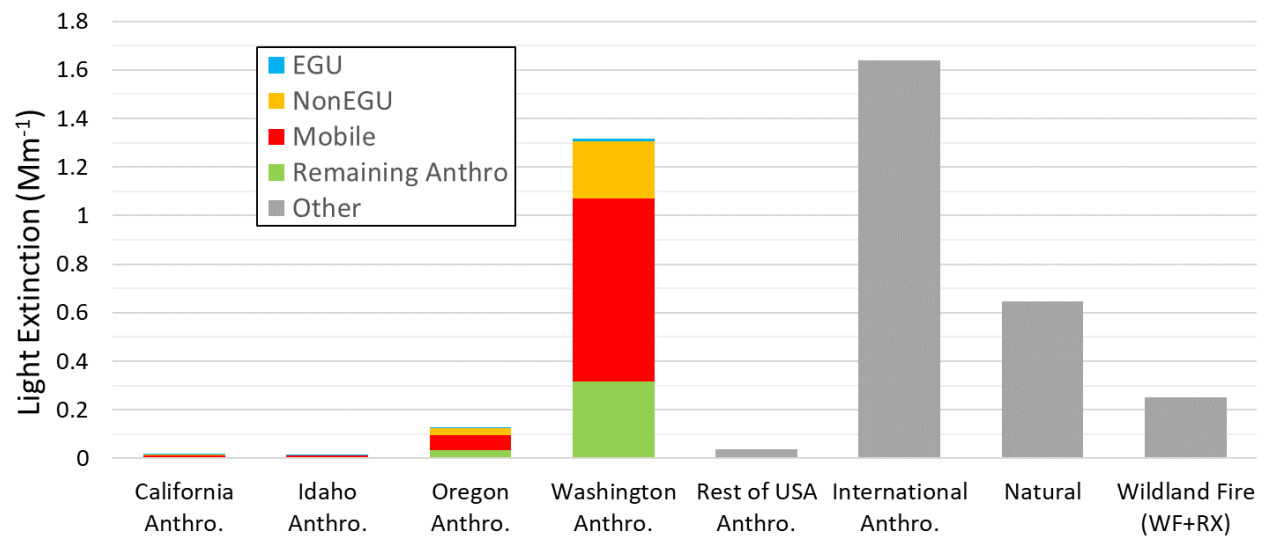


Figure 6-9: Expected source categories and regions of NO₃ in 2028 at OLYM1 for clearest days (CAMx total = 2.5 Mm⁻¹).

6.2 North Cascades National Park and Glacier Peak Wilderness

The North Cascades National Park and Glacier Peak Wilderness areas are represented by the NOCA1 IMPROVE monitoring site. The baseline conditions in Chapter 3 show that together organic mass (24%), sulfates (49%), and nitrates (10%) contributed to 83% of the light extinction on the MID at this monitoring site. On the clearest days, sulfates (36%), organic mass (26%), and nitrates (13%) contributed to 75% of the light extinction at this monitoring site.

WEP and rank point analyses

The WEP analysis for the NOCA1 site on MID for the 2028 OTB scenario is summarized in Figure 6-10, showing an AOI of sources in western Washington and the Puget Sound region, including considerable influence from the Vancouver, BC metropolitan area. Nitrates at NOCA1 show considerable influence from non-EGU Point, on-road, non-road, and non-point sources. Sulfates at NOCA1 show considerable influence from non-EGU point and non-point sources. Organic mass at NOCA1 is mostly influenced by non-point sources. Elemental carbon is mostly influenced by non-point sources but also shows a considerable influence from non-road sources. The rank point WEP analysis attributed 99.6% of point source nitrates to Washington State, with 0.3% attributed to Oregon. The rank point WEP analysis attributed 99.6% of point source sulfates to Washington State, with 0.3% attributed to Oregon.

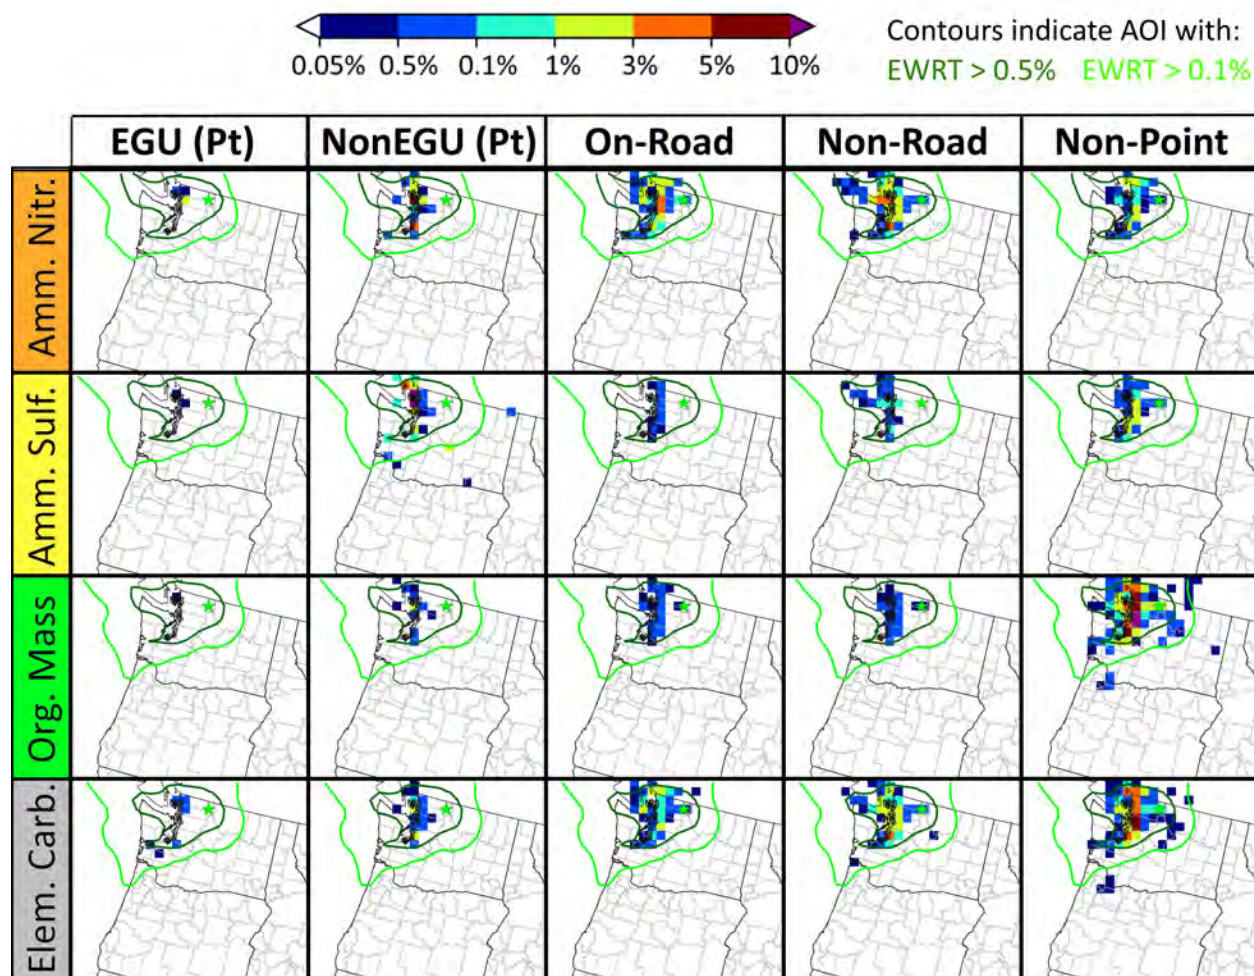


Figure 6-10: WEP for source area potential to contribute to extinction on MID by pollutant at the NOCA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at NOCA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of sulfates at NOCA1 are expected to come primarily from natural (35%), international anthropogenic (26%) and wildland fire (26%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 10% of the sulfates responsible for light extinction at NOCA1. See Figure 6-11 for more information.

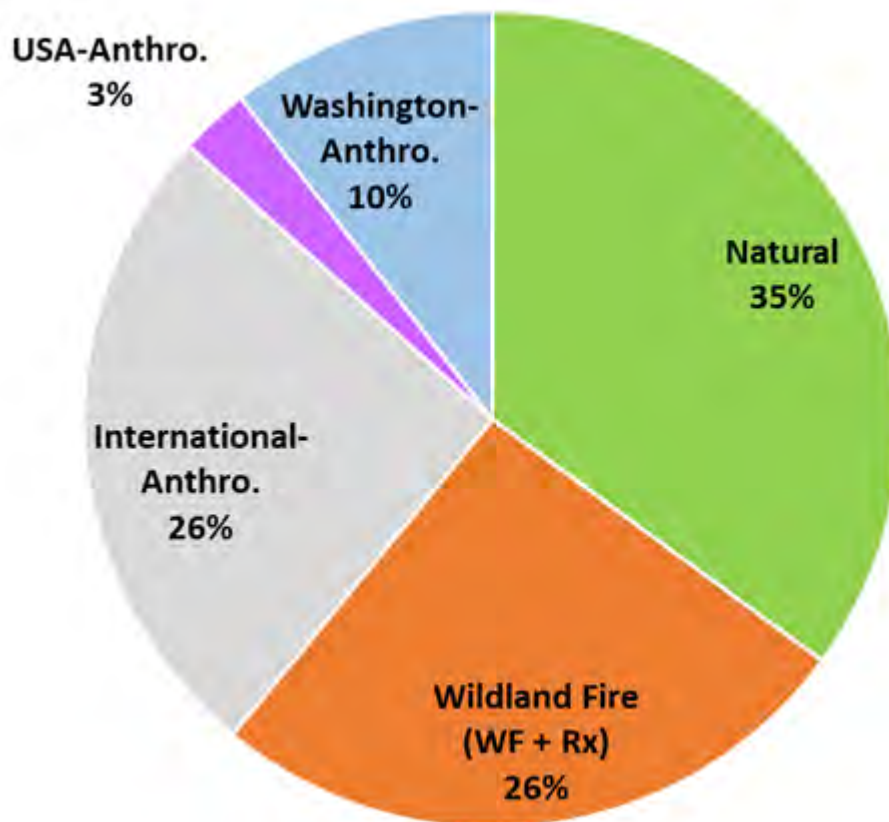


Figure 6-11: Expected source regions of SO_4 in 2028 at NOCA1 for MID (CAMx total = 11.3 Mm^{-1}).

The modeled sulfates for 2028 MID at NOCA1 was 11.3 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 8.14 Mm^{-1} and 8.16 Mm^{-1} , respectively. Figure 6-12 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the NOCA1 monitoring site on 2028 MID.

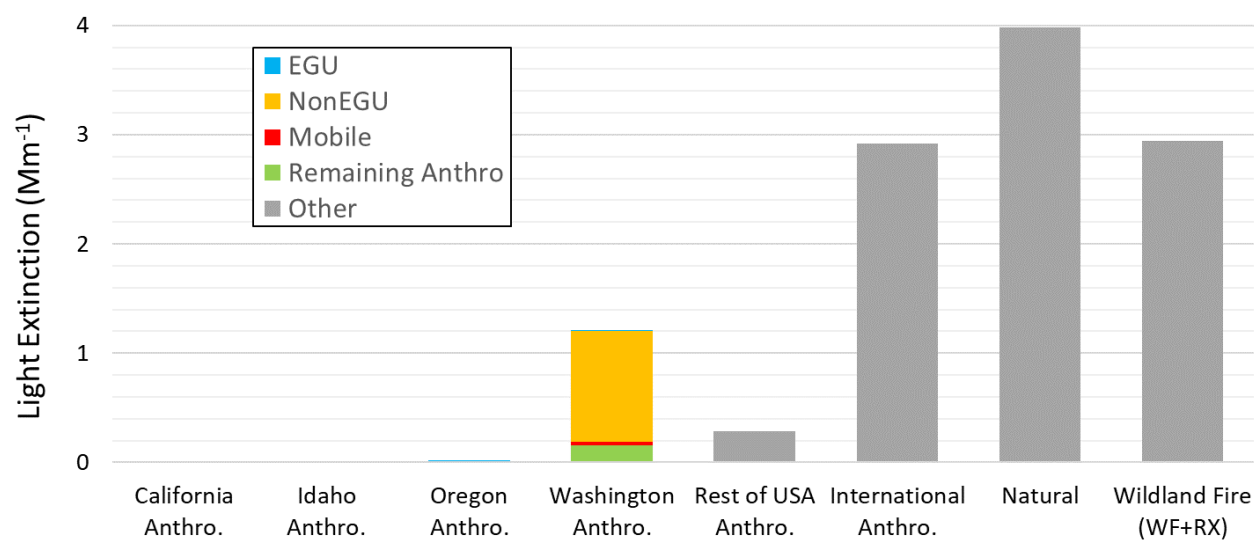


Figure 6-12: Expected source categories and regions of SO₄ in 2028 at NOCA1 for MID (CAMx total = 11.3 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at NOCA1 are expected to come primarily from natural (46%), international anthropogenic (30%), and out-of-state US anthropogenic (12%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 8% of the sulfates responsible for light extinction at OLYM1. See Figure 6-13 for more information.

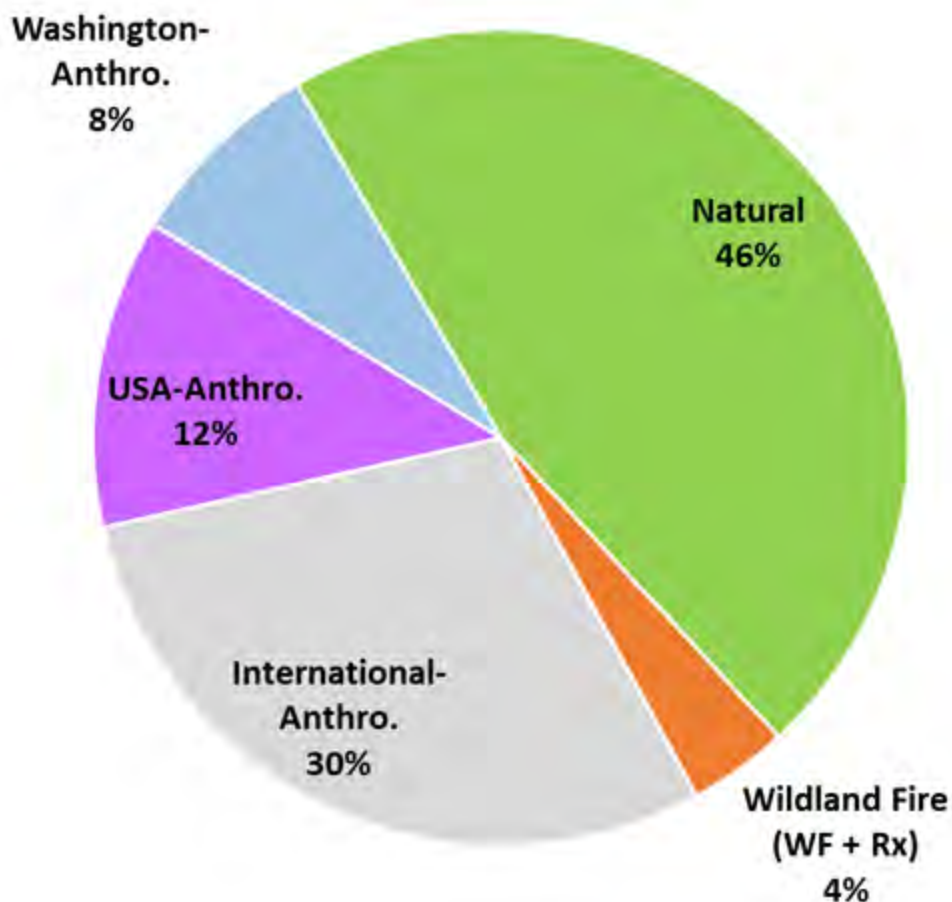


Figure 6-13: Expected source regions of SO_4 in 2028 at NOCA1 for clearest days (CAMx PSAT total = 3.6 Mm^{-1})

The modeled sulfates for 2028 clearest days at NOCA1 was 3.6 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.66 Mm^{-1} and 0.65 Mm^{-1} , respectively. Figure 6-14 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at NOCA1 on 2028 clearest days.

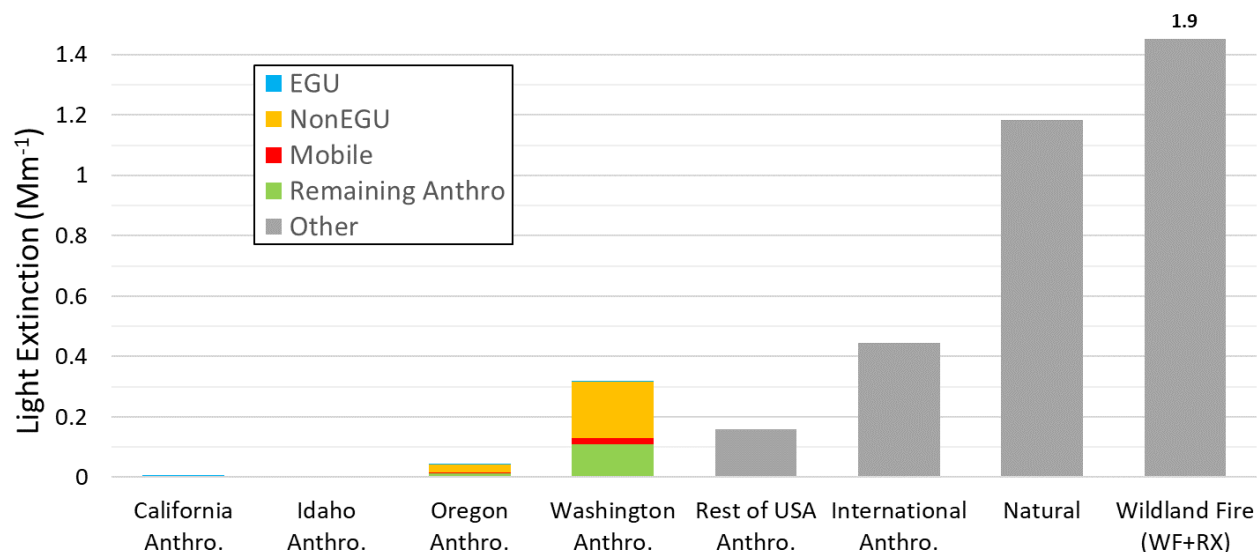


Figure 6-14: Expected source categories and regions of SO₄ in 2028 at NOCA1 for clearest days (CAMx total = 3.6 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the third largest species contribution to light extinction for the MID and clearest days during the 2014-2018 baseline at NOCA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at NOCA1 are expected to come primarily from international anthropogenic sources (45%) while natural sources (18%), and wildland fires (5%) are expected to have minimal impacts. All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 25% of the nitrates responsible for light extinction at NOCA1. See Figure 6-15 for more information.

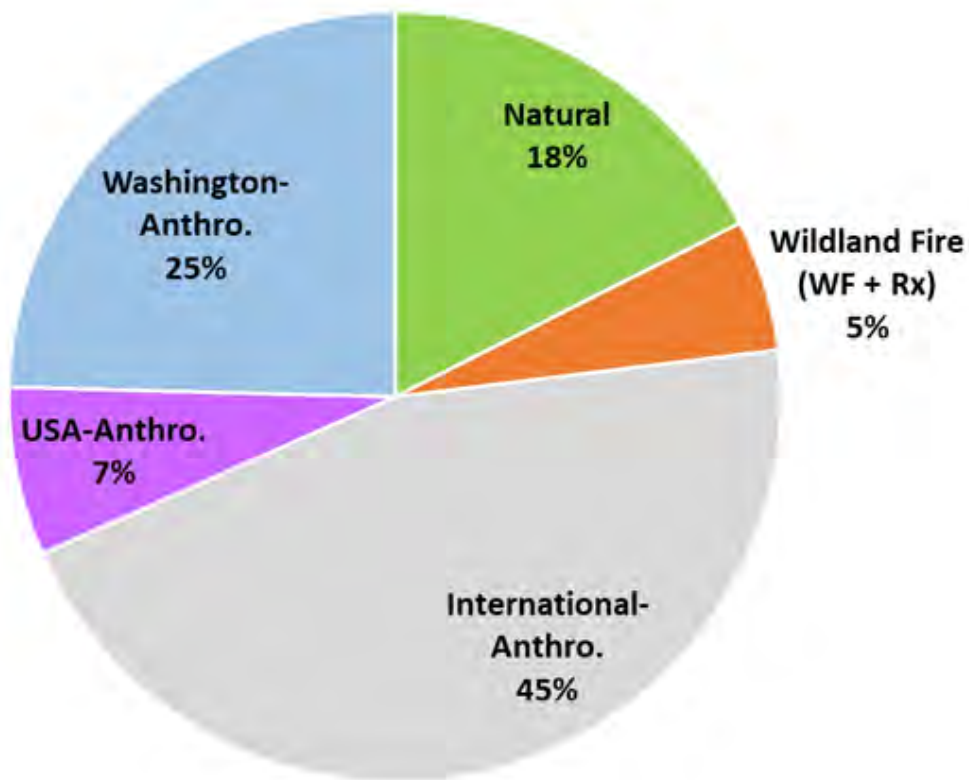


Figure 6-15: Expected source regions of NO_3 in 2028 at NOCA1 for MID (CAMx total = 5.9 Mm^{-1}).

The modeled nitrates for 2028 MID at NOCA1 was 5.9 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 1.73 Mm^{-1} and 1.24 Mm^{-1} , respectively.

Figure 6-16 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at NOCA1 on 2028 MID.

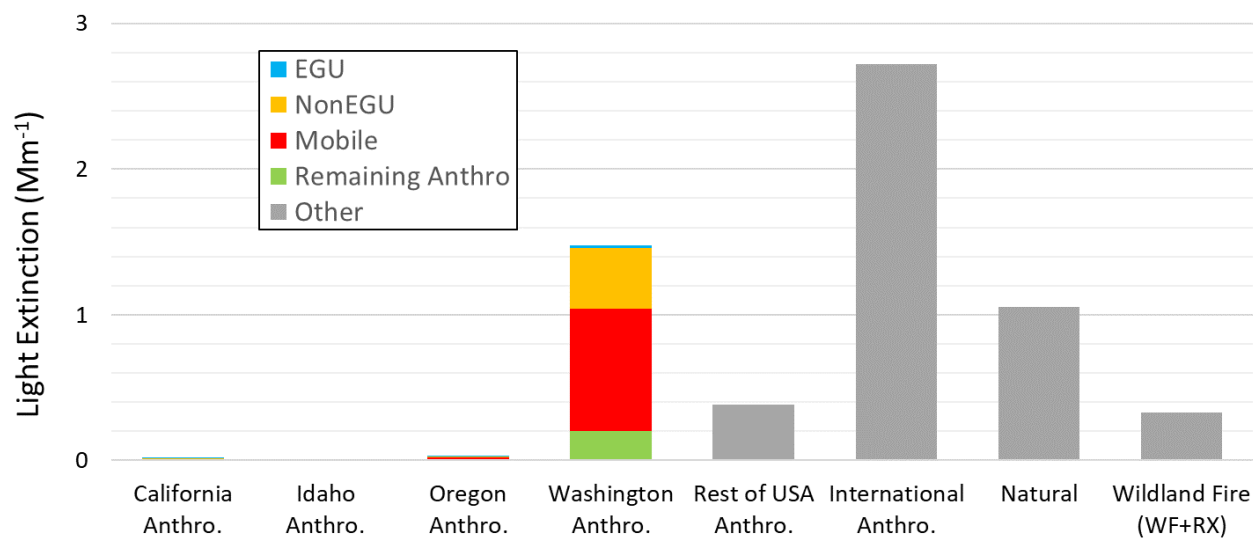


Figure 6-16: Expected source categories and regions of NO₃ in 2028 at NOCA1 for MID (CAMx total = 5.9 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of nitrates at NOCA1 are expected to come primarily from out-of-state US anthropogenic (33%), and international anthropogenic (25%) sources. Washington anthropogenic sources are expected to contribute 22% of the nitrates responsible for light extinction at NOCA1 on clearest days. See Figure 6-17 for more information.

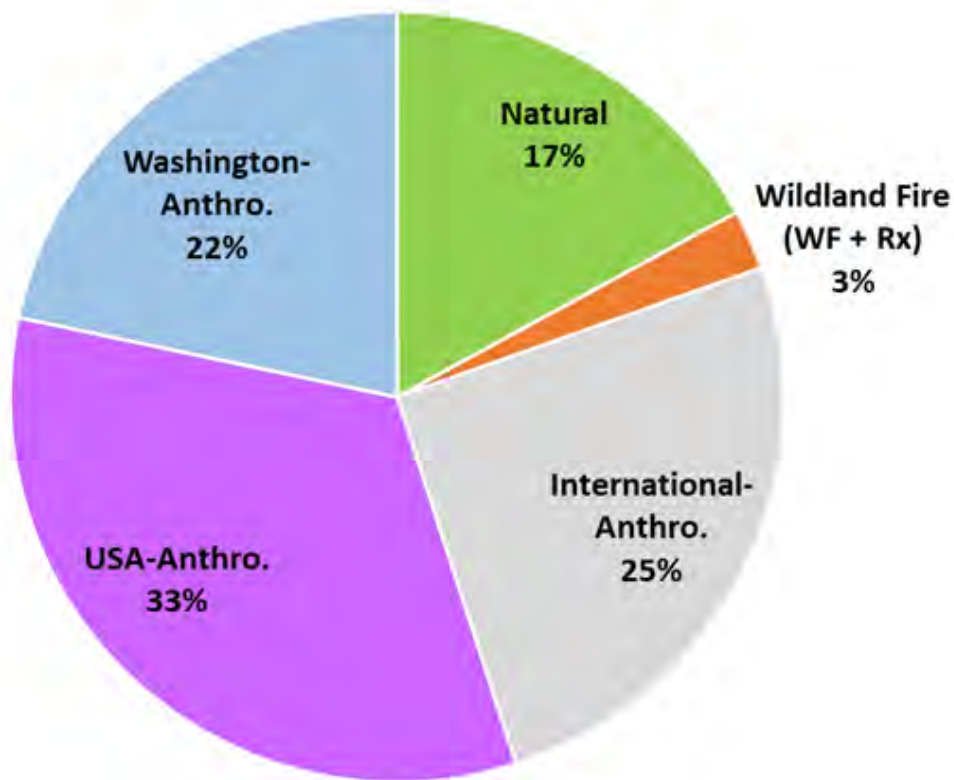


Figure 6-17: Expected source regions of NO_3 in 2028 at NOCA1 for clearest days (CAMx total = 0.8 Mm^{-1}).

The modeled nitrates for 2028 clearest days at NOCA1 was 0.8 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.24 Mm^{-1} and 0.19 Mm^{-1} , respectively. Figure 6-18 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at the NOCA1 monitoring site on 2028 clearest days.

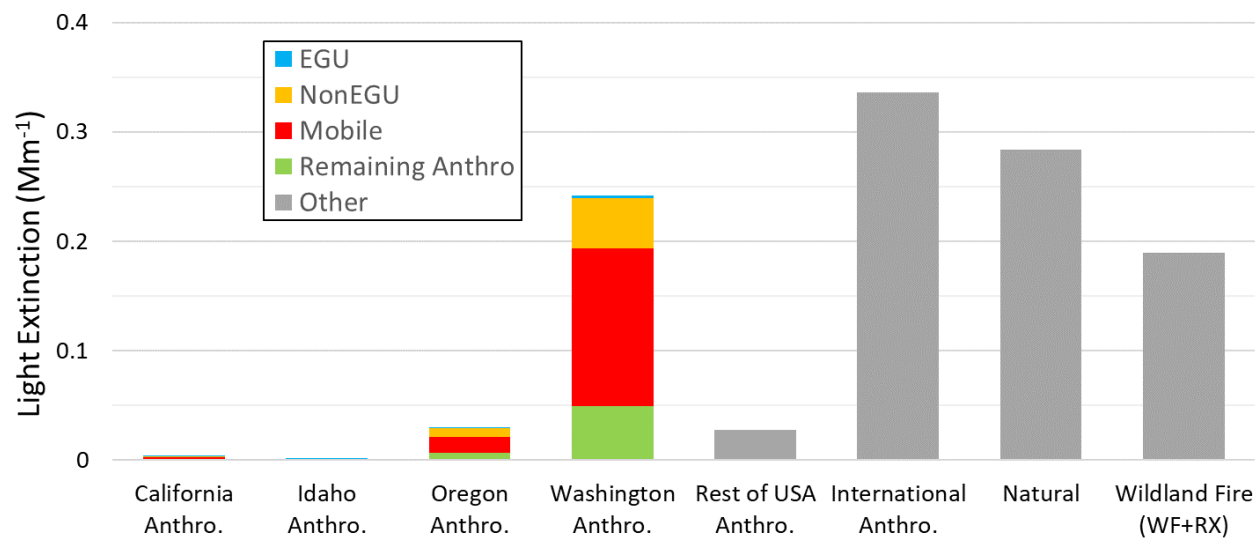


Figure 6-18: Expected source categories and regions of NO₃ in 2028 at NOCA1 for clearest days (CAMx total = 0.8 Mm⁻¹).

6.3 Alpine Lakes Wilderness

Alpine Lakes Wilderness is represented by the SNPA1 IMPROVE monitoring site. The baseline conditions presented in Chapter 3 show that sulfates (35%), organic mass (25%), and nitrates (26%) together contribute to 76% of the light extinction on the MID at this site. On the clearest days sulfates (33%), nitrates (20%), and organic mass (22%) contribute to 75% of the light extinction at this monitoring site.

WEP and rank point analyses

The WEP analysis for the SNPA1 site on MID for the 2028 OTB scenario is summarized in Figure 6-19, showing an AOI of sources that span western and central Washington, the Puget Sound area, and the Vancouver, BC and Portland, OR metropolitan areas. Nitrates at SNPA1 show considerable influence from on-road, Non-road, and non-point sources. Sulfates at NOCA1 show considerable influence from non-EGU Point and non-point sources. Organic mass at SNPA1 is mostly influenced by non-point sources. Elemental carbon is mostly influenced by non-point sources but also shows influence from non-EGU Point, on-road, and non-road sources. The rank point WEP analysis attributed 90.9% of point source nitrates to Washington State, with 8.2%, 0.4%, 0.3%, and 0.2% attributed to Oregon, California, Idaho, and Tribal Lands, respectively. The rank point WEP analysis attributed 98.3% of point source sulfates to Washington State, with 1.4% and 0.2% attributed to Oregon and California, respectively.

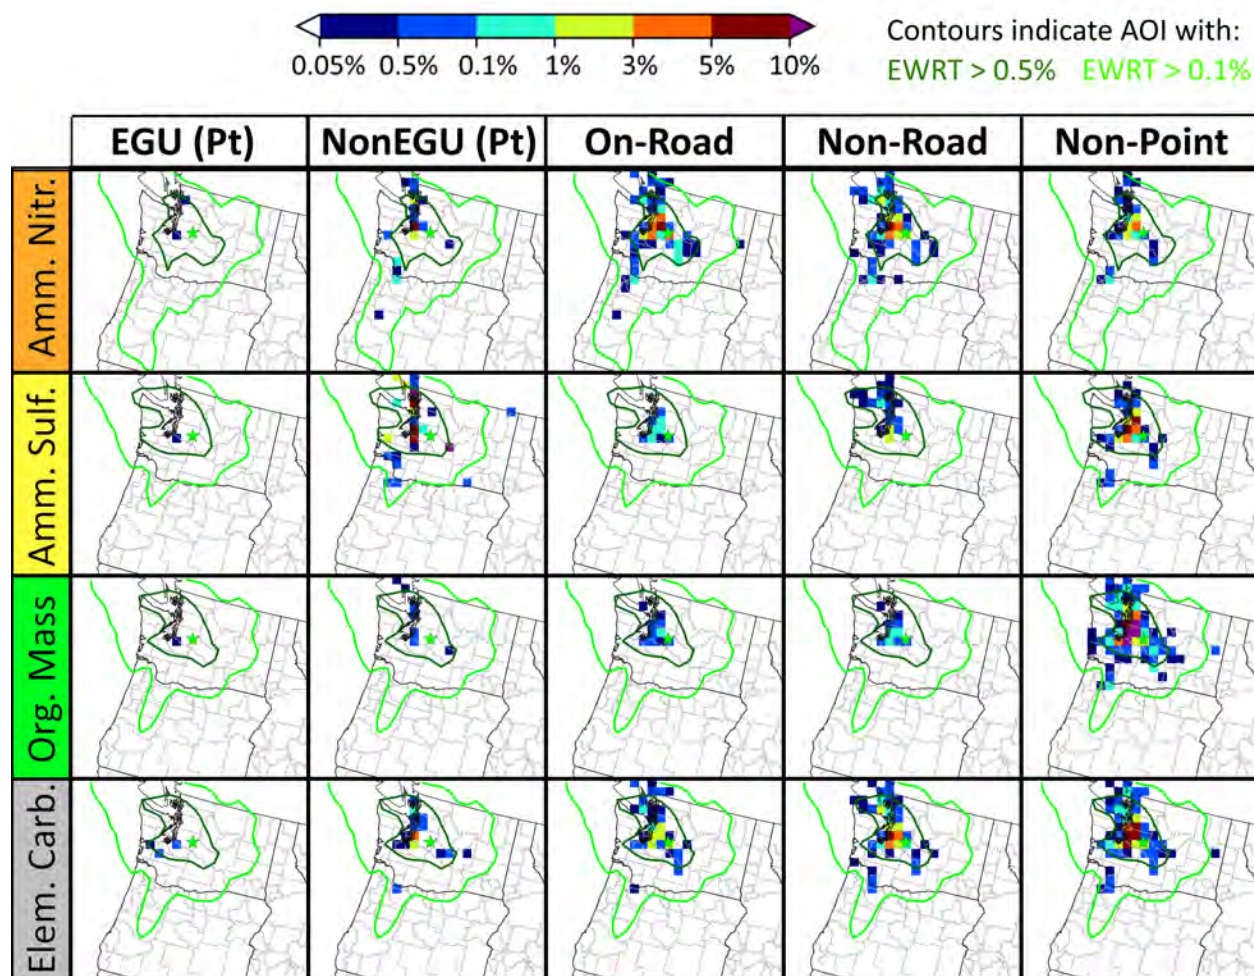


Figure 6-19: WEP for source area potential to contribute to extinction on MID by pollutant at SNPA1 (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at SNPA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of sulfates at SNPA1 are expected to come primarily from wildland fire (55%), natural (21%), and international anthropogenic sources (14%). All of these sources are beyond Washington's control.

Washington anthropogenic sources are expected to contribute 8% of the sulfates responsible for light extinction at SNPA1. See Figure 6-20 for more information.

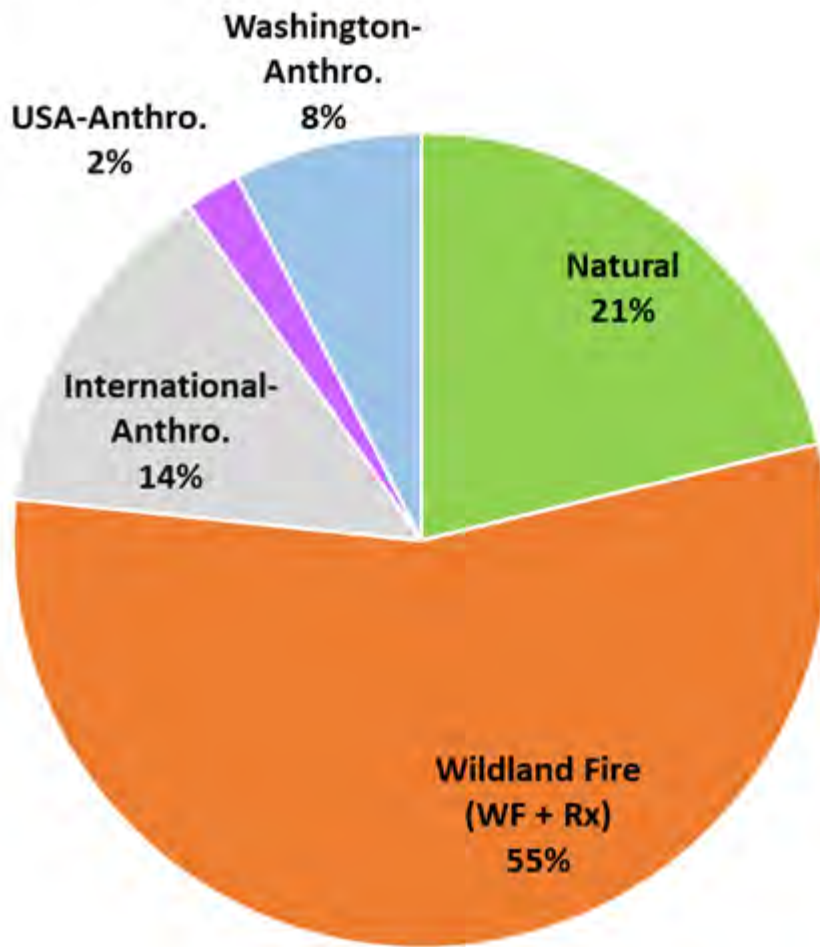


Figure 6-20: Expected source regions of SO₄ in 2028 at SNPA1 for MID (CAMx total = 22.9 Mm⁻¹).

The modeled sulfates for 2028 MID at SNPA1 was 22.9 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 8.84 Mm⁻¹ and 8.75 Mm⁻¹, respectively. The impacts of wildland fire on MID are clearly overestimated in the model for SNPA1, which is supported by the immense organic mass modeled at the site (171.3 Mm⁻¹). Figure 6-21 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the OLYM1 monitoring site on 2028 MIDs.

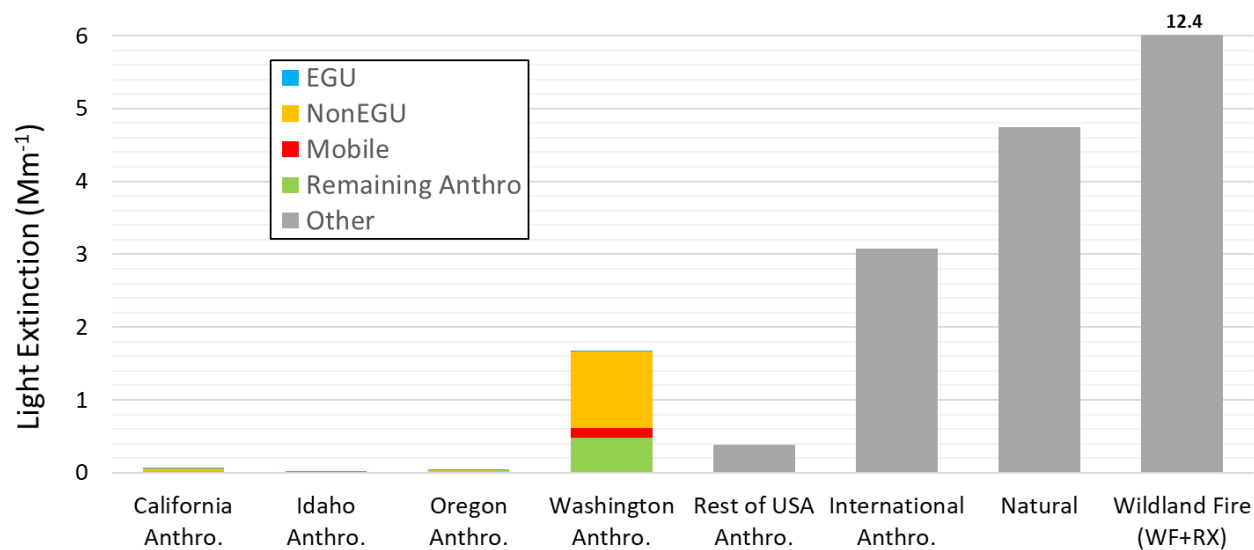


Figure 6-21: Expected source categories and regions of SO₄ in 2028 at SNPA1 for MID (CAMx total = 22.4 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at SNPA1 are expected to come primarily from natural (47%), international anthropogenic (22%), and out-of-state US anthropogenic (18%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 11% of the sulfates responsible for light extinction at SNPA1. See Figure 6-22 for more information.

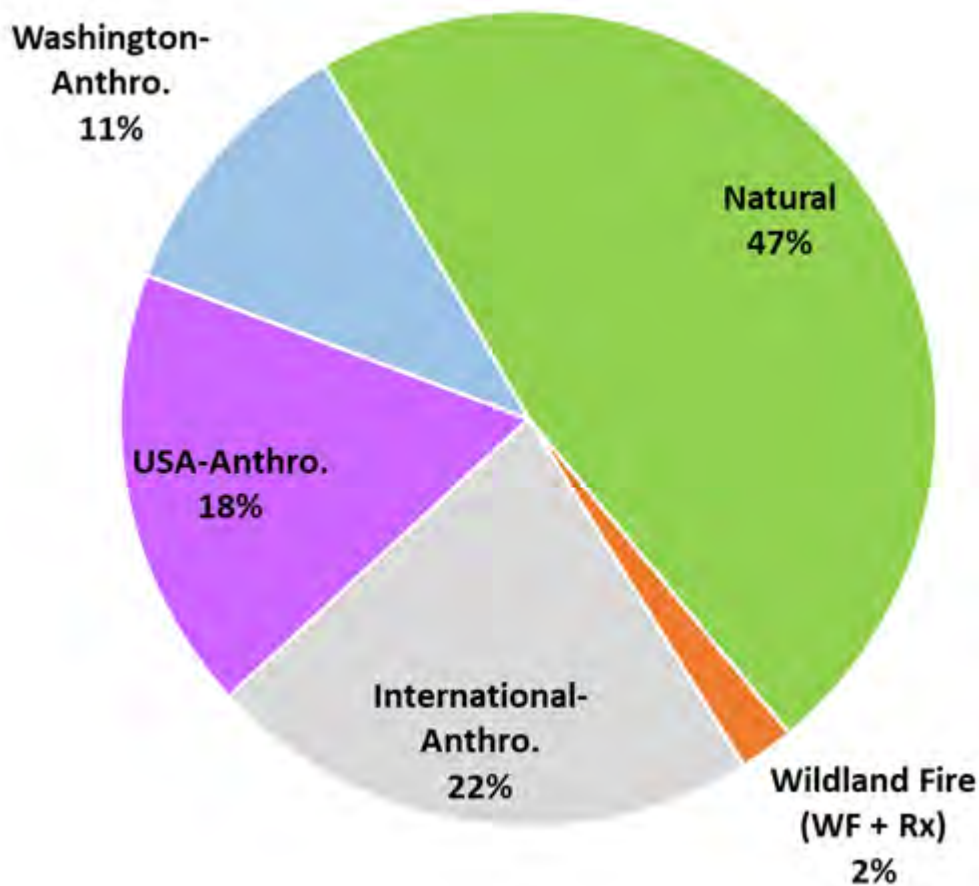


Figure 6-22: Expected source regions of SO₄ in 2028 at SNPA1 for clearest days (CAMx total = 4.4 Mm⁻¹).

The modeled sulfates for 2028 clearest days at SNPA1 was 4.4 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 1.01 Mm⁻¹ and 0.98 Mm⁻¹, respectively.

Figure 6-23 shows an expectation within Washington that non-EGU point sources contribute the most sulfate light extinction at SNPA1 on 2028 clearest days.

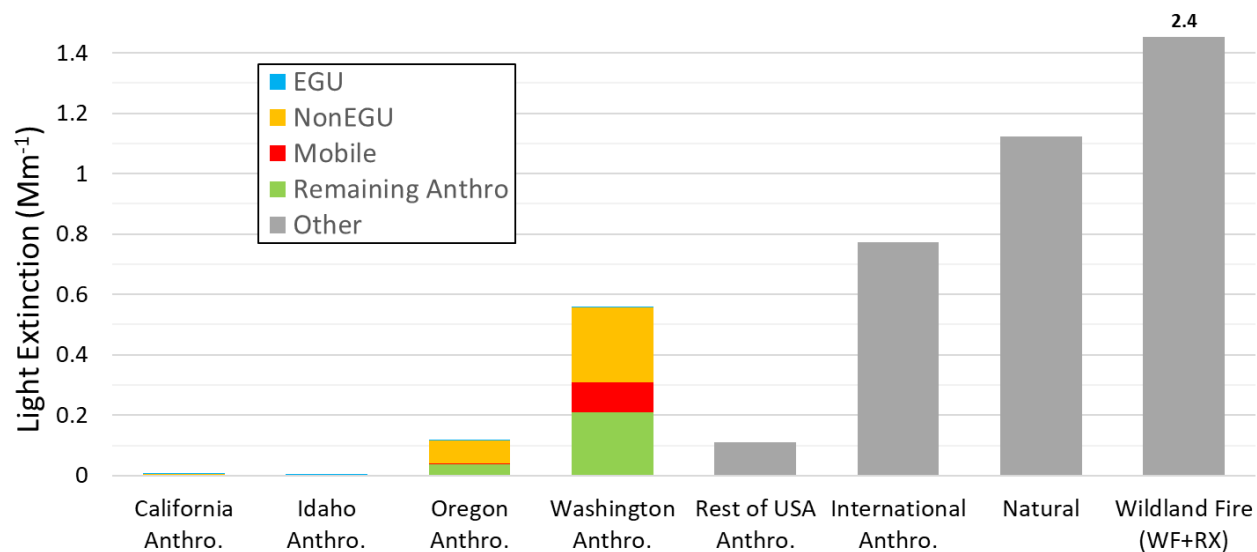


Figure 6-23: Expected source categories and regions of SO₄ in 2028 at SNPA1 for clearest days (CAMx total = 4.4 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the 2nd largest species contribution to light extinction for the MID clearest days during the 2014-2018 baseline at SNPA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at SNPA1 are expected to be most influenced from Washington anthropogenic sources (38%). Wildland fires (26%), international anthropogenic (19%), and natural sources (11%) are expected to have some impacts but are beyond Washington's control. See Figure 6-24 for more information.

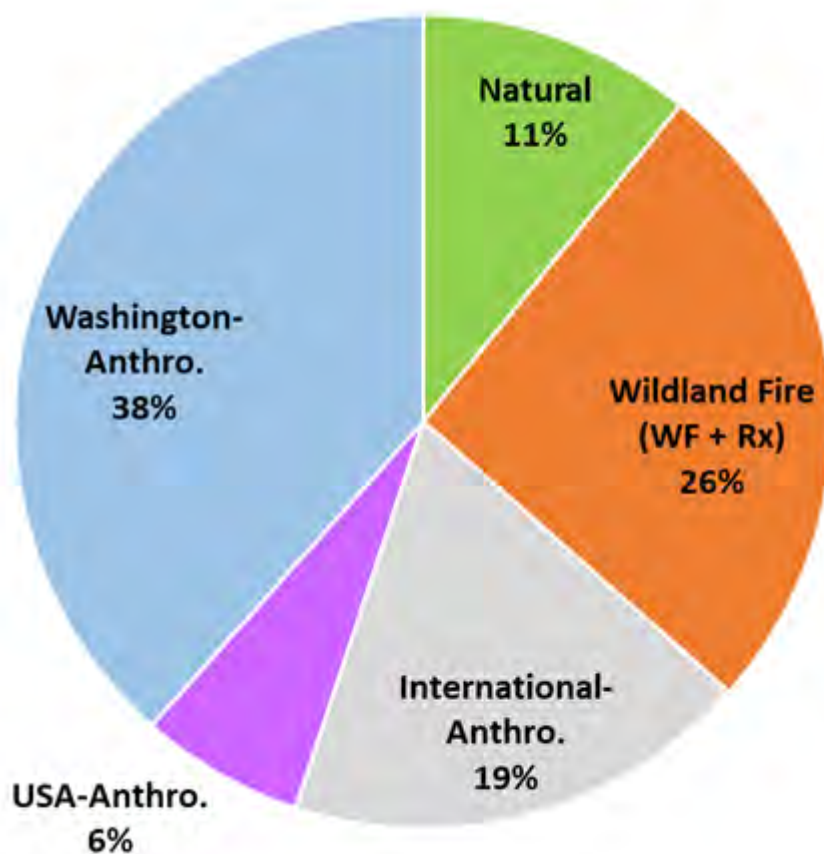


Figure 6-24: Expected source regions of NO_3 in 2028 at SNPA1 for MID (CAMx total = 14.9 Mm^{-1}).

The modeled nitrates for 2028 MID at SNPA1 was 14.9 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 6.75 Mm^{-1} and 4.26 Mm^{-1} , respectively.

Figure 6-25 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at SNPA1 on 2028 MIDs.

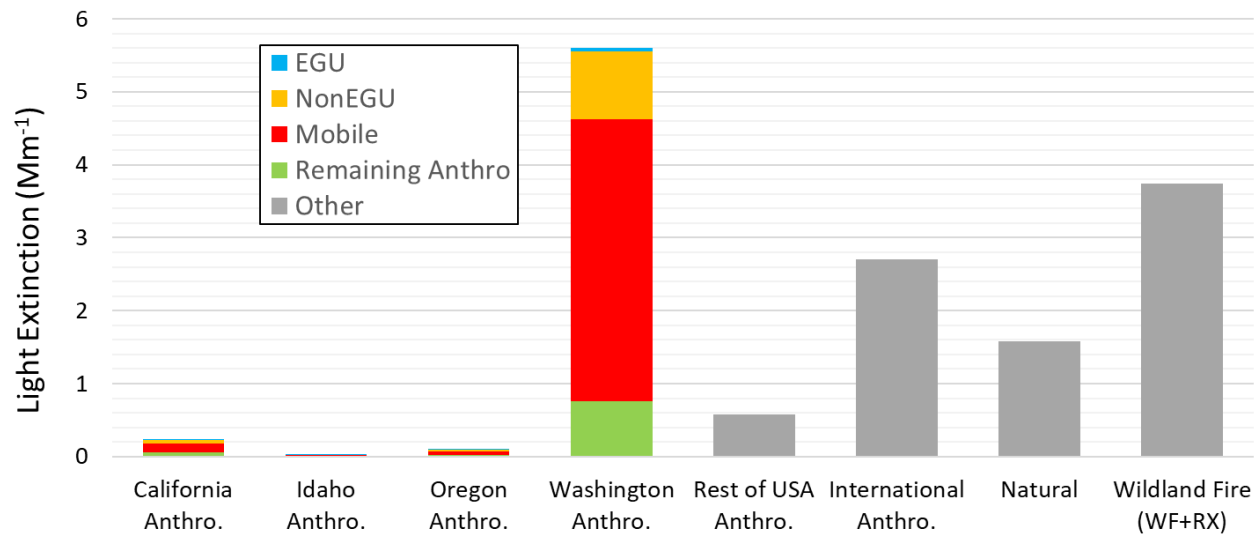


Figure 6-25: Expected source categories and regions of NO₃ in 2028 at SNPA1 for MID (CAMx total = 14.9 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days' visibility impacts of nitrates at SNPA1 are expected to come primarily from out-of-state US anthropogenic (40%) sources. Washington anthropogenic sources are expected to contribute 26% of the nitrates responsible for light extinction at SNPA1 on clearest days. See Figure 6-26 for more information.

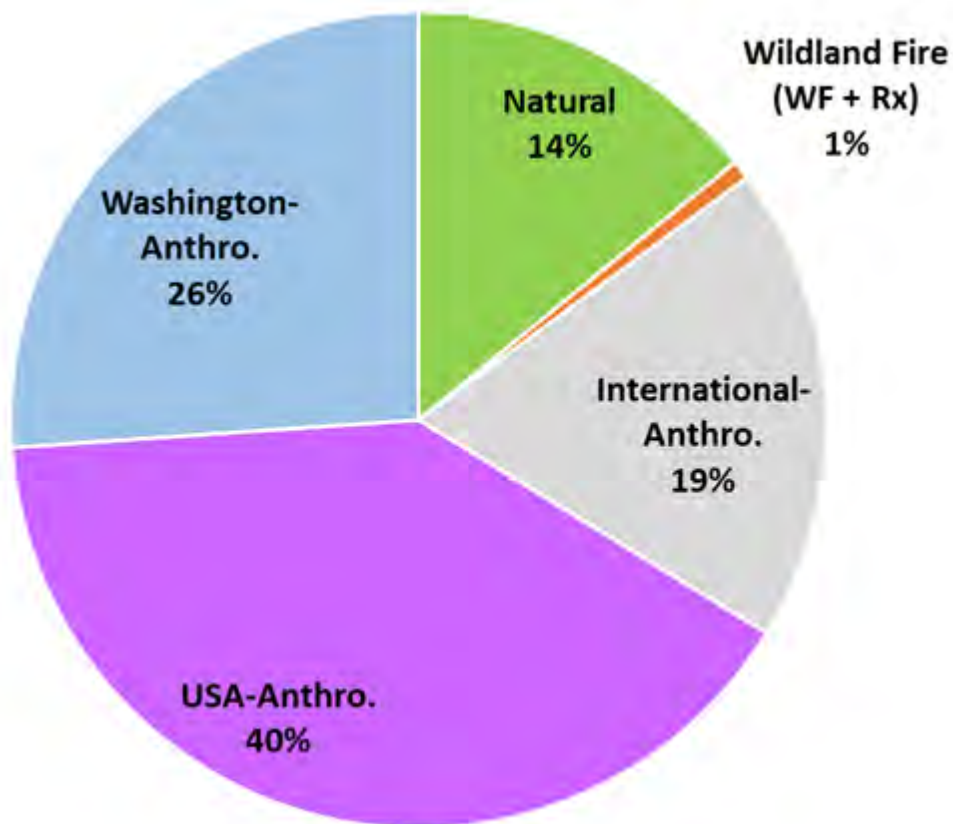


Figure 6-26: Expected source regions of NO_3 in 2028 at SNPA1 for clearest days (CAMx PSAT total = 2.2 Mm^{-1}).

The modeled nitrates for 2028 clearest days at SNPA1 was 2.2 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.61 Mm^{-1} and 0.45 Mm^{-1} , respectively.

Figure 6-27 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at the SNPA1 monitoring site on 2028 clearest days.

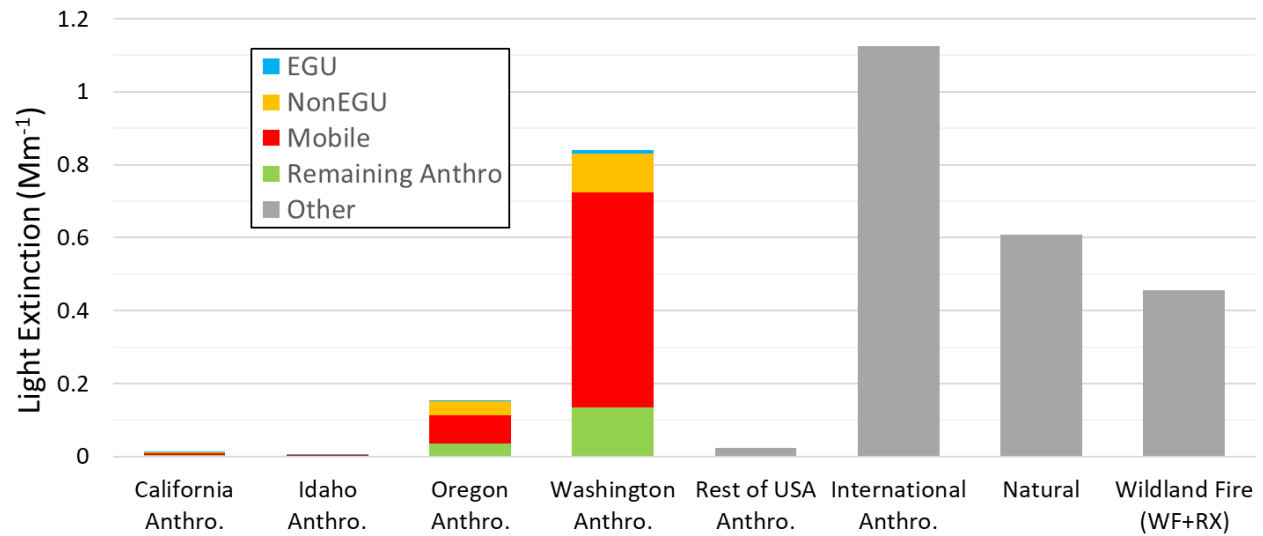


Figure 6-27: Expected source categories and regions of NO₃ in 2028 at SNPA1 for clearest days (CAMx PSAT total = 2.2 Mm⁻¹).

6.4 Mount Rainier National Park

Mount Rainier National Park is represented by the MORA1 IMPROVE monitoring site. The baseline conditions in Chapter 3 show that sulfates (41%) and organic mass (31%) make up 72% of the light extinction on the MID at this monitoring site. Nitrates (7%) and elemental carbon (9%) contribute to another 16% of the light extinction on the MID at this monitoring site. On the clearest days, sulfates (34%) and organic mass (26%) make up 60% of the light extinction at this monitoring site. Nitrates (8%) and elemental carbon (10%) contribute to another 18% of the light extinction on the clearest days at this monitoring site.

WEP and rank point analyses

The WEP analysis for the MORA1 site on MID for the 2028 OTB scenario is summarized in Figure 6-28, showing an AOI of sources in western Washington and the Puget Sound region. There is also some minimal influence from sources in the Portland, OR and Vancouver, BC metropolitan areas. Nitrates at MORA1 show considerable influence from non-EGU Point, on-road, non-road, and non-point sources. Sulfates at MORA1 show considerable influence from non-EGU Point, non-road, and non-point sources. Organic mass at MORA1 is mostly influenced by non-point sources. Elemental carbon is influenced by non-EGU Point, on-road, non-road, and non-point sources. The rank point WEP analysis attributed 97.3% of point source nitrates to Washington State, with 2.6% attributed to Oregon. The rank point WEP analysis attributed 95.6% of point source sulfates to Washington State, with 4.2% and 0.2% attributed to Oregon and California, respectively.

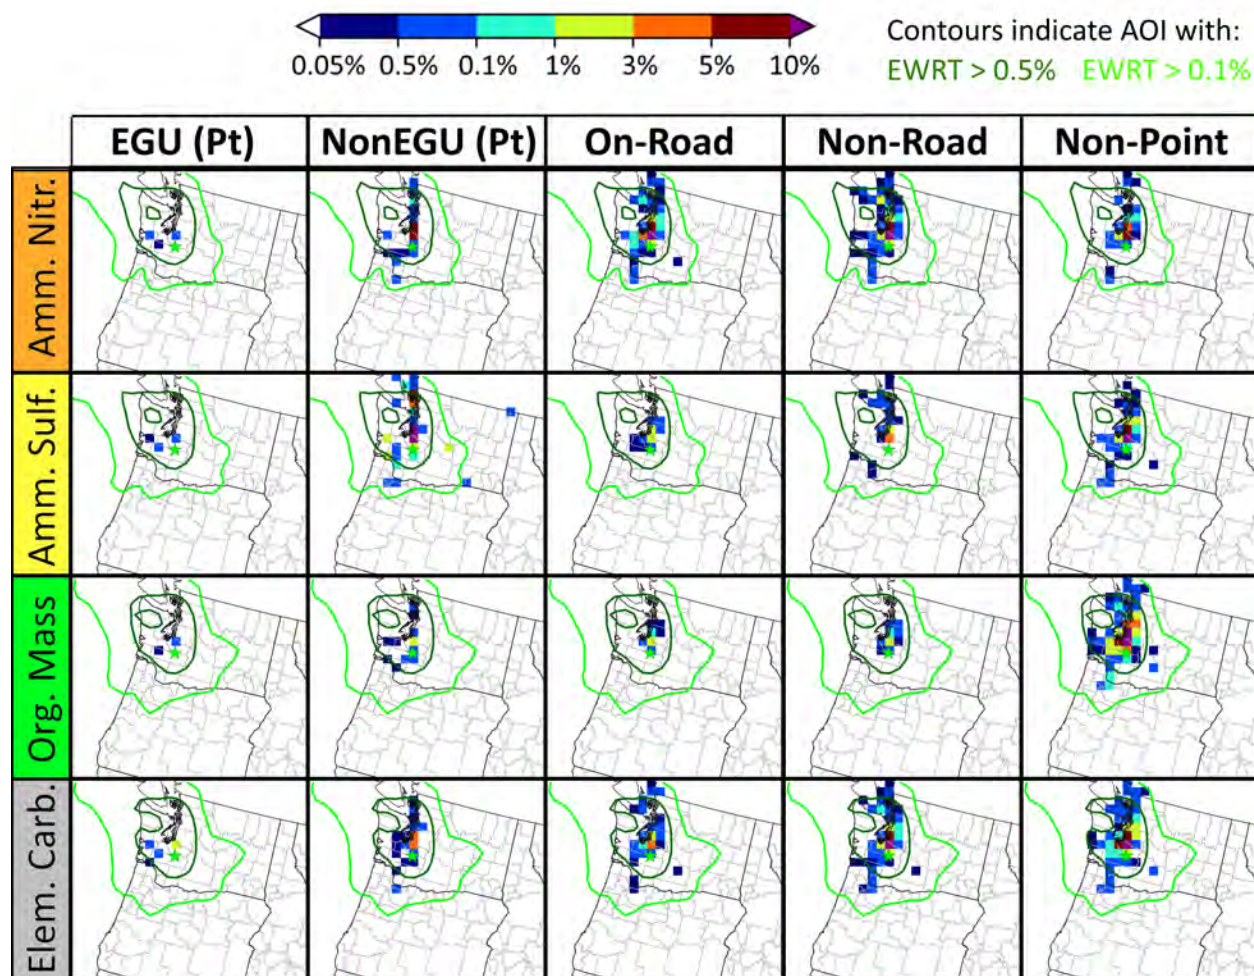


Figure 6-28: WEP for source area potential to contribute to extinction on MID by pollutant at the MORA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at MORA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of sulfates at MORA1 are expected to come primarily from natural (39%), wildland fire (25%), and international anthropogenic sources (23%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 10% of the sulfates responsible for light extinction at MORA1. See Figure 6-29 for more information.

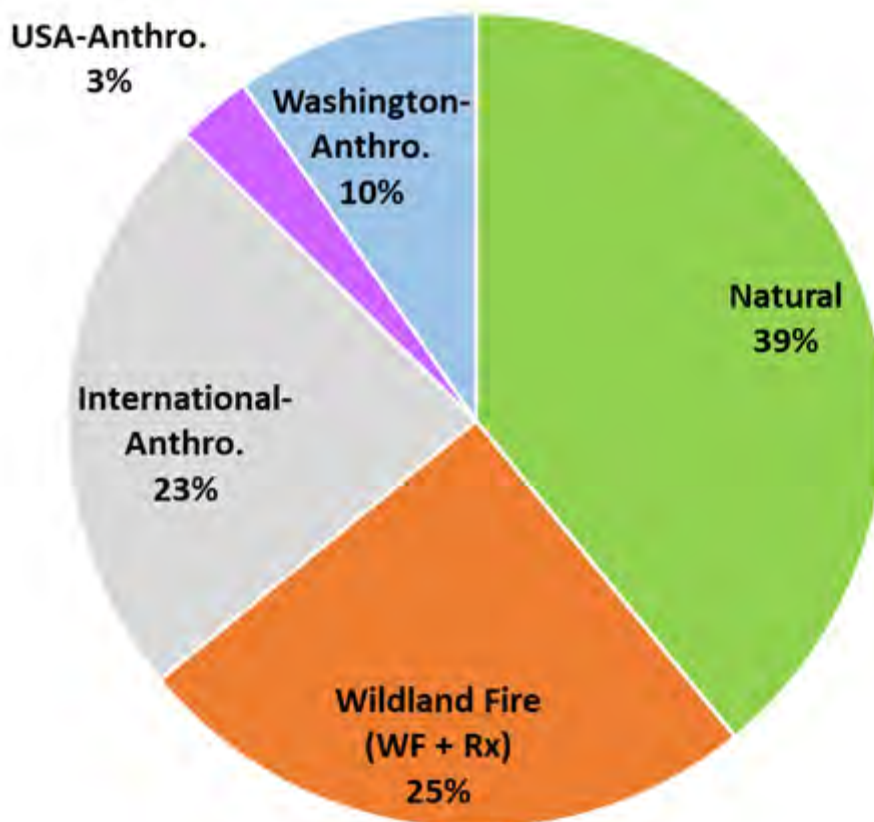


Figure 6-29: Expected source regions of SO₄ in 2028 at MORA1 for MID (CAMx total = 13.2 Mm⁻¹).

The modeled sulfates for 2028 MID at MORA1 was 13.2 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 10.15 Mm⁻¹ and 9.7 Mm⁻¹, respectively.

Figure 6-30 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the OLYM1 monitoring site on 2028 MIDs.

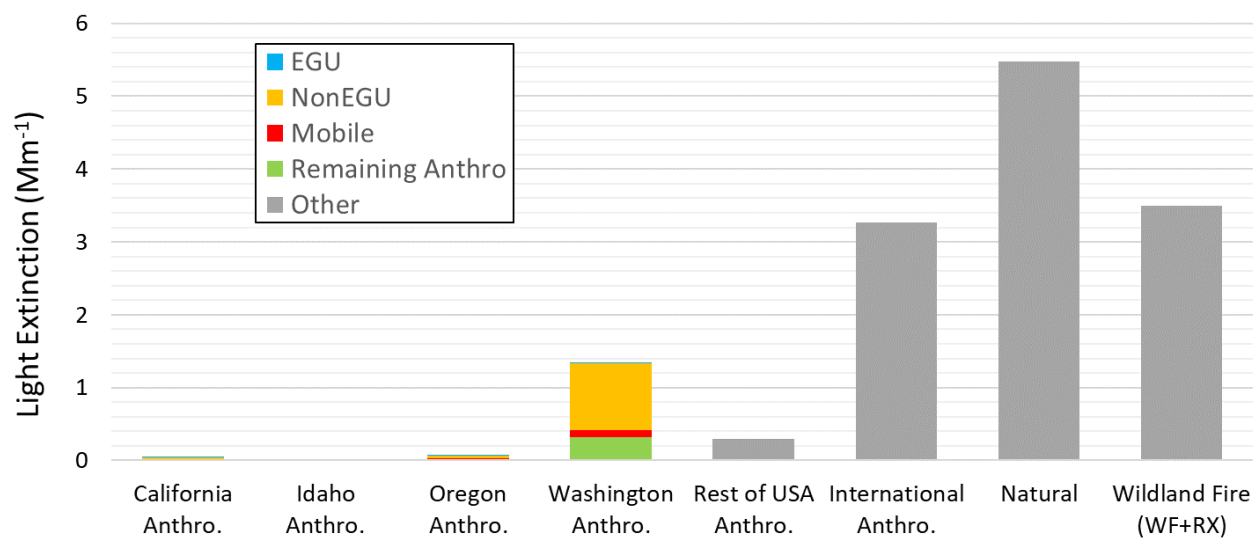


Figure 6-30: Expected source categories and regions of SO₄ in 2028 at MORA1 for MID (CAMx total = 13.2 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at MORA1 are expected to come primarily from natural (36%), out-of-state US anthropogenic (28%), and international anthropogenic (26%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 7% of the sulfates responsible for light extinction at SNPA1. See Figure 6-31 for more information.

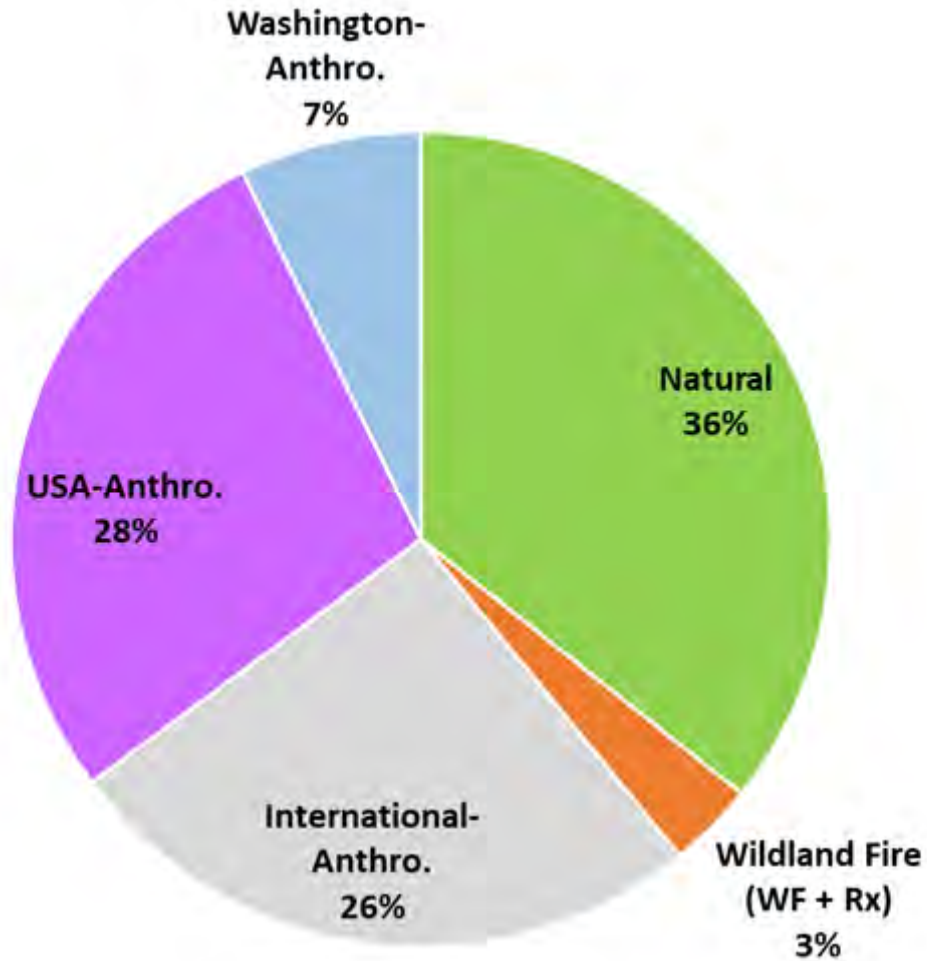


Figure 6-31: Expected source regions of SO_4 in 2028 at MORA1 for clearest days (CAMx total = 3.7 Mm^{-1}).

The modeled sulfates for 2028 clearest days at MORA1 was 3.7 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 1.3 Mm^{-1} and 1.22 Mm^{-1} , respectively.

Figure 6-32 shows an expectation within Washington that, non-EGU point sources contribute the majority of sulfate light extinction at MORA1 on 2028 clearest days.

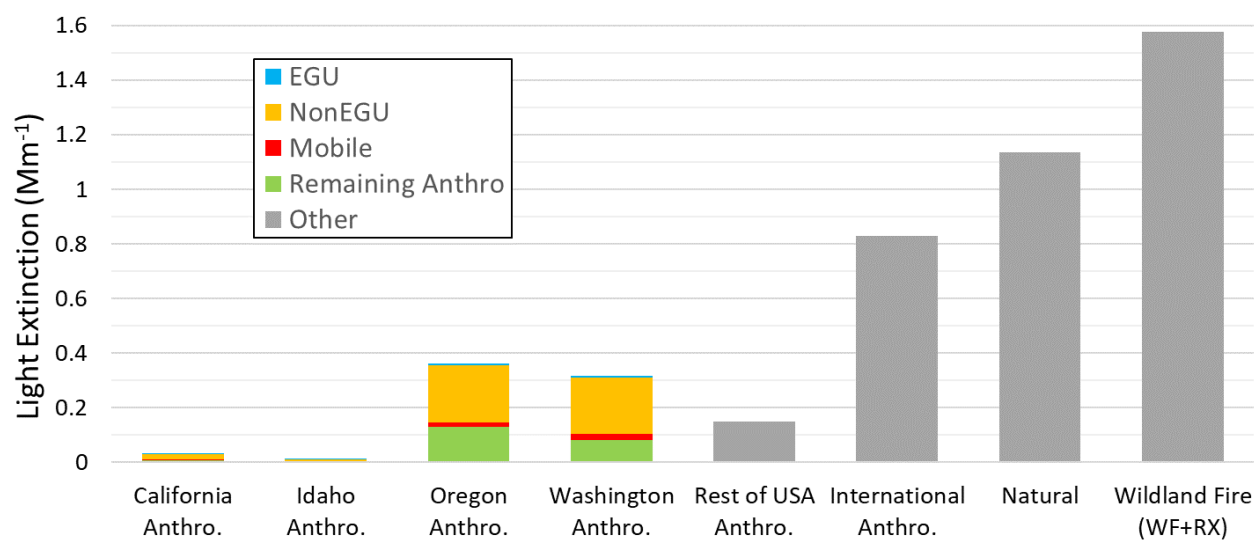


Figure 6-32: Expected source categories and regions of SO₄ in 2028 at MORA1 for clearest days (CAMx total = 3.7 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the 3rd largest species contribution to light extinction for the MID and 6th largest species contribution for the clearest days during the 2014-2018 baseline at MORA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at MORA1 are expected to be most influenced from Washington anthropogenic sources (46%). International anthropogenic (18%), Wildland fires (15%), and natural sources (14%) are expected to have some impacts but are beyond Washington's control. See Figure 6-33 for more information.

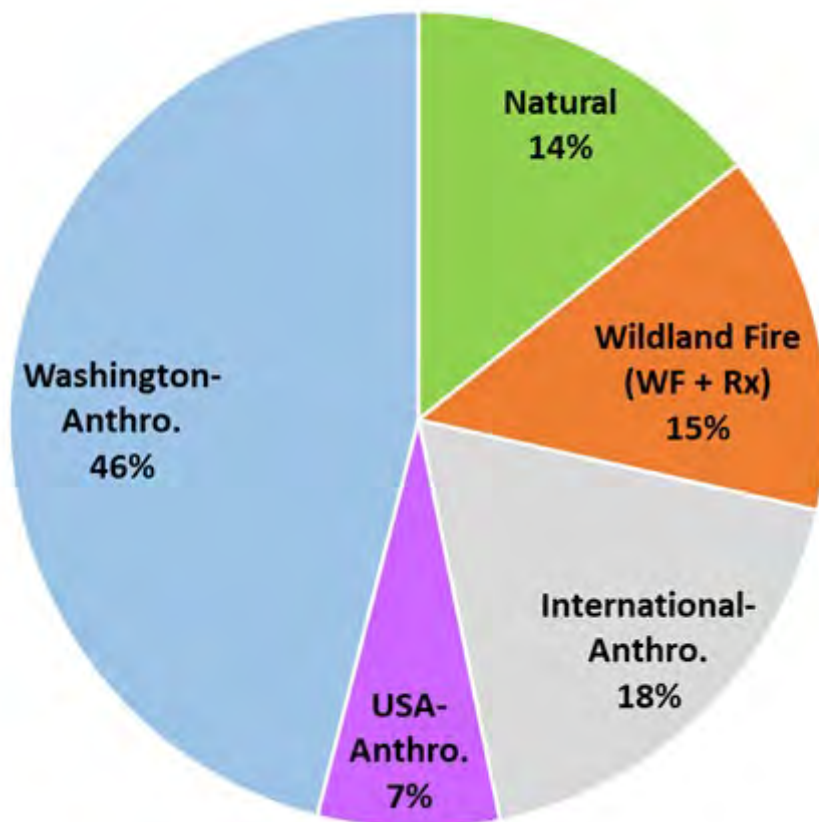


Figure 6-33: Expected source regions of NO_3 in 2028 at MORA1 for MID (CAMx total = 7.2 Mm^{-1}).

The modeled nitrates for 2028 MID at MORA1 was 7.2 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 2.27 Mm^{-1} and 1.13 Mm^{-1} , respectively.

Figure 6-34 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at MORA1 on 2028 MIDs.

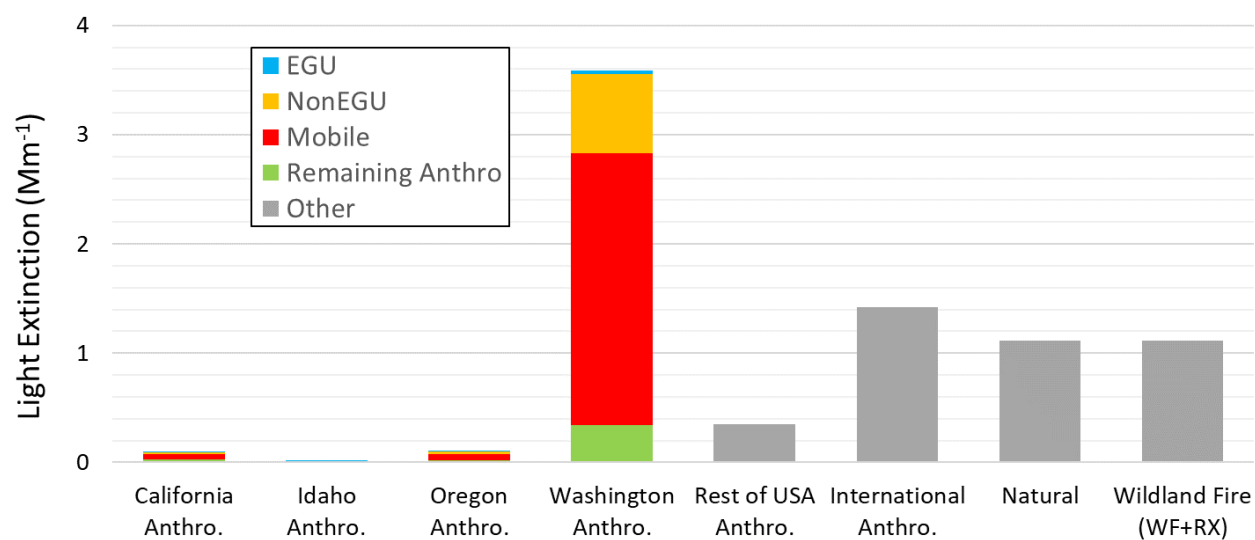


Figure 6-34: Expected source categories and regions of NO₃ in 2028 at MORA1 for MID (CAMx total = 7.2 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of nitrates at MORA1 are expected to come primarily from out-of-state US anthropogenic (54%) and international anthropogenic (20%) sources. Washington anthropogenic sources are expected to contribute 15% of the nitrates responsible for light extinction at MORA1 on clearest days. See Figure 6-35 for more information.

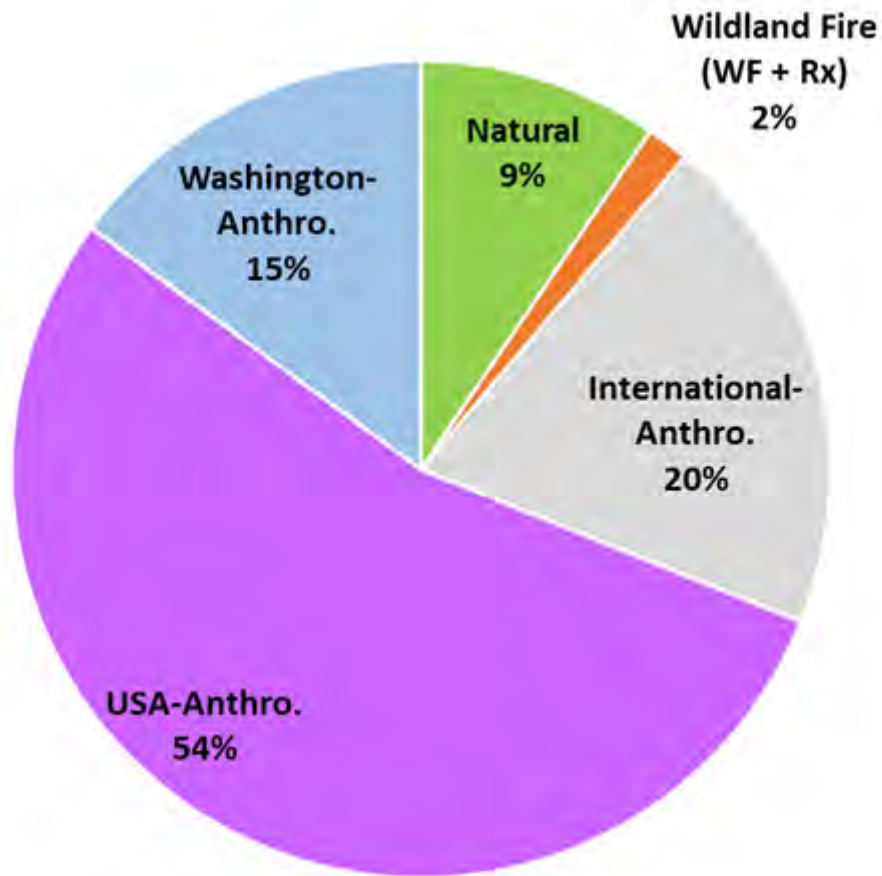


Figure 6-35: Expected source regions of NO_3 in 2028 at MORA1 for clearest days (CAMx total = 1.6 Mm^{-1}).

The modeled nitrates for 2028 clearest days at MORA1 was 1.6 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.32 Mm^{-1} and 0.24 Mm^{-1} , respectively.

Figure 6-36 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at MORA1 on 2028 clearest days.

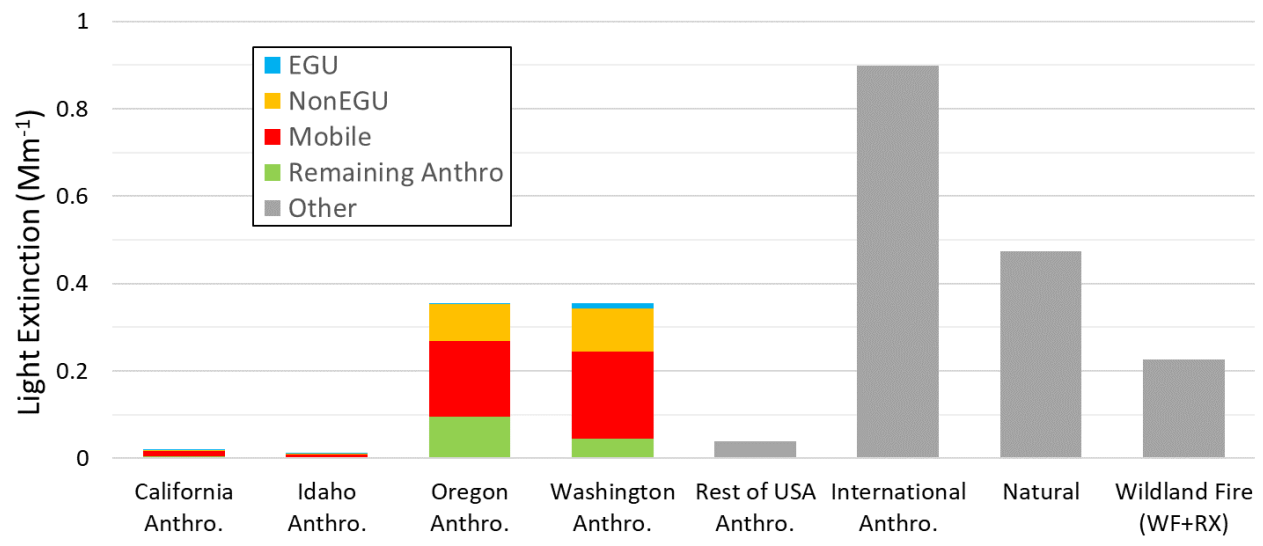


Figure 6-36: Expected source categories and regions of NO₃ in 2028 at MORA1 for clearest days (CAMx total = 1.6 Mm⁻¹).

6.5 Goat Rocks Wilderness and Mount Adams Wilderness

Goat Rocks Wilderness and Mount Adams Wilderness are represented by the WHPA1 IMPROVE monitoring site. The baseline conditions in Chapter 3 show that sulfates (50%), organic mass (22%), and nitrates (12%) together contribute to 84% of the light extinction on the MID at this monitoring site. On the clearest days sulfates (39%), organic mass (14%), and nitrates (14%) contribute to 67% of the light extinction at this monitoring site.

WEP and rank point analyses

The WEP analysis for the WHPA1 site on MID for the 2028 OTB scenario is summarized in Figure 6-37, showing an AOI of sources that span western and central Washington, the Puget Sound area, and the Vancouver, BC and Portland, OR metropolitan areas. Nitrates at WHPA1 show considerable influence from non-EGU Point, on-road, non-road, and non-point sources. Sulfates at WHPA1 show considerable influence from non-EGU Point and non-point sources. Organic mass at WHPA1 is mostly influenced by non-point sources. Elemental carbon is mostly influenced by non-point sources but also shows influence from non-EGU Point, on-road, and non-road sources. The rank point WEP analysis attributed 86.7% of point source nitrates to Washington State, with 11.9%, 0.9%, 0.3%, and 0.1% attributed to Oregon, Tribal Lands, Idaho, and California, respectively. The rank point WEP analysis attributed 89.1% of point source sulfates to Washington State, with 10.4%, 0.2%, and 0.2% attributed to Oregon, Tribal Lands, and California, respectively.

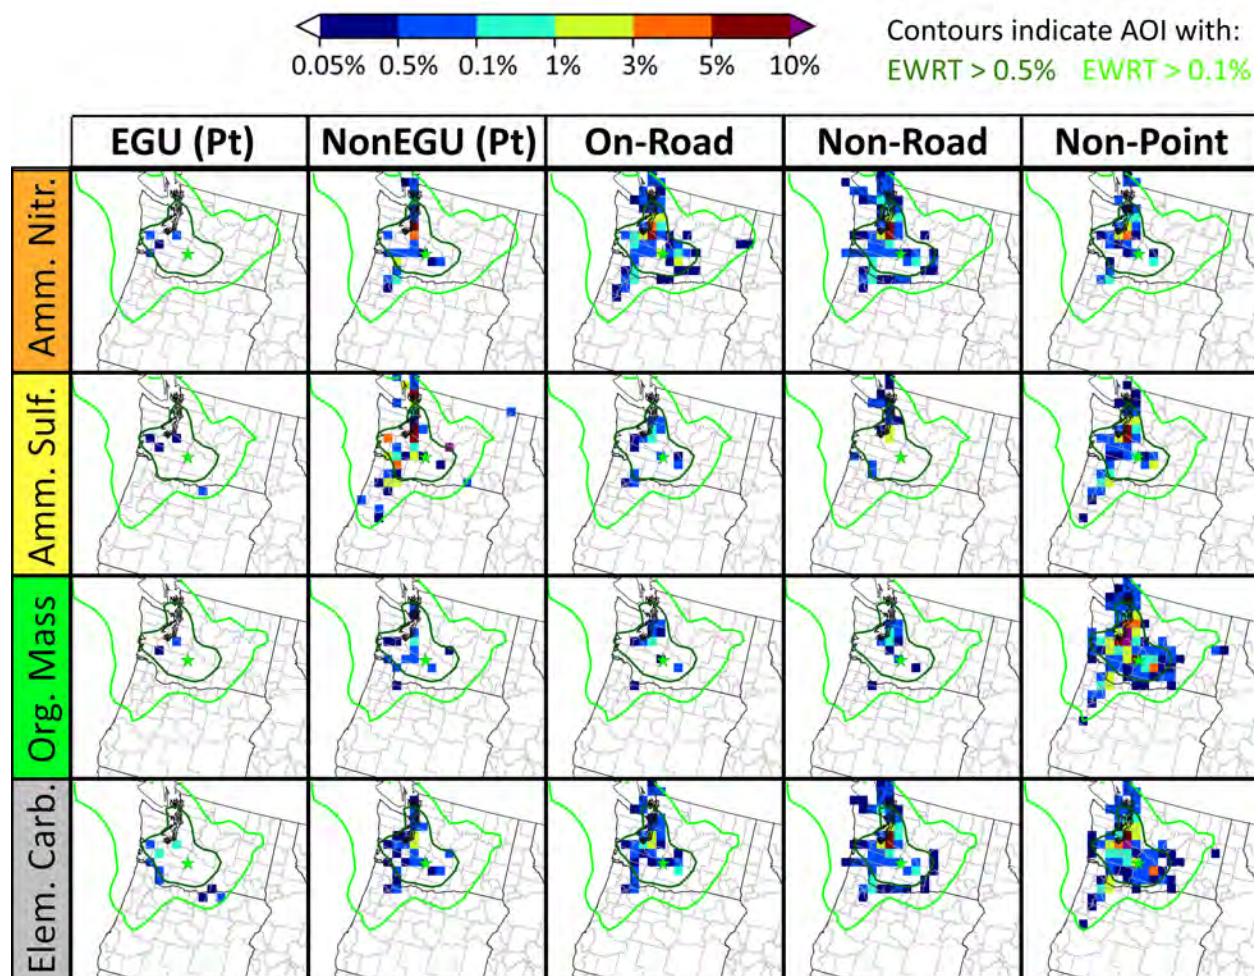


Figure 6-37: WEP for source area potential to contribute to extinction on MID by pollutant at the WHPA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at WHPA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of sulfates at WHPA1 are expected to come primarily from international anthropogenic (52%) and natural sources (35%). These sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 6% of the sulfates responsible for light extinction at WHPA1. See Figure 6-38 for more information.

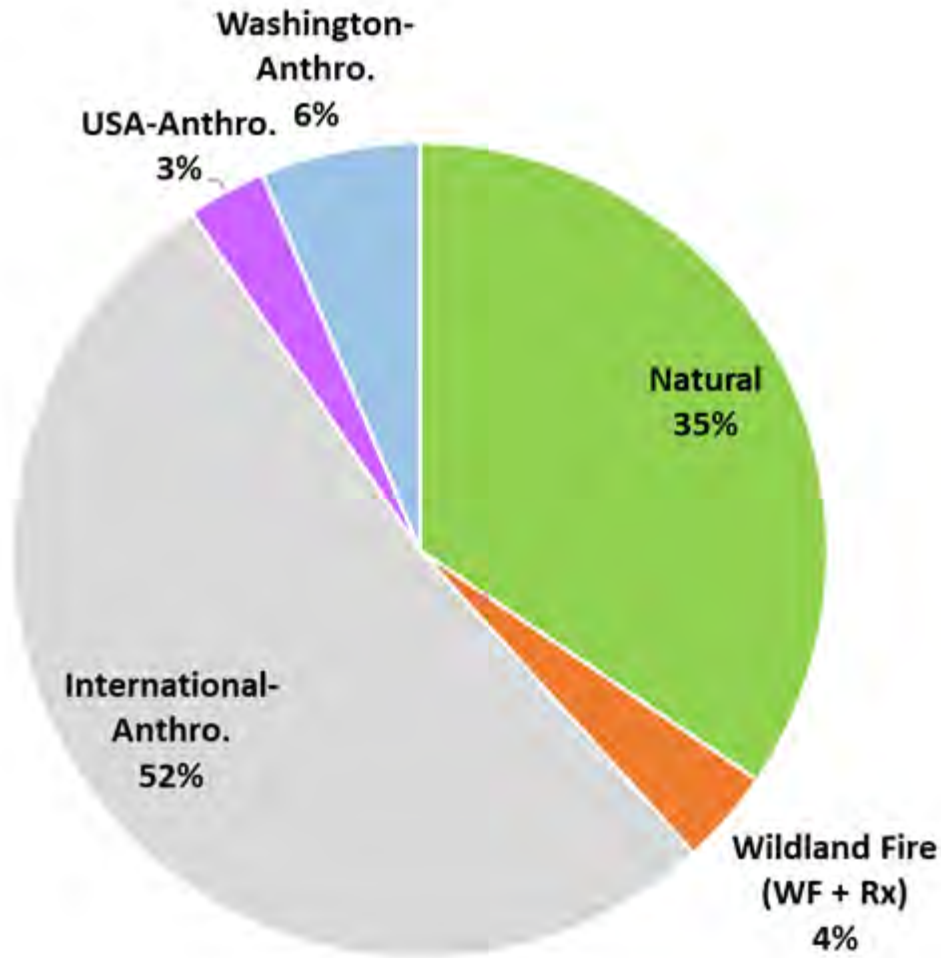


Figure 6-38: Expected source regions of SO_4 in 2028 at WHPA1 for MID (CAMx total = 8.2 Mm^{-1}).

The modeled sulfates for 2028 MID at WHPA1 was 8.2 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 6.37 Mm^{-1} and 6.32 Mm^{-1} , respectively.

Figure 6-39 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the OLYM1 monitoring site on 2028 MIDs.

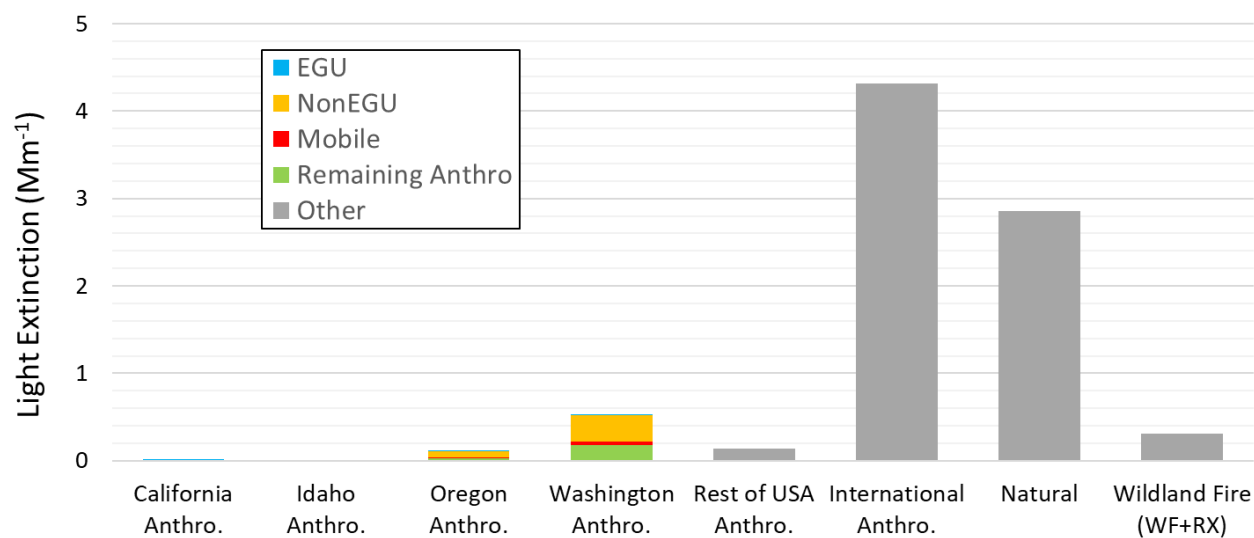


Figure 6-39: Expected source categories and regions of SO₄ in 2028 at WHPA1 for MID (CAMx total = 8.2 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at WHPA1 are expected to come primarily from natural (49%), international anthropogenic (27%), and out-of-state US anthropogenic (18%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 5% of the sulfates responsible for light extinction at WHPA1. See Figure 6-40 for more information.

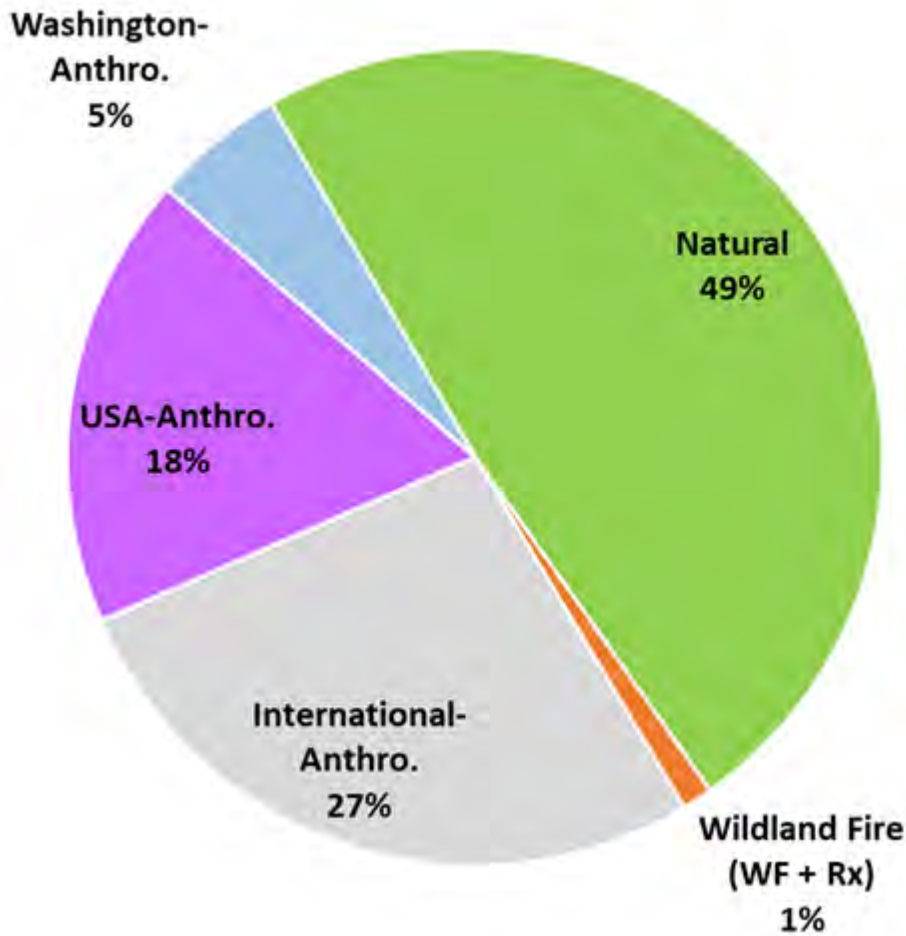


Figure 6-40: Expected source regions of SO₄ in 2028 at WHPA1 for clearest days (CAMx total = 3.0 Mm⁻¹).

The modeled sulfates for 2028 clearest days at WHPA1 was 3.0 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.41 Mm⁻¹ and 0.39 Mm⁻¹, respectively.

Figure 6-41 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at WHPA1 on 2028 clearest days.

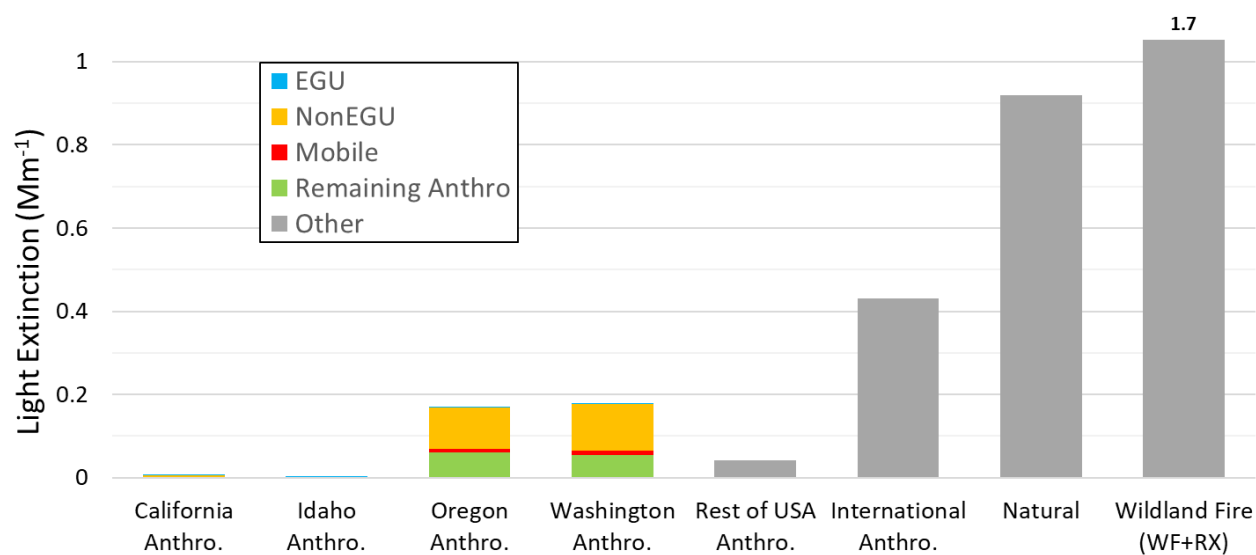


Figure 6-41: Expected source categories and regions of SO₄ in 2028 at WHPA1 for clearest days (CAMx total = 3.0 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the 3rd largest species contribution to light extinction for the MID clearest days during the 2014-2018 baseline at WHPA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at WHPA1 are expected to be considerably influenced by Washington anthropogenic sources (34%). International anthropogenic (35%) and natural sources (19%) are also expected to have considerable impacts but are beyond Washington's control. See Figure 6-42 for more information.

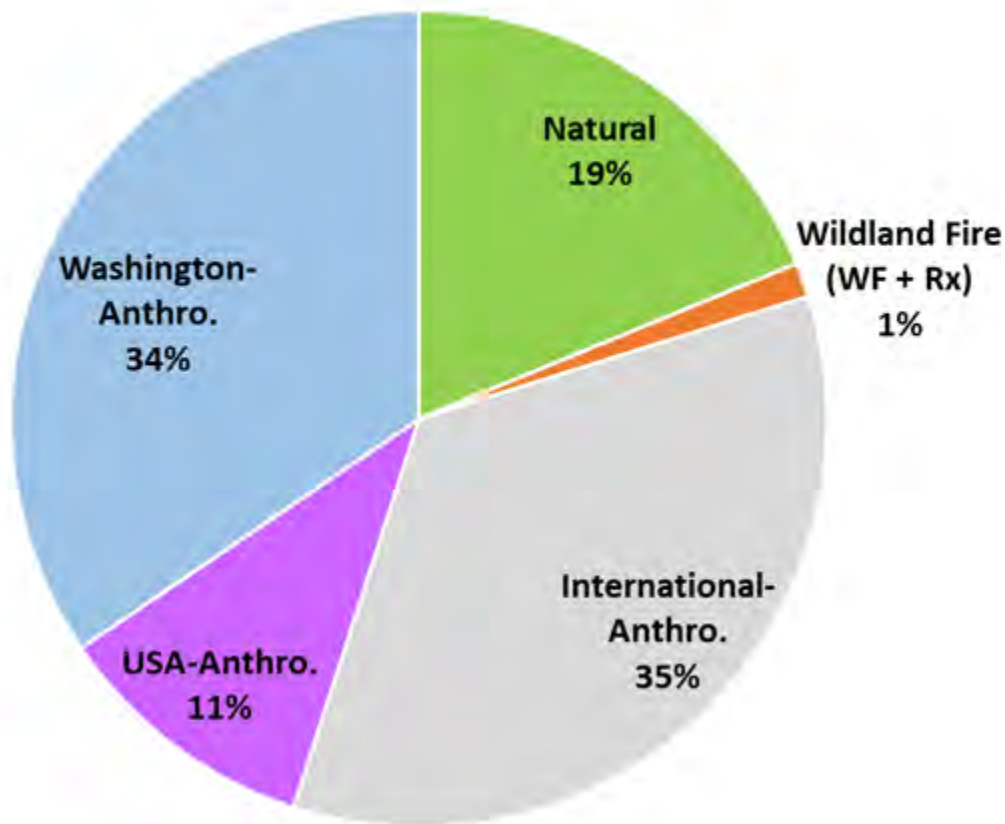


Figure 6-42: Expected source regions of NO_3 in 2028 at WHPA1 for MID (CAMx total = 4.1 Mm^{-1}).

The modeled nitrates for 2028 MID at WHPA1 was 4.1 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 1.53 Mm^{-1} and 0.97 Mm^{-1} , respectively.

Figure 6-43 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at WHPA1 on 2028 MIDs.

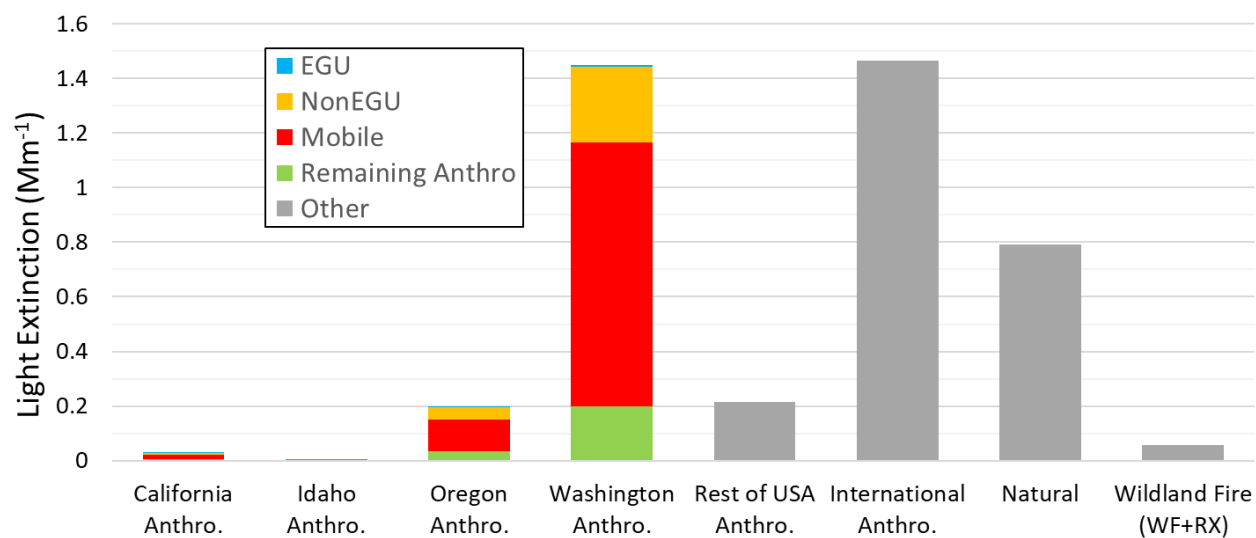


Figure 6-43: Expected source categories and regions of NO₃ in 2028 at WHPA1 for MID (CAMx total = 4.1 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of nitrates at WHPA1 are expected to come primarily from out-of-state US anthropogenic (44%) and international anthropogenic (25%) sources. Washington anthropogenic sources are expected to contribute 11% of the nitrates responsible for light extinction at WHPA1 on clearest days. See Figure 6-44 for more information.

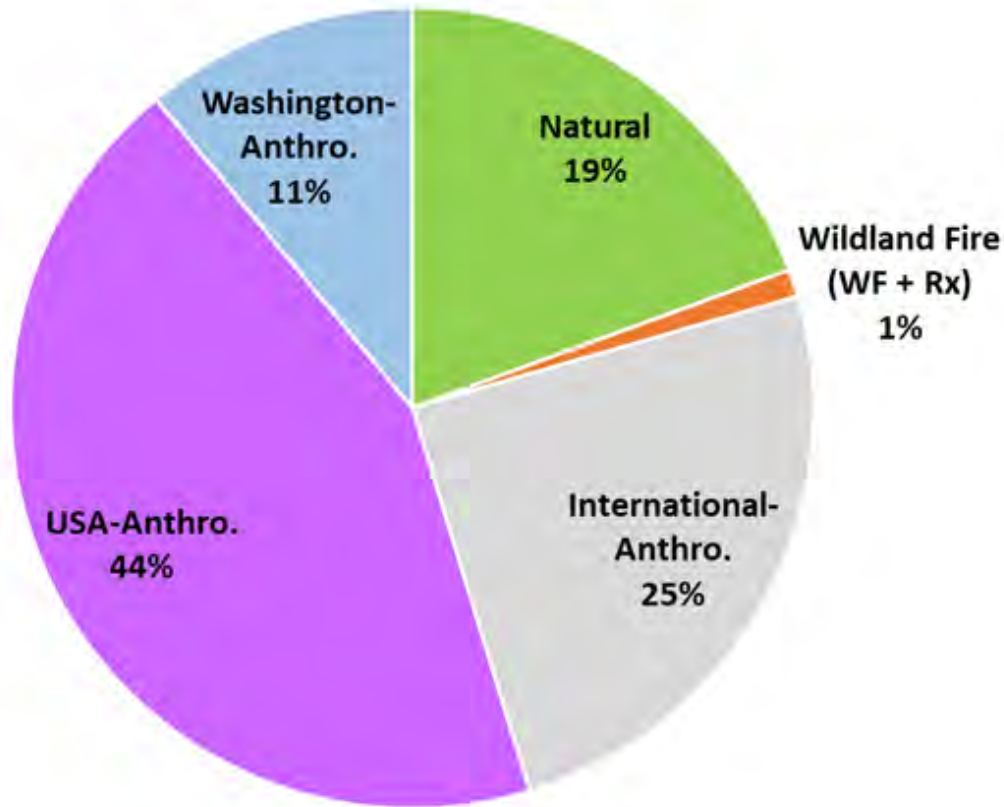


Figure 6-44: Expected source regions of NO_3 in 2028 at WHPA1 for clearest days (CAMx total = 1.1 Mm^{-1}).

The modeled nitrates for 2028 clearest days at WHPA1 was 1.1 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.15 Mm^{-1} and 0.12 Mm^{-1} , respectively.

Figure 6-45 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at WHPA1 on 2028 clearest days.

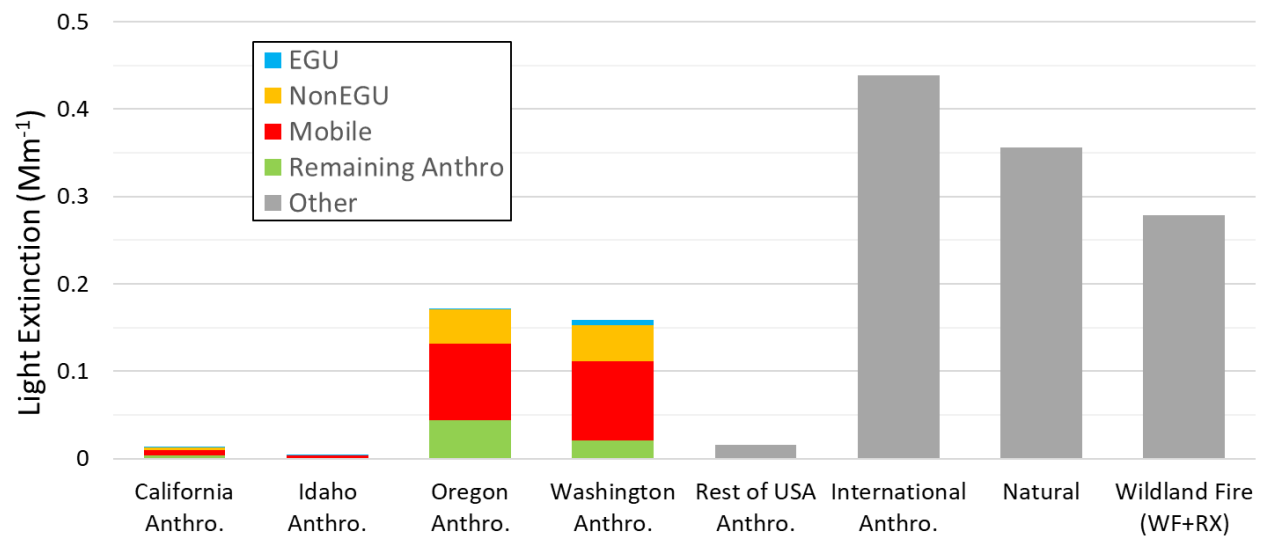


Figure 6-45: Expected source categories and regions of NO₃ in 2028 at WHPA1 for clearest days (CAMx total = 1.1 Mm⁻¹).

6.6 Pasayten Wilderness

Pasayten Wilderness is represented by the PASA1 IMPROVE monitoring site. The baseline conditions in Chapter 3 show that organic mass (32%) and sulfates (35%) make up 67% of the light extinction on the MID at this monitoring site. Elemental carbon (8%) and nitrates (14%) contribute to another 22% of the light extinction on the MID at this monitoring site. On the clearest days, sulfates make up 35% of the light extinction at this monitoring site. Organic mass (32%) and nitrates (14%) make up another 46% of the light extinction on the clearest days at this monitoring site.

WEP and rank point analyses

The WEP analysis for the PASA1 site on MID for the 2028 OTB scenario is summarized in Figure 6-46, showing an AOI of sources that span the entire state of Washington, the Puget Sound area, and the Vancouver, BC metropolitan area. Nitrates at PASA1 show considerable influence from non-EGU Point, on-road, non-road, and non-point sources. Sulfates at PASA1 show considerable influence from Non-Egu Point and non-point sources. Organic mass at PASA1 is mostly influenced by non-point sources. Elemental carbon is mostly influenced by non-point sources but also shows influence from non-EGU Point, on-road, and non-road sources. The rank point WEP analysis attributed 61.7% of point source nitrates to Washington State, with 26.5%, 8.2%, 2.7%, 0.6%, and 0.3% attributed to Tribal Lands, Oregon, Idaho, California, and Montana, respectively. The rank point WEP analysis attributed 89.5% of point source sulfates to Washington State, with 8.7%, 1.3%, 0.3%, 0.1%, and 0.1% attributed to Tribal Lands, Oregon, Idaho, Montana, and California, respectively.

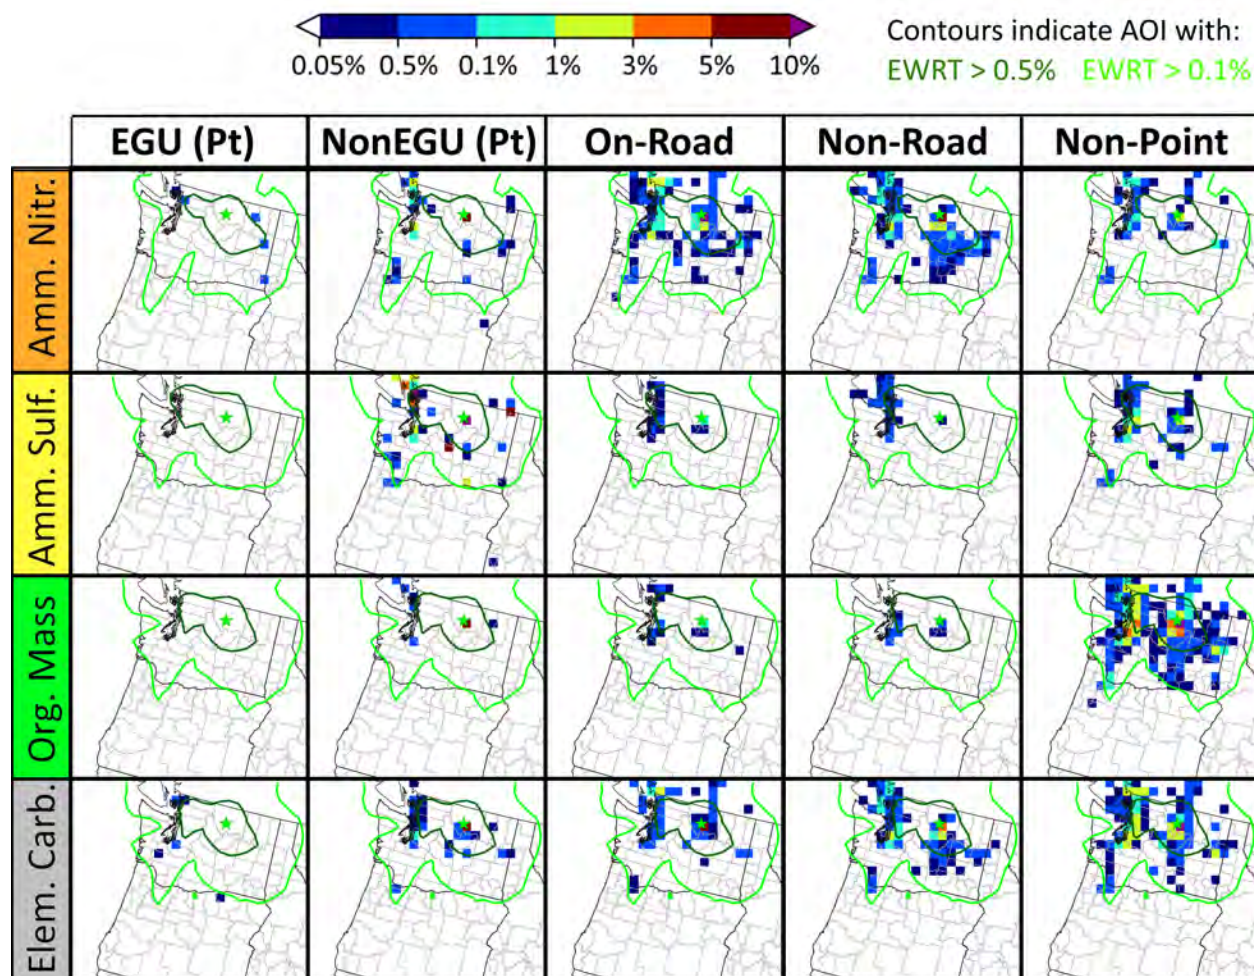


Figure 6-46: WEP for source area potential to contribute to extinction on MID by pollutant at the PASA1 IMPROVE monitor (green star), using the 2028 OTB projected emissions. Contours indicate AOI with EWRT greater than 0.5% (dark green) and 0.1% (light green) for the corresponding pollutant.

Sulfates source apportionment

Monitoring data show that sulfates were the largest species contribution to light extinction for both the MID and clearest days during the 2014-2018 baseline at PASA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of sulfates at PASA1 are expected to come primarily from international anthropogenic (49%) and natural sources (34%). These sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 7% of the sulfates responsible for light extinction at PASA1. Figure 6-47 for more information.

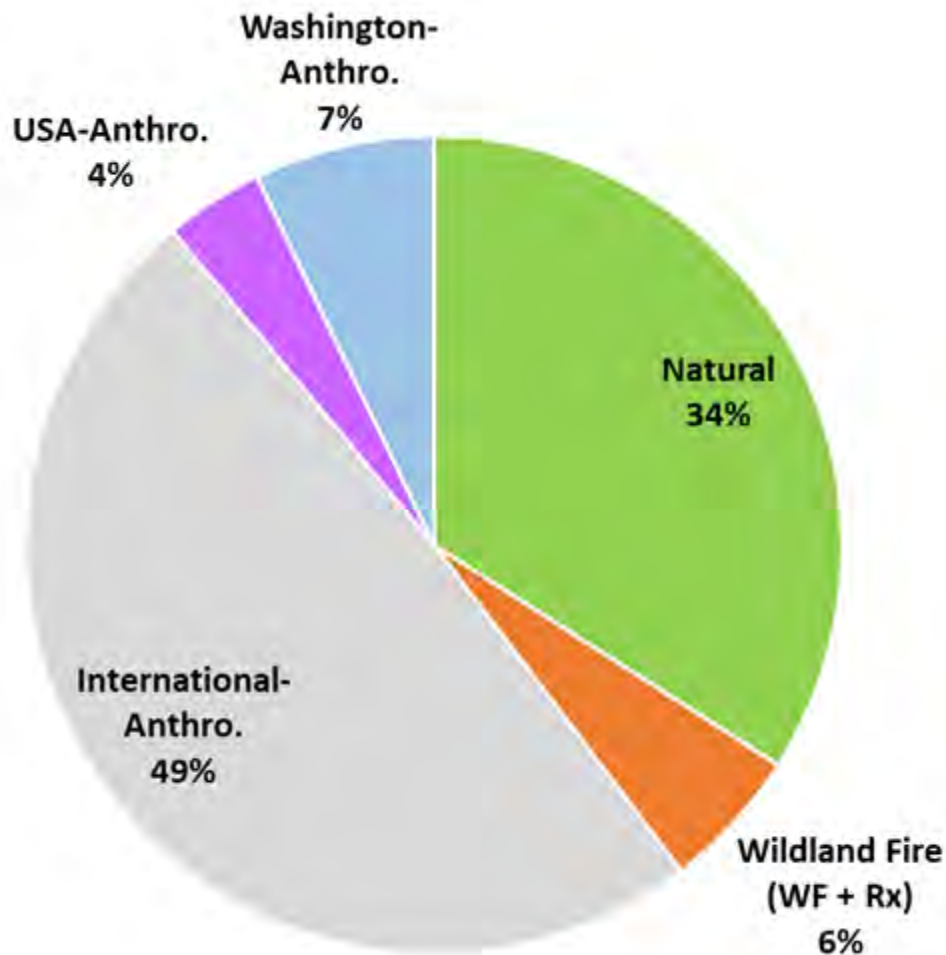


Figure 6-47: Expected source regions of SO₄ in 2028 at PASA1 for MID (CAMx total = 7.2 Mm⁻¹).

The modeled sulfates for 2028 MID at PASA1 was 7.2 Mm⁻¹ while the 2014 - 2018 observed baseline and 2028 visibility projections were 5.78 Mm⁻¹ and 5.77 Mm⁻¹, respectively.

Figure 6-48 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at the OLYM1 monitoring site on 2028 MIDs.

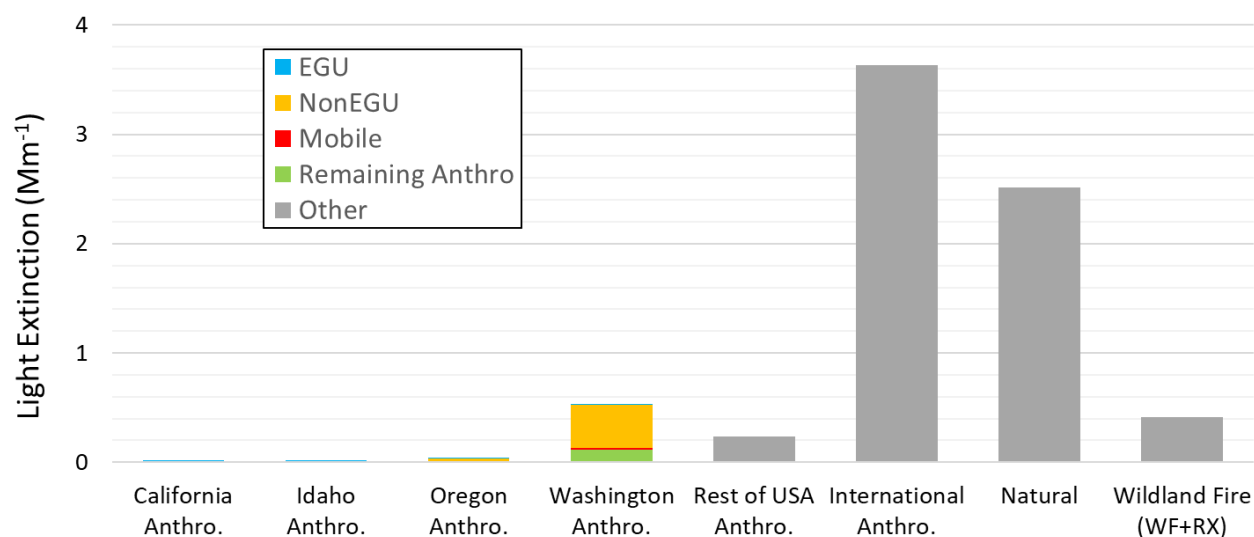


Figure 6-48: Expected source categories and regions of SO₄ in 2028 at PASA1 for MID (CAMx total = 7.2 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of sulfates at PASA1 are expected to come primarily from natural (42%), international anthropogenic (25%), and out-of-state US anthropogenic (17%). All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 13% of the sulfates responsible for light extinction at PASA1. See Figure 6-49 for more information.

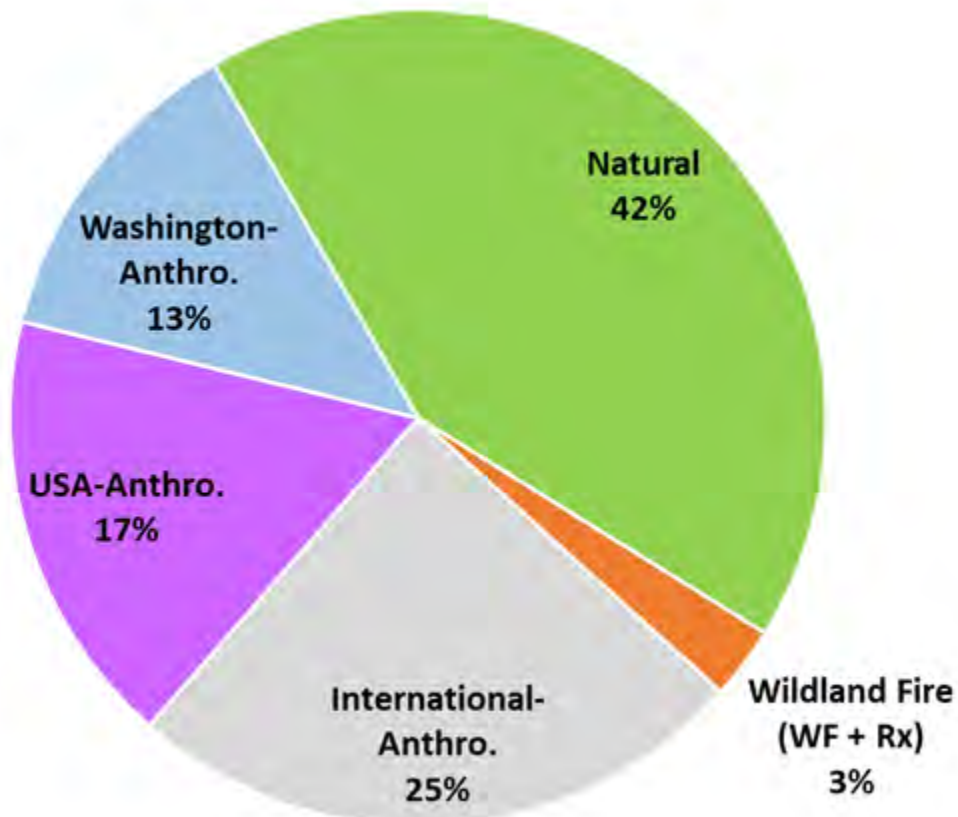


Figure 6-49: Expected source regions of SO_4 in 2028 at PASA1 for clearest days (CAMx total = 4.0 Mm^{-1}).

The modeled sulfates for 2028 clearest days at PASA1 was 4.0 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.75 Mm^{-1} and 0.71 Mm^{-1} , respectively. Figure 6-50 shows an expectation within Washington that non-EGU point sources contribute the majority of sulfate light extinction at PASA1 on 2028 clearest days.

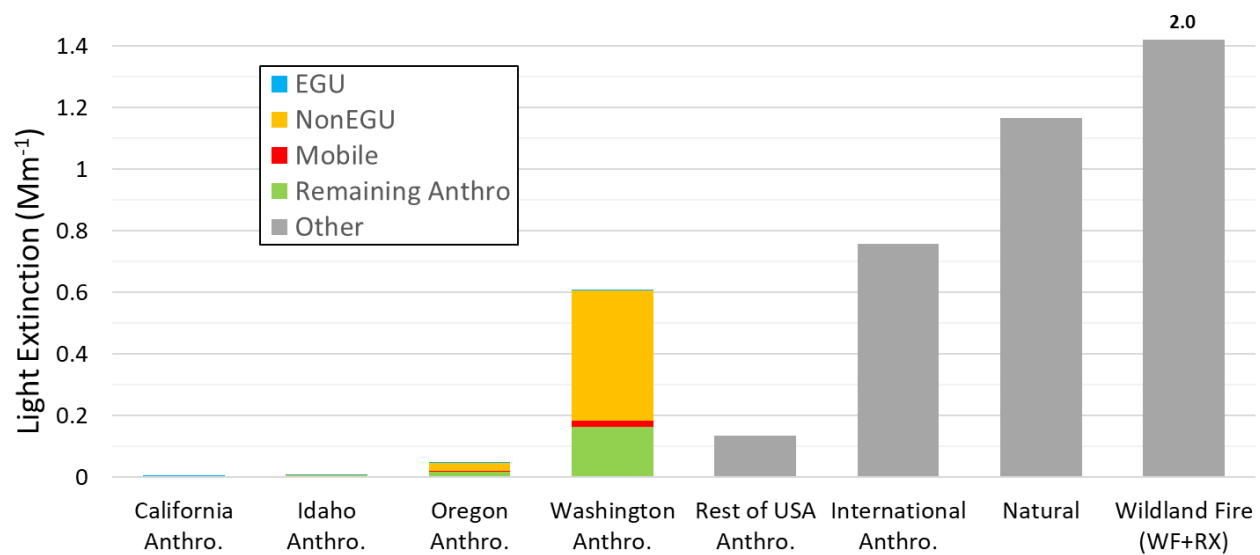


Figure 6-50: Expected source categories and regions of SO₄ in 2028 at PASA1 for clearest days (CAMx total = 4.0 Mm⁻¹).

Nitrates source apportionment

Monitoring data show that nitrates were the 3rd largest species contribution to light extinction for the MID clearest days during the 2014-2018 baseline at PASA1.

Most Impaired Days

The PSAT tracer analysis shows the 2028 MID visibility impacts of nitrates at PASA1 are expected to be most influenced from international anthropogenic sources (46%), while natural sources (16%) and wildland fires (15%) are expected to have some impacts. All of these sources are beyond Washington's control. Washington anthropogenic sources are expected to contribute 18% of the nitrates responsible for light extinction at PASA1. See Figure 6-51 for more information.

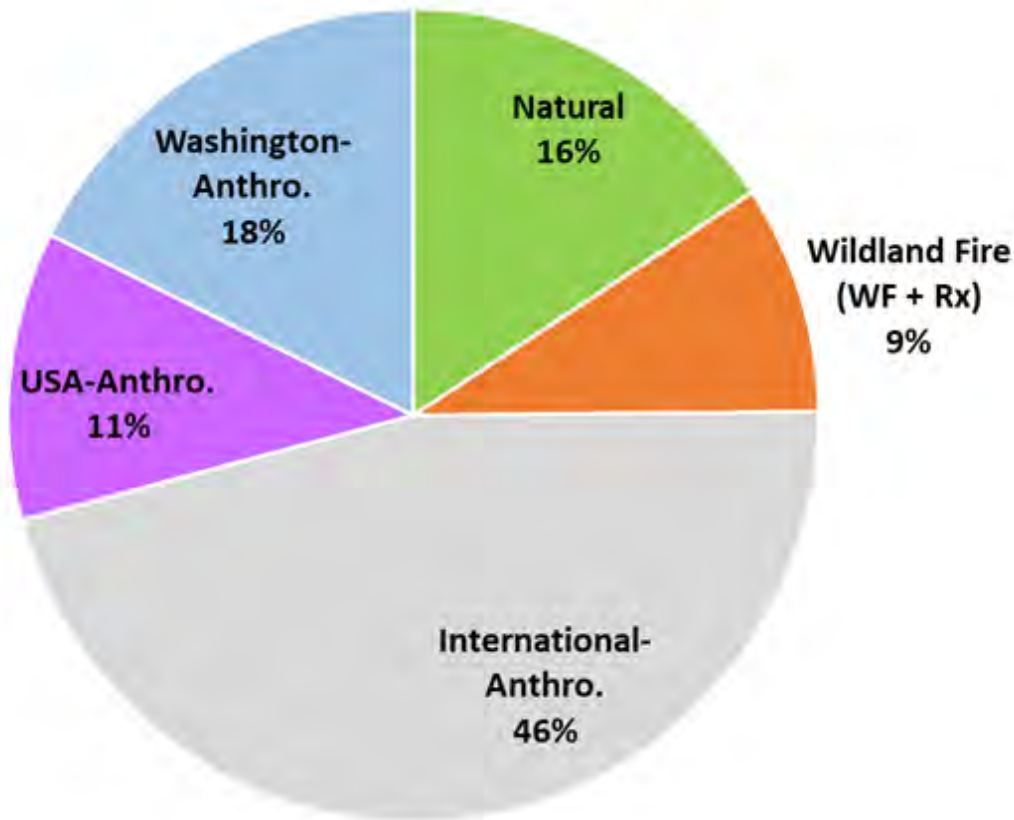


Figure 6-51: Expected source regions of NO_3 in 2028 at PASA1 for MID (CAMx total = 3.8 Mm^{-1}).

The modeled nitrates for 2028 MID at PASA1 was 3.8 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 2.34 Mm^{-1} and 1.79 Mm^{-1} , respectively.

Figure 6-52 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at PASA1 on 2028 MIDs.

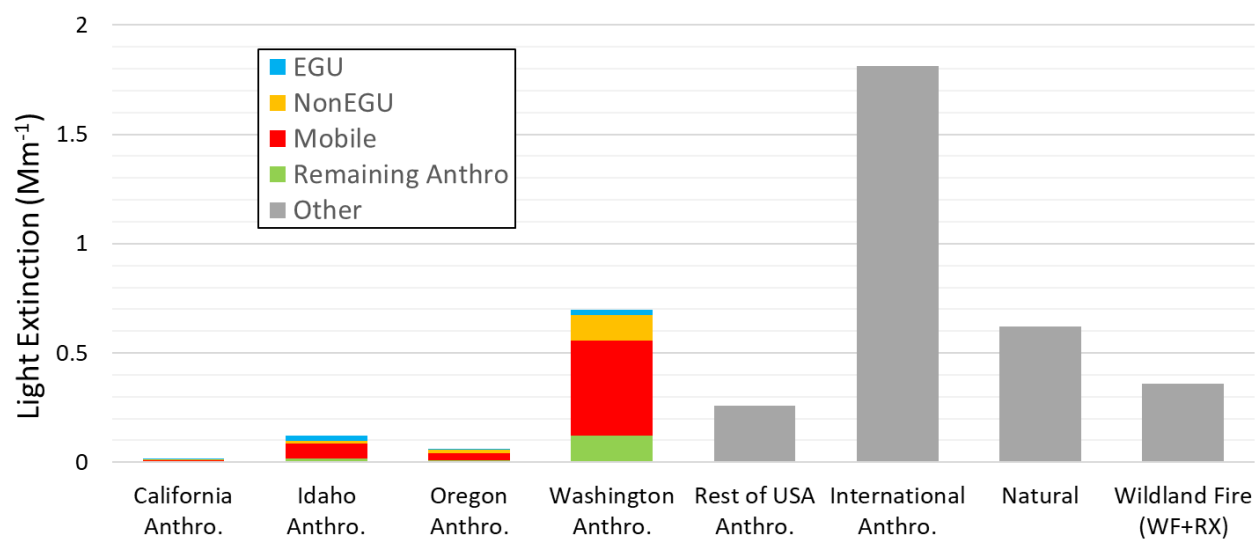


Figure 6-52: Expected source categories and regions of NO₃ in 2028 at PASA1 for MID (CAMx total = 3.8 Mm⁻¹).

Clearest Days

The PSAT tracer analysis shows that 2028 clearest days visibility impacts of nitrates at PASA1 are expected to come primarily from out-of-state US anthropogenic (39%) sources. Washington anthropogenic sources are expected to contribute 23% of the nitrates responsible for light extinction at PASA1 on clearest days. See Figure 6-53 for more information.

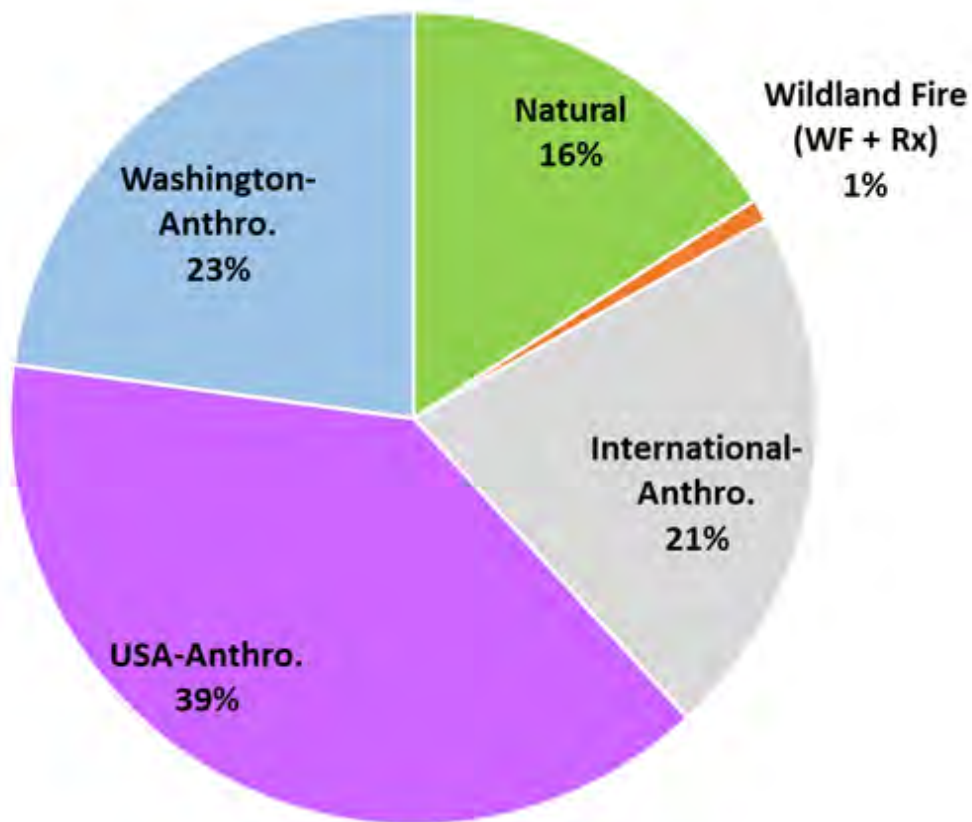


Figure 6-53: Expected source regions of NO_3 in 2028 at PASA1 for clearest days (CAMx total = 2.1 Mm^{-1}).

The modeled nitrates for 2028 clearest days at PASA1 was 2.1 Mm^{-1} while the 2014 - 2018 observed baseline and 2028 visibility projections were 0.30 Mm^{-1} and 0.23 Mm^{-1} , respectively.

Figure 6-54 shows an expectation within Washington that mobile sources contribute the majority of nitrate light extinction at PASA1 on 2028 clearest days.

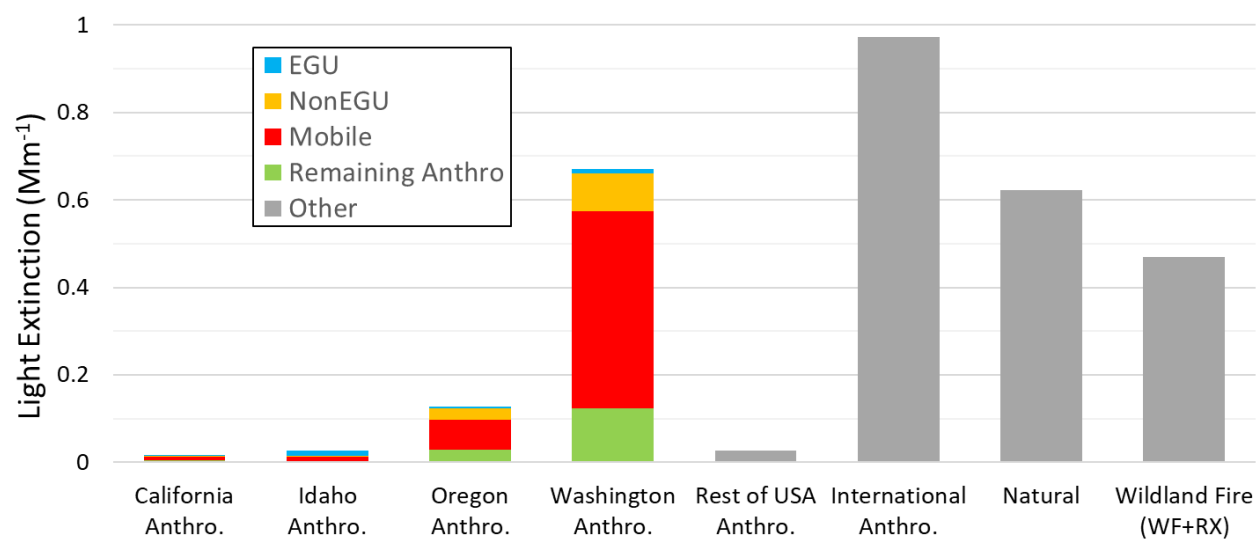


Figure 6-54: Expected source categories and regions of NO₃ in 2028 at PASA1 for clearest days (CAMx PSAT total = 2.1 Mm⁻¹).

6.7 In-State Contribution of Nitrates and Sulfates

Table 6-1 summarizes the in-state sources of sulfates by source category at each in-state mandatory Class 1 Area in 2028, as determined by the PSAT analysis. Table 6-2 summarizes the in-state sources of nitrates by source category at each in-state mandatory Class 1 Area in 2028, as determined by the PSAT analysis.

Table 6-1: Expected in-state anthropogenic sulfate contributions by source category for Washington's Mandatory Class 1 Areas in 2028.

Site	Days	Total WA Anthro.	WA EGU	WA non-EGU	WA Mobile	Remaining WA Anthro.
OLYM1	MID	8%	0%	6%	0%	2%
OLYM1	Clearest	17%	0%	9%	1%	6%
NOCA1	MID	11%	0%	9%	0%	1%
NOCA1	Clearest	8%	0%	5%	0%	3%
SNPA1	MID	7%	0%	5%	1%	2%
SNPA1	Clearest	11%	0%	5%	2%	4%
MORA1	MID	10%	0%	7%	1%	2%
MORA1	Clearest	7%	0%	5%	1%	2%
WHPA1	MID	6%	0%	4%	0%	2%
WHPA1	Clearest	5%	0%	3%	0%	2%
PASA1	MID	7%	0%	5%	0%	2%
PASA1	Clearest	13%	0%	9%	0%	3%

Table 6-2: Expected in-state anthropogenic nitrate contributions by source category for Washington's Mandatory Class 1 Areas in 2028.

Site	Days	Total WA Anthro.	WA EGU	WA non-EGU	WA Mobile	Remaining WA Anthro.
OLYM1	MID	36%	1%	11%	19%	6%
OLYM1	Clearest	33%	0%	6%	19%	8%
NOCA1	MID	25%	0%	7%	14%	3%
NOCA1	Clearest	22%	0%	4%	13%	4%
SNPA1	MID	38%	0%	6%	27%	5%
SNPA1	Clearest	26%	0%	3%	18%	4%
MORA1	MID	46%	0%	9%	32%	4%
MORA1	Clearest	15%	1%	4%	8%	2%
WHPA1	MID	34%	0%	7%	23%	5%
WHPA1	Clearest	11%	0%	3%	6%	1%
PASA1	MID	18%	1%	3%	11%	3%
PASA1	Clearest	23%	0%	3%	15%	4%

6.8 Other Mandatory Class 1 Areas Impacted by Washington Anthropogenic Emissions

The PSAT source apportionment modeling results were evaluated to determine which mandatory Class 1 Areas in nearby states are expected to be affected by emissions from Washington anthropogenic sources for sulfates and nitrates. Washington anthropogenic sources are expected to contribute a small percentage (e.g. less than 5%) of nitrates or sulfates to all IMPROVE monitors in nearby states on MID. However, some larger contributions are expected from Washington anthropogenic sources to several Montana (CABI1, FLAT1, GLAC1, MONT1, SULA1) and Oregon (KALM1, MOHO1, STAR1, THSI1) IMPROVE sites on MID that range from 5% to 22% of nitrates and 2% to 4% of sulfates. Though not shown here, the PSAT details confirm that the majority of anthropogenic emissions originating in Washington that affect out-of-state IMPROVE sites are from non-EGU (sulfates) and mobile sources (nitrates) identifies the percentage of the total modeled light extinction by species due to anthropogenic emissions from sources within Washington at IMPROVE monitors in California, Oregon, Idaho, Nevada, Montana, Utah, and Wyoming. Table 6-3 identifies all IMPROVE monitors where Washington anthropogenic sources are expected to contribute at least 0.1% of the nitrate or sulfate light extinction, based on the PSAT results. The percentage contribution is based on contributions from all modeled source areas relative to the total sulfates or nitrates, separately.

Washington anthropogenic sources are expected to contribute a small percentage (e.g. less than 5%) of nitrates or sulfates to all IMPROVE monitors in nearby states on MID. However, some larger contributions are expected from Washington anthropogenic sources to several Montana (CABI1, FLAT1, GLAC1, MONT1, SULA1) and Oregon (KALM1, MOHO1, STAR1, THSI1) IMPROVE sites on MID that range from 5% to 22% of nitrates and 2% to 4% of sulfates. Though not shown here, the PSAT details confirm that the majority of anthropogenic emissions originating in Washington that affect out-of-state IMPROVE sites are from non-EGU (sulfates) and mobile sources (nitrates).

The PSAT identified sulfate contributions from non-EGU point sources in Washington, originating from the 12,053 tons of non-EGU SO₂ emissions included in the model (see Chapter 6). However, 64 percent of those modeled SO₂ emissions (7,729 tons) are from the two aluminum facilities in Washington (Alcoa Wenatchee and Alcoa Intalco). WRAP modeled these facilities using historical emissions data and with no assumed emissions reductions. The Alcoa Wenatchee facility curtailed in 2015, going to zero emissions, and announced on December 13, 2021, that it will permanently close. The Alcoa Intalco facility curtailed in 2020 and went to zero emissions. Ecology and Intalco entered into an Agreed Order in January 2021 requiring Intalco to conduct a four-factor analysis before restarting (see Chapter 7 and appendix Q for more details).

As a result of the above analysis, we have determined that sources in Washington do not have significant impacts in other States' mandatory Class 1 Areas beyond the measures already addressed in this SIP submittal. Ecology did not receive any request for additional reductions from neighboring states during our consultations with them.

Table 6-3: Washington's Anthropogenic Emissions Contribution to Sulfate and Nitrate Light Extinction at Mandatory Class 1 Areas outside of Washington.

State	Site	MID Sulfates (% from WA Anthro)	Clearest Days Sulfates (% from WA Anthro)	MID Nitrates (% from WA Anthro)	Clearest Days Nitrates (% from WA Anthro)
CA	AGT11	0.1%	0.1%	0.0%	0.1%
CA	BLIS1	0.2%	0.3%	0.1%	0.3%
CA	DOME1	0.1%	0.2%	0.1%	0.2%
CA	HOOV1	0.1%	0.1%	0.1%	0.2%
CA	JOSH1	0.1%	0.3%	0.0%	0.2%
CA	KAIS1	0.1%	0.0%	0.1%	0.0%
CA	LABE1	0.1%	0.3%	0.3%	0.1%
CA	LAVO1	0.2%	0.4%	0.5%	0.1%
CA	PINN1	0.3%	0.1%	0.3%	0.0%
CA	PORE1	0.3%	0.2%	1.1%	1.3%
CA	RAFA1	0.2%	0.1%	0.2%	0.1%
CA	REDW1	0.5%	0.5%	4.6%	4.4%
CA	SAGA1	0.1%	0.1%	0.0%	0.0%
CA	SAGO1	0.1%	0.1%	0.0%	0.1%
CA	SEQU1	0.2%	0.1%	0.1%	0.1%
CA	TRIN1	0.2%	0.3%	0.3%	0.1%
CA	YOSE1	0.1%	0.2%	0.1%	0.1%
ID	CRMO1	0.8%	1.8%	1.7%	4.5%
ID	SAWT1	1.4%	3.2%	3.3%	7.2%
MT	CABI1	2.6%	10.1%	8.6%	21.7%
MT	FLAT1	2.7%	7.1%	6.6%	15.3%
MT	FOPE1	0.6%	0.8%	0.8%	0.8%
MT	GAMO1	2.1%	2.1%	4.5%	6.0%
MT	GLAC1	2.4%	3.9%	6.3%	8.1%
MT	MELA1	0.5%	0.4%	0.5%	0.5%
MT	MONT1	2.3%	4.2%	5.1%	10.8%
MT	NOCH1	0.5%	1.3%	0.6%	2.5%
MT	SULA1	2.8%	2.2%	7.4%	7.6%
MT	ULBE1	0.5%	2.8%	0.7%	4.3%
NV	JARB1	1.0%	1.5%	2.9%	4.8%
OR	CRLA1	0.9%	0.1%	3.9%	0.2%
OR	HECA1	2.0%	2.6%	3.6%	10.1%
OR	KALM1	1.5%	0.2%	7.3%	0.9%
OR	MOHO1	4.4%	2.0%	22.1%	13.1%

State	Site	MID Sulfates (% from WA Anthro)	Clearest Days Sulfates (% from WA Anthro)	MID Nitrates (% from WA Anthro)	Clearest Days Nitrates (% from WA Anthro)
OR	STAR1	3.5%	2.0%	15.3%	8.7%
OR	THSI1	1.9%	0.2%	9.4%	0.4%
UT	BRCA1	0.2%	0.2%	0.4%	0.3%
UT	CANY1	0.2%	0.5%	0.4%	1.0%
UT	CAPI1	0.2%	0.5%	0.4%	0.8%
UT	ZICA1	0.1%	0.5%	0.1%	0.7%
WY	BRID1	0.6%	1.0%	1.4%	2.6%
WY	NOAB1	1.4%	0.9%	1.9%	2.5%
WY	YELL2	1.2%	1.1%	2.9%	1.6%

Chapter 7. Source Selection and Four-factor Analysis

7.1 Introduction

The Regional Haze Rule (RHR, 40 CFR 51) requires Washington State to submit a long-term strategy that includes enforceable emissions limitations, compliance schedules, and other measures necessary to make reasonable progress toward 2064 natural visibility conditions in Class 1 Areas. The state must determine what new emission reductions, if any, are necessary to make reasonable progress by considering the four statutory factors:

- Costs of compliance,
- The time necessary for compliance,
- The energy and non-air quality environmental impacts of compliance, and
- The remaining useful life of any potentially affected sources.

This chapter describes Washington's source selection criteria and describes the analyses to determine controls that are reasonable and needed to make reasonable progress. Controls identified are part of the long-term strategy described in Chapter 8.

EPA issued a memorandum¹² on July 8, 2021, to "help support SIP development, submittal, review, and action for the second planning period". The RHR SIP submittal was due to EPA on July 31, 2021, and Ecology has been developing the SIP submittal for the last few years. Ecology has attempted to implement the items addressed in the clarification memorandum to the maximum extent practicable considering the limited time provided between issuance of the memorandum and the due date of the RHR SIP.

7.2 Source screening analysis (Q/d)

Ecology used annual emissions and distance from the nearest Class 1 Area to select sources for the additional analysis. Q/d is a ratio of visibility-impairing emissions (in tons) produced by a source (Q) to its distance from the nearest Class 1 Area (d). We did not screen mobile sources or non-point sources with Q/d; we discuss them in Chapter 8, Long-term Strategy.

Ecology used Washington's 2014 point-source emissions data to calculate Q values. The Western Regional Air Partnership used 2014 as the base year for modeling as it was the most recent year of certified available data when the analysis was initiated. Ecology maintains an annual point-source Emissions Inventory (EI) for all major sources in the state. Many non-major point-source emissions totals were also received from regional offices and local clean air agencies. The reported emissions of compounds that contribute to regional haze (NO_x, PM₁₀, SO₂, and NH₃) were summed (Q) for each point-source. We calculated the distance (d) from the source to the nearest Class 1 Area. Sources with larger Q/d values represent larger visibility impacts on Class 1 Areas.

¹² Peter Tsirigotis, Director, "Clarifications Regarding Regional Haze Second Implementation Plans for the Second Implementation Period," memo, addressed to Regional Air Division Directors, Regions 1-10, July 8, 2021

Major and non-major point-source data from 2014 were screened initially, but the analysis was biased by the approximately 1,100 non-major sources in the inventory with a Q/d of less than one. Ecology conducted a second screening of only the major sources. The selected major sources represent approximately 80 percent of the haze-causing emissions for the entire EI.

For the second Q/d screening we removed the non-major sources and only evaluated the 119 major sources in the EI. We focused on major sources because they contribute 90 percent of the total Q/d value even though they represent only 10 percent of the total number of all stationary sources. We screened the major sources using two thresholds: the sources with a Q/d ratio of 10 or greater and the sources that were in the top 80 percent of the sum of Q/d values of all major sources. The results are shown in **Error! Reference source not found..** The sum of all major Q/d values was 756. Eighty percent of the Q/d sum for major sources is 605 with a Q/d threshold of 15.6. We then considered a Q/d value of 10 or greater. The Q/d threshold of 10 or greater includes more sources than the 80 percent threshold. Therefore, we chose the Q/d value of 10 or greater for the threshold to require a four-factor analysis (FFA) since it includes more sources.

There are 16 major sources with a $Q/d \geq 10$. We added two sources with a $Q/d \leq 10$ so that all the facilities in a selected source category were included in the FFA. The two facilities added are Packaging Corporation of America (PCA), a paperboard mill, and US Oil, an oil refinery. See Chapter 4 for more information about the annual emissions from these selected facilities.

Ecology conducted reasonableness analyses on major facilities with a Q/d of ≥ 10 along with two additional facilities. These identified stationary sources contribute 90 percent of the haze-causing emissions in the state.

Table 7-1: Q/d of sources selected for FFA

Facility Site Name	Q (tons) of NOX, PM10, SO2, and NH3	d (km) to nearest CIA	Q/d	Nearest CIA	Category 1	Agency
TransAlta Centralia Generation, LLC	10749.4	71.8	149.8	Mount Rainier NP	Coal powered electric	SWCAA
McKinley Paper Company	367.2	4.4	83.1	Olympic NP	Pulp and Paper Plant	ORCAA
Alcoa Primary Metals Wenatchee Works	3461.7	42.8	80.9	Alpine Lakes Wilderness	Alumina Refining and Aluminum Production	Ecology - Industrial
Alcoa Primary Metals Intalco Works	5658.5	78.9	71.7	North Cascades NP	Alumina Refining and Aluminum Production	Ecology - Industrial
BP Cherry Point Refinery	2945.0	80.8	36.4	North Cascades NP	Petroleum Refineries	NWCAA
Tesoro Northwest Company	2312.3	75.4	30.7	Olympic NP	Petroleum Refineries	NWCAA
WestRock Tacoma	1353.7	48.4	27.9	Mount Rainier NP	Pulp, Paper, and Paperboard Mills	Ecology - Industrial
Nippon Dynawave Packaging Company Longview	2656.0	104.8	25.3	Mount Adams Wilderness	Paperboard Mills	Ecology - Industrial
Puget Sound Refining Company (Shell)	1793.1	73.0	24.5	Olympic NP	Petroleum Refineries	NWCAA

Facility Site Name	Q (tons) of NOX, PM10, SO2, and NH3	d (km) to nearest CIA	Q/d	Nearest CIA	Category 1	Agency
Pt Townsend Paper Corporation	848.0	35.0	24.2	Olympic NP	Paper (not Newsprint) Mills	Ecology - Industrial
Ash Grove Cement Co, E Marginal	1243.6	53.8	23.1	Alpine Lakes Wilderness	Cement Manufacturing	PSCAA
Cosmo Specialty Fibers, Inc.	973.8	58.2	16.7	Olympic NP	Paperboard Mills	Ecology - Industrial
WestRock Longview, LLC	1574.2	100.7	15.6	Mount Adams Wilderness	Paperboard Mills	Ecology - Industrial
Georgia-Pacific Consumer Operations LLC	653.0	45.4	14.4	Mount Hood Wilderness	Paper (except Newsprint) Mills	Ecology - Industrial
Phillips 66	840.6	77.2	10.9	North Cascades NP	Petroleum Refineries	NWCAA
Cardinal FG Winlock	859.8	80.1	10.7	Mount Rainier NP	Flat Glass Manufacture	SWCAA
Packaging Corporation of America (PCA) Wallowa	1048.3	111.5	9.4	Eagle Cap Wilderness	Paperboard Mills	Ecology - Industrial
US Oil & Refining Co	149.2	46.4	3.2	Mount Rainier NP	Oil Refinery	PSCAA
Total	39487.5		658.7			

Facility notification of selection for four-factor analysis

Ecology contacted the facilities selected in Spring of 2019, and informed them that we had selected them for additional RH emission analyses (see Appendix G). Some of these facilities had existing legal requirements or pending permit actions to reduce emissions, so Ecology did not request a FFA from them. We requested that facilities in the pulp and paper and the refinery source categories perform a FFA and provide the results to Ecology. Ecology also requested that the Ash Grove Cement Company and Cardinal Glass perform an FFA.

7.3 Reasonableness evaluation

When performing a reasonableness analysis on the selected facilities, the emission controls already in place and enforceable are the baseline controls in the analysis. Facilities with no new controls identified rely on the existing controls for the state to make reasonable progress.

Ecology conducted a reasonableness analysis on emission control technology for the sources selected in the Q/d analysis. This analysis determined if there were new reasonable emission controls needed to make reasonable progress at each Class 1 Area.

Four-factor analysis and reasonably available control technology (RACT) equivalency

The RHR requires States to perform a Four-Factor Analysis (FFA) to determine whether the installation of new emission controls at certain facilities is necessary for the State to make reasonable progress toward the national visibility goal. In Washington State, RCW 70A.15.2230 (the “RACT statute”) is the legal mechanism that Ecology can use to require existing sources to install new emission controls that are determined to be reasonable. Because the analysis performed under the State’s RACT process is equivalent to the RHR’s FFA, Ecology will use the RACT process to require the installation of reasonable emission controls for purposes of compliance with the RHR.

40 CFR 51.308(f) requires the State’s long-term strategy to include all measures that are “necessary to make reasonable progress, as determined pursuant to [40 CFR 51.308](f)(2)(i) through (iv).” In turn, 40 CFR 51.308(f)(2)(i) requires the State to consider the following four statutory factors in determining which emission reductions measures are necessary to make reasonable progress:

- the costs of compliance,
- the time necessary for compliance,
- the energy and non-air quality environmental impacts of compliance, and
- the remaining useful life of any potentially affected anthropogenic source of visibility impairment.

Pursuant to RCW 70A.15.1030(20) and 70A.15.2230(5), the RACT evaluation of new emission controls at existing stationary sources requires Ecology to consider the following:

- the impact of the source upon air quality,
- the availability of additional controls,

- the emission reduction to be achieved by additional controls,
- the impact of additional controls on air quality,
- and the capital and operating costs of the additional controls.

The costs of compliance

Under the RACT analysis, Ecology characterizes and considers the cost of compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. The cost of compliance factor in 40 CFR 51.308(f)(2)(i) directly correlates to the RACT analysis consideration of capital and operating costs of the additional controls. The capital and operating costs in RACT are for purchase, installation, and operation of all equipment. These costs include the actual emission control equipment, any non-air quality equipment, and the energy costs to operate the equipment.

The time necessary for compliance

Under the RACT analysis, Ecology characterizes and considers the time necessary for compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Under the RACT analysis requirements, Ecology determines the time necessary for compliance as part of considering the capital and operating costs of the additional controls and impact of the source upon air quality. Specifically, a shorter amount of time for compliance would involve costs distributed over a shorter time and thus have a larger annualized cost. The impact of the source on air quality is also a consideration in the time for compliance. The longer it takes to install and operate the control equipment the greater the negative impact on air quality.

The energy and non-air quality environmental impacts of compliance

Under the RACT analysis, Ecology characterizes and considers the energy and non-air quality environmental impacts of compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Ecology considers the energy and non-air quality environmental impacts of compliance factor as part of analyzing the capital and operating costs of the additional controls in the RACT analysis. The RACT analysis includes costs for equipment directly related to the emissions and all indirectly required equipment needed to install and operate the new controls. The operating cost requirement in the RACT analysis also covers the energy impacts of the controls and supporting equipment.

The remaining useful life of any potentially affected anthropogenic source of visibility impairment

Under the RACT analysis, Ecology characterizes and considers the remaining useful life of any potentially affected anthropogenic source of visibility impairment consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Ecology considers the remaining useful life of an emissions control system as part of calculating the capital and operating costs of the system. Specifically, the annualized costs of the emissions control system are affected by the remaining useful life. The shorter the useful life, the larger the annual costs associated with control equipment.

Additionally, RACT requires consideration of the impact of the source upon air quality.’ This is consistent with the CAA, RHR, and EPA guidance. While the four statutory factors must be considered in determining what is necessary to make reasonable progress, they are not the only factors that States may consider in this evaluation. As explained by EPA in its 2019

guidance, States have the flexibility to consider other factors, including visibility benefits, when determining the emission reduction measures that are necessary to make reasonable progress:

“Section 51.308(f)(2)(i) of the Regional Haze Rule requires consideration of the four factors listed in CAA section 169A(g)(1) and does not mention visibility benefits. However, neither the CAA nor the Rule suggest that only the listed factors may be considered. Because the goal of the regional haze program is to improve visibility, it is reasonable for a state to consider whether and by how much an emission control measure would help achieve that goal. Likewise, it is reasonable that such information on visibility benefits be considered in light of other factors that may weigh for or against the control at issue. Such a balancing of outcomes is consistent with CAA section 169A(b)(2), which states that SIPs must contain elements as may be necessary to make reasonable progress towards meeting the national visibility goal. Thus, EPA interprets the CAA and the Regional Haze Rule to allow a state reasonable discretion to consider the anticipated visibility benefits of an emission control measure along with the other factors when determining whether a measure is necessary to make reasonable progress.”¹³

Therefore, Ecology will use the RACT process to (1) evaluate and determine the emissions reduction measures that are necessary to make reasonable progress and (2) incorporate these measures into its long-term strategy and Regional Haze SIP in a manner that is enforceable as a legal and practical matter.

Reasonable control evaluation

The Interagency Monitoring of Protected Visual Environments (IMPROVE) monitoring data shows that ammonium sulfate ((NH₄)₂SO₄) and ammonium nitrate (NH₄NO₃) are two of the most significant pollutants impairing visibility in Washington’s Class 1 Areas. (NH₄)₂SO₄ is primarily from point sources and offshore sources (shipping traffic), and NH₄NO₃ is primarily from point and mobile sources, with slight contributions from non-point sources. After the initial screening for source selection, the FFA in this chapter evaluates reasonable controls for point sources of nitrogen oxides (NO_x) and sulfur dioxides (SO₂) emissions.

Ecology relies on current Washington state laws and regulations to implement any controls identified as reasonable. Washington has four potential mechanisms for implementing identified emission controls:

- Agreed order (AO) – a legally binding order that requires agreement between the parties
- Permit modification – permittee initiated change to their facility
- Reasonably available control technology – Revised Code of Washington (RCW 70A.15.2230)

Ecology prefers to use permit modifications and AOs to achieve emission reductions as these methods have the source and Ecology working together to achieve reductions. These options

¹³ EPA-457/B-10-003, *Guidance on Regional Haze State Implementation Plans for the Second Implementation Period*, Section II.B.5.

are currently not available for use with the refinery or pulp & paper industry categories during this implementation period.

Ecology will use the RACT process to evaluate reasonable emission reductions for facilities without an AO or permit modification. The result of the RACT process is a determination of the minimum emissions controls required at a facility. The determination is made through rule making for a category of sources, or a source specific order. RACT identifies the emission control equipment and the timelines for installation and operation of the equipment. The RACT rule or RACT order is federally enforceable when EPA approves it into the SIP.

Ecology has limited resources and is choosing to prioritize the implementation of reasonable controls. As discussed in EPA's guidance:¹⁴

"Another potentially reasonable approach might be for a state that identifies cost-effective new controls at a multitude of sources to choose to require controls at only a subset of those sources that constitute the vast majority of the visibility benefit. In this case, the state could rely on visibility benefits to prioritize which sources would receive new controls."

Ecology identified potential reasonable controls at a multitude of sources and is prioritizing a subset of those sources that constitute a vast majority of the visibility benefit during this implementation period. Ecology's first priority is to identify reasonable controls at the refinery facilities.

A number of factors supports the selection of refineries as the first priority. These factors include:

- Four of the five refinery facilities are located in the Puget trough, west of several Class 1 Areas. Their cumulative regional haze causing emissions influence the same Class 1 Areas.
- Predominant winds direct the emissions from the refineries towards several Class 1 Areas.
- The refineries' potential emission reductions of 4,200 tons per year account for the vast amount of potential emission reductions.

Pulp & paper mills are a subset of sources that are lower priority than refineries because:

- The pulp & paper mills are not located as close to each other as the refineries so they do not have as great of a cumulative effect.
- One mill identified with potential reasonable cost controls, Packaging Corporation of America (PCA) Wallula, is located in a direction that is downwind from the nearest Class 1 Areas. This lessens, but does not remove, the influence the mill's emissions have on Class 1 Areas.
- The potential reduction of 450 tons per year in regional haze emissions from the pulp & paper mills reasonable controls is vastly less than potential refinery emission reductions.

¹⁴ Peter Tsirigotis, Director, "Clarifications Regarding Regional Haze Second Implementation Plans for the Second Implementation Period," memo, addressed to Regional Air Division Directors, Regions 1-10, July 8, 2021.

7.4 Facility specific reasonableness analyses

The following sections contain the facility specific FFA information and Ecology's analysis of additional emission controls. TransAlta and Cardinal Glass emission reductions were included in the long-term strategy and the 2028 modeled emission projections (on-the-books) for determining reasonable progress goals. Emission reductions from the remaining facilities were not included in the modeled 2028 projection since implementation will likely occur during the next implementation period. This is due to long planning timelines at these types of facilities combined with coordination of control installation and scheduled facility maintenance shutdowns.

Ash Grove Cement Company

Ash Grove Cement Company (Ash Grove) operates a dry process cement kiln in the Duwamish Industrial area of Seattle. The primary haze causing emissions at the plant comes from the cement kiln and its associated clinker cooler baghouses. Clinker is an intermediate product in cement production.

The existing particulate controls installed at the plant meet the regulatory requirements for dry material handling. The plant also complies with the Portland Cement Manufacturing National Emission Standards for Hazardous Air Pollutants (NESHAP). This standard regulates particulate matter (PM) as a surrogate for metals (40 CFR Part 63 Subpart LLL). This NESHAP was last updated mid 2018 when the EPA determined that there were no developments in practices, processes, and control technologies that warrant revisions to the Maximum Achievable Control Technology (MACT) standards for this source category (83 FR 35122-35136, 2018).

SO₂ emissions at the plant come from burning sulfur containing fuels. The plant is capable of burning coal, natural gas, and tire-derived fuels. The plant has not been using coal for the last couple of years, but still has the ability to use it. As the facility can still use coal, SO₂ emissions from the 2014 EI (with coal combustion) were included in the modeling to determine progress. The alkaline cement clinker removes some SO₂ from the combustion gases. The facility uses this as a primary method of SO₂ control. Nitrogen oxides (NO_x) emissions from the plant also come from the combustion of all fuels allowed by permit.

Consent decree

Ash Grove entered into a consent decree with EPA, Ecology, the Puget Sound Clean Air Agency (PSCAA), and other state agencies in 2013 [SEE APPENDIX E]. The consent decree required the Seattle facility to submit an optimization protocol for the Seattle Kiln. The purpose of the protocol was to optimize the operation of the Seattle Kiln to reduce NO_x emissions to the maximum extent practicable from that kiln. EPA reviewed the optimization plan in consultation with the PSCAA.

The protocols for the optimization plan included key operating parameters resulting in the minimization of emissions of NO_x. The consent decree required minimization of NO_x to the greatest extent practicable without:

- Incurring unreasonable cost.
- Causing an exceedance of any other applicable emissions limit.

- Impairing production quality or quantity.

The protocols also required the facility to identify all potential process and/or operational changes that they could implement to reduce emissions of NOx.

On June 30, 2016, the facility submitted the NOx demonstration period report and data related to optimization. On August 25, 2016, EPA, in consultation with Ecology and PSCAA, reviewed the data and approved the limit of 5.1 pounds of NOx per ton of clinker on a 30-day rolling average.

Four Factor Analysis

The following analysis recognizes that EPA approved the consent decree of 2013 and the optimization of the facility to limit NOx emissions in 2016. The goal was to reduce NOx emissions to the greatest extent practicable within reasonable costs. Ecology does not typically perform RACT analysis on single facilities that have had a reasonable analysis performed within the last five years. The following evaluates possible additional controls.

NOx emission controls by selective catalytic reduction

Selective catalytic reduction (SCR) is a potentially viable method to reduce NOx emissions. Efficient operation of an SCR requires consistent exhaust temperatures. Changes in the temperature of the exhaust gas result in reduced NOx removal efficiency. The exit stack temperature at the facility is typically around 350°F. The typical SCR operation temperature is 650°F so the exhaust would require heating. When exhaust stream temperatures are too low, there is the potential that injected ammonia (the reducing agent) won't react (ammonia slip). Conversely, when the exhaust stream temperature is too high, ammonia (NH₃) can oxidize to NO, potentially reducing efficiencies. The reducing process needs excess NH₃ to achieve removal efficiencies in excess of 80 percent and can result in ammonia slip.

There is a risk of fouling the catalyst bed when operating an SCR. Installing the catalyst bed downstream of the particulate matter controls, (this facility uses baghouse dust collectors), can reduce fouling. The low exhaust gas temperature exiting the baghouse would require the installation of a heat exchanger system to reheat the exhaust stream to the desired reaction temperature range of between 480 °F to 800 °F. The use of a preheater or heat recovery would be required, however the use of a preheater would require additional fuel consumption and create even more NOx.

Installation of an SCR system would require storage and handling equipment for ammonia. An SCR system requires a catalytic reactor, heat exchanger, and potentially additional NOx control equipment for the emissions associated with the heat exchanger fuel combustion.

Installing the SCR in the high dust exhaust stream (e.g. before the baghouse) would put the SCR in the optimal temperature zone but there is a risk of fouling the catalyst. Faster fouling of the catalyst would result in increased operation cost and increased plant down time. A larger catalyst volume and mechanical mechanism to clean the catalyst could mitigate the fouling impacts but would require a larger physical footprint for installation.

NOx emission controls by selective non-catalytic reduction

The Consent Decree described above required the facility to optimize a selective non-catalytic reduction (SNCR) emission control system. Ash Grove submitted a new source review application with Puget Sound Clean Air Agency (PSCAA) in 2016 for the installation of the SNCR system. A permit has not been issued because of unresolved technical issues.

The main technical issue is that the permit application requested to operate the SNCR process on an “as needed” basis to achieve NO_x limits determined during a 2016 demonstration period for the EPA Consent Decree. PSCAA and Ash Grove are working on resolving the technical issues in the application with the goal of issuing a permit for the SNCR system. This permit will form the basis for emission standards that will apply to the SNCR system. Ecology intends to supplement the RHR SIP once the permit is issued. In the interim, Ecology has determined the EPA Consent Decree limit of 5.1 pounds of NO_x per ton of clinker on a 30-day rolling average is adequate for reasonable progress at this time until a final permit for the SNCR system is issued by Puget Sound Clean Air Agency.

Particulate matter emission controls

The facility upgraded their emission controls in 2019 with the installation of a Dustex 10-module pulse jet baghouse with rated flow rate of 185,000 actual cubic feet per minute (ACFM). They performed this upgrade under a permit modification with PSCAA. The permit modification requires the facility to meet the requirements of the Best Available Control Technology (BACT) requirements. PSCAA accepted the upgrade as BACT, so additional control analyses are not required.

Under the EPA’s July 8, 2021 Clarification Memo (page 9) “if a state can demonstrate that a source will continue to implement its existing measures and will not increase its emission rate, it may not be necessary to require those measures under the regional haze program in order to prevent future emission increases.” We note that the existing particulate controls installed at the plant meet the regulatory requirements for dry material handling. The plant also complies with the Portland Cement Manufacturing National Emission Standards for Hazardous Air Pollutants (NESHAP). This standard regulates particulate matter (PM) as a surrogate for metals (40 CFR Part 63 Subpart LLL). This NESHAP was last updated mid 2018 when the EPA determined that there were no developments in practices, processes, and control technologies that warrant revisions to the Maximum Achievable Control Technology (MACT) standards for this source category (83 FR 35122-35136, 2018). Because these emissions are unlikely to increase and are subject to a federally enforceable control, Ecology has determined that incorporation of a PM emission limit in the SIP is not necessary for reasonable progress.

SO₂ emission controls

The primary emission of SO₂ from the facility is from the burning of coal, tires, and various oils. The primary emission control for SO₂ is a wet scrubber. Space is limited at the site and installation of a wet scrubber would require extensive facility rearrangement and a retention pond for the waste water, in addition to the capital cost of the wet scrubber. Based on this, we do not consider the cost of a wet scrubber reasonable at this time.

The existing controls for SO₂ emissions at the facility limiting emissions to 200 ppm at 10% O₂ for one hour average and a not to exceed of 176 tons per year were deemed adequate to meet reasonable progress.

Cost of compliance

Installing SCR NO_x or SO₂ emission controls would require significant facility reconstruction. The Ash Grove facility brochure in [APPENDIX E] shows how congested the site is. To create room the emission devices would have to be elevated above the existing facility and would run into area height restrictions. The other option of raising existing plant equipment or positioning the emission control device above other equipment would require extensive structural work and would require that the facility shut down operations during construction and reconfigure the site. This would result in significant additional costs above capital expenditure and operational cost for the emission control equipment.

Ash Grove submitted a permit application for an SNCR system, and this indicates that the cost of SNCR installation is reasonable. Ecology is working with PSCAA and Ash Grove to optimize the proposed SNCR system so that the permitted system maximizes NO_x emission reductions without excessive ammonia emissions.

Time necessary for compliance

Typical planning periods to design and then install SCR NO_x or SO₂ controls are two to three years. A tuning period after installation is required to understand the physical operation of the equipment. For the Ash Grove facility, the time required to plan and then install any equipment would increase by one to two years to allow for extensive facility modifications to accommodate any equipment.

With the base infrastructure of the SNCR system already in place at the facility, an analysis and subsequent optimization study would take six to twelve months. This time estimate comes from the actual time required to perform an optimization study at a coal-fired power plant in the state. Most of the time involved in the optimization study is in setting the system parameters and then operating the facility under the parameters long enough to collect stabilized data.

Energy and non-air quality environmental impacts of compliance

SCR equipment would require preheating the exhaust stream before it enters the SCR. Preheaters burn fuel to generate heat and this would consume additional energy and create additional emissions.

The installation of a wet scrubber for SO₂ controls would require obtaining a water quality permit for use with the liquid in the wet scrubber. Depending on the permit requirements, the facility could need additional energy to treat the liquid from the wet scrubber before discharge off-site.

The SNCR system is already in place and the facility is working on obtaining a permit.

Remaining useful life of any potentially affected sources

Proper maintenance of this facility should allow it to continue operations well into the future.

Summary and preliminary recommendations

Ecology does not recommend installation of additional emission control equipment. The particulate matter controls at the site were recently upgraded. The cost for SCR NO_x and wet scrubbing SO₂ equipment installation is also unreasonable due to the confined space at the site. The existing controls for particulate matter and SO₂ were used in the model to determine reasonable progress. The installation of a new SNCR system will be permitted by PSCAA identifying use requirements.

Cardinal Glass

Cardinal FG Company Winlock (Cardinal) operates a flat glass manufacturing plant in Winlock, near the intersection of Avery Road and Highway 603, in Lewis County, Washington. In 2019, Cardinal submitted a permit modification application to SWCAA to install an SCR emission control device and increase production of plate glass. The application also proposed removing the current emission control of limiting excess oxygen. SWCAA is working with the facility to issue a permit to add SCR to the existing plant.

Ecology identified Cardinal in the Q/d analysis as a facility to review under the RH program. On January 17, 2020, Cardinal FG Company submitted a four-factor analysis.

Four-factor analysis

Cardinal FG Company Winlock submitted an application to SWCAA to modify the facility's permit by:

- Installing an SCR system to control NO_x emissions from the glass furnace;
- Increasing rated furnace production from 650 tpd to 750 tpd;
- Removing an SCR from Emergency Generator #1;
- Installing a new emergency generator; and
- Establishing voluntary emission limits at levels below major source thresholds.

The use of the current emission control system will cease once the SCR system commences operation. The facility will also install a new supplemental heater between the Electrostatic Precipitator (ESP) and the SCR system. This heater will raise the exhaust stream temperatures to the range required for proper SCR operation.

Table 7-2 shows the emissions, by pollutant in tons, after the requested modification is complete. The table also shows the change in emissions from the current permit values to the requested modified permit values.

Table 7-2: Emissions summary

Pollutant	Facility-wide potential to emit after permit modification in tons per year (tpy)	Pollutant emissions change between current limits and permit modification limits in tons per year (tpy)
NO _x	249.62	-583.05

CO	249.00	-522.48
VOC	57.79	1.92
SO ₂	114.21	41.75
PM	141.96	16.84
PM ₁₀	141.96	6.84
PM _{2.5}	141.96	16.84

Cost of compliance

Oxides of Nitrogen (NO_x) – cost and cost/ton

Cardinal's permit modification application estimated a reduction of glass furnace annual NO_x emissions from 828.05 to 245.0 tons per year (tpy). This is an annual reduction of 583.05 tpy. The estimated cost of the new SCR control system is \$10 million. Based on 3.5 percent interest and 20-year life, the annual cost is \$944,000 per year. Using the annualized cost and emissions reduction, the estimated cost effectiveness is \$1,469 per ton of NO_x. The actual cost will be higher since this does not include operating costs.

Ecology requested additional data needed to use the EPA Control Cost Manual from Cardinal to compare the EPA Control Cost Manual results to actual data for quality purposes. Ecology received the following unit specific information from Cardinal on June 15, 2020:

- Exhaust rate of 181,157 acfm @ 600 F
- SCR inlet NO_x = 437.5 lbs/hr (above current emission limit)
- SCR outlet NO_x = 49.1 lbs/hr
- Capital cost updated to \$11 million (annualized cost not updated)

SO₂, PM – Temperature change – higher scrubber temperature and reheat - cost and cost/ton

The operating temperature of the new SCR system will require the existing spray dryer and electrostatic precipitator (ESP) to operate at higher temperatures, reducing their collection efficiency and requiring a reheat burner. This increased temperature results in a greater fuel consumption and SO₂ emissions. The SO₂ emissions limit will increase from 0.6 to 0.8 lbs of SO₂/ton of glass. The natural gas-fired reheat burner will have a capacity of 17 - Million British Thermal Units (MMBtu)/hr.

The permit modification application includes a production increase at the facility from 650 to 750 tons per day (TPD). This results in an increase of total annual PM emissions even though the total PM emission limits of 0.94 lbs/ton will not change.

Time necessary for compliance

Cardinal expects to have the proposed SCR installed and operational in 2021. The permit was issued by SWCAA to the facility on February 11, 2021, and the SCR should be operating by the end of 2021.

Energy and non-air quality environmental impacts of compliance

SCR - Ammonia and PM increases

The design of the SCR system at the facility assumes a 19 percent ammonia reagent usage of 816 lbs/hr. Appendix D of the permit modification application calculates ammonia emissions. SWCAA permit 20-3409 contains the permit modification application. Based on an ammonia slip limit of 10 parts per million (ppm), estimated ammonia emissions based on continuous operation will be 9.58 tpy.

The total particulate matter (PM) emission limits of 0.94 lbs PM/ton of glass will not change. Total PM emissions will increase, however, due to the facility increasing throughput capacity from 650 to 750 tpd of glass.

Appendix C of the permit modification application (in Appendix S) calculates PM emissions. The PM emissions from the glass furnace will increase from 111.0 to 127.84 tpy, for an increase of 16.84 tpy.

The SO₂ emissions limit will increase from 0.6 to 0.8 lbs/ton. SO₂ emission increases will occur due to the increase in capacity from 650 to 750 tpd of glass. Appendix C of the permit modification application calculates SO₂ emissions. The SO₂ emissions from the glass furnace will increase from 75.6 to 117.35 tpy, for an increase of 41.75 tpy.

SO₂/PM controls - additional fuel if needed – added emissions

The existing SO₂ and PM controls for the glass furnace do not use fuel.

Remaining useful life of any potentially affected sources

The Cardinal facility has operated since 2006. The new SCR system's design life will last at least 30 years if the facility performs proper maintenance.

Ecology's review

The RH program does not prohibit or limit construction of new stationary sources of emissions or modification of existing stationary sources of emissions. Cardinal submitted a permit modification application for increased glass production and a change in emission control devices. The NO_x emission reductions resulting from the installation of the SCR are part of Ecology's long-term strategy for achieving reasonable progress goals in Class 1 Areas for this implementation period. Based on the above information and SWCAA's technical support document for the permit action, Ecology concludes:

- The new SCR will reduce NO_x emissions. The permitted emissions will be reduced to 250 tpy. Ecology's independent review of the cost for installation of the SCR determined approximately \$1,600/ton of NO_x reduced. The facility's estimate was slightly higher as the company included the additional equipment (temporary stack and larger crane) to install the new system while the facility stays in operation. This could explain the higher actual cost when compared to the EPA Control Cost Manual when using a base reconstruction factor of 1.0.
- This cost is reasonable for NO_x reductions. If the facility were not taking action on their own initiative to install a SCR system, Ecology would have pursued Cardinal Glass to install one. The permit modification with SWCAA is the only action needed for RH reductions.

Table 7-3: Cardinal cost vs Ecology using the EPA Control Cost Manual with June 15, 2020, updated exhaust flow and capital cost

Company	Actual cubic feet per minute	Capital costs (\$)	Annualized costs (\$)
Cardinal FG Winlock	181,157	11,000,000	944,000
EPA Model - R =1.0	181,157	10,899,998	750,225

Summary and preliminary recommendations

- The operating temperature of the new SCR system will require the existing spray dryer and ESP to operate at higher temperatures, reducing the collection efficiency and requiring a reheat burner. Ecology concluded that the resulting minor increase in PM and SO₂ is offset by the larger decrease in NO_x.
- The facility is working to obtain local permits needed for the installation of the SCR.
- The new permit limit for ammonia of 10 ppm and 9.5 tpy is reasonable. New SCR systems will typically have actual ammonia emissions less than 2 ppm after tuning.

Coal-fired electrical generation unit

TransAlta Centralia Generation (TransAlta) is a coal-fired power plant located east of Centralia, WA. This is the largest source of NO_x in the state. TransAlta's large quantity of emissions and tall stacks create NO_x impacts to all of the Class 1 areas within 300 km of the facility. TransAlta operates a two unit, pulverized coal-fired power plant. Each unit of the plant rates at 702.5-megawatt (MW) net output. Operation of a coal-fired power plant results in visibility impairing emissions of PM, SO₂, and NO_x.

The Coal-Fired Electric Generation Facility Bill was signed in 2011, with an effective date of July 22, 2011. The state's greenhouse gas emission performance standard for power plants codified at RCW 80.80.040 determined the main environmental impacts of the bill. The requirements in RCW 80.80.040 have compliance dates for one boiler to cease coal-fired generation by December 31, 2020, and the other boiler to cease coal-fired generation by December 31, 2025. TransAlta has ceased coal-fired power generation on one boiler and plans to cease coal-fired power generation in the other boiler by December 31, 2025.

Ecology identified TransAlta as a best available retrofit technology (BART) eligible facility in the first implementation period of RH. Ecology issued a BART Order to TransAlta on June 18, 2010 (2010BARTtransalta). This BART Order required the installation of a SNCR emission control device. Ecology issued a revision to the BART Order on December 13, 2011. The revision incorporated an optimization study on urea volume injections for the SNCR. Ecology issued a second revision to the BART order on July 29, 2020. The second revision required the installation of automated controls on the combustion system, a lower NO_x emission limit, and removal of specific urea injection volumes.

In the summer of 2019, TransAlta experienced emission opacity readings that would have exceeded the opacity limits if TransAlta had not reduced plant capacity to compensate. During a maintenance shutdown, the facility examined their ESPs. The ESPs had a visual fouling of all

interior components, which dramatically reduced their efficiency. The facility analyzed the material in the ESPs and identified it as ammonia sulfate. The source of ammonia in the system was from the reactions of urea in the SNCR system.

In coordination with SWCAA and Ecology, TransAlta installed a computerized emission control system called a Combustion Optimization System with Neural Network program (Neural Net) to decrease the ammonia slip in the SNCR. SWCAA agreed to use enforcement discretion in 2019 on the urea injection rate mandated in the 2011 BART Order revision while TransAlta was tuning the Neural Net. TransAlta collected enough process data during tuning of the neural net to agree to a more stringent NO_x emission standard of 0.18 lb/MMBtu, a decrease from the 0.21 lb/MMBtu allowed under the 2011 BART Order revision.

Because the Neural Net is able to maintain a more stringent emission standard, Ecology eliminated unnecessary requirements when issuing the second BART order revision. Specifically, the 2020 order:

- Removed the requirement of a specific urea injection rate to allow TransAlta to inject urea as required to meet the new emission standard.
- Removed the requirement to analyze and report nitrogen and sulfur coal content as the facility would have to meet NO_x, SO₂, and PM emission standards regardless of the coal used.
- Changed the requirement for ammonia emission monitoring to require monitoring only when using a urea injection rate of greater than 1.5 gallons per minute.

The BART Order was submitted to EPA and approved into the Washington SIP on May 11, 2021.

Four factor analysis

The FFA of TransAlta reflects the RCW 80.80 and the Memorandum of Agreement (MOA) between TransAlta and the Governor of Washington that TransAlta will completely cease coal-fired power generation by December 31, 2025. It also discusses the second BART Order revision that reduces NO_x emissions at the facility.

Cost of compliance

The agreement to cease coal-fired power generation greatly influences the compliance cost for installing any emission controls at TransAlta. The first unit ceased operation on December 31, 2020. This decreased by approximately half the plant emissions from coal-fired power generation. This emission reduction requires no capital cost. Operational costs to ensure that the unit will no longer be able to generate power from coal will occur, but all parties already considered this as part of the MOA.

The second BART Order revision includes the installation of the Neural Net to control combustion variables in one of the boilers. TransAlta proposed this installation and during optimization testing, the data confirmed that the controls could reduce NO_x emissions. Ecology did not request the costs associated with installing, testing, and optimizing of the neural net as TransAlta proposed it and resulted in decreased NO_x emissions for the remaining coal-fired power generation life of the facility.

Time necessary for compliance

TransAlta ceased coal-fired power generation on one of their units in December 2020. TransAlta will cease coal-fired power generation on their last unit by December 31, 2025. The Neural Net installation has already occurred and the more stringent emission limit applies to the facility until it ceases coal-fired power generation.

Energy and non-air quality environmental impacts of compliance

The energy required to meet compliance for ceasing coal-fired power operation is zero. We did not take non-air quality environmental impacts for the future of the facility into account for this analysis.

For the Neural Net, TransAlta is anticipating payback within a couple of years. This is because more efficient combustion controls reduce the amount of coal required to produce the same amount of heat.

Remaining useful life of any potentially affected sources

The facility useful life for coal-fired power generation is until December 31, 2025.

Summary and preliminary recommendations

TransAlta already has an agreement to cease coal-fired power generation by December 31, 2025. This will result in coal-related emissions from the facility going to zero. Ecology used the zero emission level in determining 2028 projected emissions and reasonable progress goals in Washington's Class 1 Areas, as well as potential effects in Class 1 Areas of neighboring states. With the installation of the neural net, the facility will also have a reduced NOx emission standard for the remaining life of the facility. For these reasons, Ecology does not anticipate further emission reductions or emission control devices for Regional Haze purposes.

Primary aluminum production

The state of Washington currently has two primary aluminum reduction facilities:

- Alcoa Primary Metals Wenatchee Works located in Wenatchee, Washington.
- Alcoa Primary Metals Intalco Works located in Ferndale, Washington

Alcoa curtailed the Wenatchee facility in 2015 and the Ferndale facility in 2020, while keeping both air permits active. Ecology did not include emission reductions from either facility when modeling on-the-books visibility projections for 2028 or determining reasonable progress goals in the state's Class 1 Areas although future emissions inventories may show emission reductions resulting from curtailment.

In 2014, the emissions from the sites were as follows:

Table 7-4: Primary aluminum facility 2014 emissions

Facility	Tons PM _{2.5}	Tons SO ₂	Tons NO _x
Alcoa Intalco	637	4,794	227
Alcoa Wenatchee	457	2,935	70

Alcoa Wenatchee Works

The Wenatchee Works facility, curtailed since 2015, has very low emissions. The facility is performing all the requirements of their air permits and could restart at any time. Wenatchee Works would need time to expand their work force from the current curtailment level and additional physical activities would need to occur prior to returning to production.

The four-factor analysis of Wenatchee Works is complicated by the curtailment status. Annual emissions are very low while in curtailment and not typical of emissions during operation. In 2016-2018, annual emissions were less than 10 tpy for all pollutants. A facility in curtailment is also not generating revenue because the facility is not selling any aluminum.

Four-factor analysis

The primary haze-causing pollutant from the facility when it is operating is SO₂. A wet scrubber and associated liquid handling structures is often used for SO₂ emission control. The following FFA details how installation of a wet scrubber system is not reasonable when the facility is in curtailment.

Cost of compliance

The cost of compliance will always be unreasonable for a facility in curtailment since the analysis is based on cost/ton of actual emissions. The facility reported 10 tons of total annual emissions in 2016. Assuming the facility could install control equipment for the entire 10 tons, the cost per ton of emissions reduced will exceed \$10,000 per ton of pollutants removed with only a \$100,000 expenditure. A cost of \$10,000 per ton is not a reasonable cost for primary aluminum facilities at this time.

Facilities with large emissions of SO₂, in tons per year, typically use wet scrubbers for emission control. Direct capital equipment costs for wet scrubbers are typically in the millions of dollars range and installing a wet scrubber would require spending at least \$100,000 per ton of SO₂ removed based on current emissions, which is not reasonable.

Because the facility has the potential to restart at any time, emissions could potentially return to pre-curtailed levels. In this situation, an analysis of the facility could potentially result in reasonable emission control costs. Calculations of the cost of compliance would depend on numerous variables, from the number of pot lines brought back on line, amount of aluminum produced, regaining experienced operators for efficient operations, and other operational determinations.

We would need to determine numerous variables associated with a restart of the facility before performing a cost analysis. At the time of facility restart, we would need to do an analysis to determine the reasonableness of the cost of potential controls.

Time necessary for compliance

With the facility in curtailment and no emission control equipment deemed reasonable, the facility is already complying with reasonable emission control. If the facility comes out of curtailment, we would need a new FFA to determine time for compliance if we identify control equipment.

Energy and non-air environmental impacts

With the facility in curtailment and no emission control equipment deemed reasonable, the facility would not have any new non-air environmental impacts. If the facility comes out of curtailment, we would need a new four-factor analysis to determine non-air environmental impacts if we identify control equipment.

Remaining useful life

The facility is currently in curtailment and not operating. The facility is performing maintenance on equipment to keep the facility in position to restart in the future. The facility has permanently closed a pot line within the last five years.

Summary and preliminary recommendations

Wenatchee Works is currently in curtailment and installation of additional emission control devices is not reasonable at this time. With the potential of the facility to restart at any time, Ecology entered into an Agreed Order (AO #18100) (WenatcheeAORH) with the facility that requires the facility perform a FFA before restarting and provide the analysis to Ecology.

The AO conditions stipulate that Alcoa shall:

1. Prepare and submit a four-factor analysis to Ecology for review and approval at least 180 days prior to restarting any of the facility's potlines. Alcoa will base the analysis on the facility's permitted emission limits and will assess potential emission control measures against the following four statutory factors:
 - The cost of compliance,
 - Time necessary for compliance,
 - Energy and non-air quality impacts of compliance, and
 - Remaining useful life of the source.
2. Within 60 days of receipt of Ecology's comments on the four-factor analysis provide all additional information and/or documentation requested by Ecology, if any, and submit an updated four-factor analysis that adequately addresses Ecology's comments.
3. Install or otherwise implement and begin operating all emission control measures identified in the final four-factor analysis submitted within three years of Ecology's approval.

Alcoa Intalco

The Intalco facility near Ferndale is capable of making approximately 307,000 tons of aluminum metal each year. The facility is located in an area that had air monitor readings that were exceeding the one-hour sulfur dioxide (SO₂) National Ambient Air Quality Standards (NAAQS). Ecology and Intalco entered into Agreed Order 16449 on July 25, 2019 (IntalcoAO16449). Intalco agreed in the AO to submit a complete Notice of Construction (NOC) application for the installation of a wet scrubber design and engineering report by October 31, 2020.

We anticipated using the information required under the terms of the AO to perform the FFA for our RH SIP. Ecology did not request the facility to perform a FFA as the AO obviated the need to perform one. On April 22, 2020, the Intalco facility announced that it was curtailing production. The AO contains a clause that “[n]otwithstanding anything else in this Order, in the event that Intalco announces the closure or curtailment of one of its three potlines (A, B, or C line, or any combination or equivalent measure thereof), then upon thirty days’ prior written notice to Ecology, this Order and Intalco’s obligations hereunder will become null and void.”

With the curtailment and subsequent voiding of the wet scrubber AO Ecology cannot count potential emissions reductions from that control.

The Intalco facility is planning to perform all requirement of their permits and could restart at any time. Intalco would need time to expand their work force from the current curtailment level and additional physical activities would need to occur prior to returning to production.

The FFA of Intalco during curtailment is more complicated than on an operating facility. Annual emissions are very low while in curtailment and not typical of emissions during operation. Emissions should be comparable to the Wenatchee Work primary aluminum facility that is already in curtailment. The Wenatchee Works facility had annual emissions in 2016-2018 that were less than 10 tpy total for all pollutants. The Intalco facility in curtailment is also not generating revenue because the facility is not selling any aluminum.

Four-factor analysis

The primary haze-causing pollutant from the facility when it is operating is SO₂. A wet scrubber and associated liquid handling structures is often used for SO₂ emission control. The following FFA details how installation of a wet scrubber system is not reasonable when the facility is in curtailment.

Cost of compliance

The cost of compliance will always be unreasonable for a facility in curtailment since the analysis is based on cost/ton of actual emissions. If Intalco curtailed emissions are similar to the Wenatchee Works facility’s reported 10 tons of total annual emissions in the 2016 EI, then Intalco will also have around 10 tons of annual emissions. Assuming the facility could install control equipment for the entire 10 tons, the cost per ton of emissions reduced will exceed \$10,000 per ton of pollutants removed with only a \$100,000 expenditure. A cost of \$10,000 per ton is not a reasonable cost for primary aluminum facilities at this time.

Facilities with large emissions of SO₂, in tons per year, typically use wet scrubbers as emission control. Direct capital equipment costs for wet scrubbers are typically in the millions of dollars

range and installing a wet scrubber would require spending at least \$100,000 per ton of SO₂ removed based on current emissions, which is not reasonable.

Because the facility has the potential to restart at any time, emissions could potentially return to 2014 EI (2014EI) levels. In this situation, an analysis of the facility could potentially result in reasonable emission control costs. Calculations of the cost of compliance would depend on numerous variables from the number of pot lines brought back on line, amount of aluminum produced, regaining experienced operators for efficient operations, and other operational determinations.

Numerous variables associated with a restart of the facility need to be determined before performing a cost analysis. At the time of facility restart, we would need to do an analysis to determine the reasonableness of the cost of compliance.

[Time necessary for compliance](#)

With the facility in curtailment and no emission control equipment deemed reasonable, the facility is already complying with reasonable emission control. If the facility comes out of curtailment, we would need a new FFA to determine time for compliance if we identify control equipment.

[Energy and non-air environmental impacts](#)

With the facility in curtailment and no emission control equipment deemed reasonable, the facility would not have any new non-air environmental impacts. If the facility comes out of curtailment, we would need a new FFA to determine non-air environmental impacts if we identify control equipment.

[Remaining useful life](#)

The facility is currently in curtailment and not operating. The facility is performing maintenance on equipment to keep the facility in position to restart in the future. Because of the uncertainties, we cannot determine the remaining useful life of the facility at this time.

Summary and preliminary recommendations

Intalco is currently in curtailment and installation of additional emission control devices is not reasonable at this time. With the potential of the facility to restart at any time, Ecology entered into an Agreed Order (AO) with the facility that requires the facility perform a FFA before restarting and provide the analysis to Ecology.

The AO conditions stipulate that Intalco shall:

1. Prepare and submit a four-factor analysis to Ecology for review and approval at least 180 days prior to restarting any of the facility's potlines. Intalco will base the analysis on the facility's permitted emission limits and will assess potential emission control measures against the following four statutory factors:
 - The cost of compliance,
 - Time necessary for compliance,
 - Energy and non-air quality impacts of compliance, and

- Remaining useful life of the source.
2. Within 60 days of receipt of Ecology's comments on the four-factor analysis provide all additional information and/or documentation requested by Ecology, if any, and submit an updated four-factor analysis that adequately addresses Ecology's comments.
 3. Install or otherwise implement and begin operating all emission control measures identified in the final four-factor analysis submitted within three years of Ecology's approval.

7.5 Chemical pulp & paper mill four-factor analysis

The pulp & paper facilities include six sulfate (Kraft) and one sulfite chemical processing facilities. Cosmo Specialty Fiber is currently the only sulfite mill in Washington. The modeled 2028 reasonable progress goals did not include any emission reductions from any of the pulp & paper mills. Ecology has limited resources and is choosing to prioritize the sequence of implementation of reasonable controls. Ecology has identified potential cost-effective controls at a multitude of sources and is choosing to require reasonable controls at only a subset of those sources.

As discussed in EPA's guidance:

“Another potentially reasonable approach might be for a state that identifies cost-effective new controls at a multitude of sources to choose to require controls at only a subset of those sources that constitute the vast majority of the visibility benefit. In this case, the state could rely on visibility benefits to prioritize which sources would receive new controls.”¹⁵

Ecology is prioritizing implementation of potential new controls starting with refinery facilities because:

- The pulp & paper mills are not located as close to each other as the refineries so they do not have as great of a cumulative effect.
- One mill identified with potential reasonable cost controls, Packaging Corporation of America (PCA) Wallula, is located in a direction that is downwind from the nearest Class 1 Areas. This lessens, but does not remove, the influence the mill's emissions have on Class 1 Areas.
- A potential reduction of 470 tons per year in regional haze emissions from the pulp & paper mills reasonable controls is vastly less than potential refinery emission reductions.

After we complete the reasonability analysis and determination for the refinery facilities, we plan to identify and implement any reasonable controls at pulp and paper facilities. Ecology will update the SIP if new emission controls are installed at pulp and paper facilities during this

¹⁵ Peter Tsirigotis, Director, “Clarifications Regarding Regional Haze Second Implementation Plans for the Second Implementation Period,” memo, addressed to Regional Air Division Directors, Regions 1-10, July 8, 2021, Section 5.1, at page 12-13.

implementation period. In the interim, Ecology has determined that no additional controls are necessary for RP at this time or included in the LTS.

Four-factor request and initial review

On September 10, 2019, Ecology requested an FFA from the seven chemical pulp mills in Washington State. Ecology received a combined FFA report from the six Kraft mills and a separate FFA from the sulfite mill (Cosmo) on December 5, 2019. After review, on January 13 2020, Ecology requested that six of the seven mills provide additional information to Ecology by February 28, 2020 [APPENDIX I].

Ecology did not request additional information from GP Camas because they are no longer a Kraft mill and facility emissions were reduced below the Q/d screening threshold. The 2019 Emission Inventory indicates regional haze causing emissions for the GP Camas facility reduced from 653 tons to 83.1 tons. The reduced emission mass changes the Q/d value from 23.1 to 1.8. With the new Q/d value being less than the threshold value of 10 for consideration, Ecology removed the facility from further analysis. If GP Camas pursues operation as a chemical pulp mill in the future, they will need to go through new source review.

On February 20, 2020, Cosmo requested a time extension for submitting additional information due to impacts of the coronavirus in China, where delivery of their product was delayed. Ecology agreed to a time extension to April 30, 2020.

Ecology received follow-up information from each of the mills in a timely manner. The FFAs and follow-up information from the pulp mills are in Appendix O. The FFA supplied from the mills all indicate that additional emission controls are unreasonable. Ecology evaluated and adjusted this information for NO_x, SO₂, and PM control. Appendix J is a summary of Ecology's revised costs/ton for controls for NO_x, SO₂, and PM, costs/ton, and estimated useful life at a 3.25 percent interest rate for the facilities.

Potentially reasonable controls at current chemical pulp mills

Ecology identified some potential reasonable controls at three Kraft mills and a sulfite mill. The Kraft mills are Nippon Dynawave Packaging Company Longview (Nippon), Packaging Corporation of America (PCA) Wallula, and WestRock PC, LLC Tacoma. The sulfite mill is Cosmo Specialty Fibers, Inc. (Cosmo) mill. Because Ecology has identified potential cost-effective controls at a multitude of sources, we are choosing to require any potential reasonable controls at only a subset of those sources. Ecology has chosen to perform a more extensive and in-depth engineering evaluation at refinery facilities first. This decision is based on the refineries having a greater potential amount of reductions to regional haze causing emissions than pulp & paper mills. The refineries are also geographically located such that they influence the same Class 1 Areas concurrently. The pulp & paper mills are more dispersed and have less of a combined influence on the Class 1 Areas.

For NO_x control using a low-NO_x burner, the following units have estimated cost/ton value less than the potential reasonableness threshold of \$6,300/ton. Adding these controls could potentially reduce NO_x emissions by approximately 150 tpy.

- Nippon Boiler #9 (\$2,754/ton) with approximately 97 tons potential reduction

- PCA boiler #1 (\$5,893/ton); with approximately 26 tons potential reduction
- PCA boiler #2 (\$4,834/ton) with approximately 30 tons potential reduction

For NO_x control using an SCR or SNCR, the following units have a cost/ton value less than the potential reasonableness threshold of \$6,250/ton. Adding one of these controls could potentially reduce NO_x emissions by approximately 500 tpy to 1025 tpy.

- Nippon hog fuel (HF) boiler #11 (\$5,413 for SNCR); (\$5,466/ton for SCR); with approximately 329 tons or 848 tons potential reduction respectively.
- Nippon Boiler #9 (\$6,041 for SCR) with approximately 175 tons potential reduction.
 - This unit was discussed above in the low-NO_x burner section. Please note that only one of these options would be used.

For PM₁₀ control, the following units have a cost/ton value less than the potential reasonableness threshold of \$7,800/ton. Adding these controls could potentially reduce PM₁₀ emissions by approximately 30 to 225 tpy depending whether Cosmo is included (see footnotes for Cosmo).

- WestRock Tacoma Lime Kiln #1 (\$6,964/ton) with approximately 33 tons potential reduction.

For SO₂ control, Ecology did not receive recent cost incurred information from the pulp mills (the scrubber at WestRock Tacoma was for HCl control). The SO₂ control cost estimates that the pulp mills submitted to Ecology are greater than the potential cost threshold range of the other RH pollutant costs of \$6,250 - \$7,800.

Additional considerations

Ecology considered the following information as part of the reasonability analysis:

- GP Camas is no longer operating as a chemical pulp mill and the emissions will change. The facility would have to apply as a new source if it ever wanted to become a chemical pulp mill in the future. This would result in evaluation of emission controls requirements at that time.
- The Cosmo mill was in curtailment from May 10, 2020 until January 27, 2021. This shows the mills sensitivity to market conditions and impacts what the reasonable cost threshold for new emission equipment is.
- Currently, no one has practically demonstrated using SCRs for recovery furnaces (boilers), but they could potentially progress to a level of technical feasibility during a future implementation period. Since this is not shown to be technically feasible at this time, those controls will not be considered for analysis during this implementation period.

Conclusion

The pulp & paper mills identified no reasonable controls in their FFAs. Ecology will need to perform a more extensive and in-depth engineering evaluation on potential control to generate more accurate and defensible cost estimates. Ecology has limited resources and is choosing to prioritize the sequence of implementation of reasonable controls. Ecology has identified

potential cost-effective controls at a multitude of sources and is choosing to require reasonable controls at only a subset of those sources at this time.

Pulp & paper mill sources are not the first priority for new control implementation. This decision is based on:

- The pulp & paper mills are not located as close to each other as the refineries so they do not have as great of a cumulative effect.
- One mill identified with potential reasonable cost controls, Packaging Corporation of America (PCA) Wallula, is located in a direction that is generally downwind from the nearest Class 1 Areas. This lessens, but does not remove, the influence the mill's emissions have on Class 1 Areas.
- The potential reduction of 450 tons per year in regional haze emissions from the pulp & paper mills reasonable controls is vastly less than potential refinery emission reductions (approximately 4,000 tons).

After we complete the reasonability analysis and determination for the refinery facilities, we plan to conduct a reasonability analysis at pulp and paper facilities. This will be included in a SIP revision or the next implementation period, depending on the timing.

7.6 Refineries

Five petroleum refineries are located in the state of Washington. The refineries are Cherry Point refinery (BP Cherry Point), Shell Anacortes refinery (Shell), Marathon Anacortes refinery (Tesoro), Ferndale refinery (Phillips 66), and U.S. Oil refinery (U.S. Oil).

Refineries have extended timeframes for design, acquisition, and installation of equipment. Work at refineries must be scheduled during narrow time windows to coincide with other work during facility shutdowns. Performing work outside of these periods significantly increases cost if the facilities would shut down solely for the equipment installation. The next facility shutdowns may occur outside of this implementation period so no emission reductions were included in the modeled 2028 visibility projections.

The refineries in Washington are over 40 years old and the facilities have maintained the majority of the equipment in a manner that has not required updating emission controls to current standards. EPA national enforcement actions and the installation of new equipment have led to the updating of some equipment. All the refineries have made changes to accommodate the new fuel standards, lower sulfur requirements, and benzene content.

Table 7-5. General refinery information.

Refinery	Process Capacity (barrels/day)	Footprint (acres)	Year Built
BP	234,000	3,300	1971
Phillips 66	107,500	900	1954
Shell	149,000	800	1958
MPC	125,000	900	1955
US Oil	42,000	136	1957

Each refinery has the same NAICS code, but are uniquely configured with different considerations for each. The major difference is in how they handle the heavy crude bottom fraction:

- BP Cherry Point uses hydrocracker and coker units.
- Phillips 66 uses a Fluidized Catalytic Cracking Unit (FCCU).
- Shell uses a FCCU and coker.
- Tesoro uses a FCCU.
- U.S. Oil produces asphalt or exports it to other refineries for further processing.

All the refineries have flexibility to send intermediate products to other refineries for final processing.

Table 7-6 shows how Washington refineries compare nationally based on NOx emissions per barrel of production capacity. The data is from the 2014 EPA emission data (2014 NEI Data, 2014) of 88 refineries located in nine states: AK, CA CO, IL, LA, MT, TX, WA, and WY. Table 7-6 only shows a subset of the 88 refineries and all Washington refineries are shown. The table is sorted from highest to lowest NOx emissions divided by production capacity. Washington refineries represent four of the top five facilities in the nine states in NOx emissions per 1,000 barrels produced per day. Three Washington refineries emit more oxides of nitrogen per barrel of production capacity than per year of any other refinery in the U.S.

Table 7-6: Washington refineries annual emissions and production capacity

State	Company	NOX tpy 2014	Ranking NOx tpy	1,000 BPD	NOx tpy/1,000 BPD
WA	Tesoro Northwest Company	1,918	3	119	16.12
WA	Shell Puget Sound Refinery	1,230	16	145	8.48
WA	BP Cherry Point Refinery	1,882	4	242	7.78
LA	Equilon Enterprises LLC - Shell Oil Products US Norco Refinery	1,626	11	225	7.23
WA	Phillips 66 Ferndale Refinery	723	31	105	6.89
IL	Exxon Mobil Oil Corp	1,386	13	238	5.83
LA	Phillips 66 Co - Alliance Refinery	1,432	12	253	5.66
IL	ConocoPhillips Co	1,863	6	334	5.58
LA	Citgo Petroleum Corp - Lake Charles Manufacturing Complex	2,197	1	418	5.25
TX	Beaumont Refinery	1,868	5	365	5.12
LA	ExxonMobil Refinery & Supply Co - Baton Rouge Refinery	1,944	2	540	3.60
TX	Deer Park Plant	1,702	9	500	3.40
TX	Baytown Refinery	1,828	8	560	3.26
WA	US Oil & Refining Co	133	68	41	3.24
TX	Port Arthur Refinery	1,858	7	603	3.08
TX	Galveston Bay Refinery	1,692	10	571	2.96
LA	Marathon Petroleum Co LP - LA Refining Division - Garyville Refinery	1,379	14	564	2.45

Refinery planning process

Ecology offered to enter into a cooperative AO with each refinery to achieve enforceable NOx emission reductions. We proposed to calculate the total amount of NOx reductions each refinery would achieve if they implemented Subpart Ja of the New Source Performance Standards (40 CFR 60 Subpart Ja). The Ja NOx total emission values would be used to calculate NOx emissions reductions that would need to occur over the remaining implementation periods prior to 2064. The refinery could meet the calculated NOx emission reductions through any NOx reduction work and not specifically tied to Ja requirements.

Ecology met with the refineries and the Western States Petroleum Association (WSPA) on September 17, 2019, to discuss this approach. At that meeting, Ecology also discussed not using the Subpart Ja option but doing a reasonability analysis at each facility. This would require a RACT determination for each facility based on their unique configurations. Ultimately, the refineries selected the reasonability analysis option over the AO approach.

On November 27, 2019, Ecology requested that the refineries perform a FFA review of equipment at the refineries. Ecology limited the scope of the FFA to equipment with large emissions of NOx. Ecology limited the scope to facilitate timely returns of the FFA to fit the timeline for RH SIP submittal. We requested the FFA for NOx emission reductions on specific pieces of equipment.

The refineries requested time extensions to the FFA request date and Ecology extended the final deadline to May 1, 2020. All of the refineries delivered their FFA's to Ecology prior to May 1, 2020.

Two refineries did not submit information on FCCU controls following criteria in Ecology's FFA request. Ecology agrees that the facilities did not need to submit a FFA on the units. Ecology subsequently decided to evaluate NOx controls using the EPA Control Cost Manual on the FCCUs since they are a large source of NOx emissions.

The refineries' FFAs indicated selective catalytic reduction (SCR) controls were not a cost-effective emissions control for any units analyzed. The refineries also indicated that low-NOx burners were either not a cost-effective emissions control or that more extensive and in-depth engineering evaluation would be required to establish costs on a unit-by-unit basis.

Ecology did a preliminary analysis using the EPA Control Cost Manual for SCR systems and worksheet model. Preliminary results indicate that SCR controls are cost-effective for the FCC units and various heaters and boilers. Ecology will perform a more extensive and in-depth engineering evaluation on each refinery to generate more accurate and defensible cost estimates. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable.

During formal consultation with the Federal Land Managers, Ecology received a request to include analysis of the calciner units at the Cherry Point Refinery. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable in regards to SO₂ emissions.

All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

Cherry Point Refinery (BP)

BP operations

BP has a total crude oil capacity of 250,000 barrels per calendar day. The refinery processes Canadian crude, domestic crude from North Dakota and Alaska North Slope and international crudes to manufacture gasoline, distillates, heavy fuel oil and propane. The refinery distributes products through pipeline-connected terminals, marine terminal via ships and barges. BP is the only refinery in the Pacific Northwest capable of manufacturing diesel made from biomass-based feed stocks. The refinery processes bio-mass feed stocks alongside conventional feed stocks in an existing ultra-low-sulfur diesel unit. Over the past decade, BP invested more than \$1.5 billion in capital improvements at the refinery (BP, 2021).

PSD permit

Ecology issued a PSD permit to BP Cherry Point (BP) on May 23, 2017. During the PSD permit's public comment period, the National Park Service submitted comments regarding impacts to the Olympic National Park (NP).

Below is a summary of the Federal Land Manager's comments that directly pertain to RH and visibility:

- According to modeling performed by the NPS, the NPS believes that "emissions from the refinery are currently causing visibility impairment at Olympic NP and North Cascades NP and significantly contributing to excess nitrogen deposition at both parks." In addition, the NPS also believes that the Coker Replacement project itself "will significantly increase the impacts of visibility-impairing pollutants at Olympic NP and significantly increase nitrogen deposition at North Cascades NP."
- On October 14, 2016, the NPS provided helpful clarifications of their concerns in a document submitted to Ecology. The letter from NPS documented no dispute that the facility followed PSD regulations, or that the BP application was complete, but rather emphasized the different approaches used to address PSD regulatory applicability from approaches used to address project impacts on the Class 1 Areas Air Quality Related Values (AQRV).
- On December 25, 2016, the NPS sent a letter to Ecology stating that emissions from the Cherry Point refinery were adversely impacting air quality related values at North Cascades and Olympic National Parks.

Regional Haze, Four Factor Analysis 2020

BP submitted a FFA to Ecology in April 2020 and determined that it was not reasonable to install new emissions control equipment. Ecology used the EPA Control Cost Manual with a retrofit factor of one to generate baseline costs for installation of SCR controls. These costs indicate that it might be reasonable to install new SCR controls. The refineries and the Western

States Petroleum Association (WSPA) contend that Ecology did not use the EPA Control Cost Manual for SCR systems appropriately.

Ecology's preliminary analysis using the EPA Control Cost Manual for SCR systems and worksheet model indicates that SCR controls are cost-effective for the FCC units and various heaters and boilers. Ecology will perform a more extensive and in-depth engineering evaluation on each refinery to generate more accurate and defensible cost estimates. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable.

All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

The following is Ecology's review of the FFA supplied by BP Cherry Point on selected equipment compared to the Cost Reports and Guidance for Air Pollution Regulations- Section 4 - NOx Controls spreadsheet¹⁶:

Table 7-7: BP Cherry Point equipment identified for RACT analysis

Company	Equipment	EPA Control Cost Manual \$/Ton	Refinery \$/Ton	TPY Reduced	Comment
BP	#1 Reformer heaters	3,101	24,378	304	
BP	Crude heater	2,051	24,378	393	
BP	Reforming furnace #1 (N H2 Plant)	6,161	78,065	262	Combined North & South stacks
BP	Reforming furnace #2 (S H2 Plant)				

Ecology reviewed the following equipment using the EPA Control Cost Manual:

Reformer Heaters

BP supplied a table with limited supporting data.

¹⁶ Cost Reports and Guidance for Air Pollution Regulations- Section 4 - NOx Controls spreadsheet:
<https://www.epa.gov/economic-and-cost-analysis-air-pollution-regulations/cost-reports-and-guidance-air-pollution>

Table 7-8 shows the costs for the retrofit that BP supplied compared to the costs from the EPA Control Cost Manual (EPA, 2021). Ecology determined that a more detailed RACT analysis is justified to refine costs.

Table 7-8: Reformer heaters cost comparison

Costs	BP FFA costs	Ecology – EPA Control Cost Manual
Capital cost \$	94,809,582	9,929,730
Maintenance \$/yr	420,048	49,649
Reagent \$/yr	284,001	57,895
Catalyst \$/yr	180,467	33,548
Annualized cost \$/yr	7,827,719	943,315
NOX tpy reduced	321	304
\$/ton NOX reduced	24,378	3,101

Ecology used the EPA Control Cost Manual cost with 90 percent control efficiency. BP did not supply the data they used to scale their costs.

Crude Heater

BP supplied a table with limited supporting data. Table 7-9 shows the costs for the retrofit that BP supplied compared to the costs from the EPA Control Cost Manual (EPA, 2021). Ecology determined that a more detailed RACT analysis is justified to refine costs.

Table 7-9: Crude heater cost comparison

Costs	BP FFA costs	Ecology – EPA Control Cost Manual
Capital cost \$	94,809,582	9,325,358
Maintenance \$/yr	420,048	46,627
Reagent \$/yr	284,001	51,515
Catalyst \$/yr	180,467	29,852
Annualized cost \$/yr	7,827,719	871,136
NOX tpy reduced	321	425
\$/ton NOX reduced	24,378	2,051

The EPA Control Cost Manual (EPA, 2021) uses current cost with 90 percent controls. BP did not supply the cost data they used to scale their cost data.

Two Reforming Furnace #1 (H2 PLANT)

BP supplied a table with limited supporting data. Table 7-10 shows the costs for the retrofit that BP supplied compared to the costs from the EPA Control Cost Manual (EPA, 2021). Ecology determined that a more detailed RACT analysis is justified to refine costs.

Table 7-10: Two reforming furnace #1 (H2 Plant) cost comparison

Costs	BP FFA costs	Ecology – EPA Control Cost Manual
Capital cost \$	143,325,183	9,325,358
Maintenance \$/yr	479,126	46,627
Reagent \$/yr	125,031	51,515
Catalyst \$/yr	65,513	29,852
Annualized cost \$/yr	11,038,382	871,136
NOx tpy reduced	141	141
\$/ton NOx reduced	78,065	6,161

The EPA Control Cost Manual uses current cost with 90 percent controls. BP did not supply the data they used to scale their cost data.

Summary

Ecology's preliminary review of the industry supplied FFA data was inconclusive for determining reasonable controls. Therefore, Ecology is performing a detailed cost-analysis to ensure the most effective reasonable controls are identified. All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

Ecology's baseline and initial four-factor review using the EPA Control Cost Manual and a retrofit factor of one determined the following:

- Factor #1 – The costs of compliance
 - o \$2,100/ton to \$6,200/ton
- Factor #2 – The time necessary for compliance.
 - o Accommodation for the time necessary for design, and installation of the equipment during a planned shutdown is required to ensure reasonable costs.
- Factor #3 – The energy and non-air quality environmental impacts of compliance
 - o The power needed to drive the exhaust fans is included in the analysis.
- Factor #4 – The remaining useful life on existing source subject to such requirement

BP Cherry Point did not indicate that any of the equipment had a limited lifetime.

Conclusion

Ecology will do a reasonability analysis to develop detailed cost-analysis to ensure the most effective reasonable controls are identified. Emission control equipment that is determined to be reasonable will then be required for installation at the facility. The RHR SIP will be amended to reflect any new control requirements. To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls will likely occur in the next implementation period.

Phillips 66

Operations

The Phillips 66 refinery has an average annual processing rate of approximately 108,000 barrels of crude oil per day. Located outside of Ferndale in Whatcom County, this petroleum refinery uses crude oil as a feedstock that is processed into a variety of petroleum products including gasoline, diesel, fuel oil, liquefied petroleum gas (LPG), and butane. The refinery receives crude oil via marine vessels, railcars, and by pipeline (Phillips 66 Refinery, 2021).¹⁷

Regional Haze, Four Factor Analysis 2020

Phillips 66 submitted a FFA to Ecology in April 2020 and determined that it was not reasonable to install new emissions control equipment. Ecology used the EPA Control Cost Manual with a retrofit factor of one to generate baseline costs for installation of a SCR controls. These costs indicate that it might be reasonable to install new SCR controls. The refineries and the Western States Petroleum Association (WSPA) contend Ecology's application of the EPA Control Cost Manual for SCR systems at refineries is not appropriate.

Ecology's preliminary analysis using the EPA Control Cost Manual for SCR systems and worksheet model indicates that SCR controls are cost-effective for the FCC units and various heaters and boilers. Ecology will perform a more extensive and in-depth engineering evaluation on each refinery to generate more accurate and defensible cost estimates. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable.

All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

As part of our analysis, Ecology compared cost data provided by Phillips 66 with corresponding costs from the EPA Control Cost Manual's SCR tools with the results shown in Table 7-11 below.

Table 7-11: Phillips 66 Equipment identified for RACT

Company	Equipment	EPA Control Cost Manual \$/Ton	Refinery \$/Ton	TPY Reduced	Comment
Phillips 66	Crude heater 1F-1	2,640	12,225	166	
Phillips 66	FCCU/CO Boiler/Wet Gas Scrubber 4F-100, 4F-101	3,954		247	NSCR is installed.

Ecology reviewed the following equipment using the EPA SCR Cost Model:

¹⁷ <https://www.phillips66.com/refining/ferndale-refinery>

Crude heater 1F-1

Phillips 66 supplied a table with limited supporting data. Table 7-12 shows the costs for the retrofit that Phillips 66 supplied compared to the costs from the EPA Control Cost Manual. Ecology determined that a more detailed reasonableness is justified to refine costs.

Table 7-12: Crude heater 1F-1 cost comparison

Costs	Facility FFA costs	Ecology – EPA Control Cost Manual
Capital cost \$	16,615,487	5,084,927
Maintenance \$/yr	83,077	25,425
Reagent \$/yr	17,691	20,677
Catalyst \$/yr	18,680	11,982
Annualized cost \$/yr	1,944,651	437,150
NOX tpy reduced	159	166
\$/ton NOX reduced	12,225	2,640

Ecology used the EPA Control Cost Manual cost with 90 percent controls. Phillip 66 did not supply the data they used to scale their cost data.

FCCU/CO Boiler

In 2006, Phillips 66 modified the FCCU to include ESNCR for NO_x controls and so was not required to submit a FFA for this unit. As FCC units are a large source of NO_x emission at refineries that have them, Ecology decided to use the EPA Control Cost Manual anyway to review reasonableness of installing SCR systems on the FCCUs.

Table 7-13: FCCU/CO boiler cost

Costs	Ecology – EPA Control Cost Manual
Capital cost \$	8,983,013
Maintenance \$/yr	44,915
Reagent \$/yr	49,624
Catalyst \$/yr	27,183
Annualized cost \$/yr	976,820
NOX tpy reduced	247
\$/ton NOX reduced	3,954

Ecology used the EPA Control Cost Manual cost with 90 percent controls.

Summary

Ecology's preliminary review of the industry supplied FFA data was inconclusive for determining reasonable controls. Therefore, Ecology is performing a detailed cost-analysis to ensure the most effective reasonable controls are identified. All controls identified as reasonable in the reasonability analysis have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

Ecology's baseline and initial four-factor review using the EPA Cost Control Manual and a retrofit factor of one determined the following:

- Factor #1 – The costs of compliance
 - o \$2,600/ton to \$4,000/ton
- Factor #2 – The time necessary for compliance
 - o Accommodation for the time necessary for design, and install the equipment during a planned shutdown is required to result in reasonable costs.
- Factor #3 – The energy and non-air quality environmental impacts of compliance
 - o The power needed to drive the exhaust fans is included in the analysis.
- Factor #4 – The remaining useful life on existing source subject to such requirements.
 - o Phillips 66 did not indicate that any of the equipment had a limited lifetime.

Conclusion

Ecology will do a reasonability analysis to develop detailed cost-analysis to ensure the most effective reasonable controls are identified. Emission control equipment that is determined to be reasonable will then be required for installation at the facility. The RHR SIP will be amended to reflect any new control requirements. To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls will likely occur in the next implementation period.

Shell

Operations

The Shell refinery has an average annual processing rate of approximately 145,000 barrels (5.7 million gallons) of crude oil per day. When the refinery first began operating, most of its crude oil came from Canada via pipeline. Although it continues to receive crude from central and western Canada, feedstock also arrives by tanker from oilfields on Alaska's North Slope.

On an annual basis, the refinery produces multiple types of gasoline in addition to fuel oil, diesel fuel, propane, jet fuel, butane, and petroleum coke. It also produces two chemicals---nonene and tetramer---that industry uses in a variety of plastic products. Shell also owns and operates a cogeneration facility on the refinery site.¹⁸

The cogeneration facility was originally the March Point Cogeneration Company (MPCC), which Puget Sound Refinery (PSR) took possession of in February 2010. Air Liquide and Linde operate

¹⁸ <https://www.shell.us/about-us/projects-and-locations/puget-sound-refinery/about-shell-puget-sound-refinery.html>

hydrogen plants on property owned by PSR and adjacent to the refinery. However, both Air Liquide and Linde are independent companies and permitted separately from Shell. This report does not address emission sources from Air Liquide and Linde in this report.

Regional Haze, Four-Factor Analysis 2020

Shell submitted a FFA to Ecology in April 2020 and determined that it was not reasonable to install new emissions control equipment. Ecology used the EPA Control Cost Manual with a retrofit factor at one to generate baseline costs for installation of a SCR controls. These costs indicate that it might be reasonable to install new SCR controls. The refineries and the Western States Petroleum Association (WSPA) contend the use of the EPA Control Cost Manual for SCR systems at refineries is not appropriate in how Ecology applied it.

Ecology's preliminary analysis using the EPA Control Cost Manual for SCR systems and worksheet model indicates that SCR controls are cost-effective for the FCC units and various heaters and boilers. Ecology will perform a more extensive and in-depth engineering evaluation on each refinery to generate more accurate and defensible cost estimates. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable.

All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

Table 7-14: Shell equipment identified for RACT rule development

Company	Equipment	EPA Model \$/Ton	Refinery \$/Ton	TPY Reduced	Comment
Shell	Boiler #1 Erie City--31G-F1	2,441	12,511	179	8-yr life
Shell	Cogen turbine 1 MW	---	---	---	Current SCR controls – Study
Shell	Cogen turbine 2 MW	---	---	---	Current SCR controls – Study
Shell	Cogen turbine 3 MW	---	---	---	Current SCR controls – Study
Shell	FCCU Regenerator Unit	1,948	---	521	
Shell	CRU #2 HTR, INTERHTR--10H-101,102,103	6,346	10,813	69	

Ecology reviewed the following equipment using the EPA Control Cost Manual:

BOILER #1 ERIE CITY--31G-F1

Shell's FFA supplied a table with limited supporting data. Table 7-15 shows the costs for the retrofit that Shell supplied compared to the costs from the EPA Control Cost Manual. Ecology determined that a more detailed reasonableness analysis is justified to provide more credible and defensible costs.

Table 7-15: Boiler #1 Erie City--31G-F1 cost comparison

Costs	Shell	Ecology – EPA Control Cost Manual
Capital cost \$	11,420,745	5,084,927
Maintenance \$/yr	57,104	25,425
Reagent \$/yr	17,221	20,677
Catalyst \$/yr	39,340	11,982
Annualized cost \$/yr	2,053,888	437,150
NOX tpy reduced	164	179
\$/ton NOX reduced	12,511.00	2,441

Ecology used the EPA Control Cost Manual cost with 90 percent controls. Shell did not supply the cost data they used to scale their cost data and had only an eight-year life for the boiler. The limited eight-year lifetime of the boiler caused the cost/ton value to be significantly higher than a 25-year lifetime. With an eight-year lifetime, a requirement for the boiler to be retired after this period would be justified and the boiler should be required to decommission. Any new boiler brought in to replace it would need to go through the permitting process as a new source.

FCCU/CO Boiler

It was Shell's understanding that the addition of particulate matter and SO₂ controls on the FCCU in 2014 meant that they were not required to submit a NO_x FFA. Current emissions limit on the FCCU is 1,380 tpy and 142.2 ppm NO_x on a yearly average. As FCC units are a large source of NO_x emission at refineries that have them, Ecology decided to use the EPA Control Cost Manual anyway to review reasonableness of installing SCR systems on the FCCUs.

Table 7-16: FCCU/CO boiler cost

Costs	Ecology – EPA Control Cost Manual
Capital cost \$	10,680,913
Maintenance \$/yr	53,405
Reagent \$/yr	62,274
Catalyst \$/yr	36,086
Annualized cost \$/yr	1,014,677
NO _x tpy reduced	521
\$/ton NO _x reduced	1,948

Ecology used the EPA Control Cost Manual cost with 90 percent controls.

CRU #2

Shell supplied a table with limited supporting data. Table 7-17 shows the costs for the retrofit that Shell supplied compared to the costs from the EPA Control Cost Manual. Ecology determined that a more detailed reasonableness analysis is justified to provide more credible and defensible costs.

Table 7-17: CRU #2 cost comparison

Costs	Facility FFA costs	Ecology – EPA Control Cost Manual
Capital cost \$	5,939,772	5,084,927
Maintenance \$/yr	29,699	25,425
Reagent \$/yr	6,165	20,677
Catalyst \$/yr	13,454	11,982
Annualized cost \$/yr	635,480	437,150
NO _x tpy reduced	59	77
\$/ton NO _x reduced	10,813	6,346

Ecology used the EPA Control Cost Manual cost with 90 percent controls. Shell's cost was similar but they used a lower emission reduction.

Three turbines have SCR installed on the units. The current emission limit is 74 tpy at 9 ppm NO_x. Actual emissions vary from 46-64 tpy (5.6-7.8 ppm) with less than 2 tpy (less than 0.5 ppm) ammonia. As part of the reasonableness analysis an engineering optimization study to minimize NO_x emissions is needed to see if emissions can match similar new units permitted below 2 ppm NO_x.

Summary

Ecology's preliminary review of the industry supplied FFA data was inconclusive for determining reasonable controls. Therefore, Ecology is performing a detailed cost-analysis to ensure the most effective reasonable controls are identified. All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

Ecology's four-factor review has determined the following:

- Factor #1 – The costs of compliance
 - \$1,900/ton to \$ 6,300/ton
- Factor #2 – The time necessary for compliance
 - Accommodation for the time necessary for design, and installation of the equipment during a planned shutdown is required to validate reasonable costs.
- Factor #3 – The energy and non-air quality environmental impacts of compliance
 - The power needed to drive the exhaust fans is included in the analysis.
- Factor #4 – The remaining useful life on existing source subject to such requirements
 - Shell indicates that the BOILER #1 ERIE CITY--31G-F1 had a limited lifetime of 8 years. Ecology will work with NWCAA to have a regulatory order on the boiler to shut the unit down by January of 2028.

Conclusion

Ecology will do a reasonability analysis to develop detailed cost-analysis to ensure the most effective reasonable controls are identified. Emission control equipment that is determined to be reasonable will then be required for installation at the facility. The RHR SIP will be amended to reflect any new control requirements. To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls will likely occur in the next implementation period.

Marathon Petroleum Company

Process

Marathon Petroleum Company (MPC) is the current owner of the Anacortes refinery. Located in Anacortes, the refinery has a total crude oil capacity of 119,000 barrels per calendar day.

The refinery processes Canadian crude, domestic crude from North Dakota and Alaska North Slope, and international crudes to manufacture gasoline, distillates, heavy fuel oil, and propane.

The refinery distributes products through pipeline-connected terminals and MPC's marine terminal via ships and barges.¹⁹

Table 7-18: MPC emission rates pre - and post - best available retrofit technology (BART)

Pollutant	Pre-BART, tpy	Post-BART, tpy	Basis of comparison	Sources included in comparison
NOX	1360	1303	2005 vs. post-BART projects (F-103 ULNB)	BART sources only
SO2	5540	474	2005 vs. 2008 (FGS; RFG treatment*)	All refinery sources
PM/PM10	588	140	2005 vs. post BART projects (FGS); no oil burning at F-103)	BART sources plus F-302

* Refinery Fuel Gas (RFG) treatment improvements affected all combustion sources

2010 regional haze best available retrofit technology

During the first regional haze implementation period the MPC facility was operated by Tesoro. Tesoro had a BART determination and Federal Implementation Plan for Tesoro (MPC) found that four of the BART-eligible sources contribute approximately 93 percent of the NOx emissions from the 14 combustion sources: F-103, F-304, F-6650, and F-6651. Tesoro (MPC) identified that it was cost effective to add NOx controls on these four units. The cost was found unreasonable if the facility needed to have a special outage just for the NOx controls. These outages usually occur every five to six years.

PSD permit

On July 18, 2017, Ecology issued a PSD permit to Tesoro (MPC). During the public comment period, the Federal Land Managers made comments regarding the impacts to the Olympic Class 1 area. These comments are contained in the PSD technical support document, https://fortress.wa.gov/ecy/ezshare/AQ/PSD/PSD_PDFS/Tesoro_Anacortes_TSD.pdf

Federal Land Manager's comments 4-6, pages 45-51 indicated the major issues with the issued PSD permit were:

- Tesoro (MPC) should be reviewed in the next RH period
- Supported the installation of SCR on the new boiler and control of vapors from loading marine vessels

Regional Haze

Ecology's preliminary analysis using the EPA Control Cost Manual for SCR systems and worksheet model indicates that SCR controls are cost-effective for the FCC units and various heaters and boilers. Ecology will perform a more extensive and in-depth engineering evaluation on each refinery to generate more accurate and defensible cost estimates. Ecology will perform a detailed reasonability analysis to determine what controls are reasonable.

¹⁹ <https://www.marathonpetroleum.com/Operations/Refining/Anacortes-Refinery/>

All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

The following is Ecology's review of the four-factor analysis supplied by MPC on selected equipment compared to BART and the EPA Control Cost Manual:

Table 7-19: Tesoro equipment identified for RACT rule development

Company	Equipment	EPA Model 2020 \$/Ton	MPC 2020 \$/Ton	BART 2008 \$/Ton	TPY reduced
Tesoro	FCCU ²⁰	1,159	14,381	4,592	843.3
Tesoro	F 102 Crude Heater	2,962	16,086	---	147.6
Tesoro	F 201 Vacuum Flasher Heater	7,589	35,279	---	57.6
Tesoro	F 6650 CAT Reformer Heater	3,736	21,196	3,349	117
Tesoro	F 6651 CAT Reformer Heater	3,520	21,196	3,349	124.2
Tesoro	F 751 Main Boiler	2,159	10,060	---	202.5
Tesoro	F 752 Main Boiler	2,570	10,513	---	170.1

Ecology reviewed the following equipment using the EPA SCR Cost Model:

²⁰ FCCU is SNCR, others LNB.

FCCU

MPC supplied a table with limited supporting data. Table 7-20 shows the costs for the retrofit that MPC supplied compared to the costs from the EPA Control Cost Manual. Ecology determined that a more detailed reasonableness analysis is justified to provide more credible and defensible costs.

Table 7-20: FCCU cost comparison

Cost	MPC	Ecology EPA Control Cost Manual
Capital cost \$	114,030,975	10,286,436
Maintenance \$/yr	570,155	51,432
Reagent \$/yr	1,340,590	59,974
Catalyst \$/yr	116,845	34,754
Annualized cost \$/yr	10,747,992	977,202
\$/ton NOX reduced	14,381	1,159

Ecology used the EPA Control Cost Manual cost with 90 percent controls. MPC did not supply the cost data they used to scale their cost data. The MPC data is based on SNCR controls at about 60 percent controls, which account for the higher \$/ton cost.

F 102 CRUDE HEATER

Both MPC and Ecology used the EPA Control Cost Manual with different results. To reconcile the difference a more detailed reasonableness analysis is justified to provide more credible and defensible costs:

Table 7-21: Crude heater cost comparison

Costs	MPC EPA Control Cost Manual	Ecology EPA Control Cost Manual
Ft ³ /min-MMBtu/hr	55,577	484
Ammonia \$/gal	3.513	0.293
acfm	6,381,721	115,784
Vspace	19,760.72	112
Catalyst Ft ²	6,648	121
Capital cost \$	20,876,000	5,084,927
Maintenance \$/yr	104,380	25,425
Reagent \$/yr	315,021	20,677
Catalyst \$/yr	3,548	11,982
Annualized cost \$/yr	2,021,692	437,150
\$/ton NOX reduced	16,086	2,962

MPC incorrectly changed the default value in the model for the ft³/min-MMBtu/hr input. Ecology used the default value and determined the minimum cost of \$439,065/yr.

Other equipment

We used the default cost of \$437,150/yr for the other equipment. MPC incorrectly changed the default value for the Ft³/min-MMBtu/hr input to the EPA Control Cost Manual for all their determinations other than the FCCU.

Summary

Ecology's preliminary review of the industry supplied FFA data was inconclusive for determining reasonable controls. Therefore, Ecology is performing a detailed cost-analysis to ensure the most effective reasonable controls are identified. All controls identified as reasonable in the reasonability analysis will have requirements for installation and operation in a federally enforceable manner consistent with the RHR. The results of the analysis and determinations from the analysis will be included in a RHR SIP supplement.

- Factor #1 – The costs of compliance
 - \$1,200/ton to \$7,600/ton
- Factor #2 – The time necessary for compliance
 - Accommodation for the time necessary for design, and installation of the equipment during a planned shutdown is required to validate reasonable costs.
- Factor #3 – The energy and non-air quality environmental impacts of compliance
 - The power needed to drive the exhaust fans is included in the analysis.
- Factor #4 – The remaining useful life on existing source subject to such requirements
 - MPC did not indicate that any of the equipment had a limited lifetime.

Conclusion

Ecology will do a reasonability analysis to develop detailed cost-analysis to ensure the most effective reasonable controls are identified. Emission control equipment that is determined to be reasonable will then be required for installation at the facility. The RHR SIP will be amended to reflect any new control requirements. To allow for scheduling flexibility needed to maintain cost-effectiveness, installation of controls may occur in the next implementation period.

US Oil

Operations

The US Oil Refinery has an average daily processing rate of approximately 41,000 barrels of crude oil per day. It uses crude oil as a feedstock processed into a variety of petroleum products including gasoline, diesel, fuel oil, and asphalt.²¹

Regional Haze, State Implementation Plan, Final December 2010

During the first implementation period, BART was not triggered for US Oil based on their emissions.

Regional Haze four-factor analysis 2020

US Oil submitted a FFA to Ecology in April 2020 and concluded that additional emission control devices were not reasonable. Ecology analyzed the data and concluded that US Oil based the analysis on the EPA Control Cost Manual and the results were similar to Ecology's analysis using the EPA Control Cost Manual. The emissions were only 28 tpy for the largest unit and the cost effectiveness was over \$15,000/ton of NO_x reductions.

The following is Ecology's review of the four-factor analysis supplied by US Oil on selected equipment compared to the EPA Control Cost Manual:

²¹ <http://usor.com/about/about>

HEATER H11

The facility supplied a table with the limited supporting data.

Table 7-22: Heater H11 cost comparison

Cost	Facility	Ecology EPA Control Cost Manual
Capital cost \$	4,894,235	5,084,927
Maintenance \$/yr	24,471	25,425
Reagent \$/yr	2,979	20,677
Catalyst \$/yr	9,862	11,982
Annualized cost \$/yr	522,175	437,150
NOx tpy reduced	28	28
\$/ton NOx reduced	18,649	15,612

Ecology and US Oil used the EPA Control Cost Manual with minor differences.

Summary and preliminary recommendations

Ecology's review indicates that additional controls are likely not cost reasonable, but recommends a more detailed and defensible cost reasonableness analysis to verify this initial review. Any reasonable emission control equipment from the analysis will result in a determination of equipment to install with federally enforceable conditions.

- Factor #1 – The costs of compliance
 - Over \$15,000/ton for SCR controls
- Factor #2 – The time necessary for compliance
 - Accommodation for the time necessary for design, and installation of the equipment during a planned shutdown is required to validate reasonable costs.
- Factor #3 – The energy and non-air quality environmental impacts of compliance
 - The power needed to drive the exhaust fans is included in the analysis.
- Factor #4 – The remaining useful life on existing source subject to such requirements
 - US Oil did not indicate that any of the equipment had a limited lifetime

Conclusion

Ecology will do a reasonability analysis to develop more robust and defensible cost data. Emission control equipment that is determined to be reasonable will then be required for installation at the facility. The RHR SIP will be amended. Installation of any reasonable emission controls for implementation may occur in the next implementation period to be reasonable.

7.7 Summary

Ecology performed a four-factor analysis on sources selected using the EPA approved Q/d screening process. Ecology focused on major point sources that had a Q/d of 10 or greater. We selected sources emitting approximately 80 percent of all haze-causing emissions in the entire emission inventory for a four-factor analysis.

The selected sources included:

- a flat glass facility,
- five petroleum refineries,
- six pulp & paper facilities,
- a coal-fired power plant,
- a cement plant
- two aluminum smelters

Two facilities have enforceable emission reductions that were used in on-the-books emission projections. The power plant is ceasing coal-fired power production by the end of 2025 and the flat glass facility is changing their emission controls to a SCR system.

The aluminum facilities are currently in curtailment and their actual emissions are essentially zero. An Agreed Order with the two facilities was issued to have the facilities perform a FFA if

and when they restart. This will provide an accurate evaluation of the facilities' impacts on regional haze using actual restart operating conditions.

Ecology has preliminarily identified potential cost-effective controls at a multitude of sources and is choosing to require reasonable controls at only a subset of those sources.²² Ecology is prioritizing the sequence of implementation of reasonable controls. The first priority is to identify reasonable controls at the refinery facilities. A number of factors supports the selection of refineries as the first priority:

- Four of the five refinery facilities are located in the Puget trough, west of several Class 1 Areas. Their cumulative regional haze causing emissions influence the same Class 1 Areas.
- Predominant winds direct the emissions from the refineries towards several Class 1 Areas.
- The refineries' potential emission reductions of 4,200 tons per year account for the vast amount of potential emission reductions.

Our second priority is to identify and implement reasonable controls at pulp and paper facilities after the refinery facilities. Pulp & paper mills are a subset of sources that are lower priority than refineries because:

- The pulp & paper mills are not located as close to each other as the refineries so they do not have as great of a cumulative effect.
- One mill identified with potential reasonable cost controls, Packaging Corporation of America (PCA) Wallula, is located in a direction that is downwind from the nearest Class 1 Areas. This lessens, but does not remove, the influence the mill's emissions have on Class 1 Areas.
- The potential reduction of 450 tons per year in regional haze emissions from the pulp & paper mills reasonable controls is vastly less than potential refinery emission reductions.

Ecology will supplement the SIP when new controls are determined to be reasonable and scheduled for implementation.

²² Peter Tsirigotis, Director, "Clarifications Regarding Regional Haze Second Implementation Plans for the Second Implementation Period," memo, addressed to Regional Air Division Directors, Regions 1-10, July 8, 2021.

Chapter 8. Long-term Strategy for Visibility Improvement

8.1 Introduction

Section 169A(b)(2) of the federal Clean Air Act requires each state to submit a Regional Haze (RH) State Implementation Plan (SIP) revision approximately every 10 years. The SIP revision includes a long-term strategy (LTS) for making reasonable progress toward the national visibility goal, which is to remedy any existing visibility impairment in Class 1 Areas resulting from human-caused air pollution and to prevent future visibility impairment.

Washington's LTS for visibility improvement is a set of "enforceable emissions limitations, compliance schedules, and other measures that are necessary to make reasonable progress, as determined pursuant to [40 CFR 51.308](f)(2)(i) through (iv)" (40 CFR 51.308(f)(2)). Specifically:

- (i) The State must evaluate and determine the emission reduction measures that are necessary to make reasonable progress by considering the costs of compliance, the time necessary for compliance, the energy and non-air quality environmental impacts of compliance, and the remaining useful life of any potentially affected anthropogenic source of visibility impairment.
- (ii) The State must consult with those States that have emissions that are reasonably anticipated to contribute to visibility impairment in the mandatory Class I Federal area to develop coordinated emission management strategies containing the emission reductions necessary to make reasonable progress.
- (iii) The State must document the technical basis, including modeling, monitoring, cost, engineering, and emissions information, on which the State is relying to determine the emission reduction measures that are necessary to make reasonable progress in each mandatory Class I Federal area it affects.
- (iv) The State must consider the following additional factors in developing its long-term strategy:
 - (A) Emission reductions due to ongoing air pollution control programs, including measures to address reasonably attributable visibility impairment;
 - (B) Measures to mitigate the impacts of construction activities;
 - (C) Source retirement and replacement schedules;
 - (D) Basic smoke management practices for prescribed fire used for agricultural and wildland vegetation management purposes and smoke management programs; and
 - (E) The anticipated net effect on visibility due to projected changes in point, area, and mobile source emissions over the period addressed by the long-term strategy.

Washington's LTS protects Class 1 Areas within and outside the state. It includes controls Ecology determined to be reasonable when we considered the four statutory factors, as well as federal, state, and local controls on haze-causing emissions.

Ecology relied on the Western Regional Air Partnership (WRAP) for air quality modeling and other analytical tools to identify pollutants, the sources of those pollutants, and to predict future levels of visibility impairment. WRAP fostered a regionally consistent approach to haze planning in the western states and provided a sound mechanism for consultation. Consultation among the 15 western states within WRAP has occurred through meetings of WRAP committees, workgroups, and forums with participation by conference calls, face-to-face meetings, and workshops (Appendix K).

The LTS covers a 10-year period from 2018 - 2028 and focuses both on existing regulatory mechanisms and those needed in the future to control and reduce visibility-impairing emissions. The administrative rules the EPA promulgated to implement the federal Clean Air Act's LTS requirements are in 40 CFR 51.308(f)(2)(i). In establishing its LTS for the 2018–2028 implementation period, Ecology evaluated the feasibility of implementing new controls at major and minor stationary sources, mobile sources, and non-point sources (40 CFR 51.308(f)(2)(i)). A detailed summary of that evaluation and the methods used for source selection are in Chapter 7.

Ecology designed the LTS to include the enforceable emissions limitations, compliance schedules, and other measures that are necessary to make reasonable progress, as determined pursuant to (f)(2)(i) through (iv). The reasonable progress goals (RPGs) reflect the emissions reductions achieved through implementation of the LTS in each of the state's Class 1 Areas during this implementation period (2018 - 2028). The reasonable progress goals (RPGs) serve as benchmarks for progress toward meeting the national visibility goal by 2064. The description of RPGs for Washington's Class 1 Areas are in Chapter 9 in detail. We measure the success of our LTS by evaluating the resulting RPGs to improvements in visibility on the most impaired days (MID). Chapter 3 has more information about the MID metric.

8.2 Washington's approach to long-term strategy

We identified three categories of pollutants that contribute significantly to the MIDs, which we need to reduce during this second implementation period. Interagency Monitoring of Protected Visual Environments (IMPROVE) monitoring data shows that sulfates (primarily), nitrates (secondarily), and organic mass are the dominant pollution species affecting visibility in the Class 1 Areas during the MIDs. We identified sources of these pollutants from within and outside Washington State. Chapter 7 describes the source selection and evaluation process that we used to identify potential pollution controls on selected point sources within Washington.

In order to calculate anticipated progress and set toward the RPGs, Ecology incorporated the results of federally mandated controls applicable to out-of-state sources of emissions that contribute to visibility impairment in Washington's Class 1 areas. However, Ecology's emissions control authority only applies to sources and pollutants within the state's regulatory jurisdiction. Emission sources that contribute to visibility impairment in Washington but are outside of Ecology's regulatory jurisdiction include wildfires, prescribed burns, marine vessels,

and both stationary and mobile sources that are located offshore, in other states, or in other countries.

We also identified federal, state and local rules, permits, and standards that limit haze-causing emissions that are already in place, or put in place during this implementation period. We rely in part on these existing emission controls to decrease emissions during and beyond this implementation period of 2018 - 2028.

Federal fuel and engine rules are of special importance to our progress towards RPGs because they have resulted in large reductions in mobile source air pollution during the last 30 years. Improvements in vehicle and engine design, and cleaner, higher-quality fuels have substantially reduced mobile source emissions and we expect the progress to continue, even with more miles driven and more power equipment used every year. We also expect on-going efforts to increase electrification of cars and trucks to reduce mobile source pollution in this second implementation period.

For example, President Biden signed an executive order in August of 2021 that establishes a goal for new cars and trucks sold in the U.S. in 2030 – specifically, that 50 percent be electric vehicles, including battery electric, plug-in hybrid electric or fuel-cell electric vehicles. Although this goal is non-binding, its inclusion in an executive order is likely to drive technological innovation. President Biden also called on EPA and the U.S. Department of Transportation to begin working on rules for:

- new fuel economy standards for passenger cars and light trucks for model year (MY) 2027 through at least MY 2030,
- new fuel economy standards for HD pickup trucks and vans for MY 2028 through at least MY 2030, and
- new fuel economy standards for medium- and HD-engines and vehicles to begin as soon as MY 2030.

In addition to these developments on federal fuel and engines standards, Washington State is currently engaged in rulemaking to reduce mobile source emissions by adopting California's more protective vehicle emission standards for new vehicles sold in Washington, starting with model year 2025 (Chapter 173-423 WAC, Low Emission Vehicles). Ecology expects to finalize this rule by December 30, 2021. In addition, in May 2021, Governor Inslee signed into law the Transportation Fuels-Clean Fuels Program ([E3SHB 1091](https://leg.wa.gov/bills/2021/1091)²³, codified at RCW Chapter 70A.535), which requires Ecology to adopt a rule establishing a clean fuels standard to reduce the carbon intensity of transportation fuels used in Washington. The intent of the clean fuels standard is to reduce emissions of not only greenhouse gases but also "conventional air pollutants from diesel and gasoline." (RCW 70A.535.005(3)(a)). Ecology is currently preparing to begin this rulemaking and expects to finalize the rule by December 30, 2022.

²³ <https://lawfilesexternal.wa.gov/biennium/2021-22/Pdf/Bills/Session Laws/House/1091-S3.SL.pdf?q=20210929134724>

8.3 Development of Washington's long-term strategy

The Regional Haze Rule (RHR) requires consultation between states on the development of coordinated emission management strategies. Appendix R is a record of our inter-state consultation. (40 CFR 51.308(f)(2)(ii)). This requirement applies both to Class 1 Areas within Washington and to Class 1 Areas outside of Washington where we reasonably anticipate emissions from sources in Washington to contribute to visibility impairment. The RHR also requires that states consider five additional factors in developing their LTS (40 CFR 51.308(f)(2)(iv)). We discuss those five factors later in this chapter.

Through WRAP technical collaborations, the western states agreed upon the RPGs for 2028 (the end of the second implementation period) and a regionally consistent approach to addressing visibility impairment in the west.

8.4 Major visibility-impairing pollutants

Ecology's evaluation of potential controls focused primarily on reduction of sulfates and nitrates during the 2018 - 2028 implementation period. The first (or foundational) RH SIP that covered 2005 - 2018 dealt with both regional haze and reasonably attributable visibility impairment (RAVI). RAVI is visibility impairment clearly attributed to individual sources instead of collective effects from multiple sources over a large area.

IMPROVE monitoring data shows that sulfates (primarily), nitrates (secondarily), and organic mass are the dominant pollution species affecting visibility in the Class 1 Areas during the MIDs. See Chapter 3 for more information on monitoring.

Sulfates

Sulfates are the primary pollutant contributing to total light extinction (including Rayleigh scattering) for the MIDs in 2014 - 2018. Sulfates range from 35 to 50 percent of the total light extinction. In the 2028 projections, sulfates range from 37 to 53 percent of total light extinction and remain the primary pollutant contributing to total light extinction at all of the IMPROVE sites. The 2028 projections show a reduction in sulfate emissions largely due to cessation of coal-fired operation at TransAlta by 2025 and large reductions in marine fuel sulfate levels.

Nitrates

The 2014 – 2018 five-year average of MIDs in Class 1 Areas shows that nitrates contribute 9 to 26 percent of species contribution to light extinction. In the 2028 projections, nitrate contribution to the total light extinction ranges from 5 to 19 percent. The 2028 projections show a reduction in nitrate emissions primarily due to decreases in on-road and non-road mobile source emissions.

Organic mass

Organic mass contributes approximately 21 to 32 percent of total light extinction at IMPROVE sites in Washington in the 2014 – 2018 period. In the 2028 projections, organic mass contributes a similar amount of 21 to 33 percent of total light extinction. Organic mass from fire is an important contributor to light extinction. Several Class 1 Areas see large contributions to

visibility impairment due to smoke from fire; it is the highest in the Pasayten Wilderness. Organic mass is composed of either primary organic aerosols or secondary organic compounds. Primary organic aerosols are particulates directly emitted from combustion processes due to natural and anthropogenic causes. Secondary organic aerosols form particulates from condensation or photo-oxidization of volatile organic compounds from biogenic or anthropogenic sources.

Volatile organic compounds

Non-point sources are the largest human-generated source category of volatile organic compounds in 2018. Emissions from solvent use and residential wood combustion dominate these contributions. Both of these reflect the impact population growth has on the total amount of emissions.

8.5 State, federal, and local rules and controls that limit emissions of visibility-impairing pollutants

Washington's LTS to achieve reasonable progress goals relies on federal, state, and local controls on sources of visibility-impairing pollutants. WRAP identified all existing (adopted) rules and upcoming rules and limits, and incorporated the data into the calculations of expected reductions and improvements in visibility in 2028 (WRAP 2028 modeling). The modeling used the following regulations that limit emissions.

Adopted rules, programs, and permits

Federal fuel and engine rules for on-road and nonroad engines are of special importance. These result in large projected percent decreases in visibility-impairing emissions in Washington by 2028.

- Mobile source controls:
 - Heavy Duty Diesel (2007 and later model year) Engine Standard (40 CFR 86.007-11).
 - Tier 3 Tailpipe Standards (79 Fed. Reg. 23414 (Apr. 28, 2014)). Starting in 2017, these reduced both tailpipe and evaporative emissions from passenger cars, light-duty trucks, medium duty passenger vehicles, and some heavy-duty vehicles. The gasoline sulfur standard will enable more stringent vehicle emissions standards and make emissions control systems more effective.
 - Large Spark Ignition and Recreational Engines and Vehicle Rule (67 Fed. Reg. 68242 (Nov. 8, 2002)).
 - Tier 4 Nonroad Diesel Engines and Fuel Rule (40 CFR Part 1039).
 - Low sulfur fuel requirements for gasoline engines, on-road diesel engines, nonroad diesel engines, and locomotives (40 CFR 80 Subpart I).
 - Ultra-low sulfur diesel fuel for highway, nonroad, locomotive, and marine diesel necessary for new advanced emission control technologies. This contributes to particulate matter reductions in the existing fleet of nonroad engines and equipment (40 CFR 80.500).

- Maximum Achievable Control Technology (MACT) emission standards (40 CFR Part 63): Combustion Turbines (Subpart YYYY), Industrial Boilers and Process Heaters (Subpart DDDDD), and Reciprocating Internal Combustion Engines (RICE) (Subpart ZZZZ).
- Permits and state/EPA consent agreements.
- Ozone and Coarse Particulate Matter (PM₁₀) SIPs in place in the WRAP region.
- State oil and gas emissions control programs.

Additional federal and international rules leading to emission reductions and visibility improvement:

- MACT emission standards (40 CFR Part 63):
 - Petroleum Refineries (Subparts CC and UUU).
 - Boilers (area sources) (Subpart 6J).
 - Revised Utility Boilers (Subpart UUUUU).
 - Various area source MACTs.
- Stationary Spark Ignition Internal Combustion Engine Rules (40 CFR 60 Subpart JJJJ).
- Locomotive and Marine Diesel Emission Standards for engines with a cylinder displacement of less than 30 liters (73 Fed. Reg. 37096 (June 30, 2008)).
- Corresponding EPA rules for Category 3 Marine Diesel Engines with a cylinder displacement equal to or greater than 30 liters (75 Fed. Reg. 22896 (Apr. 30, 2010)).
- International Maritime Organization (IMO) rules reducing NO₂ and SO₂ emissions from commercial marine vessels.

8.6 Controls on visibility-impairing pollutants not in previous RH SIP

Since approval of Washington's 2010 RH SIP, Ecology, EPA, and other federal agencies, have adopted or implemented the following programs to reduce emissions from stationary and mobile sources.

Table 8-1. Control Strategies not in previous RH SIP.

Regulatory Program	Affected Sources	Affected Visibility Impairing Air Pollutants
North American Maritime Emission Control Area (ECA) and Maritime Pollution (MARPOL) Annex VI	Marine vessels operating within 200 nautical miles of United States and Canada's Pacific and Atlantic Ocean coast lines	SO _x , NO _x , PM _{2.5}
40 CFR Part 94 Marine Engine Requirements	Marine vessels operating in US Waters.	NO _x , SO _x , PM _{2.5}
Motor Vehicle CAFE/GHG standards	Light and medium duty on-road vehicles	NO _x , PM _{2.5}
On-road Tier 3 diesel standards	Diesel fueled engines, especially on road vehicles	SO _x , PM _{2.5}
Utility Boiler MACT	Coal fired boilers at electric generating stations	PM _{2.5} , SO _x
Large and Area Source Boiler MACTs	All commercial/industrial boilers	NO _x , PM _{2.5} , SO _x
Commercial and Industrial Solid Waste Incineration Units (CISWI) New Source Performance Standards (NSPS)	Industrial/commercial boilers burning designated solid wastes	NO _x , PM _{2.5} , SO _x
SSI NSPS	Sewage sludge incinerators	NO _x , PM _{2.5}
Revised Petroleum Refinery NSPS and MACT requirements	Petroleum refineries, very large petroleum storage tanks	VOC, PM _{2.5}

The most current emission inventory reflects the effects of many of these rules. Specific marine programs not included in the previous inventory that have significant impacts on Washington air quality include the North American Maritime Emission Control Area (ECA) regulations, the MARPOL VI annex, and the Marine Engine Requirements (40 CFR Part 94).

Starting in August 2012, the ECA required marine vessels within 200 nautical miles of the North American coast to use fuels with no more than 1 percent sulfur content, which decreased to 0.1 percent in 2015. EPA and the U.S. Coast Guard share implementation responsibilities for these requirements and have allowed some shipping companies delayed compliance dates for these requirements. Together, these programs require marine vessels to reduce SO₂ emissions by the equivalent of changing from 3.5–5 percent sulfur by weight fuel to 0.1 percent sulfur by weight

fuel. We expect a 70–90 percent reduction in SO_x emissions from marine vessels in the ECA area. According to the EPA, ships complying with the ECA will reduce annual emissions of NO_x, SO_x and PM_{2.5} by 23 percent, 74 percent and 86 percent, respectively, below the predicted levels without the ECA by 2020 (EPA Fact sheet 420-F-10-105, March 2010).

MARPOL (the International Convention for the Prevention of Pollution from Ships) Annex VI addresses air pollution from ocean-going ships. The MARPOL VI set limits on NO_x emissions and has required the use of fuel with lower sulfur content since June of 2011.

40 CFR Part 94 marine engine requirements phase in NO_x reductions as manufacturers build new vessels or install new replacement engines. Part 94 requires that new engines meet Tier 2 requirements in 2011 (equal to the MARPOL requirement) and Tier 3 requirements starting in 2016. EPA estimates that these NO_x requirements will reduce national marine vessel NO_x by 80 percent from 2009 levels.

The effects of the marine vessel fuel sulfur requirements are reflected in the IMPROVE data, though the effects of the ECA are not fully reflected in the data due to the long lead time for the phase-in of the MARPOL requirements and the relatively recent date (2013) for vessels to meet the first stage requirements.

Washington State emission limits and shutdowns

The following emission limits and shutdown schedules have gone into effect since the last implementation period or will occur prior to the end of the second implementation period and are part of Washington's LTS.

- TransAlta Centralia Generation, LLC Power Plant: best available retrofit technology (BART) Order revision and shutdown of coal-fired boilers. TransAlta is the only coal-fired power generation facility in Washington State. The facility ceased coal-fired operation in one boiler in December 2020 and will completely cease coal-fired operation by the end of 2025. Ecology updated the TransAlta BART Order in 2020, and EPA approved its incorporation into the SIP in June 2021 (86 Fed. Reg. 24502). This revised BART Order established lower NO_x emissions limits from the remaining coal-fired boiler until the facility ceases coal-fired operation by the end of 2025.
- Cardinal Glass, a flat glass facility, submitted a permit modification application to Southwest Clean Air Agency (SWCAA) to install a selective catalytic reduction (SCR) emission control device and increase production of plate glass. The application also proposed removing the permit's emission controls of limiting excess oxygen. SWCAA issued the permit to the facility on February 11, 2021, and the SCR should be installed and operating in 2022. Ecology is submitting this permit as part of the LTS in our SIP.
- Ash Grove consent decree: The Ash Grove Cement Company entered into a consent decree with EPA, Ecology, the Puget Sound Clean Air Agency (PSCAA), and other state agencies in 2013 (Appendix E). The consent decree required the Seattle facility to submit an optimization protocol for the Seattle Kiln to optimize the operation of this unit to reduce NO_x emissions to the maximum extent practicable. On August 25, 2016, EPA, in consultation with affected state agencies, approved the new limit of 5.1 pounds of NO_x

per ton of clinker on a 30-day rolling average. Ecology is submitting this consent decree as part of the LTS in our SIP.

Non-regulatory factors can also result in decreased emissions. Economic and market conditions can drive business decisions that may result in decreased or curtailed production. In Washington, two aluminum smelters are currently in curtailment due to market conditions, one since 2014 and the second one since 2020. Ecology worked with these facilities to develop Agreed Orders (AOs 18100 and 18216 in Appendix Q) that require them to complete a four-factor analysis to evaluate emission controls prior to start-up, should they decide to resume operations. The four-factor analysis developed by the smelters will be subject to Ecology's approval, and any controls identified as necessary to make reasonable process must be installed and operational within three years of start-up. In addition, one of the smelters is in an area that EPA designated as being in nonattainment for the 2010 1-hour SO₂ NAAQS, effective April 31, 2021. Nonattainment is a separate and distinct regulatory program of the Clean Air Act, but the emission controls required for purposes of attainment will have visibility benefits. The SO₂ attainment plan will describe any emission controls required to bring the area back into attainment, such as installation of new control equipment and/or new emission limits. Future RH SIP analyses will incorporate the effects of the RH Agreed Orders and the attainment plan on visibility for new controls installed at the smelters as a result. Chapter 7 discusses these facilities in more detail. Ecology is submitting Agreed Orders AO 18100 and AO 18216 in Appendix Q as part of the LTS in our SIP.

Non-point and mobile sources

The RHR requires that states identify all anthropogenic sources of visibility impairment considered by the state when developing its LTS, including stationary, mobile, and non-point sources (40 CFR 51.308(f)(2)(i)). We discuss stationary sources in the previous section and in Chapter 6 (Source Apportionment) and Chapter 7 (four-factor Analysis).

Woodstoves

Woodstove smoke in Washington contributes to visibility impairment in the state. However, since 2007, Washington has decreased emissions from woodstoves by supporting a woodstove buy-back and exchange program (Chapter 173-433 WAC). This program provides grant funding to local clean air agencies and Ecology's regional offices to use in programs that replace older woodstoves with new, cleaner burning woodstoves or cleaner heat sources such as heat pumps, gas stoves, or furnaces. Some of these grant recipients have also run woodstove recycling programs where they buy back and destroy older stoves to remove them from use. Ecology estimates that in the past 13 years, state and local government agencies have bought back or exchanged more than 8,000 stoves for an estimated total reduction of 194 tons of PM_{2.5}. Since 2007, Ecology and the local clean air agencies have provided grants to replace 6,068 old woodstoves with cleaner sources of heat and incentives to recycle 2,472 woodstoves that did not meet current emission standards. This has reduced PM_{2.5} emissions by over 200 tons.

Recent federal actions also contribute to the reduction of woodstove emissions. EPA's 2015 NSPS for new woodstoves established "Step 2" emission standards that went into effect in May

2020, limiting PM_{2.5} emissions to 2.0 grams per hour if using crib wood (has standard characteristics) or 2.5 grams per hour if the manufacturer chooses to use cord wood for performance testing (40 CFR 60 Subpart AAA). Prior to May 2020, Washington state law was more stringent than the applicable NSPS, limiting PM_{2.5} emissions to 2.5 grams per hour for catalytic devices and 4.5 grams per hour for all other devices (RCW 70A.15.3530). Because the federal standards are now more stringent, Ecology is using its delegated CAA authority to enforce the NSPS Step 2 standards.

Mobile sources

Although Ecology does not directly regulate emissions from mobile sources, we actively participate in programs that reduce mobile source emissions and manage grants that result in reduced emissions and higher fuel economy.

Mobile sources are the largest contributors to NOx emissions in Washington. Population growth has contributed to increased mobile source emissions. Factors that have decreased mobile source emissions include fleet turnover to more fuel efficient or electric vehicles, low sulfur fuel requirements, and adoption of California's low emission vehicle standards.

Motor Vehicle Emission Inspection program retirement

Another program that has contributed to emission reductions from mobile sources was Washington's vehicle emission testing program. The program required vehicles registered in Washington to meet state emission limits as a condition of vehicle registration. The combination of the vehicle emission testing program and advances in vehicle technology led to reduced mobile source emissions. The legislature phased the emission testing program out starting in 2005 based on Ecology's prediction that more fuel efficient and electric vehicles would replace the need for it by 2020 (RCW 70A.25.030). The program ended on January 1, 2020.

New state laws and regulations

Washington has also pursued mobile source emission reductions through the technology of zero emission vehicles (ZEV) and low-emission vehicles (LEV). Special provisions in the federal Clean Air Act (Section 177) allow states to adopt California's standards instead of the federal motor vehicle emission standards. California's standards contain both LEV and ZEV requirements.

In 2005, the Washington Legislature adopted the California vehicle emission standards for passenger cars, light duty trucks, and medium duty passenger vehicles (ESHB [1397](#)). However, the law did not adopt the ZEV standards or the LEV standards for medium duty trucks (trucks generally weighing between 8,500 and 14,000 pounds). The 2020 Legislature expanded Washington's program to include the entire California program and directed Ecology to adopt rules to implement the ZEV program ([SB 5811](#)). We are currently in the process of adopting rules to reflect our expanded statutory authority.

In addition, Ecology submitted a SIP revision to EPA in 2019 to adopt by reference California's LEV program. The purpose of the SIP revision was to implement programs to reduce vehicle emissions that contribute to formation of ground level ozone and fine particulate matter.

(PM_{2.5}). The precursors to ground level ozone and PM_{2.5} also contribute to regional haze. EPA is currently proposing to approve this revision to the Washington SIP (86 FR 46169).

State grant programs

Ecology has also pursued grant opportunities that result in decreased emissions from mobile sources. Volkswagen (VW) violated federal and state clean air laws by installing illegal emissions software on some diesel vehicles. In January 2016, the U.S. Department of Justice filed a lawsuit on behalf of EPA against VW. After admitting fault, VW reached multiple settlements with EPA and Ecology. Ecology is managing \$140 million in settlement funds used to reduce air pollution from transportation. As of February 2020 we have committed \$91 million statewide to projects that decrease diesel emissions such as electrification of school buses, transit buses, ferries, state fleet vehicles, port drayage trucks, shore power, and installing light duty electric vehicle charging stations.

Factors required for the long-term strategy

In addition to the FFA, the RHR requires states to consider the following five factors in developing a LTS (40 CFR 51.308(f)(2)(iv)).

Emission reductions due to ongoing air pollution control programs, including measures to address reasonably attributable visibility impairment (40 CFR 51.308(f)(2)(iv)(A)).

In addition to the ongoing air pollution control programs described above, current state and federal rules and state and local air agency permits limit visibility-impairing emissions from point, non-point, and mobile sources. The projected 2028 emissions inventory reflects the emission reductions from most rules and permits in existence in 2018.

To obtain a permit, future major and minor new sources, or modifications to existing sources, will need to meet state permitting requirements; including meeting Best Available Control Technology (BACT) emission limits. Major New Source Review (NSR) permits include requirements to meet Air Quality Related Values (AQRV) protection criteria established by EPA for Class 1 Areas.

Ecology and local air pollution control authorities work to reduce emissions from existing emission producing units and to minimize new emissions through the state NSR program. This program requires BACT emission reductions for all new sources and modifications that result in an increase of emissions.

State law (RCW 70A.15.2220) requires that when a source decides to modify or replace an existing emission control system, Ecology or the local air pollution control authority must assure that the modified or replacement control system meets a reasonably available control technology (RACT) level of emissions control at a minimum.

Measures to mitigate the impacts of construction activities (40 CFR 51.308(f)(2)(iv)(B)).

Ecology or a local air quality agency regulates construction activities as a source of air pollution. The following State air quality rules (WAC 173-400-040(3) and (9)) address air emissions associated with construction activities.

- WAC 173-400-040(3) (Fallout)
- WAC 173-400-040(4) (Fugitive emissions)
- WAC 173-303-040(9) (Fugitive dust)

Local clean air agencies and local governments have additional rules and policies governing mitigation of air pollution from construction activities. We describe types of construction permits in Washington below. These are all part of a federally enforceable permitting program.

A prevention of significant deterioration (PSD) permit applies to new large facilities or major changes at existing large facilities that could increase air pollution in an area that meets air quality standards. The intent is to prevent that area's air quality from getting worse.

A notice of construction (NOC) approval order is required before installing a new source of air pollution or modifying an existing source of air pollution.

Regulators issue a general order for similar sources of air pollution, instead of a series of individual NOC permits.

An air operating permit (AOP) combines all applicable rules and requirements for operation and procedures, emission standards, monitoring, recordkeeping, and reporting. An AOP is required for major sources that emit or have the potential to emit more than 100 tons per year of any air pollutant, 10 tons per year or more of any hazardous air pollutant, or more than 25 tons per year of a combination of hazardous air pollutants.

Source retirement and replacement schedules (40 CFR 51.308(f)(2)(iv)(C)).

TransAlta's Centralia Power Plant boiler number one ceased coal-fired energy production in December of 2020. The remaining boiler (boiler number two), and thus the entire facility, is required to cease coal-fired operation by the end of 2025. A 2020 revised BART Order requires reduced NOx levels until coal-fired production ceases in 2025.

Basic smoke management practices for prescribed fire used for agricultural and wildland vegetation management purposes and smoke management programs (40 CFR 51.308(f)(2)(iv)(D)).

As part of the regional haze LTS, states are required to consider basic smoke management practices for prescribed fire used for agricultural and wildland vegetation (silvicultural) management purposes and smoke management programs (40 CFR Section 51.308(f)(2)(iv)(D)). Under Washington State law, Ecology and the local air agencies regulate agricultural burning (WAC 173-430). The state has established controls required for agricultural burning to minimize adverse health and environmental impacts. The state works with a variety of stakeholders including agricultural burners, agricultural interest groups, and air quality interest groups to encourage development, research, and use of alternatives to burning.

The Washington State Department of Natural Resources (DNR) issues silvicultural burning permits in Washington according to the regulatory direction provided in the SIP-approved 1998 Washington Department of Natural Resources Smoke Management Plan.²⁴²⁵ The goal of the plan is to coordinate and facilitate statewide regulation of silvicultural burning on lands under DNR jurisdiction, and on unimproved federally managed forestlands and participating tribal lands. The strategy of DNR's Smoke Management Plan is to balance the protection of public health and visibility with the need for silvicultural burning to improve ecosystem health and reduce the damaging effects of catastrophic wildfires. Prescribed silvicultural burning is a non-point source and prescribed burn plumes can have significant impacts on visibility. Washington proactively addressed this source in its RAVI SIP. Washington incorporated the state's Smoke Management Plan into the September 1999 revisions to the RAVI SIP and EPA approved the Smoke Management Plan's incorporation into the SIP in 2003. DNR is currently revising and preparing to update the Smoke Management Plan in the SIP. Ecology will provide status of the RAVI SIP in the 2025 RH Progress Report.

The anticipated net effect on visibility due to projected changes in point, non-point, and mobile source emissions over the period addressed by the long-term strategy (40 CFR 51.308(f)(2)(iv)(E)).

Ecology used the WRAP modeled inventory for this RH SIP to determine the expected net effect of projected changes to visibility due to emission changes over the control period for the second RH SIP ending in 2028. The modeled effects reflect the implementation of controls on the books.

²⁴ <https://www.epa.gov/sips-wa/epa-approved-nonregulatory-provisions-and-quasi-regulatory-measures-washington-sip>

²⁵ http://file.dnr.wa.gov/publications/rp_burn_smptoc.pdf

Table 8-2 below presents the net effects of emission changes on visibility. The net effect for the MID was considered in establishing RPGs for Washington’s mandatory Class 1 Areas. The modeling results show that we meet the goal of no degradation of visibility for the clearest days.

Table 8-2: Anticipated net effect on visibility of emission reductions over the second control period for MID, in deciviews (dv)

Class 1 Area	2014 to 2018 (dv)	2028 projected visibility (dv)	Improvement (dv)
Olympic National Park	11.9	11.5	0.4
North Cascades National Park and Glacier Peak Wilderness	10	9.8	0.2
Alpine Lakes Wilderness	12.7	12.0	0.7
Mount Rainier National Park	12.7	12.0	0.7
Goat Rocks Wilderness and Mount Adams Wilderness	8	7.6	0.4
Pasayten Wilderness	9.5	9.2	0.3

Table 8-3: Anticipated net effect on visibility of emission reductions over the second control period for clearest days, (dv)

Class 1 Area	2014 to 2018 (dv)	2028 projected visibility (dv)	Improvement (dv)
Olympic National Park	3.6	3.4	0.2
North Cascades National Park and Glacier Peak Wilderness	2.5	2.4	0.1
Alpine Lakes Wilderness	3.3	3.1	0.2
Mount Rainier National Park	3.9	3.7	0.2
Goat Rocks Wilderness and Mount Adams Wilderness	1.0	0.9	0.1
Pasayten Wilderness	1.6	1.5	0.1

8.7 Summary

Washington State's LTS for visibility improvement reduces haze-causing emissions that contribute to visibility impairment in Washington's Class 1 Areas and in Class 1 Areas outside of Washington, where we reasonably anticipate Washington emissions contribute to visibility impairment.

The LTS for this second RH SIP includes the following key elements:

- Existing federal and state laws and regulations, including federal fuel and engine rules for on-road and non-road vehicles, are important for making reasonable progress by 2028.
- Additional reductions from mobile sources due to state legislation, rulemaking, and grants will continue to decrease vehicle emissions.
- New emission controls to reduce NOx emissions, including the cessation of all coal-fired energy generation in the state by 2025 (and reductions in NOx at the coal-fired facility until 2025), and SCR operation at Cardinal Glass.
- Organic mass emissions resulting primarily from fire are an important contributor to total light extinction in Washington's Class 1 Areas.
- Regional contributions beyond the direct control of Ecology, from Canada and Pacific offshore sources and wildfires, play a significant role in visibility impairment in Washington's Class 1 Areas.
- Washington's LTS prioritizes improvement to visibility on the MID.

Chapter 9. Reasonable Progress Goals

9.1 Introduction

The Regional Haze Rule requires states to establish reasonable progress goals (RPGs) for mandatory Class 1 Areas within the state. The RPGs, expressed in deciviews (dv), reflect projected visibility improvements achieved by the end of the current implementation period (2018 to 2028) for the most impaired days (MID) and ensure no degradation in visibility on the clearest days. The RPGs are based on the long-term strategy that addresses visibility impairment for each Class 1 Area (see Chapter 8). The long-term strategy includes the measures that are necessary to make reasonable progress during this implementation period.

In the establishment of RPGs, the Regional Haze Rule requires states to consider both:

- The uniform rate of progress (URP) needed to attain natural conditions by 2064 (shown as a glidepath), and
- The four statutory factors required by the federal Clean Air Act to use in determining what measures are necessary to make reasonable progress.

Ecology's calculation of RPGs relies on technical data and analysis developed by the Western Regional Air Partnership (WRAP). Data are available on WRAP's [Technical Support System \(TSS2\) website](http://views.cira.colostate.edu/tssv2/)²⁶.

WRAP determined the RPGs for each Class 1 Area using the guidance "Procedures for Making Visibility Projections and Adjusting Glidepaths using the WRAP-WAQS 2014 Modeling Platform" (Appendix D). Projected 2028 emissions for mobile sources and major facilities were obtained by WRAP from EPA and states, representing existing and expected controls. The modeled baseline and projections were used to calculate relative response factors (RRFs), which were applied to the measured baseline period concentrations at the IMPROVE sites, thus providing 2028 RPG visibility projections (see Chapter 5 for more information on modeling). The RPGs for Washington's Class 1 Areas are shown in Table 9-1.

²⁶ <http://views.cira.colostate.edu/tssv2/>

Table 9-1: Washington's Class 1 Areas and their 2028 reasonable progress goals in deciviews (dv)

Class 1 Area	Reasonable progress goal
Olympic National Park	11.5 dv
North Cascades National Park	9.8 dv
Glacier Peak Wilderness Area	9.8 dv
Alpine Lakes Wilderness Area	12.0 dv
Mount Rainier National Park	12.0 dv
Goat Rocks Wilderness Area	7.6 dv
Mount Adams Wilderness Area	7.6 dv
Pasayten Wilderness Area	9.2 dv

Uniform rate of progress glidepath adjustment

The charts in this chapter illustrate the regional haze glidepath as defined by EPA guidance and an alternative glidepath with a 2064 endpoint adjustment. The adjusted endpoint of the glidepath and thus the associated slope is consistent with methods described in the EPA's September 2019 regional haze modeling Technical Support Document. Per the Regional Haze Rule, a state can select the default glidepath slope or propose to use endpoint adjustment options for international sources and prescribed fire contributions to visibility at each Class 1 Area (40 CFR 51.308(f)(1)(vi)).

Washington's Class 1 Areas are all affected by international anthropogenic contributions that Washington cannot control. Source apportionment results (Chapter 6) show that sulfates from international anthropogenic sources are expected to impact visibility more than in-state sources at all Washington Class 1 Areas. Source apportionment results also show that nitrates from international anthropogenic sources are expected to impact visibility more than in-state sources at most Washington Class 1 Areas, with the exception of Alpine Lakes Wilderness Area and Mount Rainier National Park. We propose to use the international adjustment added to the EPA estimated natural conditions endpoint, calculated using the 2028 modeling results normalized to the monitored visibility.

Four-factor analysis

The RHR requires states to perform a four factor analysis (FFA) to determine whether the installation of new emission controls at certain facilities is necessary for the state to make reasonable progress toward the national visibility goal. 40 CFR 51.308(f)(2)(i) requires the state to consider the following four statutory factors in determining which emission reductions measures are necessary to make reasonable progress:

- Costs of compliance,
- The time necessary for compliance,
- The energy and non-air quality environmental impacts of compliance, and
- The remaining useful life of any potentially affected sources.

Ecology selected point sources with the largest “Q/d” to undergo a FFA, where the annual emissions (Q) is divided by the distance to the nearest Class 1 Area (d). The Q/d point-source screening is discussed in Chapter 7, while the long-term strategies for non-point and mobile sources are discussed in Chapter 8. Ecology requested a FFA from facilities chosen in the source-selection process. Ecology reviewed the FFA information submitted by the sources. The conclusions from this review are described in Chapter 7 and summarized here.

The Interagency Monitoring of Protected Visual Environments (IMPROVE) monitoring data show that sulfate (SO₄) and nitrate (NO₃) are two of the most significant pollutants impairing visibility in Washington’s Class 1 Areas. SO₂ and NO_x emissions are precursors of SO₄ and NO₃, respectively. The WRAP visibility projections show that SO₄ and NO₃, which are mostly anthropogenic in origin, are expected to continue impairing visibility in 2028 more than the other monitored pollutant species. The majority of SO₄ impairment at Class 1 Areas from in-state sources is attributed to non-EGU (electric generating units) point sources, as discussed in Chapter 6. The majority of NO₃ impairment at Class 1 Areas from in-state sources is attributed to mobile vehicles.

Ecology is focusing on SO₂ and NO_x emission reductions from major point sources for this implementation period (2018 – 2028) because major point sources contribute the majority of the haze-causing emissions that the state can potentially control. SO₂ and NO_x make up the majority of the haze-causing emissions from the major sources. NO_x emissions from mobile sources decreased significantly prior to 2018 due to the vehicle and engine provisions of Title II of the Clean Air Act and other regulations (40 C. F. R. Parts 85, 86, 88 through 94, 600, and 1033 through 1068), and are expected to continue decreasing each year due to fleet turnover and recent legislation requiring Ecology to adopt California’s low emission vehicle standards ([SB 5811](#), 2020)²⁷ and to establish a clean transportation fuels standard ([E3SHB 1091](#), 2021)²⁸.

Ecology evaluated projected 2028 emissions of SO₂ and NO_x from specific emission processes as defined by Source Classification Codes (SCCs). We identified the SCCs projected to have the largest SO₂ and NO_x emissions from in-state point sources. The resulting three groups were industrial processes, external combustion boilers, and internal combustion engines. Emissions of SO₂ and NO_x from specific industries and emission source categories vary greatly across these three groups.

Ecology calculated the total emissions of SO₂, NO_x, PM₁₀, and NH₃ from each major facility to inform source-selection. The majority of sources selected for FFA are located in the Puget Sound lowlands in western Washington, and may contribute to visibility impairment at multiple Class 1 Areas. Seven of Washington’s eight Class 1 Areas are directly to the east of the Puget Sound lowlands, in the Cascade Mountains. The eighth Class 1 Area is located directly to the

²⁷ <https://lawfilesexternal.wa.gov/biennium/2019-20/Pdf/Bills/Session Laws/Senate/5811.SL.pdf?cite=2020%20c%20143%20%C2%A7%201>

²⁸ <https://lawfilesexternal.wa.gov/biennium/2021-22/Pdf/Bills/Session Laws/House/1091-S3.SL.pdf?q=20210929134724>

west of the Puget Sound lowlands on the Olympic Peninsula. See Chapter 7 for details about the process used and the final list of sources selected for FFA.

Based on the FFAs, we concluded that there is potential for SO₂ and NO_x emission reductions from a number of emission points, principally boilers, process heaters, and fluidized catalytic cracking unit/carbon monoxide boiler systems.

Reasonably available control technology

As discussed in Chapter 7, in Washington State, RCW 70A.15.2230 (the “RACT statute”) is the legal mechanism that Ecology can use to require existing sources to install new emission controls that are determined to be reasonable. Because the analysis performed under the State’s RACT process is equivalent to the RHR’s FFA, Ecology will use the RACT process to require the installation of reasonable emission controls for purposes of compliance with the RHR.

After the RACT analysis is complete, Ecology will make a determination of what constitutes reasonable emission control(s) for each selected source. The determination will result in an enforceable requirement to install and operate the controls identified in the analysis. The results of the analysis and the subsequent determinations will be included in a supplement to our Regional Haze SIP revision. Development of controls is discussed more as part of Washington’s long-term strategy in Chapter 6 (Source Apportionment) and Chapter 7 (FFA).

Progress in reducing visibility impairing pollutants

As discussed in Chapter 4, projected 2028 emissions and the resulting RPGs reflect controls “on-the-books” (OTB) throughout the WRAP region. OTB controls are existing, legally adopted controls that will reduce visibility impairing pollutants during the second implementation period of 2018 to 2028. Large statewide reductions in NO_x (50 percent) are expected by 2028 as a result of engine and fuel rules that reduce vehicle emissions. Significant reductions in NO_x and SO₂ are also expected after the full cessation of coal-burning at TransAlta Centralia Generation facility in 2025. Additionally, recent emission reductions measures for TransAlta and Cardinal Glass were included in the long-term strategy and the 2028 modeled emission projections for determining reasonable progress goals. For the purpose of the WRAP modeling and this document these recent emission reduction measures were included in the “2028 OTB projection” because the TransAlta reduction measures were approved by the EPA in the SIP on May 7, 2021 (86 FR 24502) and the revised Cardinal Glass permit was issued by SWCAA to the facility on February 11, 2021 for inclusion in the LTS. These and other controls are discussed in Chapter 8 (long-term strategy).

9.2 Olympic National Park

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at Olympic National Park are monitored at the IMPROVE site OLYM1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 14.9 dv. The calculated natural conditions for the adjusted glidepath are 8.9 dv, a difference of 6 dv and

a rate of 0.1 dv per year (6 dv divided by 60 years). This is the rate that needs to be maintained to reach natural visibility conditions in the park by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 1.4 dv. The 2028 RPG is projected to be 11.5 dv, which is a visibility improvement of 3.4 dv from the baseline.

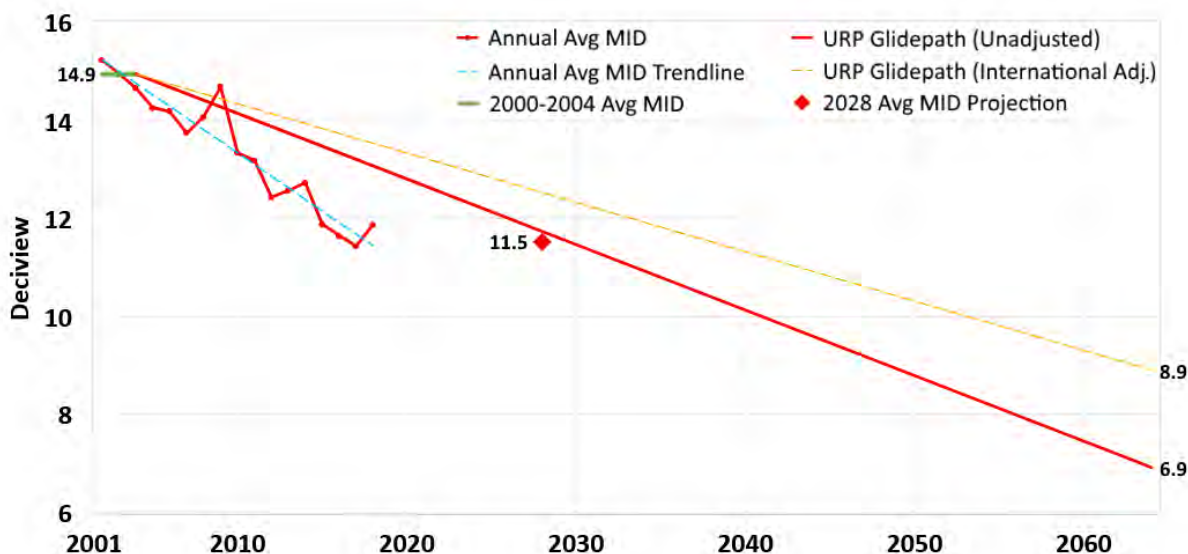


Figure 9-1: Projected 2028 visibility conditions on the MID in Olympic National Park.

Progress in reducing visibility impairing pollutants

Table 9-2: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Olympic National Park.

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	10.0	4.3	4.6	1.2	1.3	0.2	0.8
2028 OTB projection	10.0	3.3	4.5	1.0	1.3	0.2	0.8
Percent change	0%	-23%	-3%	-14%	0%	-1%	0%

Summary: Ecology concludes from this analysis that progress is being made in reducing visibility impairing pollutants impacting Olympic National Park. The 2028 RPG for Olympic National Park is 11.5 dv assuming emission controls that are on the books.

Clearest days

The monitored 2000-2004 baseline conditions at OLYM1 on the Clearest Days are 6 dv. This second SIP covers the 2018 - 2028 period. WRAP modeling projects no degradation on the

clearest days because the 2028 visibility of 3.37 dv for the clearest days is below the baseline for the clearest days.

9.3 North Cascades National Park and Glacier Peak Wilderness

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at North Cascades National Park and Glacier Peak Wilderness are monitored at the IMPROVE site NOCA1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 12.6 dv. The calculated natural conditions for the adjusted glidepath are 8.2 dv, a difference of 4.4 dv and a rate of 0.07 dv per year (4.4 dv divided by 60 years). This is the average rate that needs to be maintained to reach natural visibility conditions in these Class 1 Areas by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 1.8 dv. The 2028 RPG is projected to be 9.8 dv, which is a visibility improvement of 2.8 dv from the baseline and 0.2 dv below the 2014 to 2018 average.

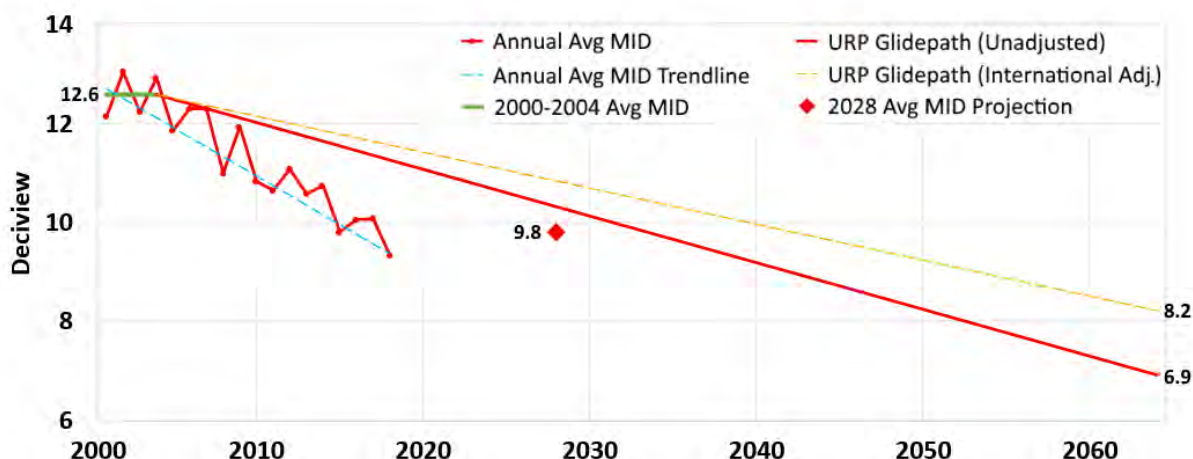


Figure 9-2: Projected 2028 visibility conditions on the MID in North Cascades National Park and Glacier Peak Wilderness

Progress in reducing visibility impairing pollutants

Table 9-3: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in North Cascades National Park and Glacier Peak Wilderness.

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	8.1	1.7	4.0	0.9	1.3	0.2	0.3
2028 OTB projection	8.2	1.2	4.0	0.9	1.3	0.2	0.3
Percent change	0%	-28%	-1%	-4%	0%	-1%	0%

Summary: Ecology concludes from this analysis that progress is being made in reducing visibility impairing pollutants that impact the North Cascades National Park and Glacier Peak Wilderness. The 2028 RPG is 9.8 dv assuming emission controls that are on the books.

Clearest days

The monitored 2000-2004 baseline conditions at NOCA1 on the clearest days are 3.4 dv. WRAP modeling projects no degradation on the clearest days because the 2028 visibility of 2.38 dv for the clearest days is below the clearest days baseline.

9.4 Alpine Lakes Wilderness

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at Alpine Lakes Wilderness are monitored at the IMPROVE site SNPA1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 15.4 dv. The calculated natural conditions for the adjusted glidepath are 8.2 dv, a difference of 7.2 dv and a rate of 0.1 dv per year (7.2 dv divided by 60 years). This is the average rate that needs to be maintained to reach natural visibility conditions in the park by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 2.9 dv. The 2028 RPG is projected to be 12.0 dv, which is a visibility improvement of 3.4 dv from the baseline and 0.7 dv below the 2014 to 2018 average.

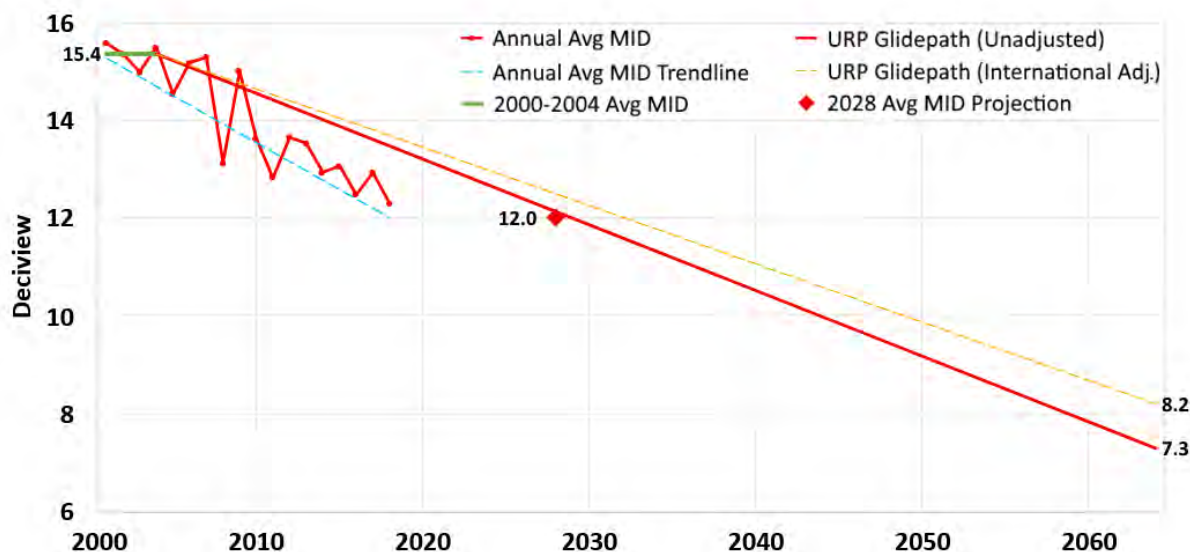


Figure 9-3: Projected 2028 visibility conditions on the MID in Alpine Lakes Wilderness

Progress in reducing visibility impairing pollutants

Table 9-4: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in the Alpine Lake Wilderness.

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	8.8	6.7	6.4	1.8	1.1	0.2	0.3
2028 OTB projection	8.8	4.3	6.3	1.8	1.1	0.2	0.3
Percent change	-1%	-37%	-1%	-4%	0%	-1%	-1%

Summary: Ecology concludes from this analysis that Washington is making progress in reducing visibility impairing pollutants impacting Alpine Lakes Wilderness. The 2028 RPG is 12.0 dv assuming emission controls that are on the books.

Clearest days

The monitored 2000-2004 baseline conditions at SNPA1 on the clearest days are 5.5 dv. WRAP modeling projects no degradation on the clearest days because the 2028 visibility of 3.0 dv is below the clearest days baseline.

9.5 Mount Rainier National Park

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at Mount Rainier National Park are monitored at the IMPROVE site MORA1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 16.5 dv. The calculated natural conditions for the adjusted glidepath are 8.9 dv, a difference of 7.6 dv and a rate of 0.1 dv per year (7.6 dv divided by 60 years). This is the average rate that needs to be maintained to reach natural visibility conditions in the park by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 3.0 dv. The 2028 RPG is projected to be 12.0 dv, which is a visibility improvement of 4.5 dv from the baseline and 0.7 below the 2014 to 2018 average.

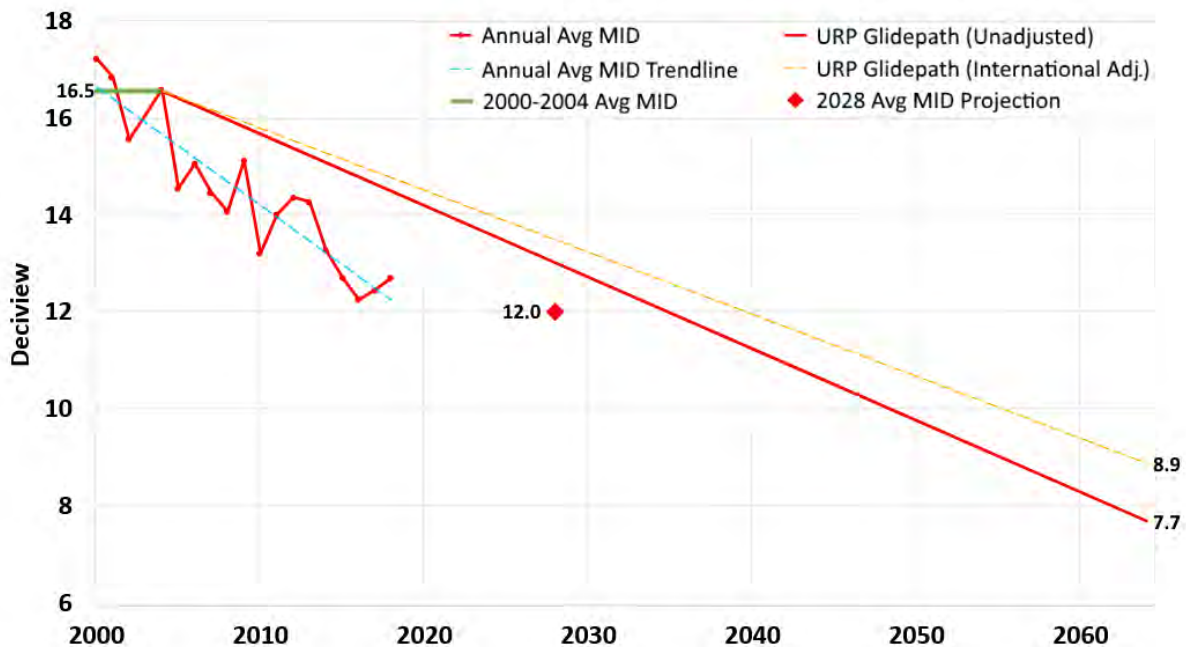


Figure 9-4: Projected 2028 visibility conditions on the MID in Mount Rainier National Park

Progress in reducing visibility impairing pollutants

Table 9-5: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Mount Rainier National Park.

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	10.1	2.3	7.8	2.3	1.9	0.2	0.3
2028 OTB projection	9.7	1.1	7.4	1.9	1.9	0.2	0.3
Percent change	-4%	-50%	-5%	-16%	+1%	-3%	0%

Sulfate:

Statewide emissions of SO_2 are projected to decline almost 40% between the 2000-2004 baseline period and 2028. This decline results from a 29% reduction in point source emissions and a 95% reduction in on-road and off-road mobile source emissions. The mobile source reduction reflects the removal of sulfur from on-road and off-road fuels.

Summary: Ecology concludes from this analysis that overall Washington is making progress in reducing visibility impairing pollutants impacting Mount Rainier National Park. The 2028 RPG is 12.0 dv assuming emission controls that are on the books.

Clearest days

The monitored 2000-2004 baseline conditions at MORA on the clearest days are 5.5 dv. WRAP modeling projects no degradation on the clearest days because the 2028 visibility of 3.68 dv is below the clearest days baseline.

9.6 Goat Rocks Wilderness and Mount Adams Wilderness

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at Goat Rocks Wilderness and Mount Adams Wilderness are monitored at the IMPROVE site WHPA1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 10.5 dv. The calculated natural conditions for the adjusted glidepath are 8.1 dv, a difference of 2.4 dv and a rate of 0.04 dv per year (2.4 dv divided by 60 years). This is the average rate that needs to be maintained to reach natural visibility conditions in the park by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 0.96 dv. The 2028 RPG is projected to be 7.6 dv, which is a visibility improvement of 2.9 dv from the baseline and 0.4 dv below the 2014 to 2018 average. Natural conditions have been reached at these Class 1 Areas and air quality is projected to continue to be better than natural conditions by 2028. However, we anticipate that there may be additional visibility improvements with improved air quality in the state over the remaining implementation periods.

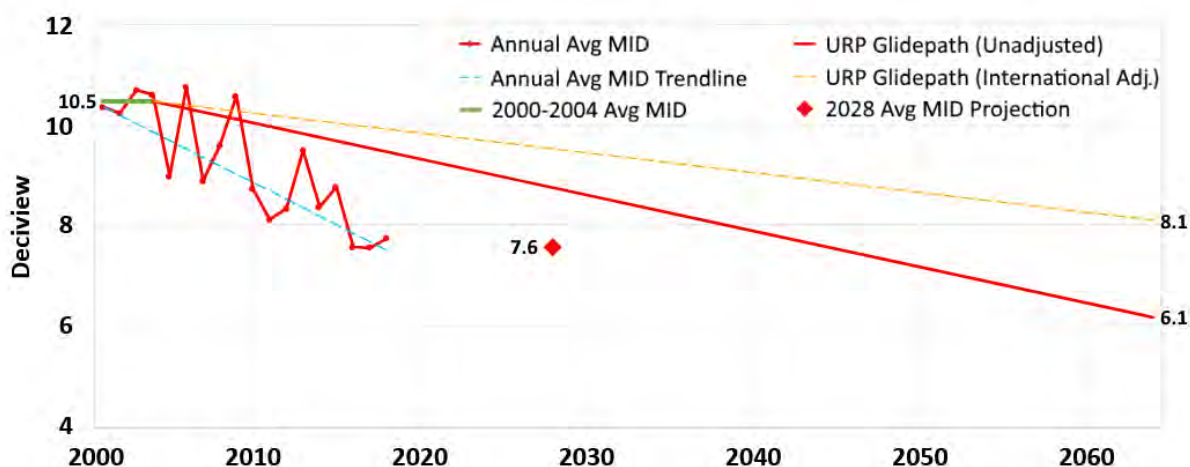


Figure 9-5: Projected 2028 Visibility Conditions on the MID in Goat Rocks Wilderness and Mount Adams Wilderness

Progress in reducing visibility impairing pollutants

Table 9-6: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Mount Adams Wilderness and Goat Rocks Wilderness

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	6.4	1.5	2.8	0.7	0.9	0.3	0.2
2028 OTB Projection	6.3	1.0	2.6	0.5	0.9	0.3	0.2
Percent Change	-1%	-36%	-7%	-21%	0%	-3%	-1%

Summary: Ecology concludes from this analysis that overall Washington is making progress in reducing visibility impairing pollutants impacting Goat Rocks Wilderness and Mount Adams Wilderness. The 2028 RPG is 7.5 dv assuming emission controls that are on the books. This is less than projected natural conditions of 8.1 with the glidepath adjusted endpoint.

Clearest days

The monitored 2000-2004 baseline conditions at WHPA1 on the clearest days are 1.7 dv. WRAP modeling projects no degradation on the clearest days because the 2028 visibility of 0.91 dv is below the clearest days baseline.

9.7 Pasayten Wilderness

Most impaired days

Baseline, adjusted glidepath, and projected visibility

Visibility conditions at Pasayten Wilderness are monitored at the IMPROVE site PASA1. The monitored 2000-2004 baseline visibility at this site on the most impaired days (MID) is 10.4 dv. The calculated natural conditions for the adjusted glidepath are 8.0 dv, a difference of 2.4 dv and a rate of 0.04 dv per year (2.4 dv divided by 60 years). This is the average rate that needs to be maintained to reach natural visibility conditions in the park by 2064. The amount of visibility improvement from the baseline to 2028 required to stay below the 2028 URP adjusted glidepath for MID is 0.96 dv. The 2028 RPG is projected to be 9.2 dv, which is a visibility improvement of 1.2 dv from the baseline and 0.3 dv below the 2014 to 2018 average.

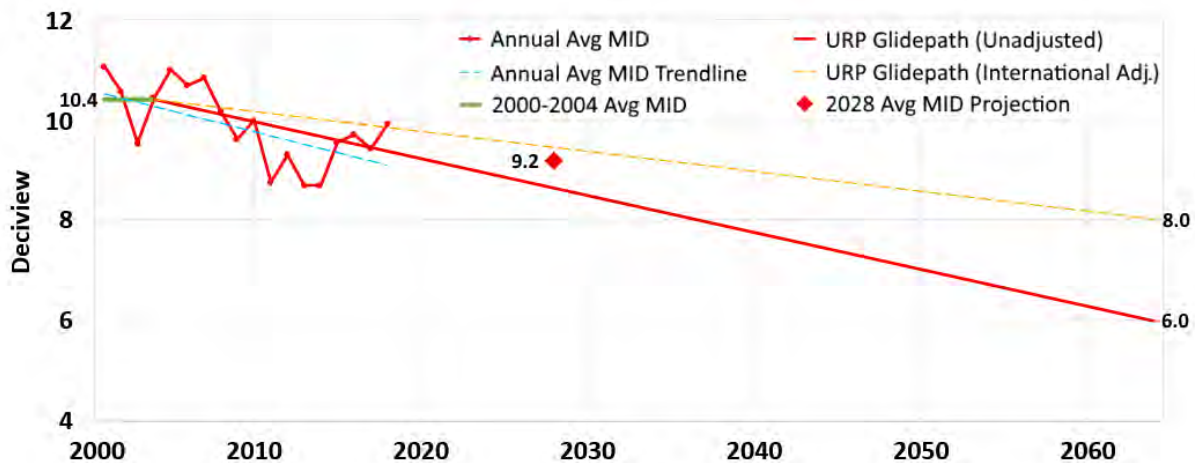


Figure 9-6: Projected 2028 visibility conditions on the MID in Pasayten Wilderness

Progress in reducing visibility impairing pollutants

Table 9-7: Projected changes in light extinction (Mm^{-1}) from 2014 – 2018 baseline to 2028 in Pasayten Wilderness

	Ammonium sulfate	Ammonium nitrate	Organic mass	Elemental carbon	Coarse mass	Fine soil	Sea salt
IMPROVE 2014-2018 average	5.8	2.3	5.4	1.1	1.3	0.4	0.1
2028 OTB projection	5.8	1.8	5.2	1.0	1.3	0.4	0.1
Percent change	0%	-23%	-2%	-9%	0%	-1%	-1%

Summary: Ecology concludes from the analysis provided above that Washington is making progress in reducing visibility impairing pollutants impacting Pasayten Wilderness. The 2028 RPG is 9.2 dv assuming emission controls that are on the books.

Clearest days

The monitored 2000-2004 baseline conditions at PASA1 on the clearest days are 2.7 dv. WRAP modeling projects no degradation on the clearest days because the 2028 visibility of 1.46 dv is below the clearest days baseline.

9.8 Summary

Ecology established RPGs, in deciviews, for the MID and the clearest days as required by the Regional Haze Rule. These are summarized in Table 9-8 and Table 9.9. It is projected that Washington will continue to make progress during this implementation period and the 2028 MID RPGs are below the URP adjusted glidepath. The 2028 RPGs for the clearest days are projected to stay below the baseline and therefore show no degradation in visibility.

Table 9-8: 2028 reasonable progress goals in deciviews (dv) for the MID

Mandatory Class 1 Areas	Baseline conditions 2000-2004	Five-year average 2014 to 2018	MID reasonable progress goal 2028	Unadjusted glidepath 2028	Adjusted glidepath 2028
Olympic National Park	14.9	11.9	11.5	11.7	12.5
North Cascades National Park & Glacier Peak Wilderness	12.6	10	9.8	10.3	10.8
Alpine Lakes Wilderness	15.4	12.7	12.0	12.1	12.5
Mount Rainier National Park	16.5	12.7	12.0	13	13.9
Goat Rocks Wilderness & Mount Adams Wilderness	10.5	8.0	7.6	8.7	9.5
Pasayten Wilderness	10.4	9.5	9.2	8.6	9.4

Table 9-9: 2028 projections in deciviews (dv) for the clearest days

Mandatory Class 1 Areas	2000-2004 Baseline Conditions	2028 projection
Olympic National Park	6	3.37
North Cascades National Park & Glacier Peak Wilderness	3.4	2.38
Alpine Lakes Wilderness	5.5	3.03
Mount Rainier National Park	5.5	3.68
Goat Rocks Wilderness & Mount Adams Wilderness	1.7	0.91
Pasayten Wilderness	2.7	1.46

International anthropogenic emissions contribute to visibility impairment in all of Washington's Class 1 Areas. International emissions include emissions from Canada, Asia, international commercial marine vessels from outside and inside the Emissions Control Areas, and all other non-US anthropogenic emission sources from outside and inside the modeling domain. Thus Washington is adding the international contributions to the endpoint (natural conditions) of the glidepaths for all the State's Class 1 Areas since those emissions are significant and are not controllable by the state. If prescribed fire has a significant influence on regional haze in the future, natural conditions may need to be adjusted further, as allowed by the Regional Haze Rule.

Under the Regional Haze Rule, RPGs for the clearest days are required to ensure no degradation of visibility from baseline visibility conditions. WRAP's modeling analysis indicates these goals will be met. Washington's average decrease in dv (visibility improvement) is summarized in Table 9-10. The required average decrease in dv per year from 2004–2064 to achieve natural conditions is listed in the second column. For both 2004–2018 and 2004–2028, Washington's visibility improvement per year exceeds the average per year rate needed to achieve natural conditions by 2064.

Table 9-10: Average visibility improvement in deciviews (dv) on MIDs at Washington's Class 1 Areas

Monitor	2004 to 2064 dv average needed per year to stay on track to meet 2064 natural conditions	Actual dv decrease per year 2004 to 2018	Projected 2004 to 2028 RPG dv decrease per year
MORA1	0.13	0.27	0.19
WHPA1	0.04	0.18	0.12
SNPA1	0.12	0.19	0.14
NOCA1	0.07	0.19	0.12
PASA1	0.04	0.06	0.05
OLYM1	0.10	0.21	0.14

Chapter 10.Future Planning Process and Summary

10.1 Future planning process

The Regional Haze Rule requires each state to prepare a long-term monitoring strategy and commit to the periodic collection, reporting, and analysis of monitoring and emissions inventory data. The Regional Haze Rule also includes other requirements regarding periodic progress reports, State Implementation Plan (SIP) revisions, and continuing consultation. These future planning requirements are:

- Submitting a monitoring strategy with the SIP
- Including a commitment to update the statewide emissions inventory of visibility impairing pollutants
- Submitting periodic reports describing progress towards the reasonable progress goals
- Determining the adequacy of the existing SIP
- Revising the SIP every ten years
- Continuing interstate coordination and consultation
- Continuing consultation with the Federal Land Managers (FLMs)

Monitoring strategy

Ecology will continue to work in collaboration with the Western Regional Air Partnership (WRAP) and rely upon their adequate technical support to meet its commitment to conduct the analyses necessary to meet the requirements of the Regional Haze Rule.

Ecology will depend on the Inter-Agency Monitoring of Protected Visual Environments (IMPROVE) monitoring program to collect and report aerosol monitoring data for long-term reasonable progress tracking as specified in the Regional Haze Rule. The Regional Haze Rule is a long-term tracking program with an implementation period set for 60 years and states expect the IMPROVE program will provide data based on the following goals:

- Maintain a stable configuration of the individual monitors and sampling sites, and stability in network
- Continue operations for the purpose of continuity in tracking reasonable progress trends
- Assure sufficient data capture at each site of all visibility-impairing species
- Comply with EPA's quality control and assurance requirements
- Prepare and disseminate periodic reports on IMPROVE program operations

Ecology is relying on the IMPROVE program with the fundamental assumption that network data collection operations will not change, or if changed, will remain directly comparable to those operated by the IMPROVE program during the 2000-04 Regional Haze Rule baseline period. Ecology based the technical analyses and reasonable progress goals in this implementation plan on data from these sites.

Federal agencies provide the human resources to operate these monitors. Ecology will collaborate with the EPA, FLMs, other states, tribes, and the IMPROVE committee to ensure adequate and representative data collection and reporting by the IMPROVE program.

Ecology will use data reported by the IMPROVE program as part of the regional technical support analysis tools found at the Technical Support System (TSS2), as well as other analysis tools and efforts sponsored by WRAP. Ecology will participate in the ongoing regional analysis activities of WRAP to collectively assess and verify the progress toward reasonable progress goals and natural conditions. We will also support interstate consultation as the Regional Haze Rule is implemented, and collaborate with WRAP members to ensure the continued operation of these technical support analysis tools and systems. Ecology may conduct additional analyses as needed.

Statewide emissions inventory updates

Ecology has prepared a statewide inventory of emissions that we reasonably expect to cause or contribute to visibility impairment in Class 1 Areas. Chapter 4 of this plan summarizes the emissions by pollutant and source category.

Ecology will update statewide emissions and will use the data for tracking emission changes and trends. We will update the inventories every three years on the same schedule as the three-year reporting required by EPA's Consolidated Emissions Reporting Rule.

Ecology is a member of WRAP and will continue to use WRAP to store and access emission inventory data for the region. Ecology will also depend on and participate in additional periodic emissions inventory efforts by the WRAP. Further, Ecology will continue to depend on and use the capabilities of the WRAP's regional modeling to simulate the air quality impacts of emissions for haze and other related air quality planning purposes.

Periodic progress reports

The Regional Haze Rule requires states to submit a progress report to EPA every five years evaluating progress towards the reasonable progress goals. The requirements for the progress report are in the Regional Haze Rule (40 CFR 51.308(g)) and are discussed in Chapter 1 of this document.

Washington commits to submitting a report on reasonable progress to EPA every five years. The reasonable progress report will evaluate progress made towards the reasonable progress goals for each mandatory class 1 area. Ecology's review will address each of the required elements listed above. The state will also evaluate the monitoring strategy adequacy in assessing reasonable progress goals.

Determination of State Implementation Plan Adequacy

The Regional Haze Rule requires states to make a determination of the adequacy of the implementation plan as part of its five-year progress report. Based on the findings of the five-year progress report, Ecology finds that no further substantive SIP revisions of the existing plan are required in order to meet established visibility goals at this time.

Future State Implementation Plan Revisions

In addition to a SIP revision made for plan inadequacy, the Regional Haze Rule requires the states to revise and submit a comprehensive regional haze implementation plan revision to EPA every ten years. Future SIP revisions must evaluate and reassess all of the elements required

under 40 CFR 51.308(f) and specifically address the items listed in 40 CFR 51.308(f)(1-3). The plan revision must take into account improvements in monitoring data collection and analysis, control technologies and other relevant factors. Washington's commitments to comply with Regional Haze Rule requirements for future plans follows:

Approximately every 10 years, Washington commits to completing and submitting a comprehensive regional haze SIP revision to EPA, evaluating and reassessing all of the elements required under 40 CFR 51.308(f). In evaluating and reassessing these elements, Washington commits to:

- Determine current visibility (most recent five-year period preceding the required date of the SIP submittal for which data is available) conditions for the most impaired and least impaired days and determine the actual progress made towards natural conditions.
- Determine the effectiveness of the long-term strategy for achieving the reasonable progress goals for the prior SIP period as well as include enforceable emission limitations and compliance schedules.
- Affirm or revise the current reasonable progress goals based on assessment of new or updated information, improved technologies and on-going legislation. If the reasonable progress goals are insufficient to attain natural conditions by 2064, Washington will analyze whether there are additional or new control measures to adopt to achieve the degree of visibility improvement projected by the analysis contained in the SIP.

Continuing Interstate Coordination and Consultation

In accordance with 40 CFR 51.308(f)(2)(ii), Washington commits to continue consultation with other states which may reasonably be anticipated to cause or contribute to visibility impairment in Washington's mandatory Class 1 Areas. Washington will also continue consultation with any state for reasonably anticipated Washington's emissions that cause or contribute to visibility impairment in those states' mandatory Class 1 Areas.

Should disagreement arise between another state, or group of states and Washington, Washington will describe the actions taken to resolve the disagreement in its regional haze SIP submittal for EPA's consideration. Washington commits to coordinate its emission management strategies with affected states and will continue to include in its future regional haze SIP revisions all measures necessary to obtain its share of emissions reductions for meeting other states' reasonable progress goals.

Washington commits to continued participation in the WRAP, to the extent possible, and to coordinating future plan revisions with other WRAP member states in addressing regional haze.

Continuing Consultation with the Federal Land Managers

Section 51.308(i)(2) of the Regional Haze Rule requires that the state provide FLMs the opportunity for consultation in person and at least 60 days prior to holding any public hearing on plan revisions.

Washington commits to continuing to provide FLMs the opportunity for consultation in accordance with 40 CFR 51.308(i)(2).

The designated visibility protection program coordinators for the National Park Service and the U.S. Forest Service will coordinate the consultation.

Tribal Communication

Ecology will continue outreach and communication with WA Tribes and tribes in neighboring states to provide the opportunity for engagement with the tribes regarding the regional haze program.

10.2 Amendments to the 2021 regional haze SIP revision

The RHR requires States to perform a Four-Factor Analysis (FFA) to determine whether the installation of new emission controls at certain facilities is necessary for the State to make reasonable progress toward the national visibility goal. In Washington State, RCW 70A.15.2230 (the “RACT statute”) is the legal mechanism that Ecology can use to require existing sources to install new emission controls that are determined to be reasonable. Because the analysis performed under the State’s RACT process is equivalent to the RHR’s FFA, Ecology will use the RACT process to require the installation of reasonable emission controls for purposes of compliance with the RHR.

40 CFR 51.308(f) requires the State’s long-term strategy to include all measures that are “necessary to make reasonable progress, as determined pursuant to [40 CFR 51.308](f)(2)(i) through (iv).” In turn, 40 CFR 51.308(f)(2)(i) requires the State to consider the following four statutory factors in determining which emission reductions measures are necessary to make reasonable progress:

- the costs of compliance,
- the time necessary for compliance,
- the energy and non-air quality environmental impacts of compliance, and
- the remaining useful life of any potentially affected anthropogenic source of visibility impairment.

Pursuant to RCW 70A.15.1030(20) and 70A.15.2230(5), the RACT evaluation of new emission controls at existing stationary sources requires Ecology to consider the following:

- the impact of the source upon air quality,
- the availability of additional controls,
- the emission reduction to be achieved by additional controls,
- the impact of additional controls on air quality,
- and the capital and operating costs of the additional controls.

The costs of compliance

Under the RACT analysis, Ecology characterizes and considers the cost of compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. The cost of compliance factor in 40 CFR 51.308(f)(2)(i) directly correlates to the RACT analysis consideration of capital and operating costs of the additional controls. The capital and operating costs in RACT are for purchase, installation, and operation of all equipment. These costs include the actual emission

control equipment, any non-air quality equipment, and the energy costs to operate the equipment.

The time necessary for compliance

Under the RACT analysis, Ecology characterizes and considers the time necessary for compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Under the RACT analysis requirements, Ecology determines the time necessary for compliance as part of considering the capital and operating costs of the additional controls and impact of the source upon air quality. Specifically, a shorter amount of time for compliance would involve costs distributed over a shorter time and thus have a larger annualized cost. The impact of the source on air quality is also a consideration in the time for compliance. The longer it takes to install and operate the control equipment the greater the negative impact on air quality.

The energy and non-air quality environmental impacts of compliance

Under the RACT analysis, Ecology characterizes and considers the energy and non-air quality environmental impacts of compliance consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Ecology considers the energy and non-air quality environmental impacts of compliance factor as part of analyzing the capital and operating costs of the additional controls in the RACT analysis. The RACT analysis includes costs for equipment directly related to the emissions and all indirectly required equipment needed to install and operate the new controls. The operating cost requirement in the RACT analysis also covers the energy impacts of the controls and supporting equipment.

The remaining useful life of any potentially affected anthropogenic source of visibility impairment

Under the RACT analysis, Ecology characterizes and considers the remaining useful life of any potentially affected anthropogenic source of visibility impairment consistent with 40 CFR 51.308(f)(2)(i) and EPA guidance. Ecology considers the remaining useful life of an emissions control system as part of calculating the capital and operating costs of the system. Specifically, the annualized costs of the emissions control system are affected by the remaining useful life. The shorter the useful life, the larger the annual costs associated with control equipment.

Additionally, RACT requires consideration of the impact of the source upon air quality.’ This is consistent with the CAA, RHR, and EPA guidance. While the four statutory factors must be considered in determining what is necessary to make reasonable progress, they are not the only factors that States may consider in this evaluation. As explained by EPA in its 2019 guidance, States have the flexibility to consider other factors, including visibility benefits, when determining the emission reduction measures that are necessary to make reasonable progress:

“Section 51.308(f)(2)(i) of the Regional Haze Rule requires consideration of the four factors listed in CAA section 169A(g)(1) and does not mention visibility benefits. However, neither the CAA nor the Rule suggest that only the listed factors may be considered. Because the goal of the regional haze program is to improve visibility, it is reasonable for a state to consider whether and by how much an emission control measure would help achieve that goal. Likewise, it is reasonable that such information

on visibility benefits be considered in light of other factors that may weigh for or against the control at issue. Such a balancing of outcomes is consistent with CAA section 169A(b)(2), which states that SIPs must contain elements as may be necessary to make reasonable progress towards meeting the national visibility goal. Thus, EPA interprets the CAA and the Regional Haze Rule to allow a state reasonable discretion to consider the anticipated visibility benefits of an emission control measure along with the other factors when determining whether a measure is necessary to make reasonable progress.”²⁹

Washington received four-factor analyses from the refineries that indicated there were no reasonable controls at the refineries. Ecology then conducted preliminary analyses using emission inventory data and the EPA Control Cost Manual. The results from the four-factor analyses and the preliminary control cost model were vastly different. This indicated the need for a more robust analysis to determine reasonableness of controls. Therefore, Ecology will use the RACT process to (1) evaluate and determine the emissions reduction measures that are necessary to make reasonable progress and (2) incorporate these measures into its long-term strategy and Regional Haze SIP in a manner that is enforceable as a legal and practical matter.

Ecology will supplement this plan with the results of the reasonableness analysis. The analysis will include an implementation schedule that will be coordinated with scheduled maintenance shutdowns at the refineries when necessary to maintain costs at a reasonable level. These shutdowns occur approximately every two to six years. Emission reductions from refineries were not included in the 2028 projected emissions for the second implementation period, so this does not affect the modeled 2028 reasonable progress goals.

10.3 Summary

National Visibility Goal

In 1977, Congress amended the Clean Air Act and declared a national visibility goal:

“The prevention of any future, and the remedying of any existing, impairment of visibility in mandatory class I Federal areas which impairment results from manmade air pollution.” (CAA § 169A).

The objectives of the Regional Haze Rule are to improve existing visibility in all 156 mandatory Class 1 Areas, prevent future impairment of visibility by human-caused sources, and meet the national goal of natural visibility conditions by 2064. Emissions from numerous sources that are often mixed and transported long distances cause visibility impairment related to regional haze

Washington’s State Implementation Plan

There are planning phases from 2005 to 2064; each planning phase covers approximately 10 years. The first regional haze state implementation plan (regional haze SIP) revision covered the

²⁹ EPA-457/B-10-003, *Guidance on Regional Haze State Implementation Plans for the Second Implementation Period*, Section II.B.5.

initial planning period from 2005 to 2018. It provided the basis for future SIPs to continue reducing visibility-impairing emissions and meet the national visibility goal by 2064.

This second regional haze SIP sets reasonable progress goals for each of the eight mandatory Class 1 Areas in Washington. The reasonable progress goals reflect already adopted controls for sources that cause or contribute to visibility impairment. Ecology will supplement this second SIP revision with reasonable controls that we determine during the next phase of this implementation period.

Washington developed a long-term strategy that addresses reasonably attributable visibility impairment and regional haze. The long-term strategy applies to mandatory Class 1 Areas both within the state and outside the state where emissions from the state are reasonably anticipated to contribute to visibility impairment. We designed the coordinated strategy to achieve the reasonable progress goals for mandatory Class 1 Areas inside Washington and the reasonable progress goals established by other states for mandatory Class 1 Areas outside of Washington where emissions from Washington are reasonably anticipated to contribute to visibility impairment.

Long-Term Challenges and Issues

Under the Regional Haze Rule, the state of Washington is responsible for doing its share of visibility improvement to achieve the national goal for mandatory Class 1 Areas within Washington and Class 1 Areas outside of Washington that it may affect. The Western Regional Air Partnership (WRAP) has provided a technical framework for understanding and dealing with the source regions and sources of visibility impairment. The WRAP analysis has also revealed significant challenges to long-term reasonable progress and raised technical and regulatory issues.

Significant challenges to meeting the national visibility goal in Washington's mandatory Class 1 Areas:

- Emissions from outside the modeling domain, Pacific offshore, and Canada significantly impact visibility. These are all beyond the state's control. In this regional haze SIP, we have proposed an adjustment to the glidepath endpoint to compensate for these international contributions.
- It will be difficult to achieve natural conditions, at some Class 1 Areas, unless we can either reduce the contribution of organic mass from fire to visibility impairment or not include it in the most impaired days metric. The most impaired days (MID) metric as it is currently calculated is insufficient to remove the effect of all wildfire smoke in Washington. With an increase in catastrophic fire in the Pacific Northwest, this will continue to be a challenge and requires an acceptable method to adjust the MID metric within each state as needed.

Meeting the national goal also requires addressing technical and regulatory issues including:

- Better understanding of the role of biogenic organic aerosols in visibility impairment and analytical technical tools

- Reconsideration of natural conditions especially in light of the expectation that prescribed fire will be more widespread in the future
- Continued development of federal rules reducing visibility-impairing pollutants
- Continued development of controls for on-road and off-road mobile sources

Meeting these challenges and dealing with the issues presented by our changing environment will ultimately enable Washington to achieve natural conditions within the state and contribute to meeting natural conditions in Class 1 Areas outside the state.

Bibliography

- 2014 NEI Data. (2014). 2014 National Emissions Inventory (NEI) Data. Retrieved from <https://www.epa.gov/air-emissions-inventories/2014-national-emissions-inventory-nei-data>
- 40 CFR 51.308 (d)(4)(v). (2012). Regional haze program requirements.
- 40 CFR 51.308(d)(1). (2020, July 01). Regional haze program requirements.
- 40 CFR 51.308(d)(1)(i)(A). (2020, July 1). Regional haze program requirements. 40 CFR 51.308(d)(3). (n.d.).
- 40 CFR 51.308(f). (n.d.).
- 40 CFR 60 Subpart Ja. (2013). Petroleum Refineries: New Source Performance Standards. Retrieved from <https://www.epa.gov/stationary-sources-air-pollution/petroleum-refineries-new-source-performance-standards-nsps-40-cfr>
- 40 CFR Part 63 Subpart LLL. (n.d.). Portland Cement Manufacturing Industry: National Emission Standards for Hazardous Air Pollutants (NESHAP).
- 83 FR 35122-35136. (2018, July 25). National Emission Standards for Hazardous Air Pollutants From the Portland Cement Manufacturing Industry Residual Risk and Technology Review. Federal Register. Retrieved from <https://www.govinfo.gov/content/pkg/FR-2018-07-25/pdf/2018-15718.pdf>
- BP. (2021). Cherry Point Refinery. Retrieved from Cherry Point Refinery: https://www.bp.com/en_us/united-states/home/where-we-operate/washington/cherry-point-refinery.html
- BP. (n.d.). Cherry Point Refinery Web Site. Retrieved 2021, from Cherry Point Refinery: https://www.bp.com/en_us/united-states/home/where-we-operate/washington/cherry-point-refinery.html

Chapter 173-485 WAC. (n.d.). Petroleum Refinery Greenhouse Gas Emission Requirements. Retrieved from <https://apps.leg.wa.gov/WAC/default.aspx?cite=173-485&full=true>

Ecology [Washington State Department of]. (n.d.). Washington Regional Haze Program Web Site. Retrieved from Washington State Department of Ecology: <https://ecology.wa.gov/Air-Climate/Air-quality/Air-quality-targets/Regional-haze>

EPA. (2003, September). Guidance for Estimating Natural Visibility Conditions Under the Regional Haze Rule . Retrieved from <https://www.epa.gov/sites/production/files/2021-03/documents/tracking.pdf>

EPA. (2013). 40 CFR 60 Subpart Ja. Petroleum Refineries: New Source Performance Standards. EPA. (2021). Cost Reports and Guidance for Air Pollution Regulations- Section 4 - NOx Controls. Retrieved from <https://www.epa.gov/economic-and-cost-analysis-air-pollution-regulations/cost-reports-and-guidance-air-pollution>

Grand Canyon Visibility Transport Commission. (1996). Report of the Grand Canyon Visibility Transport Commission to the United States Environmental Protection Agency.

Huitsing, G. (2016, November 01). WA RH RACT for Pulp and Paper Mills. Olympia: State of Washington: Department of Ecology. Retrieved from <https://apps.ecology.wa.gov/publications/documents/1602023.pdf>

IMPROVE. (2021, March 1). The Interagency Monitoring of Protected Visual Environments. Retrieved from <http://vista.cira.colostate.edu/Improve/>

IMPROVE Steering Committee's Technical Subcommittee for Algorithm Review. (n.d.). Revised IMPROVE Algorithm for Estimating Light Extinction from Particle Speciation Data.

IMPROVE. (n.d.). The Interagency Monitoring of Protected Visual Environments Web Site. Retrieved 2021, from <http://vista.cira.colostate.edu/Improve/>

Malm, W. C. (2018). Introduction to Visibility (Classic Reprint ed.). Forgotten Books.

Marc Pitchford, W. M. (2007). Revised Algorithm for Estimating Light Extinction from IMPROVE Speciation Data. Journal of the Air & Waste Management Association, 1326-1336. doi:10.3155/1047-3289.57.11.1326

National Park Service Public Use Statistics Office. (n.d.). Washington National Parks Statistics. Retrieved from U.S. Department of the Interior: <http://www.nature.nps.gov/stats/state.cfm?st=wa>

Newman, A. e. (2017). Washington State Regional Haze 5-Year Progress Report. Olympia, WA: Washington State Department of Ecology. Retrieved from <https://apps.ecology.wa.gov/publications/SummaryPages/1702008.html>

NPS. (n.d.). Washington National Parks Statistics Web Site. Retrieved from U.S. Department of the Interior: <http://www.nature.nps.gov/stats/state.cfm?st=wa>

OSHA. (2017). Process Safety managemtn for Petroleum Refineries. Washington, DC: United States Department of Labor: Occupational Safety and Health Administration. Retrieved from <https://www.osha.gov/Publications/OSHA3918.pdf>

Parker, K. R. (1996). Applied Electrostatic Precipitation. Springer.

Phillips 66 . (n.d.). Ferndale Refinery Web Site. Retrieved from Phillips 66 Refinery: <https://www.phillips66.com/refining/ferndale-refinery>

Phillips 66 Refinery. (2021). Ferndale Refinery. Retrieved from Phillips 66 Refinery: <https://www.phillips66.com/refining/ferndale-refinery>

Pitchford, M., Malm, W., Schichtel, B., Kumar, N., Lowenthal, D., & Hand, J. (2007). Revised Algorithm for Estimating Light Extinction from IMPROVE Speciation Data. Journal of the Air & Waste Management Association, 1326-1336. doi:10.3155/1047-3289.57.11.1326

RCW 70A.15.2230. (n.d.). RACT Requirements.

RCW 70A.15.2230. (n.d.). RACT requirements. Retrieved from <https://app.leg.wa.gov/RCW/default.aspx?cite=70A.15.2230>

Schneider, D. e. (2010, revised 2012). Regional Haze State Implementation Plan. Air Quality Program. Olympia, WA: Washington State Department of Ecology. Retrieved from <https://apps.ecology.wa.gov/publications/SummaryPages/1002041.html>

- South Coast AQMD. (2021). NOx Rulemaking. Retrieved from http://www.aqmd.gov/docs/default-source/rule-book/Proposed-Rules/1109.1/1109-1_community-info-request-11-3-20.xlsx?sfvrsn=6
- U.S. Energy Information Administration. (n.d.). Annual Energy Outlook. Retrieved from <https://www.eia.gov/outlooks/aeo/>
- U.S. Energy Information Administration. (n.d.). Annual Energy Outlook Web Site. Retrieved from <https://www.eia.gov/outlooks/aeo/>
- U.S. EPA & NHTSA. (2011, September 15). 76 FR 57105. Greenhouse Gas Emissions Standards and Fuel Efficiency Standards for Medium- and Heavy-Duty Engines and Vehicles. Retrieved from <https://www.govinfo.gov/content/pkg/FR-2011-09-15/pdf/2011-20740.pdf>
- U.S. EPA. (1990, October). Draft New Source Review Workshop Manual; Prevention of Significant Deterioration and Nonattainment Area Permitting.
- U.S. EPA. (2003, September). Guidance for Estimating Natural Visibility Conditions Under the Regional Haze Rule. Guidance for Estimating Natural Visibility Conditions Under the Regional Haze Rule. Retrieved from <https://www.epa.gov/sites/production/files/2021-03/documents/tracking.pdf>
- U.S. EPA. (2019). Guidance on Regional Haze State Implementation Plans for the Second Implementation Period.
- U.S. EPA and NHTSA. (2012, October 15). 77 FR 62623. 2017 and Later Model Year Light-Duty Vehicle Greenhouse Gas Emissions and Corporate Average Fuel Economy Standards. Retrieved from <https://www.govinfo.gov/content/pkg/FR-2012-10-15/pdf/2012-21972.pdf>
- Varga, J. J. (1976). Control of reclamation (sinter) Plant Emissions using Electrostatic Precipitators. Office of Research and Development, EPA. Retrieved from <https://nepis.epa.gov/Exe/ZyNET.exe/91014J82.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1976+Thru+1980&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=>

- Varga, J. J. (1976). Scarfing Machine Wet Electrostatic Precipitator Design Characteristics. Office of Research and Development, EPA. Retrieved from <https://nepis.epa.gov/Exe/ZyNET.exe/91015MWD.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1976+Thru+1980&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&In tQFieldOp=0&ExtQFieldOp=0&XmlQuery=>
- Washington Department of Ecology. (2010, revised 2012). <https://apps.ecology.wa.gov/publications/SummaryPages/1002041.html>. Air Quality Program, Lacey, WA. Retrieved from <https://apps.ecology.wa.gov/publications/SummaryPages/1002041.html>
- Washington State Department of Ecology. (2017). Washington State Regional Haze 5-Year Progress Report. Retrieved from <https://apps.ecology.wa.gov/publications/SummaryPages/1702008.html>
- Washington State Department of Ecology. (2021, March 1). Ecology's Regional Haze. Retrieved from Washington State Department of Ecology: <https://ecology.wa.gov/Air-Climate/Air-quality/Air-quality-targets/Regional-haze>
- Washington State Department of Health. (2021). Washington Environmental Health Disparities Map. Retrieved from Washington Tracking Network: <https://www.doh.wa.gov/DataandStatisticalReports/WashingtonTrackingNetworkWTN/InformationbyLocation/WashingtonEnvironmentalHealthDisparitiesMap>
- Western Regional Air Partnership. (2001). Policy for Categorizing Fire Emissions. Natural Background Task Team of the Fire Emissions Joint Forum.
- Western Regional Air Partnership. (2006). BART Modeling Protocol, Appendix H of Identification of Best Available Retrofit Technology – Eligible Sources in the Western Regional Air Partnership.
- Western Regional Air Partnership. (2006). Visibility Model Performance Evaluation – Final.
- Western Regional Air Partnership. (2013). Retrieved from The WRAP Technical Support System (TSS) (Archived): <http://vista.cira.colostate.edu/tss>

WRAP. (2001). Policy for Categorizing Fire Emissions. Natural Background Task Team of the Fire Emissions Joint Forum.

WRAP. (2006). BART Modeling Protocol, Appendix H of Identification of Best Available Retrofit Technology – Eligible Sources in the Western Regional Air Partnership.

WRAP. (2006). Visibility Model Performance Evaluation – Final.

WRAP. (2013). The WRAP Technical Support System (TSS) Web Site (Archived). Retrieved from <http://vista.cira.colostate.edu/tss>

WRAP. (2021, March 1). Home. Retrieved from The Western Regional Air Partnership: <http://www.wrapair2.org/>

WRAP. (2021, March 1). Procedures for Making Visibility Projections and Adjusting Glidepaths using the WRAP-WAQS 2014 Modeling Platform.

WRAP. (n.d.). Inventory Collaborative 2016v1 Emissions Modeling Platform. Retrieved from Inventory Collaborative 2016v1 Emissions Modeling Platform: <http://views.cira.colostate.edu/wiki/wiki/10202>

WRAP. (n.d.). Inventory Collaborative 2016v1 Emissions Modeling Platform. Retrieved from Inventory Collaborative 2016v1 Emissions Modeling Platform: <http://views.cira.colostate.edu/wiki/wiki/10202>

WRAP. (n.d.). The Western Regional Air Partnership Web Site. Retrieved 2021, from <http://www.wrapair2.org/>

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-10:
Landfill Inspection Report (Jan. 2025)

INSPECTION REQUIREMENTS FOR CCR LANDFILLS

40 CFR 257.84(b) Annual Inspections by a Qualified Professional Engineer

- (1) Existing and new CCR landfills and any lateral expansion of a CCR landfill must be inspected on a periodic basis by a qualified professional engineer to ensure that the design, construction, operation, and maintenance of the CCR unit is consistent with recognized and generally accepted good engineering standards. The inspection must, at a minimum, include:
 - (i) A review of available information regarding the status and condition of the CCR unit, including, but not limited to, files available in the operating record; and
 - (ii) A visual inspection of the CCR unit to identify signs of distress or malfunction of the CCR unit.
- (2) The qualified professional engineer must prepare a report following each inspection that addresses the following:
 - (i) Any changes in geometry of the structure since the previous annual inspection.
 - (ii) The approximate volume of CCR contained in the unit at the time of the inspection.
 - (iii) Any appearances of an actual or potential structural weakness of the CCR unit, in addition to any existing conditions that are disrupting or have the potential to disrupt the operation and safety of the CCR unit; and
 - (iv) Any other change(s) which may have affected the stability or operation of the CCR Unit since the previous annual inspection.

TRANSALTA CENTRALIA MINING LLC

LIMITED PURPOSE LANDFILL, ANNUAL INSPECTION REPORT

Date, Time, and Weather Conditions of the Inspection:

The annual inspection of the Coal Combustion Residual (CCR) unit, the TransAlta Centralia Mining LLC (TCM) Limited Purpose Landfill (LPLF) was conducted on **January 15, 2025**, beginning at around 10:30AM. The inspection was conducted by Steven J. Mahr, a qualified professional engineer, and accompanied by Marc Read, the manager of landfill operation.

Weather conditions at the time of inspection were cloudy and cool.

In accordance with the requirement the following observations were made during the inspection:

Review of available information

The CCR Operation records were reviewed for the CCR unit, otherwise known as the TCM LPLF. This included the weekly landfill inspection reports on file for the calendar year of 2024. Also reviewed were the weekly fugitive dust control inspection reports. No issues or items of concern developed from the records review.

Visual Inspection of the CCR unit

As noted above, a visual inspection of the TCM LPLF was conducted on January 15, 2025. The inspection began by driving around the perimeter access roads as an initial assessment of the landfill. This was followed by physically walking around the toe of the TCM LPLF and examining the slopes for structural integrity.

(1) Changes in Geometry

There were no changes to geometry in 2024.

(2) Approximate Volume of CCR Contained in the Unit

Records indicate the TCM LPLF contains approximately **851,722 cubic yards** of approved waste materials. Approximately 5,427 cubic yards of waste material was added to the landfill in 2024.

(3) Structural Integrity of the CCR unit

Based on the observations made during the perimeter inspection and the physical walk around the toe of the TCM LPLF there were no appearances of actual or potential structural weakness of

the landfill. **No conditions were observed** at the time of inspection to indicate a disruption of or have the potential to disrupt the operation and safety of the landfill.

CERTIFICATION OF ENGINEER:

By means of this certification, I attest that I am familiar with the requirements and provisions of Title 40 CFR Section 257.84(b), that I, Steven J. Mahr, a registered professional engineer in the State of Washington have visited and examined the CCR unit identified in this report, and that the design, construction, operation, and maintenance of the CCR unit is consistent with recognized and generally accepted good engineering standards.



BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-11:
EPA COBRA Health Effects Estimate

COBRA Web Edition



CO-Benefits Risk Assessment (COBRA) is a screening tool that enables state, local, and tribal government staff and others interested in the effects of air pollution to estimate the air quality and health benefits of different emissions scenarios.

You are using the web-based version of COBRA. For the COBRA desktop application, visit the [COBRA download page](#).

Step 1: Build Scenario

Complete the sections below and click "Add to Scenario."

A. Select Location REQUIRED

Select the states or counties where the emissions changes will occur. [i](#)

South Dakota

>

☐

Tennessee

>

☐

Texas

>

☐

Utah

>

☐

Vermont

>

☐

Virginia

>

☒

Washington

>

☐

West Virginia

>

☐

Wisconsin

>

☐

Wyoming

[Select All](#) | [Deselect All](#)

B. Select Sector REQUIRED

Select the industry or sector where the emissions changes will occur. 

Sector

Fuel Combustion: Industrial

Subsector (optional)

All subsectors

Subsector (optional)

All subsectors

C. Modify Emissions REQUIRED

Enter emissions changes for **at least one** of the four pollutants below. 

PM_{2.5} (Baseline = 1,593.25 tons)

reduce by **increase by**

120

☒ tons ☐ percent

SO₂ (Baseline = 2,118.86 tons)

reduce by **increase by**

934.72

☒ tons ☐ percent

NO_x (Baseline = 10,318.95 tons)

reduce by **increase by**

2804.53

☒ tons ☐ percent

VOC (Baseline = 643.66 tons)

reduce by **increase by**

enter #

☒ tons ☐ percent

NH₃ (Baseline = 83.95 tons)

reduce by **increase by**



tons



percent

ADD TO SCENARIO

Step 2: Review Scenario

Review the scenario below. To add changes to more locations or sectors, repeat Step 1 to continue building your scenario.

Location(s)**Sector****Emissions Modification(s)**

Washington - All Counties

Fuel Combustion: Industrial

PM_{2.5} reduce by 120 tonsSO₂ reduce by 934.72 tonsNO_x reduce by 2,804.53 tons**Discount rate:** 

2%



Custom:

RUN SCENARIO

Step 3: View Results

BUILD NEW SCENARIO

A. Summary of Health Effects Results

Below is a table with the health effects results based on your scenario.

You are viewing results for all contiguous U.S. states. This is because changes in air quality can impact health endpoints in multiple locations due to the transportation of emissions across state and county lines.

Use the filters below to see health effects for a specific state or county.

1. Filter by state:

All contiguous U.S. states

2. Filter by county: (optional)

All counties

Results for: All Contiguous U.S. States

 Export: [All results](#) | [Current filter](#)

Health Endpoint 	Pollutant	Change in Incidence  (cases, annual)		Monetary Value  (dollars, annual)	
		Low	High	Low	High
✓ Mortality *	PM _{2.5} O ₃	7.5	11	\$110,000,000	\$170,000,000
Nonfatal Heart Attacks	PM _{2.5}	2.3	2.3	\$190,000	\$190,000
Infant Mortality	PM _{2.5}	0.025	0.025	\$400,000	\$400,000
✓ Hospital Admits, All Respiratory	PM _{2.5} O ₃	0.61	0.61	\$14,000	\$14,000
✓ Emergency Room Visits, Respiratory	PM _{2.5} O ₃	13	13	\$21,000	\$21,000
✓ Asthma Onset	PM _{2.5} O ₃	44	44	\$3,300,000	\$3,300,000
✓ Asthma Symptoms	PM _{2.5} O ₃	6,900	6,900	\$2,000,000	\$2,000,000
Emergency Room Visits, Asthma	O ₃	0.059	0.059	\$49	\$49
Lung Cancer Incidence	PM _{2.5}	0.26	0.26	\$12,000	\$12,000
Hospital Admits, Cardio-Cerebro/Peripheral Vascular Disease	PM _{2.5}	0.4	0.4	\$12,000	\$12,000
Hospital Admits, Alzheimers Disease	PM _{2.5}	1.1	1.1	\$24,000	\$24,000

Hospital Admits, Parkinsons Disease	PM _{2.5}	0.19	0.19	\$4,600	\$4,600
Stroke Incidence	PM _{2.5}	0.23	0.23	\$14,000	\$14,000
✓ Hay Fever/Rhinitis Incidence	PM _{2.5} O ₃	280	280	\$310,000	\$310,000
Cardiac Arrest, Out of Hospital	PM _{2.5}	0.055	0.055	\$3,400	\$3,400
Emergency Room Visits, All Cardiac	PM _{2.5}	0.97	0.97	\$2,100	\$2,100
Minor Restricted Activity Days	PM _{2.5}	3,000	3,000	\$370,000	\$370,000
School Loss Days	O ₃	3,100	3,100	\$5,300,000	\$5,300,000
Work Loss Days	PM _{2.5}	510	510	\$160,000	\$160,000

Total Health Effects from PM_{2.5}

\$49,000,000 \$110,000,000

Total Health Effects from O₃

\$72,000,000 \$72,000,000



Total Health Effects

\$120,000,000 \$180,000,000

Note: Dollar amounts shown are based on 2023 currency values. Additionally, all values have been rounded to 2 significant figures. Please [export the results](#) in order to see values prior to rounding.

* The Low and High values represent differences in the methods used to estimate some of the health impacts in COBRA. For example, high and low results for avoided premature mortality are based on two different epidemiological studies of the impacts of PM_{2.5} on mortality in the United States.

B. Map of Health Effects and Air Quality Results


Below is a map showing health effects and air quality data based on your scenario.


Use the filter below to change the map's data layer. Click on a county on the map to explore the data.

Select the map's data layer:

Total Health Benefits (\$, low estimate)

Displaying: Total Health Benefits (\$, low estimate)

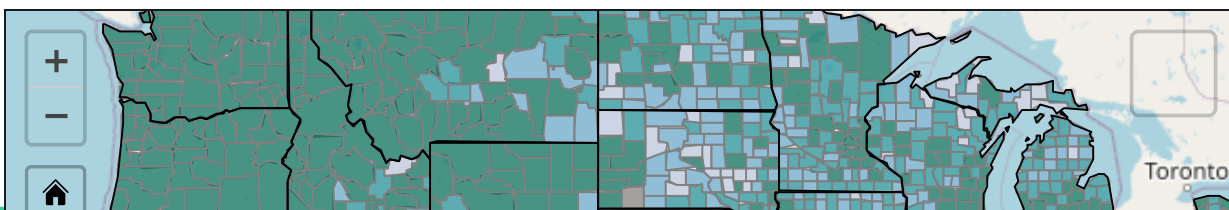

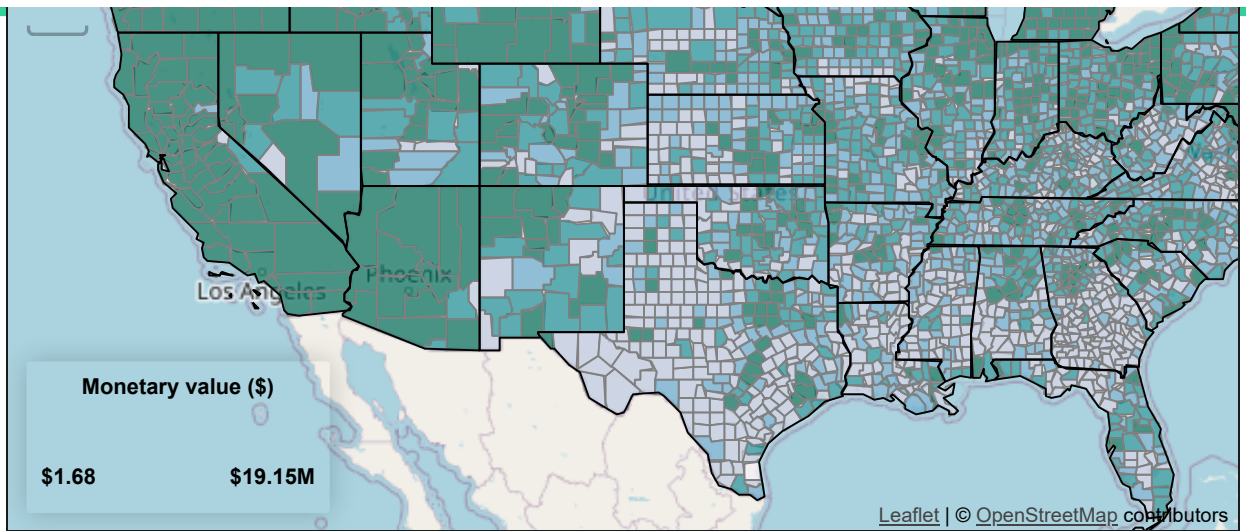

LAST UPDATED ON APRIL 12, 2021

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-12:
DOE 202(c) Webpage

[Documents](#) [Calendar](#) [News](#) [Contact](#)[Site Search](#) [Companies Search](#) [Dockets Search](#)

Resource Adequacy in Washington State

The UTC and the Washington State Department of Commerce co-host resource adequacy meetings to help ensure Washington has a reliable and affordable electricity supply.

Resource adequacy means having enough electricity available to meet customer needs at all times, even during extreme weather. The UTC and Commerce bring together utilities, regional planners, other experts, and the public to discuss how to plan for future electricity demand, improve coordination, and make sure the state has the power it needs.

State law (RCW 19.280.065) requires the UTC and Commerce to hold at least one of these meetings every year. Topics include electricity demand and supply, how utilities are working together to keep the grid reliable, and steps being taken to prepare for the future. A summary of each meeting is sent to the governor and the Legislature within 60 days.

CONTACT INFORMATION

Heather Moline

heather.moline@utc.wa.gov
360-664-1330

Payton Swinford

payton.swinford@utc.wa.gov
360-664-1209

Upcoming Meetings

A shorter-term winter readiness and gas-electric system coordination meeting is scheduled from **8:30 a.m. to noon on Nov. 4, 2025**. For details on attendance, speakers, and topics, see the notice, agenda, and presentation materials below, and in [Docket UE-210096](#).

Meeting Materials and Presentations

Materials from past and upcoming meetings, including presentations, reports, and supporting documents, can be accessed below:

November 4, 2025 - Meeting Resources

- [Notice of Winter 2025 Resource Adequacy Meeting - UE-210096](#)
- [Winter 2025 Resource Adequacy Meeting Agenda](#)
- [Winter 2025 Resource Adequacy Presentation - NWGA + WECC + NERC](#)
- [Winter 2025 Resource Adequacy Presentation - PacifiCorp](#)
- [Winter 2025 Resource Adequacy Presentation - Seattle City Light](#)
- [Winter 2025 Resource Adequacy Presentation - NW Natural](#)
- [Winter 2025 Resource Adequacy Presentation - Cascade Natural Gas](#)
- [Winter 2025 Resource Adequacy Presentation - Avista](#)
- [Winter 2025 Resource Adequacy Presentation - Puget Sound Energy](#)


- [Winter 2025 Resource Adequacy Presentation - NWGA + PNUCC](#)

[Previous 2025 Resource Adequacy Materials](#)[2024 Meeting Resources](#)[Past Meeting Resources](#)


Meeting Recordings

A recording of the most recent resource adequacy meeting is available below, in addition to within the docket housing these meetings, [UE-210096](#):

Video URL

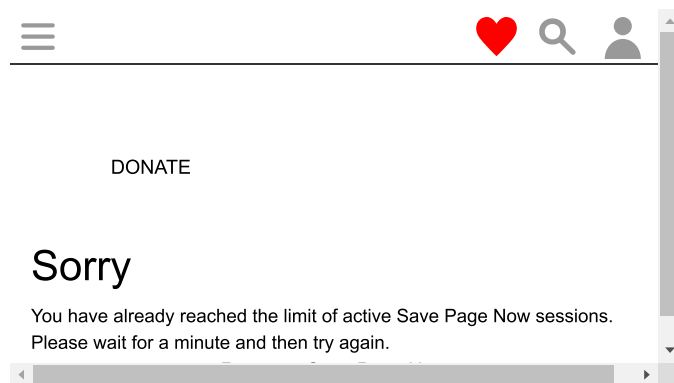

Video URL

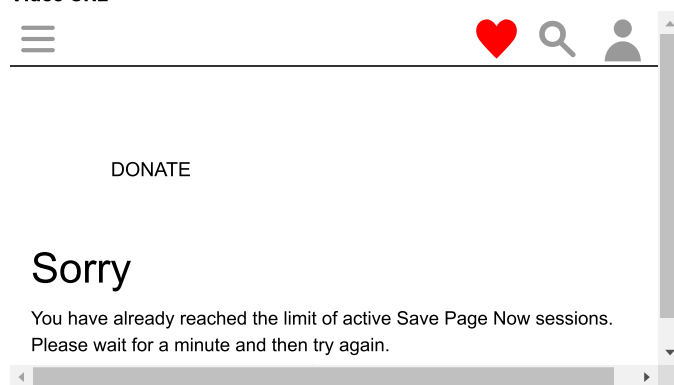[Previous Meeting Recordings](#)

Washington's Resource Adequacy Efforts

Washington's electricity system is undergoing significant changes as the state transitions to 100% clean energy under the [Clean Energy Transformation Act \(CETA\)](#). The UTC and Commerce play a critical role in ensuring that utilities can provide sufficient electricity while meeting clean energy mandates.

For more details about resource adequacy efforts in Washington state, visit the [Commerce Resource Adequacy page](#).

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-13:
DOE Order No. 202-22-4



Department of Energy
Washington, DC 20585

Order No. 202-22-4

Pursuant to the authority vested in the Secretary of Energy by section 202(c) of the Federal Power Act (FPA), 16 U.S.C. § 824a(c), and section 301(b) of the Department of Energy Organization Act, 42 U.S.C. § 7151(b), and delegated by email correspondence (Dec. 23, 2022), and for the reasons set forth below, I hereby determine that an emergency exists in the electricity grid operated by PJM Interconnection, LLC (PJM) due to a shortage of electric energy, a shortage of facilities for the generation of electric energy, and other causes, and that issuance of this Order will meet the emergency and serve the public interest.

Emergency Situation

On December 24, 2022, PJM, the Regional Transmission Operator (RTO) for 65 million people in thirteen states and the District of Columbia (the PJM Region), filed a *Request for Emergency Order Under Section 202(c) of the Federal Power Act* (Application) with the United States Department of Energy (Department) “to preserve the reliability of the bulk electric power system.”

The PJM Region, like many regions across the country, is currently being affected by a severe winter weather system. PJM states that this weather system caused a significant drop in temperatures across the PJM Region on December 23, 2022, accompanied by high winds in excess of 40 mph. As a consequence of the impact of wind and decreasing temperatures, the demand for electricity in the PJM Region rose to an unusually high peak load on the evening of December 23, 2022, in excess of 135,000 MW. This severely cold weather is expected to last through Sunday morning.

While the vast majority of generating units in the PJM Region continue to function adequately under these stressed conditions, some units have experienced operating difficulties due to cold weather or fuel limitations, primarily gas. Specifically, approximately 45,000 MW of generating units (the majority of which are thermal) are currently outaged or derated. PJM has expressed its concern that these units will be unable to return to service over at least the next 48 hours, which coincides with the time period for which PJM is requesting this Order. Since these units may not promptly return to service, and in the event PJM experiences additional generating unit outages, PJM states that it may need to curtail some amount of firm load on December 24, December 25, or December 26, 2022 in order to maintain the security and reliability of the PJM system.

Description of Mitigation Measures

In its Application, PJM identifies the measures it is taking to ensure the supply of generation will continue to be sufficient to meet system demand and reserve requirements. On December 20, 2022, PJM issued a cold weather advisory in the PJM Region in anticipation of the forecasted weather conditions. Then on December 23, 2022, PJM issued

a PJM Region-wide cold weather alert which further highlighted PJM's expected need to call higher-than-normal generation resources in light of the anticipated weather.

On December 23, 2022, generating reserves diminished to a level that required PJM to declare an Energy Emergency Alert (EEA) Level 2 and take other emergency actions. PJM states that after having exhausted economic operation, PJM triggered a Maximum Generation Emergency Action to increase the PJM Region generation above the maximum economic level. Further, PJM triggered its load management reduction actions to provide additional load relief by using PJM-controllable load management programs. PJM called on demand response providers and curtailment service providers to reduce load. PJM also issued public appeals for consumers to reduce usage. PJM has continued to employ these emergency actions through December 24, 2022, and anticipates needing to continue them through the order end date that it has requested.

Since December 23, 2022, PJM has also taken additional measures to provide additional reserves, including:

- Reducing exports to neighboring regions and requested shared reserves for neighboring regions; consistent with joint operating agreements and other regulatory requirements, PJM has continued to communicate and collaborate with its interconnected neighboring systems when the demand on the PJM system has exceeded expected energy and reserve requirements and when emergency transfers were required to support PJM's interconnected neighboring systems;
- Issuing additional public conservation appeals;
- Running uneconomic generation during lower load periods to ensure their availability during peak conditions;
- Utilizing its Emergency Procedures to assist in maximizing the pumped storage hydro generation levels;
- Communicating and preparing transmission and distribution service providers to implement distribution voltage reduction measures; and
- Communicating and preparing transmission and distribution service providers to implement firm load shed.

In its Application, PJM committed to continue to take such actions, including utilizing other supply resources before calling upon any generators to operate in excess of permitting levels. According to PJM, it is nevertheless possible that the measures it has and will take may not be sufficient to avoid the need to curtail firm load in order to ensure system reliability.

Request for Order

PJM requests that the Secretary issue an order immediately, effective today, December 24, 2022, through 12:00 p.m. Eastern Time on Monday, December 26, 2022, authorizing the electric generating units identified in Exhibit A, as well as any other

generating units subject to emissions or other permit limitations in the PJM Region to operate up to their maximum generation output levels under the limited circumstances described in this Order, notwithstanding air quality or other permit limitations. The generating units (Specified Resources) that this Order pertains to are listed on the Order 202-22-4 Resources List, as described below.

ORDER

Given the emergency nature of the expected load stress, the responsibility of PJM to ensure maximum reliability on its system, and the ability of PJM to identify and dispatch generation necessary to meet the additional load, I have determined that, under the conditions specified below, additional dispatch of the Specified Resources is necessary to best meet the emergency and serve the public interest for purposes of FPA section 202(c). This determination is based on, among other things:

- The emergency nature of the expected load stress caused by the current cold weather event threatens to cause loss of power to homes and local businesses in the areas that may be affected by curtailments, presenting a risk to public health and safety.
- The expected shortage of electric energy, shortage of facilities for the generation of electric energy, and other causes in the PJM Region demonstrate the need for the Specified Resources to contribute to the reliability of the PJM Region.
- PJM is responsible to ensure maximum reliability on its system, and, with the authority granted in this Order, its ability to identify and dispatch generation, including the Specified Resources, necessary to meet the additional load resulting from the cold weather event is enhanced.

In line with the anticipated circumstances precipitated by the cold weather event, this Order is limited to the period beginning with the issuance of this Order on December 24, 2022 through 12:00 pm Eastern Time on December 26, 2022. Because the additional generation may result in a conflict with environmental standards and requirements, I am authorizing only the necessary additional generation on the conditions contained in this Order, with reporting requirements as described below.

FPA section 202(c)(2) requires the Secretary of Energy to ensure that any 202(c) order that may result in a conflict with a requirement of any environmental law be limited to the “hours necessary to meet the emergency and serve the public interest, and, to the maximum extent practicable,” be consistent with any applicable environmental law and minimize any adverse environmental impacts. PJM anticipates that this Order may result in exceedance of emissions of sulfur dioxide, nitrogen oxide, mercury, and carbon monoxide emissions, as well as wastewater release limits. To minimize adverse environmental impacts, this Order limits operation of dispatched units to the times and within the parameters determined by PJM for reliability purposes.

Based on my determination of an emergency set forth above, I hereby order:

A. From the time this Order is issued on December 24, 2022, to 12:00 pm Eastern Time on December 26, 2022, in the event that PJM determines that generation from the Specified Resources is necessary to meet the electricity demand that PJM anticipates in the PJM Region during this event, I direct PJM to dispatch such unit or units and to order their operation only as needed to maintain the reliability of the power grid in the PJM Region when the demand on the PJM system exceeds expected energy and reserve requirements. Specified Resources are those generating units set forth on the Order 202-22-4 Resource List, subject to updates directed here and as described in paragraph D, which the Department shall post on www.energy.gov.

B. To minimize adverse environmental impacts, this Order limits operation of dispatched units to the times and within the parameters determined by PJM for reliability purposes. Consistent with good utility practice, PJM shall exhaust all reasonably and practically available resources, including available imports, demand response, and identified behind-the-meter generation resources selected to minimize an increase in emissions, to the extent that such resources provide support to maintain grid reliability, prior to dispatching the Specified Resources. PJM shall provide a daily notification to the Department reporting each generating unit that has been designated to use the allowance and operated in reliance on the allowances contained in this Order.

In furtherance of the foregoing and, in each case, subject to the exhaustion of all available imports, demand response, and identified behind-the-meter generation resources selected to minimize an increase in emissions available to support grid reliability:

- (i) For any generation resource whose operator notifies PJM that the unit is unable, or expected to be unable, to produce at its maximum output due to an emissions or other limit in any federal environmental permit, and during the pendency of a PJM-triggered Maximum Generation Emergency Action, at any point before 12:00 Eastern Time on Monday, December 26, 2022, the unit will be allowed to exceed any such limit only during any period for which PJM has declared an Energy Emergency Alert (EEA) Level 2 or Level 3 (during which time PJM will have triggered a Maximum Generation Emergency Action), except as described in item (iii) below in certain limited circumstances in anticipation of an EEA Level 2. Once PJM declares that the EEA Level 2 event has ended, the unit would be required to immediately return to operation within its permitted limits. And at all other times, the unit would be required to operate within its permitted limits, except for the limited exceptions provided herein for operations in anticipation of an EEA Level 2 to prevent the cycling of units or facilitate the charging or pumping of other resources necessary for the EEA Level 2.
- (ii) For any generation resource whose operator notifies PJM that the unit is offline or would need to go offline at any point before 12:00 Eastern Time on Monday, December 26, 2022, due to an emissions or other limit in any

federal environmental permit, PJM may direct the unit operator to bring the unit online, or to keep the unit online, and to operate at the level consistent with its permits but subject to the exceptions set forth in this Order. In this circumstance, the operator is allowed to make all of the unit's capacity available to PJM for dispatch during any period for which PJM has declared an EEA Level 2 or 3 (during which time PJM has triggered a Maximum Generation Emergency Action), except as described in item (iii) below in certain limited circumstances in anticipation of an EEA Level 2. Once PJM declares that such an EEA Level 2 event has ended and the Maximum Generation Emergency Action is discontinued, the unit would be required to immediately return to operating at a level below the higher of its minimum operating level or the maximum output allowable under the permitted limit.

- (iii) PJM is hereby granted authority to operate the Specified Units that are combined cycle generating units in certain limited circumstances in advance of declaring an EEA Level 2, Maximum Generation Emergency, or in between such events, where such operation or continued operation of the Specified Resource is reasonably necessary to avoid shutting down and restarting the Specified Unit. PJM has represented that such cycling of units can cause reliability issues regarding restarting, delays, and increased emissions during startup. PJM is further authorized to operate the Specified Units in certain limited circumstances in advance of the declaring an EEA Level 2, Maximum Generation Emergency where such operation or continued operation of the Specified Resource is reasonably necessary to facilitate charging storage resources or pumping for pumped storage facilities that will be needed during an anticipated EEA Level 2. PJM is required to take measures to dispatch units for which cycling would otherwise be required in a manner reasonably intended to limit the duration and operating level of those units in such a way as to minimize exceedance of permit limitations consistent with the security and reliability of the PJM Region.
- (iv) To minimize adverse environmental impacts as set forth herein, this Order limits operation of dispatched units to the times and within the parameters determined by PJM for reliability purposes. Consistent with good utility practice, and notwithstanding standard merit order dispatch, PJM shall exhaust all reasonably and practically available resources, including available imports, demand response and identified behind-the-meter generation resources selected to minimize an increase in emissions to the extent that such resources provide support to maintain grid reliability prior to dispatching the Specified Resources at levels above their permitted emissions levels. PJM shall provide a daily notification to the Department reporting each generating unit that has been designated to use the allowance and operated in reliance on the allowances contained in this Order.

C. All operation of the Specified Resource must comply with applicable environmental requirements, including but not limited to monitoring, reporting, and recordkeeping requirements, to the maximum extent feasible while operating consistent with the emergency conditions. This Order does not provide relief from any obligation to pay fees or purchase offsets or allowances for emissions that occur during the emergency condition or to use other geographic or temporal flexibilities available to generators.

D. In the event that PJM identifies additional generation units that it deems necessary to operate in excess of federal environmental permitting limits in order to maintain the reliability of the power grid in the PJM Region when the demand on the PJM system exceeds expected energy and reserve requirements, PJM shall provide prompt written notice to the Department of Energy at AskCR@hq.doe.gov with the name and location of those units that PJM has identified, as well as additional notice by the same means through updating Exhibit A to its Application with such additional generation units, the fuel type of such unit, and the anticipated category of environmental impact, at 09:00 Eastern Time or 21:00 Eastern Time, whichever follows closest in time to the unit identification by PJM to the greatest extent feasible. Such additional generation unit shall be deemed a Specified Resource for the purpose of this Order for the hours prior to the required written notice to the Department updating Exhibit A, and PJM may dispatch such additional generation units, provided that if the Department of Energy notifies PJM that it does not approve of such generation unit being designated as a Specified Resource, such generation unit shall not constitute a Specified Resource upon notification from the Department. The Department shall post an updated Order 202-22-4 Resource List as soon as practicable following notification from PJM under this paragraph.

E. PJM shall provide such additional information regarding the environmental impacts of this Order and its compliance with the conditions of this Order, in each case as requested by the Department of Energy from time to time. By January 26, 2023, PJM shall report all dates between December 24, 2022, and December 26, 2022, inclusive, on which the Specified Resources were operated, the hours of operation, and exceedance of permitting limits, including sulfur dioxide, nitrogen oxide, mercury, carbon monoxide, and other air pollutants, as well as exceedances of wastewater release limits. PJM shall submit a final report by February 27, 2023, with any revisions to the information reported on January 26, 2023. The environmental information submitted in the final report shall also include the following information:

- (i) Emissions data in pounds per hour for each Specified Resource unit, for each hour of the operational scenario, for CO, NO_x, PM₁₀, VOC, and SO₂;
- (ii) Emissions data must include emissions (lbs/hr) calculated consistent with reporting obligations pursuant to operating permits, permitted operating/emission limits, and the actual incremental emissions above the permit limits;

- (iii) The number and actual hours each day that each Specified Resource unit operated in excess of permit limits or conditions, e.g., “Generator #1; December 25, 2022; 4 hours; 04:00-08:00 CT”;
- (iv) Amount, type and formulation of any fuel used by each Specified Resource;
- (v) All reporting provided under the Specified Resource’s operating permit requirements over the last three years to the United States Environmental Protection Agency or local Air Quality Management District for the location of a Specified Resource that operates pursuant to this Order;
- (vi) Additional information requested by DOE as it performs any environmental review relating to the issuance of this Order; and
- (vii) Information provided by the Specified Resource describing how the requirements in paragraph C above were met by the Specified Resource while operating under the provisions of this Order.

In addition, PJM shall provide information to the Department quantifying the net revenue in aggregate associated with generation in excess of environmental limits in connection with orders issued by the Department pursuant to Section 202(c) of the Federal Power Act.

F. PJM shall take reasonable measures to inform affected communities where all Specified Resources operate that PJM has been issued this Order, in a manner that ensures that as many members of the community as possible are aware of the Order, and explains clearly what the Order allows PJM to do. At a minimum, PJM shall post a description of this Order on its website (with a link to this Order) and identify the name, municipality or other political subdivision, and zip code of Specified Resources covered by this Order, as the Specified Resources may be updated pursuant to paragraph D above. In addition, in the event that a Specified Resource operates pursuant to this Order, a general description of the action authorized by this Order will be included in any press release issued by PJM with respect to the cold weather event and will include a reference to the website posting required by the preceding sentence for further information. PJM shall describe the actions taken to comply with this paragraph in the reports delivered to the Department pursuant to paragraph E above.

G. This Order shall not preclude the need for the Specified Resource to comply with applicable state, local, or Federal law or regulations following the expiration of this Order.

H. PJM shall be responsible for the reasonable third-party costs of performing analysis of the environmental and environmental justice impacts of this Order, including any analysis conducted pursuant to the National Environmental Policy Act.

I. This Order shall be effective upon its issuance, and shall expire at 12:00 Eastern Time on Monday, December 26, 2022, with the exception of the reporting requirements in

Department of Energy Order No. 202-22-4

paragraph E. Renewal of this Order, should it be needed, must be requested before this Order expires.

Issued in Washington, D.C. at 5:30 PM Eastern Standard Time on this 24th day of December 2022.

Kathleen B.
Hogan

 Digitally signed by Kathleen B. Hogan
Date: 2022.12.24 17:38:01 -05'00'

Undersecretary of Energy for Infrastructure

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-14:
DOE Order No. 202-17-4 Summary of Findings

Summary of Findings

Department of Energy Order No. 202-17-4

September 14, 2017

Section 202(c) of the Federal Power Act (FPA) (codified at 16 U.S.C. § 824a(c)), through section 301(b) of the Department of Energy Organization Act (codified at 42 U.S.C. § 7151(b)), authorizes the Secretary of Energy, upon finding “that an emergency exists by reason of a sudden increase in the demand for electric energy, or a shortage of electric energy or of facilities for the generation or transmission of electric energy, or of fuel or water for generating facilities, or other causes,” to issue an order “requir[ing] . . . such temporary connections of facilities and such generation, delivery, interchange, or transmission of electric energy as in [the Secretary’s] judgment will best meet the emergency and serve the public interest.” 16 U.S.C. § 824a(c)(1). If the order “may result in a conflict with [an] environmental law or regulation,” then the Secretary must “ensure that such order requires generation, delivery, interchange, or transmission of electric energy only during hours necessary to meet the emergency and serve the public interest, and, to the maximum extent practicable, is consistent with any applicable . . . environmental law or regulation and minimizes any adverse environmental impacts.” *Id.* § 824a(c)(2). Orders issued under FPA section 202(c) “that may result in a conflict with [an] environmental law or regulation” expire 90 days after they are issued, but the Secretary “may renew or reissue such order[s] . . . for subsequent periods, not to exceed 90 days for each period, as [the Secretary] determines necessary to meet the emergency and serve the public interest.” *Id.* § 824a(c)(4)(A).

The Department’s regulations implementing FPA section 202(c) define the term “emergency” to mean, among other situations, “a specific inadequate power supply situation.” 10 C.F.R. § 205.371. The regulations do not exhaustively list what qualifies as an emergency, but they note specifically that “[e]xtended periods of insufficient power supply as a result of inadequate planning or the failure to construct necessary facilities can result in an emergency as contemplated in these regulations.” *Id.*

On June 13, 2017, PJM filed a *Request for Emergency Order Pursuant to Section 202(c) of the Federal Power Act* (Order Application) (included in the docket¹ of this Order) with the Department “to preserve the reliability of [the] bulk power transmission system in the North Hampton Roads area.” Virginia Electric and Power Company² (Dominion), the electric utility serving the area, owns the coal-fired, power generating Units 1 and 2 at the Yorktown Power Station in Yorktown, Virginia. In November 2011 and October 2012, Dominion notified PJM of its plan to deactivate Units 1 and 2, respectively, effective December 31, 2014, because the units were not equipped to

¹ The docket of this Order is available at <https://www.energy.gov/oe/downloads/federal-power-act-section-202c-dominion-energy-virginia-june-2017>.

² See Dominion Energy, Inc., Form 10-Q filing, at 1 (Aug. 3, 2017), included in the docket of this Order.

comply with the Environmental Protection Agency's (EPA) Mercury and Air Toxics Standards (MATS), 40 C.F.R. part 63 subpart UUUUU. On June 24, 2014, pursuant to 40 C.F.R. § 63.6(i)(4)(i)(A), the Virginia Department of Environmental Quality granted Dominion a one-year MATS compliance extension for Yorktown Units 1 and 2.

On April 16, 2016, pursuant to section 113(a) of the Clean Air Act, 42 U.S.C. § 7413(a)(3) and (4), the EPA issued an Administrative Compliance Order (ACO) through April 15, 2017. The ACO implemented a 2011 MATS Enforcement Policy regarding issuance of section 113(a) administrative orders to sources that are unable to comply with the MATS but that may need to operate for up to a year to address a specific and documented reliability concern. The 2011 MATS Enforcement Policy was limited in application to units critical for reliability purposes. The EPA found that operation of Yorktown Units 1 and 2 met the policy criteria, as verified by the Federal Energy Regulatory Commission (FERC). Dominion has not achieved full compliance with the MATS for Yorktown Units 1 or 2 since the ACO expired, and section 113(a) of the Clean Air Act bars further compliance extensions.

Since Dominion's decision to retire the coal-fired Yorktown units, PJM has planned for their permanent deactivation by including required transmission upgrades in its own Regional Transmission Expansion Planning Process. PJM is subject to federal reliability standards enforced by the North American Electric Reliability Corporation (NERC), the Electric Reliability Organization designated by FERC. PJM holds the highest-level reliability responsibilities for the system it manages as a certified Reliability Coordinator, Balancing Authority, and Transmission Operator. PJM is also registered with NERC as a Planning Coordinator and Transmission Planner, among other functions. NERC Compliance Registry Active Entities List (updated Sept. 7, 2017), included in the docket of this Order. PJM applies reliability criteria to evaluate transmission system conditions and then develops the transmission solutions needed to ensure compliance with the reliability standards. The PJM Board of Managers approves those solutions in a Regional Transmission Expansion Plan (RTEP). Through its Transmission Expansion Advisory Committee (TEAC) and Sub-Regional RTEP Committees, PJM works with stakeholders throughout the RTEP's development. PJM Manual 14B, "Regional Planning Process," included in the docket of this Order. The PJM Board of Managers approved the transmission upgrades necessitated by the retirement of Yorktown Units 1 and 2 on May 17, 2012. TEAC Recommendations to the PJM Board (PJM Staff Whitepaper), May 2012, at 12, included in the docket of this Order.

PJM's approved solution was the Skiffes Creek Transmission Project, which consists of three components: a 500kV line, a 230kV line rebuild, and a new switching station. United States Army Corps of Engineers (Army Corps), Memorandum for the Record re: Department of the Army Environmental Assessment and Statement of Findings for the Above-Referenced Standard Individual Permit Application, CENAO-WR-RS (NAO-2012-00080 / 13-V0408), at 1, included in the docket of this Order. A

number of issues in the North Hampton Roads area, many of which are interrelated, needed to be addressed to avoid overloading transmission lines with too much power, as detailed in PJM's Deactivation Study. Yorktown Units 1 and 2 Generator Deactivation Notification: Deactivation Study Results – updated June 26, 2017 (PJM Deactivation Study), included in the docket of this Order. *See also Va. Elec. & Power Co.*, Commission Comments on Requests for EPA Administrative Orders, Docket No. AD16-11-000, 153 FERC ¶ 61,265 at PP 14-16 (2015).

PJM completed a series of analyses consistent with RTEP procedures, finding that only the Skiffes Creek Transmission Project—and none of the stakeholder-proposed alternatives—addressed the full range of potential reliability violations. Order Application, app. I, at 16. For example, reliance on operation of the oil-fired Yorktown Unit 3 generator would not address thermal overload and voltage violations on the 230kV and 115kV bulk electric system that PJM identified because of significant environmental operating restrictions and other plant operation constraints associated with that unit, including an 8 percent capacity factor limitation. *See id.*, app. II, at 18. As a result, PJM did not recommend reliance on Yorktown Unit 3 as a sustainable alternative solution to the identified reliability criteria violations. *Id.*

As part of PJM's analyses, Dominion transmission staff provided PJM with an analysis of system needs as well as potential solutions to the retirement of generating units at Yorktown and elsewhere. Dominion Update to Retirement Study Results (Mar. 10, 2012), included in the docket of this Order. Dominion's analysis, which was based on PJM's initial determination of reliability criteria violations that needed to be addressed, was independently validated by PJM and publicly vetted through the PJM stakeholder process before PJM staff recommended that the Board of Managers approve the Skiffes Creek Transmission Project. PJM Staff Whitepaper at 12, included in the docket of this Order.

PJM, as the Regional Transmission Organization (RTO) responsible for transmission system operation across multiple states, including Virginia, maintains its expert determination that the Skiffes Creek Transmission Project is the most effective and efficient solution to address the identified reliability criteria violations. Order Application, app. I, at 16. As recently as March 1, 2017, PJM provided the Army Corps with an analysis of proposed alternatives and found that none of them sufficiently resolved the identified violations. Letter to Col. Jason E. Kelly, U.S. Army Corps of Engineers (Mar. 1, 2017), included in the docket of this Order. PJM's subsequent RTEP materials reaffirm the need for the Skiffes Creek Transmission Project, even considering the updated, steadily rising load forecasts in the recently released 2017 PJM Load Forecast Report (included in the docket of this Order). *See* PJM Interconnection, L.L.C., 2017 RTEP Process Scope & Input Assumptions, rev. 1, at 25-27 (Aug. 3, 2017), included in the docket of this Order.

Construction of the Skiffes Creek Transmission Project began in July 2017 and is expected to take approximately 18-20 months. *Order No. 202-17-2 Renewal Application Filing* (Renewal Application) at 3. Until the Project is completed, a plan known as the North Hampton Remedial Action Scheme (RAS) remains in effect. According to NERC's Glossary of Terms, a RAS is "[a] scheme designed to detect predetermined System conditions and automatically take corrective actions that may include, but are not limited to, adjusting or tripping generation ([megawatts] and [megavolt amperes (reactive)]), tripping load, or reconfiguring a System(s)." Glossary of Terms Used in NERC Reliability Standards (updated Aug. 1, 2017), at 24, included in the docket of this Order.

To preserve the grid's reliability, the North Hampton RAS would allow PJM, the grid operator, to drop load—that is, shut off power to certain customers—to prevent voltage collapse. Dominion presented this RAS to PJM in January 2017, and the SERC Reliability Corporation, the NERC-delegated regional reliability enforcement entity, approved it that same month. See Dave Rees, *Dominion Virginia Power Sets Plan for Emergency Blackouts*, Daily Press, Jan. 13, 2017, included in the docket of this Order. If Yorktown Units 1 and 2 were unavailable, many N-1-1 contingencies could result in voltage collapse and thermal overloads. New Remedial Action Scheme, North Hampton RAS (Presentation to PJM), at 4, included in the docket of this Order; PJM Deactivation Study, included in the docket of this Order. According to FERC, "An N-1-1 contingency is a sequence of events consisting of an initial loss of a single generator or transmission element, followed by system adjustment, followed by another loss of a single generator or transmission element." *Price Formation in Energy and Ancillary Services Markets Operated by Regional Transmission Organizations and Independent System Operators*, Docket No. AD14-14-000, 153 FERC ¶ 61,221 at P 30 n.61 (2015).

The North Hampton RAS is on standby for use at PJM's discretion. If PJM detects the loss of certain facilities, it could trip the remaining feeds to the Yorktown area and drop service to approximately 150,000 customers, preventing voltage collapse. Rotating outages would follow until the system returns to normal operating parameters. New Remedial Action Scheme, North Hampton RAS (Presentation to PJM), at 6, included in the docket of this Order. According to U.S. Census estimates, the region PJM identifies as the North Hampton Roads load area in its Order Application had a population of more than 660,000 as of July 2016. At a minimum, rotating outages under the RAS would therefore impact, directly or indirectly, several hundred thousand people. United States Census Bureau, QuickFacts database, available at <https://www.census.gov/quickfacts/fact/table/US/PST045216>.

On July 3, 2017, the Army Corps issued a permit to Dominion for the Skiffes Creek Transmission Project pursuant to section 10 of the Rivers and Harbors Act of 1899 (33 U.S.C. § 403) and section 404 of the Clean Water Act (33 U.S.C. § 1344). On July

10, 2017, Dominion commenced construction of the Skiffes Creek Transmission Project. Renewal Application at 3.

On August 24, 2017, PJM filed its Renewal Application with DOE. The filing included all reports required by Order No. 202-17-2 (included in the docket of this Order). PJM said that construction of the Project was still expected to take 18-20 months, and that periodic transmission outages would be necessary to proceed apace with the Project. The same day, Dominion wrote to the Department that it “agrees with the Renewal Application and will operate in accordance with its provisions.” Further, Dominion acknowledged that a 202(c) order “is not a long term solution to the reliability issues in the North Hampton Roads area on the Virginia Peninsula.” The Skiffes Creek Transmission Project, underway as of July 2017, is the long-term solution.

On September 7, 2017, the Department received comments from Sierra Club opposing PJM’s renewal request. On September 13, 2017, the Department received an answer to Sierra Club’s comments from PJM. Both documents are included in the docket of this Order.

Discussion

Order No. 202-17-2 directs operation of Yorktown Units 1 and 2 as needed to address reliability issues, subject to a dispatch methodology submitted to the Department for review. The reliability issues noted in Order No. 202-17-2 were described as Scenario One, increased load due to weather-related temperature extremes, and Scenario Two, decreased transmission capacity required by the RTEP upgrade. Scenario Two was contemplated but not yet applicable when Order No. 202-17-2 was issued because the Army Corps permit application for the Skiffes Creek Transmission Project was still pending. On July 3, the Army Corps issued Permit No. NAO-2012-00080, resulting in the potential need to operate Yorktown Units 1 and 2 to address both Scenario One and Two reliability issues. To date, in accordance with Order No. 202-17-2, PJM has directed operation of Yorktown Units 1 and/or 2 for all or part of 13 days. PJM Interconnection, L.L.C., Report on Yorktown Units 1 and 2 Operations Pursuant to Order No. 202-17-2, Attachment 1, included in the docket of this Order; Telephone call to Steven Pincus, Associate General Counsel, PJM, Sept. 11, 2017.

Scenario One applies when load conditions exceed a certain threshold due to local transmission issues that would cause PJM to operate the system outside its normal operating parameters.³ Weather-related temperature extremes are one example of such a local transmission issue. Scenario Two is also triggered when load conditions exceed a certain threshold, but the threshold is lowered depending on the particular construction-related transmission outages in effect as the Skiffes Creek Transmission Project is built.

³ Exact load thresholds were submitted as critical electric infrastructure information and are thus not described here so as not to provide vulnerability information on critical infrastructure.

Because the Project minimizes environmental impacts by utilizing existing transmission line rights-of-way to the extent possible, portions of existing transmission lines must be taken offline for upgrades. Under either scenario, when the relevant thresholds are exceeded, to prevent system overload and uncontrolled power disruptions, PJM must implement the North Hampton RAS. The only sufficient alternative to the RAS and its resulting outages for up to approximately 150,000 customers is the emergency operation of Yorktown Units 1 and 2. The demand response available to PJM is a small fraction of the load threshold and is “not sufficient to ensure reliable service.” Order Application, app. II, at 18. Likewise, Dominion has limited demand-side management and curtailment capabilities, insufficient for reliability purposes even when fully deployed. *See id.*, app. III, at 21.

Activating the RAS would immediately interrupt service to load in the North Hampton Roads area. PJM asserts that, according to the RAS, during certain high load conditions, this “load shedding” could result in the loss of roughly 950 MW of electric power—that is, the loss of service to over 150,000 North Hampton Roads area customers. Order Application at 9. This service interruption could last hours or even days. *See* North Hampton RAS Presentation to PJM, at 8, included in the docket of this Order. Activating the RAS is not a gradual approach that presents a wide range of likely impacts; it is an extreme measure with immediate consequences to 150,000 customers. While the RAS is designed to prevent more catastrophic, uncontrolled grid impacts from occurring, load shedding of this magnitude is significant, and would trigger mandatory reporting both to DOE and FERC. DOE Form OE-417 requires reporting within one hour for “[l]oad shedding of 100 Megawatts or more implemented under emergency operational policy,” and within six hours for “[l]oss of electric service to more than 50,000 customers for 1 hour or more.” This is the same level of reporting triggered by a cyber or other hostile attack on grid resources. Form OE-417, Electric Emergency Incident and Disturbance Report, https://www.oe.netl.doe.gov/docs/OE417_Form_03312018.pdf. Similarly, FERC and NERC mandate notification for a variety of serious events including when a bulk electric system emergency triggers automatic load shedding of 100 MW or more, as in the RAS. *See* North American Electric Reliability Corporation, Reliability Standard EOP-004-3 (Event Reporting), http://www.nerc.com/_layouts/PrintStandard.aspx?standardnumber=EOP-004-3&title=Event%20Reporting.

To underscore the potential impact of RAS activation, the estimated 150,000 impacted customers are counted by meter, not individual. One or more meters could translate to large household or commercial or industrial facilities, including those critical to health and safety systems. Whether counted as 150,000 or that amount multiplied several times over, the anticipated impact of this emergency situation is on par with or exceeds the impacts described in prior 202(c) orders. *Crisp Cnty. Power Comm’n v. Ga. Power Co.*, 35 FPC 629, 630-31 (1966) (ordering interconnection to prevent, in part,

outages lasting more than an hour and affecting 500 to 2,000 customers on Crisp County, Georgia's system). *City of Cleveland, Ohio v. Cleveland Elec. Illuminating Co.*, 47 FPC 747, 749 (1972) (ensuring reliable service was provided to the approximately 20% of the city's consumers). Cleveland's 1970 Census-reported population was 750,903, suggesting that just over 150,000 individuals were affected by the 1972 202(c) order. See <https://www.census.gov/population/www/documentation/twps0027/tab20.txt>. As described earlier, the U.S. Census estimated the population of the North Hampton Roads load area at nearly 661,000 people just over a year ago.

A benefit of the planning efforts mandated by federal reliability standards is that entities such as PJM can accurately forecast the impacts to the bulk power system in steady-state and various contingency event situations. Thus, as reliability planning continues to mature, there should be fewer electric energy shortages that take bulk power system owners, operators, and regulators by surprise. That planners can identify conditions under which shortages may occur, however, does not rule out electric energy shortages constituting emergencies under FPA section 202(c) and the Department's implementing regulations. It is impossible to plan for every contingency, and challenges may arise even when implementing the most prudent plans. FPA section 202(c) affords the Secretary of Energy discretion in finding when an emergency exists and how best to meet the emergency and serve the public interest.

Here, an emergency exists due to the imminent possibility of implementing the North Hampton RAS under a range of both steady-state and contingency events, including potential transmission congestion preventing the delivery of available generation to the North Hampton Roads area. PJM Deactivation Study at 1-2, included in the docket of this Order. The RAS would leave approximately 150,000 customers without power, including residential, industrial, commercial, health and safety facilities, major national defense, and educational institutions. See Order Application, app. IV, at 30-31. That creates serious health and safety issues. Issuance of today's Order meets the emergency and serves the public interest.

In these circumstances, transmission outages, like those contemplated for or otherwise in connection with the construction of the Skiffes Creek Transmission Project, constitute an emergency for purposes of a section 202(c) order. As stated earlier, the Department's implementing regulations, in their current form since 1981, contemplate that "[e]xtended periods of insufficient power supply as a result of inadequate planning or the failure to construct necessary facilities [may create] an emergency." 10 C.F.R. § 205.371. The regulations add that "[i]n such cases, the impacted 'entity' will be expected to make firm arrangements to resolve the problem until new facilities become available, so that a continuing emergency order is not needed." *Id.* PJM, the impacted entity in this case, requested today's Order. Through the RTEP, PJM made firm arrangements to resolve the problem through the Skiffes Creek Transmission Project, which is now permitted and under construction. That construction was delayed due to events beyond

PJM's control has no bearing on the likelihood of power outages for 150,000 customers. Such a power loss event would also constitute an emergency as contemplated by FERC in its Public Utility Regulatory Policies Act of 1978 regulations, which define "system emergency" as "a condition on a utility's system which is likely to result in imminent significant disruption of service to customers or is imminently likely to endanger life or property." 18 C.F.R. § 292.101(b)(4). The risk faced by 150,000 customers will continue, assuming the Skiffes Creek Transmission Project construction schedule is met, for approximately another 18 months. Today's Order is limited in time and specifically tailored to address an emergency contemplated both in the authorizing statute and the Department's implementing regulations.

Between 2005 and 2007, DOE issued orders under similar circumstances, directing the Mirant Potomac River Generation Station to operate until two new 230kV transmission lines could be built to ensure reliability to a portion of the District of Columbia. See Order No. 202-5-3 (relying on DOE regulatory definition of emergency as including extended periods of insufficient power supply as a result of inadequate planning or the failure to construct necessary facilities). In a series of orders under FPA section 202(c), the Secretary ordered operation of the generation units while the two existing 230kV lines that supplied the central District of Columbia area were temporarily and sequentially removed from service to connect the new lines. Neither the problems leading up to the closure of the generating units nor the need for a particular transmission solution were unexpected. Nevertheless, the Department found that imminent power shortages, faced if contingency events occurred, constituted an emergency under the Federal Power Act. Order Nos. 202-5-3, 202-6-1, 202-6-2, 202-7-1, and 202-7-2.

In this matter, the likelihood of RAS activation is not theoretical. While Order No. 202-17-2 was in effect, PJM had to call upon Yorktown Units 1 and/or 2 on 13 days over three months. Absent Order No. 202-17-2, the RAS would have been activated instead. The alternatives available to PJM and Dominion are not sufficient to ensure reliability without available capacity from Yorktown Units 1 and 2. As described, PJM and Dominion cannot mobilize adequate alternatives to counter the loss of transmission during construction of the Skiffes Creek Transmission Project. For example, demand response resources, while potentially helpful at the margin, are insufficient to address either Scenario One or Scenario Two. See Order Application, app. II, at 18. Further, PJM's recent RTEP Input Assumptions and Scope Whitepaper indicates that Dominion theoretically has up to 130 MW of distributed solar generation available during the summer. 2017 RTEP Process Scope and Input Assumptions, rev. 1, tbl.3.2, at 18 (Aug. 3, 2017), included in the docket of this Order. Outside of ramp-up and ramp-down times, each Yorktown Unit typically ran at 100 MW output or higher, day or night, when operational while Order No. 202-17-2 was in effect. PJM Interconnection, L.L.C., Report on Yorktown Units 1 and 2 Operations Pursuant to Order No. 202-17-2, Attachment 1. Distributed generation is an intermittent resource; even under ideal conditions, with full-capacity, daytime generation and load reduction at the height of the

summer, distributed generation generally would still not have offset the baseload generating capacity needed to ensure reliability on the North Hampton Roads area grid. And any flexibility for scheduling the Skiffes Creek Transmission Project's construction during historically low-load periods ended when the EPA ACO expired, as expeditious completion of the Project is now the priority. Therefore, even if PJM and Dominion made full use of available alternatives, capacity from Yorktown Unit 1, 2, or both would still be necessary to meet the emergency and serve the public interest.

FPA section 202(c)(2) requires the Secretary of Energy to ensure that any 202(c) order that may result in a conflict with a requirement of any environmental law or regulation be limited to the "hours necessary to meet the emergency and serve the public interest, and, to the maximum extent practicable, [be] consistent with any applicable . . . environmental law or regulation and minimize[] any adverse environmental impacts." Certain load conditions may necessitate operation of Yorktown Units 1 and 2.

To minimize the hours of operation and adverse environmental impacts, the Order contains certain limitations. First, DOE maintains consistency with EPA's approach in the 2016 ACO by authorizing operation of Yorktown Units 1 and 2 only when called upon by PJM for reliability purposes. The Department consulted with EPA and has reviewed data provided by PJM and Dominion on operations, air emissions, and water usage. This Order will continue the operational limitations described in EPA's above-referenced ACO, AED-CAA-113(a)-2016-0005. Second, DOE requires that PJM and Dominion, consistent with good utility practice, first exhaust all reasonably and practically available resources, including demand response and behind-the-meter generation resources, before operating Yorktown Units 1 and 2. Third, DOE requires continued compliance with the June 27 dispatch methodology, which was reviewed by the Department, and which remains subject to continuing oversight by the Department. In particular, the dispatch methodology establishes Yorktown Units 1 and 2 commitment procedures, describes the utilization and trip conditions of the North Hampton RAS for mitigating congestion on the Virginia Peninsula or North Hampton Roads area, and describes Dominion's mitigation options for the existing James River tower contingency. The dispatch methodology is an operating protocol that limits the ability of PJM to dispatch Yorktown Units 1 and 2 only when needed to mitigate reliability issues associated with scheduled and emergency transmission outages directly related to the Skiffes Creek Transmission Project and other local transmission issues. The EPA ACO recognized that such a dispatch methodology, under which PJM determines when the Yorktown units are needed for reliability issues, serves the objective of minimizing emissions. ACO at 8-9, included in the docket of this Order. Fourth, to track when Yorktown Units 1 and 2 are operated to maintain grid reliability and to monitor associated air emissions and water usage, reports will be required every two weeks going forward. If the Department becomes concerned with PJM or Dominion's compliance with this Order, enforcement actions are available, up to and including termination of the underlying order.

While DOE has constrained PJM's operations with regard to Yorktown Units 1 and 2, it is necessary to preserve reasonable discretion for PJM, as a Transmission Operator, to address the second-to-second operational challenges of grid management. This follows DOE's practice in earlier orders issued under FPA section 202(c), which prioritized reliability concerns as identified and assessed by the operator. For example, Order No. 202-02-1 (Aug. 16, 2002) ordered Cross-Sound Cable Company, LLC to operate a cable across Long Island Sound, limiting "transmission and delivery of . . . electric capacity and/or energy [to that] necessary in the judgment of the New York Independent System Operator [ISO] to meet the supply and essential reserve margin needs of the Long Island Power Authority [LIPA]," but only "in order for LIPA to serve its firm retail customers after it has implemented all available load reduction measures consistent with good utility practice." Order No. 202-03-1 (Aug. 14, 2003) directed operation of the same cable, but specifically ordered the New York ISO and ISO New England to require Cross-Sound Cable Company to operate the cable. That order also required both RTOs to "consult with each other and with appropriate reliability organizations." Today's Order similarly requires PJM to identify and mitigate reliability issues in accordance with DOE's specified operational limitations.

In considering renewal or reissuance of an order under FPA section 202(c) that may conflict with an environmental law or regulation, DOE is required to "consult with the primary Federal agency with expertise in the environmental interest protected by such law or regulation" and to include "conditions as such Federal agency determines necessary . . . to the extent practicable." 16 U.S.C. § 824a(c)(4). The EPA is the primary federal agency in this case with expertise in the protected environmental interest, specifically MATS and section 316(b) of the Clean Water Act, and the Department consulted with EPA after receiving the Renewal Application. Email from Acting Assistant Administrator Starfield, Office of Enforcement and Compliance Assurance, to Acting Under Secretary for Science and Energy Hoffman (Sept. 11, 2017), included in the docket of this Order. After consulting with EPA, and consistent with that consultation, the Department found that the only appropriate short-term emissions limitation on Yorktown Units 1 and 2 would be to curtail operating hours to the maximum extent practical for reliability purposes.

Pursuant to the National Environmental Policy Act of 1969, the Department has determined that issuance of this Order fits within the category of actions included in Categorical Exclusion (CX) B4.4 and otherwise meets the requirements for application of a CX. The Order fits within the category of actions because it authorizes "[p]ower marketing services and power management activities (including, but not limited to, storage, load shaping and balancing, seasonal exchanges, and other similar activities), provided that the operations of generating projects would remain within normal operating limits." Records of Categorical Exclusion Determination, Order No. 202-17-4, Sept. 11, 2017, included in the docket of this Order.

Summary of Findings for Department of Energy Order No. 202-17-4

For the reasons stated above, the Secretary of Energy finds that an emergency exists threatening imminent electric energy shortages, and that this Order is necessary to address the emergency and serve the public interest in the North Hampton Roads area. The limitations on operation set forth in Order No. 202-17-4 and outlined above are, to the maximum extent practicable, consistent with applicable environmental laws or regulation and minimize any adverse environmental impacts, and the reporting requirements for operations and estimated emissions ensure transparency of implementation.

BEFORE THE UNITED STATES DEPARTMENT OF ENERGY

Federal Power Act Section 202(c))
Emergency Order: Transalta)
Centralia Generation LLC)
_____)

Motion to Intervene, Motion for Clarification, and Requests for Rehearing and Stay
of Sierra Club, NW Energy Coalition, Washington Conservation Action, Climate
Solutions, Public Citizen, and Environmental Defense Fund
(collectively, “Public Interest Organizations” or “PIOs”)

Exhibit 2-15:
DOE Order No. 202-02-1



Department of Energy

Washington, DC 20585

Order No. 202-02-1


Pursuant to the authority vested in me by section 202(c) of the Federal Power Act, 16 U.S.C. 824a(c), and section 301(b) of the Department of Energy Organization Act, 42 U.S.C. 7151(b), I hereby determine that an emergency exists on Long Island in the State of New York due to a shortage of electric energy, a shortage of facilities for the generation of electric energy, a shortage of facilities for the transmission of electric energy and other causes, and that issuance of this order will alleviate the emergency and serve the public interest. Based on this determination, I hereby order:

From the effective date and time of this order until 12:01 a.m. Eastern Daylight Time, October 1, 2002, Cross-Sound Cable Company, LLC is directed to operate the Cross-Sound Cable and related facilities connecting substations in New Haven, Connecticut and Shoreham, Long Island, New York, to transmit and deliver electric capacity and/or energy when, as and in such amounts as may be scheduled and purchased by the Long Island Power Authority (LIPA), and to take such actions as are necessary in order to enable it to do so, including but not limited to energizing and continuing to energize the facilities of Cross-Sound Cable Company, LLC; *provided*, that this order otherwise shall be limited to requiring the transmission and delivery of such electric capacity and/or energy as is necessary in the judgment of the New York Independent System Operator to meet the supply and essential reserve margin needs of LIPA, in order for LIPA to serve its firm retail customers after it has implemented all available load reduction measures consistent with good utility practice, including curtailing and/or terminating service to interruptible customers, public appeals for conservation, reducing 30 minute reserves to zero, and implementing voltage reductions; *and provided further*, that prior to exercising its judgment as required by this order, the New York Independent System Operator must consult with ISO New England, Inc. to ensure that the scheduling of such electric capacity and/or energy will not violate system operating criteria, and the New York Independent System Operator should, as practicable, consult with appropriate reliability organizations. If necessary, just and reasonable terms for the transmission and delivery of electric capacity and/or energy pursuant to this order, including the compensation therefor, shall be established by a supplemental order issued pursuant to Federal Power Act section 202(c).

Nothing in this order shall preclude use of the energized Cross-Sound Cable and its related facilities connecting substations in New Haven, Connecticut and Shoreham, Long Island, New York, to transmit and deliver electric capacity and/or energy from Long Island to Connecticut or from Connecticut to Long Island in accordance with the operating and scheduling protocols and decisions of the New York Independent System Operator and ISO New England, Inc.

This order shall be effective upon its issuance.

Issued in Washington, D.C. at 2:38PM this 16th day of August, 2002.

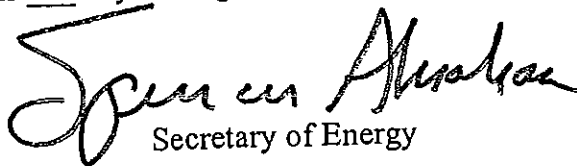
Secretary of Energy

